



Lumary

USER MANUAL

Product&Notes

What's in the Box



- Lumary Smart Ultra-thin Downlight

PACKAGE CONTENTS



A



B



C



D

PART	DESCRIPTION	QUANTITY
A	3" Smart Ultra-thin Downlight	1
B	J-Box Driver	1
C	Nuts	3
D	HOLE CUT-OUT	1

Notes

- Lumary's products don't recommend that you use dimmers because flicker may occur during use.
- Make sure your mobile device meets the following requirements:
For iOS: Ensure your device is running iOS 13.3 or higher.
For Android: Ensure your device is running Android 9.0 or higher.
- Ensure that you are connecting to a 2.4GHz Wi-Fi network as Lumary devices are not compatible with 5GHz networks.

IMPORTANT SAFETY INSTRUCTIONS

When using product, basic precautions should always be followed, including the following:

- Heed all warnings, including below warnings AND those included on product.
- Lumary recessed luminaires (fixtures) are designed to meet the latest NEC requirements and are certified in full compliance with UL. Before attempting installation of any recessed lighting luminaire check your local electrical code. This code sets the wiring standards for your locality and should be carefully studied before starting.
- Read and follow these instructions.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Connect fixture to a 120 volt, 60 Hz power source. Any other connection voids the warranty.
- Fixture should be installed by persons with experience in household wiring or by a qualified electrician. The electrical system, and the method of electrically connecting the fixture to it, must be in accordance with the National Electrical Code and local building codes.

- **WARNING** - Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire.

WARNING



Risk of Fire-MINIMUM 90 °C SUPPLY CONDUCTORS.If uncertain,consult an electrician.



Risk of Electric Shock-To avoid possible electrical shock, be sure that power supply is turned off at fuse box or circuit breaker before installing or servicing luminaire.



Risk of Fire/Electric Shock-LED Kit



Installation requires knowledge of luminaires electrical systems.If not qualified, don't attempt installation. Contact a qualified electrician. Luminaire wiring and electrical parts may be damaged when drilling for installation of LED kit. Check for enclosed wiring and components.


CAUTION




Edges may be Sharp - Wear gloves while handling.

INSTALLATION


1. Turn off the power before installation. Remove the existing fixture if applicable. Determine the location and necessary hole cutout diameter using the supplied table and cut the ceiling hole with the listed approximate diameter(Fig1)




2. Open the J-Box cover and remove the appropriate knockout(s) on the side panel. Install the appropriate cable clamp(s) (not included) and insert the electrical supply cable through the cable clamp. Connect the supply wires to the fixture wires by using 3 connectors. Attach white to white, black to black, copper to the ground wire.(Fig2)




3. Insert J-Box through the mounting hole and secure it, connect the fixture power cable to the J-Box. (Fig3)



4. Push the spring-loaded clips into the mounting hole upwards and insert the fixture into it. Release the clips and the fixture will be pulled flush to the ceiling.(Fig4)

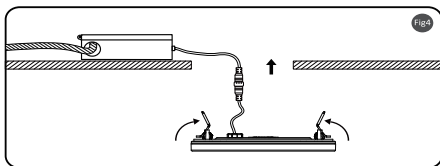


5. Turn on the power after installation, check the fixture can work well.(Fig5)

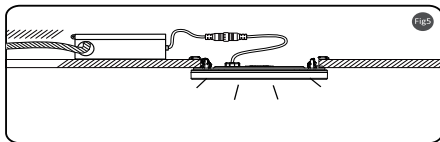

Paring Your Device with Lumary App

What You Need:

- A Wi-Fi router supporting the 2.4GHz and 802.11b/g/n bands. 5GHz is not supported.
- A smartphone running iOS or Android.



1.Download the "Lumary" App from the App Store or Google Play.

2.Register a Lumary account.

Note:Please select your region and country.

3. Connect

NOTE: Lumary's products can't connect to 5GHz networks.

Steps:

1. Turn on your smartphone's Bluetooth;
2. Open the Lumary App, In the top corner of the Devices screen, click "+" and select "Add Device" to confirm that the device is paired.
3. Each time the device without distribution network is powered on, confirm the light is breathing or blinking pairing mode;
If not, you need to use the switch to reset: on-off-on-off-on;
4. Find the device, choose Wi-Fi and enter password, press "Next".
Click "Add", and wait patiently. After that, click "Done", and the device is successfully added to the App.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

Remote control paired device

Note: Not all devices are compatible with the remote control. Downlights of models A/B/C/D/F that have been manufactured after January 2022 are compatible with the remote control. If you require more detailed information, please do not hesitate to contact us at our after-sales email address: support@lumary.tech.

1. The device is powered by 2xAAA dry batteries.
 2. The lighting device needs to be paired with the App through the mobile phone first.
 3. For devices that have completed network configuration to the App, keep the network unblocked.
 4. Turn off the device through the wall switch, and then turn on the switch after 5 seconds. Within 1 minute of power-on, the lighting device and remote control are in a pairing state.
 5. Long press any key on the remote control A/B/C/D as needed until the device flashes to indicate success. If during the configuration process, the required device is not fully paired, long press the group button again until all devices are paired. If it times out, repeat step 4.
-
1. Short press: On/OFF for devices paired under grouping
 2. Long press: Group key for device pairing
 3. Long press "Grouping Key" and "Brightness-" combination key to unpair all devices under the grouping"
 4. Bind: Group A/B/C/D key (long press until device blinks or breathes).
 5. Unbind: "Brightness-" + any group A/B/C/D key (long press combination key for 3s).

Parameter information

Name	Lumary Smart Ultra-thin Downlight
Model	L-SD3A1
Input Voltage	120VAC,60Hz
Wattage	7W
Color Temperature	RGBAI +Tunable White(2700K-6500K)
CRI	90+
Lumens	350lm
Beam Angle	110°
Rated Life	25000h



RoHS



Contains FCC ID:2ANDL-CBU

Made in China

Troubleshooting

1. Can't connect the light to Lumary App.

- Check whether the downlight is powered on.
- Check whether your smartphone Wi-Fi is enabled.
Please make sure Wi-Fi connected to your phone is 2.4GHz (5GHz band is not supported).
- Make sure your smartphone is close to the device when connecting for the first time.
- Check if you have entered the correct Wi-Fi password during Wi-Fi setup.
- Make sure the distance between the bulb and router is less than 50ft.
- If you fail to bind, you will need two phones, one to set the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, the device is normal. The problem may be in the router, you need to check your router Settings to see if there are MAC and DHCP restrictions.

2. Can I group multiple Lumary devices together?

- Yes, you can group multiple lights and other Lumary devices by Schemes, Same model, General (Wi-Fi or Bluetooth devices).
It depends on the function of different devices.

If you have any questions. You can contact us via our after-sales email: support@lumary.tech or leave a message on our official social media account.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Voice Control Quick Guide for Amazon Alexa

1. Log in to Lumary App, tap the smart device and enter into, click"✎" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".
4. Tap "Allow".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

Name and Control Each Device by Voice

Alexa will automatically sync the names you set for your devices in the Lumary app. You can rename the light in Alexa to simplify voice commands.

To control your Lumary smart device, just ask Alexa. Make sure your devices are already set up using the Lumary App.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the bedroom light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the coffee machine."

"Alexa, set the living room to 50%."

"Alexa, dim porch light."

*Some commands require compatible devices.



Voice Control Quick Guide for Google Assistant

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".
4. Click "Agree and link".
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

Name and Control Each Device by Voice

Google will automatically sync the names you set for your devices in the Lumary App. You can rename the light in Google to simplify voice commands.

To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary App.

Things you can say*:

"Hey Google, turn on all the lights in my bedroom."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, turn off the coffee machine."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

Customer Service

24

HOURS

Quick Response

Quick Response

If there is any problem please check the Troubleshooting page . When you could not fix this, please contact us after-sale email, we will respond within 24 hours. The fastest way to help us confirm the problem is to send us a video of the problematic light to our official email box. support@lumary.tech
WhatsApp:+86 188 2656 6792

30

DAYS

MONEY-BACK

MONEY-BACK

For **30 days** after the date of purchase, return your Lumary product and receive a full refund **for ANY reason**.

2-YEAR WARRANTY



Free Replacement No Repair

After the buyer purchases the product, if the product has a quality problem within the scope of the seller's warranty service within the service validity period, the seller will replace the buyer with a **product for free**.



Friendly Reminder

We do not recommend you to leave a product review first, as we cannot get in touch with you through reviews/feedback to solve any product usage problems. Please contact us through the after-sales email. We sincerely hope to solve your problem every time and provide the best after-sales service.

Please rest assured that our service aim is to make customers 100% satisfied. If there is any problem, please contact us as soon as possible, we will not let you down.

Can't connect? Need help?



HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:

support@lumary.tech

Visit us at:

www.lumary.tech

www.lumarysmart.com