

EL99A

4" Line Voltage Housing, Airtight.




PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

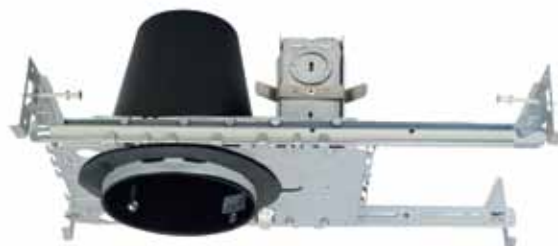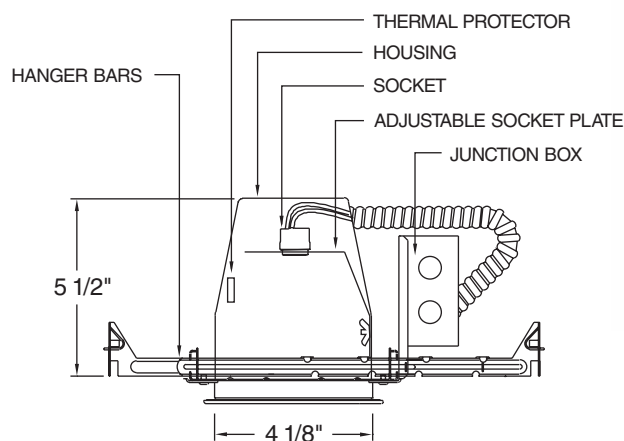

PRODUCT SPECIFICATIONS

Housing Features: Integral thermal protector guards against improper lamping. Single wall construction.

Adjustable socket bracket allows the use of different lamp types and sizes as well as proper and consistent positioning.

the EL99A housings meets restricted air flow Requirements. (Per ASTM E-283 Standards). IECC Compliant.

Lamp: 120V, 50/75W Maximum. See trim page for lamp type and rating.

Lamp Holder: Medium base socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cut-out.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates. Listed for feed through.

Mounting: Hanger bars span 24" joists and can be repositioned 90 degrees. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel material for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.

CATALOG NUMBER

Example: EL99A - EL901W

See trim page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com

© ELCO LIGHTING 2012 All Rights Reserved. Rev. Jul. 2012. ELCO Lighting reserves the right to make specification and design changes without notice.

ELCO
LIGHTING



ELCO Lighting®