


ASSEMBLY INSTRUCTION

FIREPLACE MANTEL 60/72"

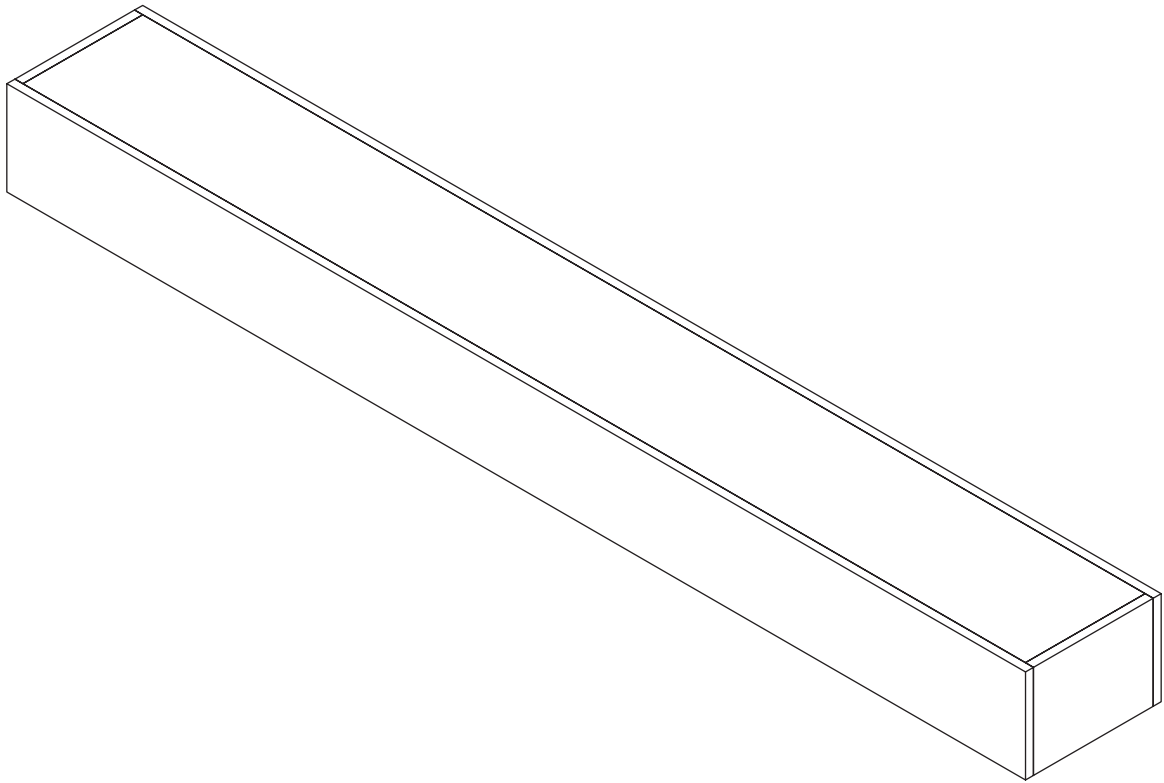


- Do NOT use a drill while assembling
- Assemble all parts on a soft surface


Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.

COMPONENT


1

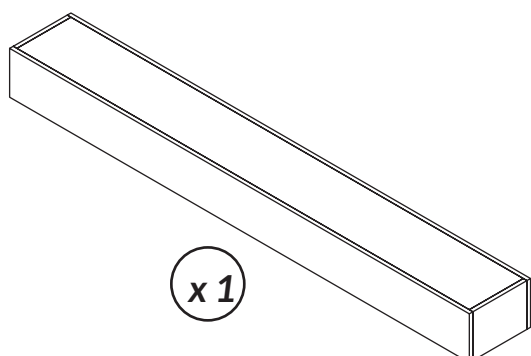


2

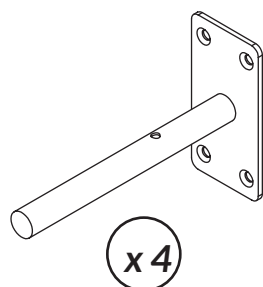


HARDWARE



M5 x 50 - 20 pcs

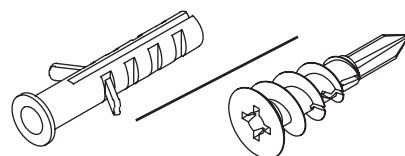


Anchor - 16 pcs

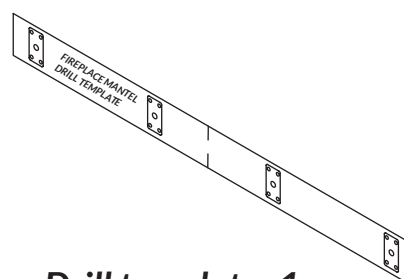


Drill template- 1 pc


TOOL : Some tools are not included

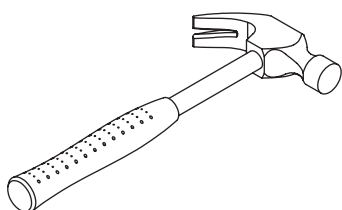


Hammer

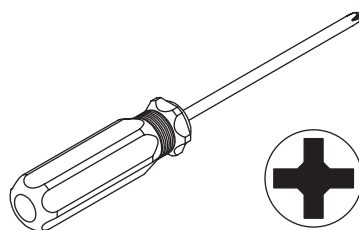


**Phillip-head
screwdriver**

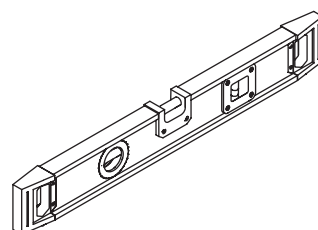

Level Ruler


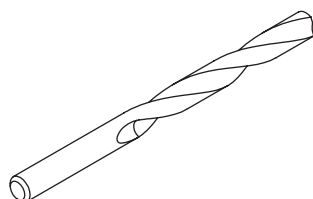


**Drill bit
8mm or 5/16"
6mm or 1/4"**

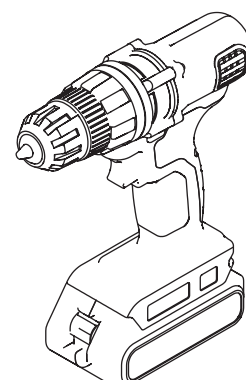


Power drill

STEP 1 : Use level ruler to determine surface horizontal.
Then position your the drill template where you want it and mark the spot with the pencil.
Double check with the below dimension.

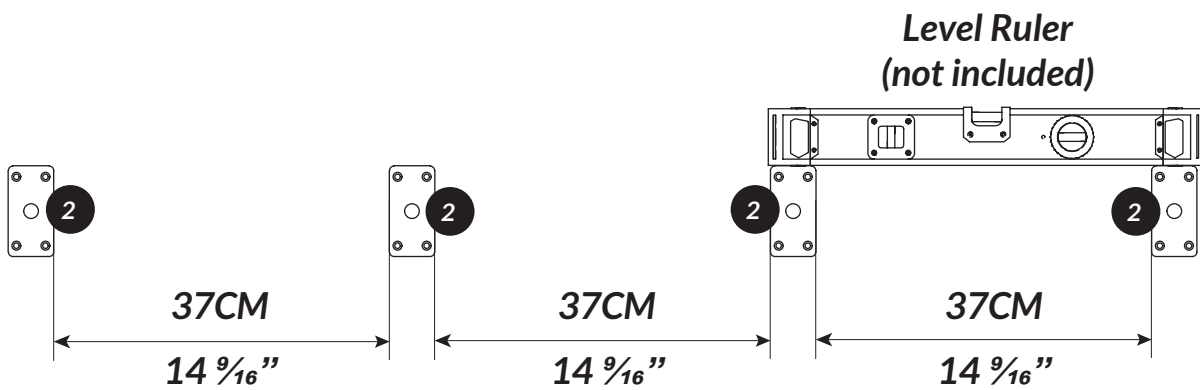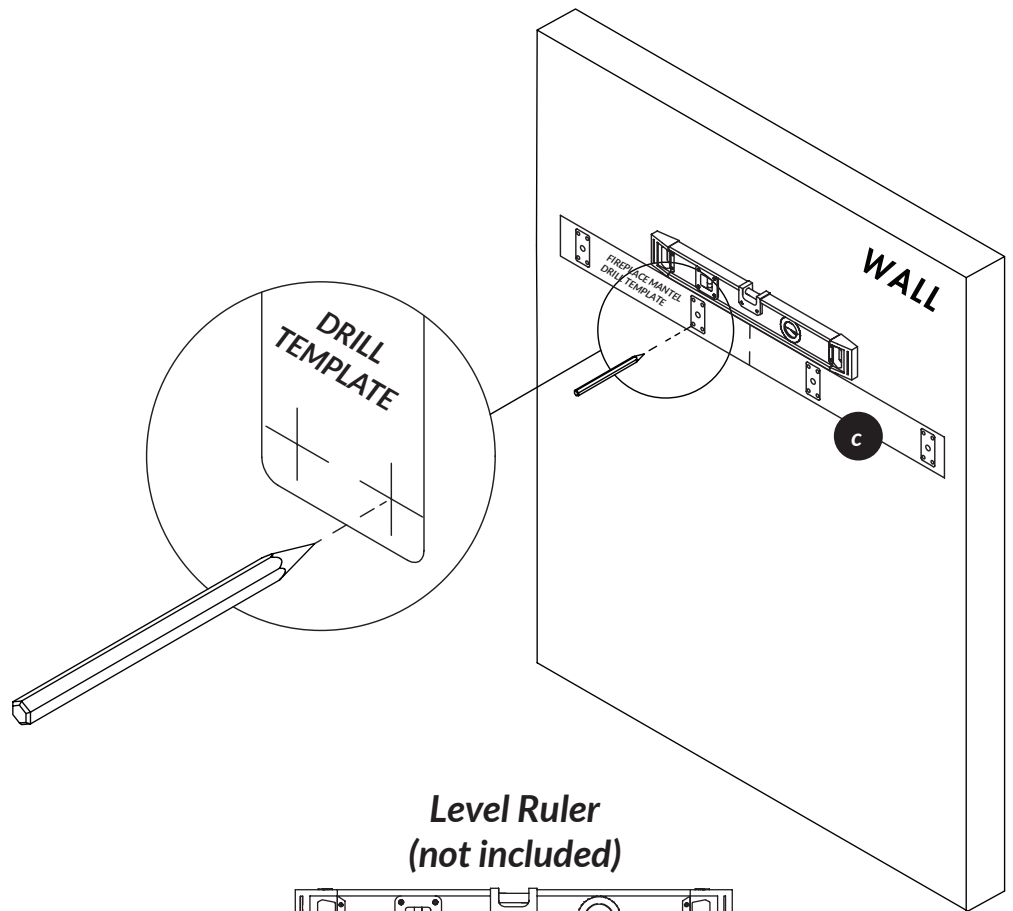


Fireplace Mantel 60" Pattern

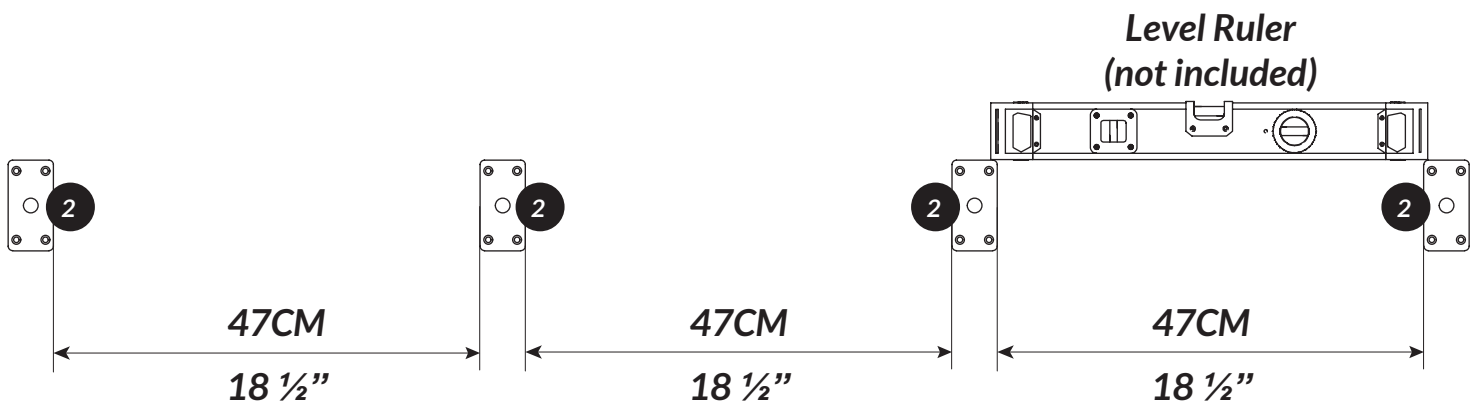


Fireplace Mantel 72" Pattern




STEP 2 : Drill all holes in wall using (8mm) or (5/16") drill bit for brick/concrete anchor
 Drill all holes in wall using (6mm) or (1/4") drill bit for drywall anchor.

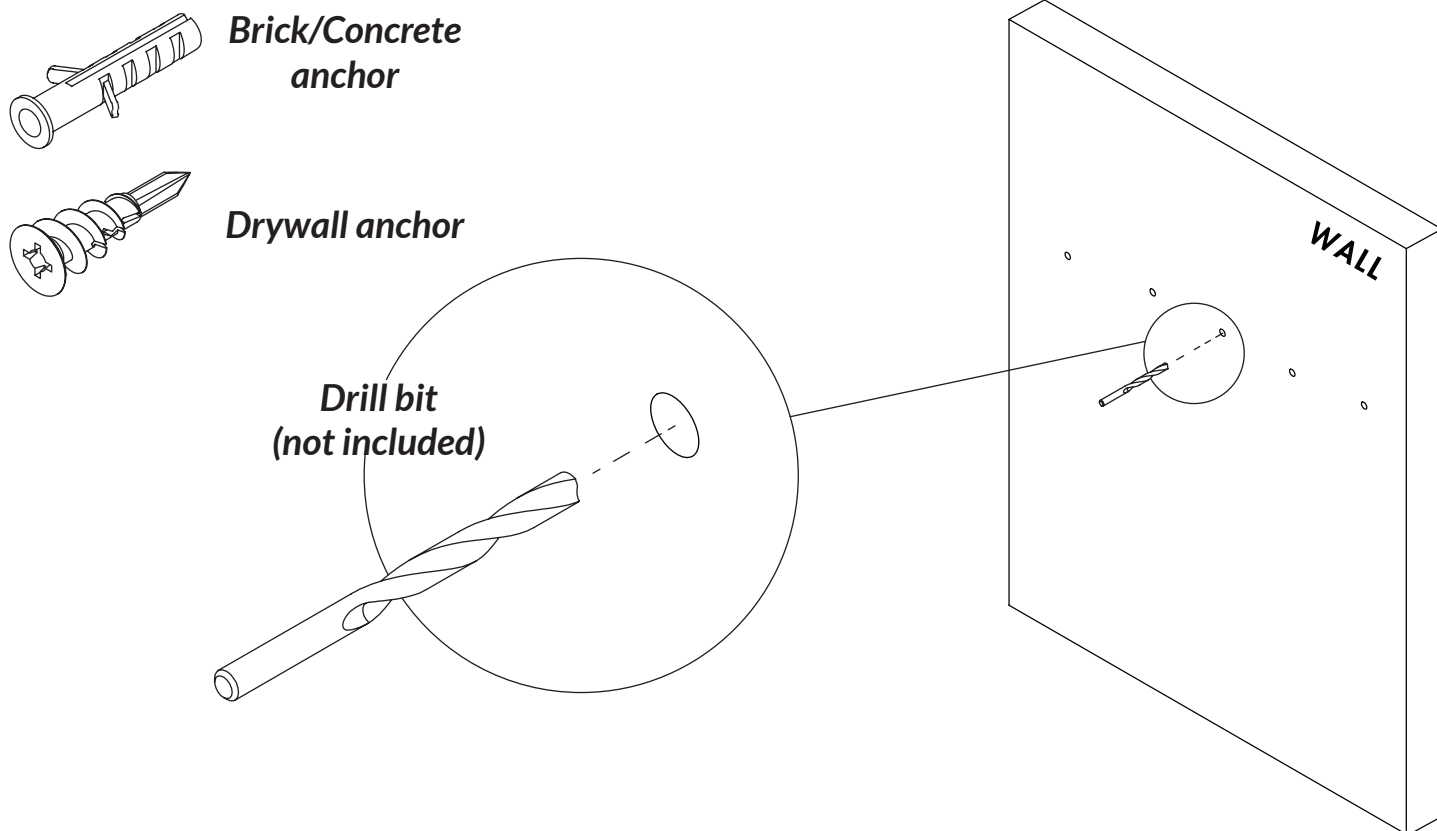

STEP 3 : Put all anchor onto the wall.
 Then secure the bracket on the wall using the screw.

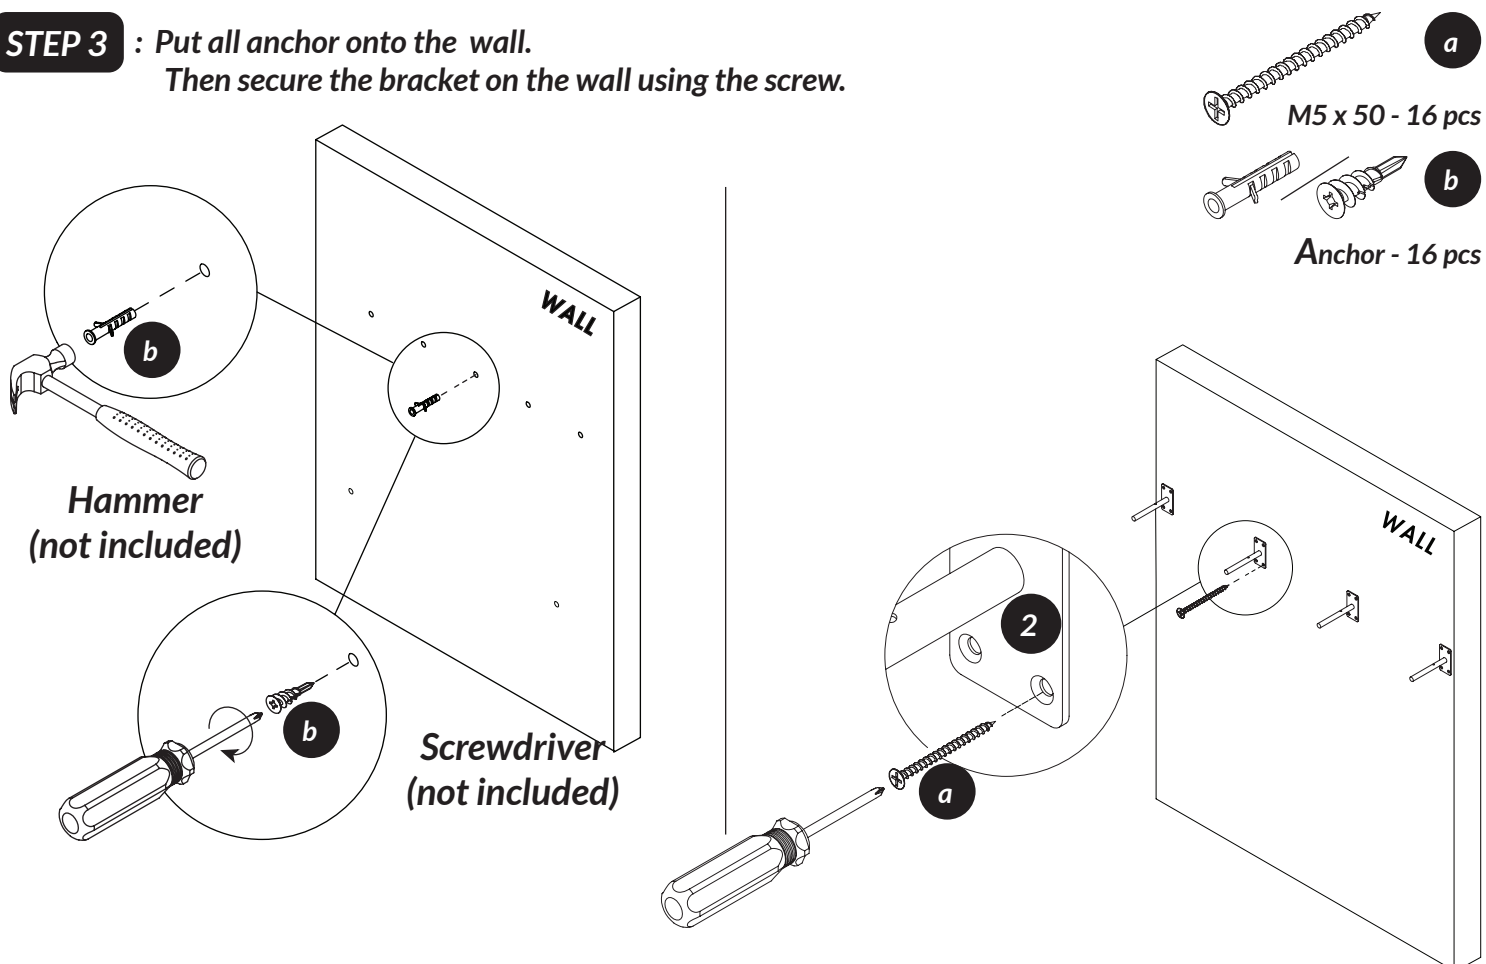

STEP 4 : Secure the screw under the shelf.

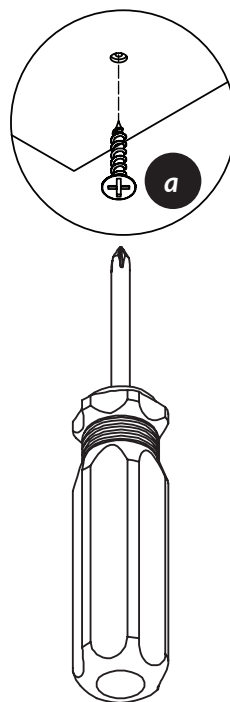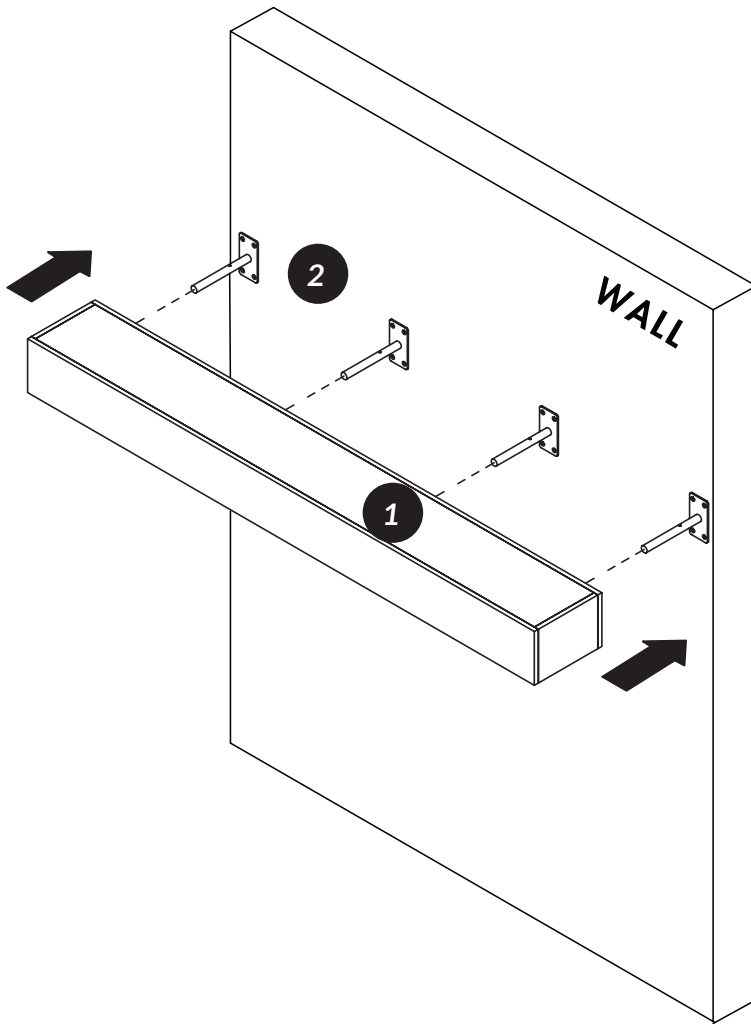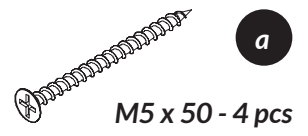

Screwdriver
(not included)

