



INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.

Installation Guide

3-LIGHT DRUM PENDANT



Questions, problems, missing parts?

Contact the customer service department at info@getinlight.com

We commit to respond to emails within 24 hours - and sooner, if possible!

We are devoted to solving problems and offering the best service to our customers.

SKU #
IN-0337-3-BK

Model #
10093



**PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING
INSTALLATION AND RETAIN FOR FUTURE REFERENCE.**



ATTACH YOUR RECEIPT HERE

Purchase Date _____

Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purpose, this matter should be referred to Inlight Co. Ltd.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: RISK OF ELECTRICAL SHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

WARNING: RISK OF BURN

- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all lamp manufacturer's warnings, recommendations and restrictions for: driver type, burning position, mounting locations/methods, replacement, and recycling.

CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.

Warranty

Inlight offers a 1 year warranty from the date of purchase which covers repairs or replacements of defective parts of the housing, optics, and electronics. Contact the Customer Service Team at info@getinlight.com or visit www.getinlight.com

Installation Instructions

BEFORE STARTING THE INSTALLATION, SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER. CONSULT A LOCAL LICENSED ELECTRICIAN OR ELECTRICAL CONTRACTOR IF YOU ARE NOT SURE ABOUT THE INSTALLATION.



TURN OFF ELECTRICITY

At main fuse box (or circuit breaker box)
Before removing the old fixture



REQUIRES 2 PEOPLE

Assistance will be required to support
the fixture during installation

1 Remove the CROSS BAR which was pre-installed to the CANOPY, then install it to the junction box by using two mounting screws.

2 Thread the fixture wire from the fixture through the LOWER ROD, and then secure the LOWER ROD onto fixture using the THREADED PIPE. Thread the FIXTURE WIRES through the RODS and the CANOPY, and then secure the ROD assembly to the set nipple of the CANOPY.

Note: Length adjustable from 11" to 46". Use fewer rods if shorter length is desired.

3 Place the CAGE onto the SHADE, and then attach assembly canopy to the top center pipe nipple of the SHADE, by turning it clockwise until tight.

4 Pull out the source wires from the junction box. Make wire connections using wire nuts as follows:

- Connect the black wire from the fixture to the black wire from the junction box.
- Connect the white wire from the fixture to the white wire from the junction box.
- Attach the fixture grounding wire to the CROSS BAR with the green grounding screw, and then connect it to the house grounding wire with a wire nut.


Carefully put the wires back into the junction box.

5 Attach the CANOPY to the CROSS BAR by inserting it through the mounting screws which was pre-installed on the CROSS BAR, then secure it with the two ball nuts.

6 Install the bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.

7 Screw the THREADED PIPE into the coupling at the bottom of the fixture, then secure it with HEX NUT A.

8 Screw the HEX NUT B into the THREADED PIPE. Place the GLASS DIFFUSER, RUBBER RING (A,B), and WASHER (A,B) onto the THREADED PIPE, then secure with HEX NUT C. Place the CAP onto the THREADED PIPE, Tighten with CAP NUT.

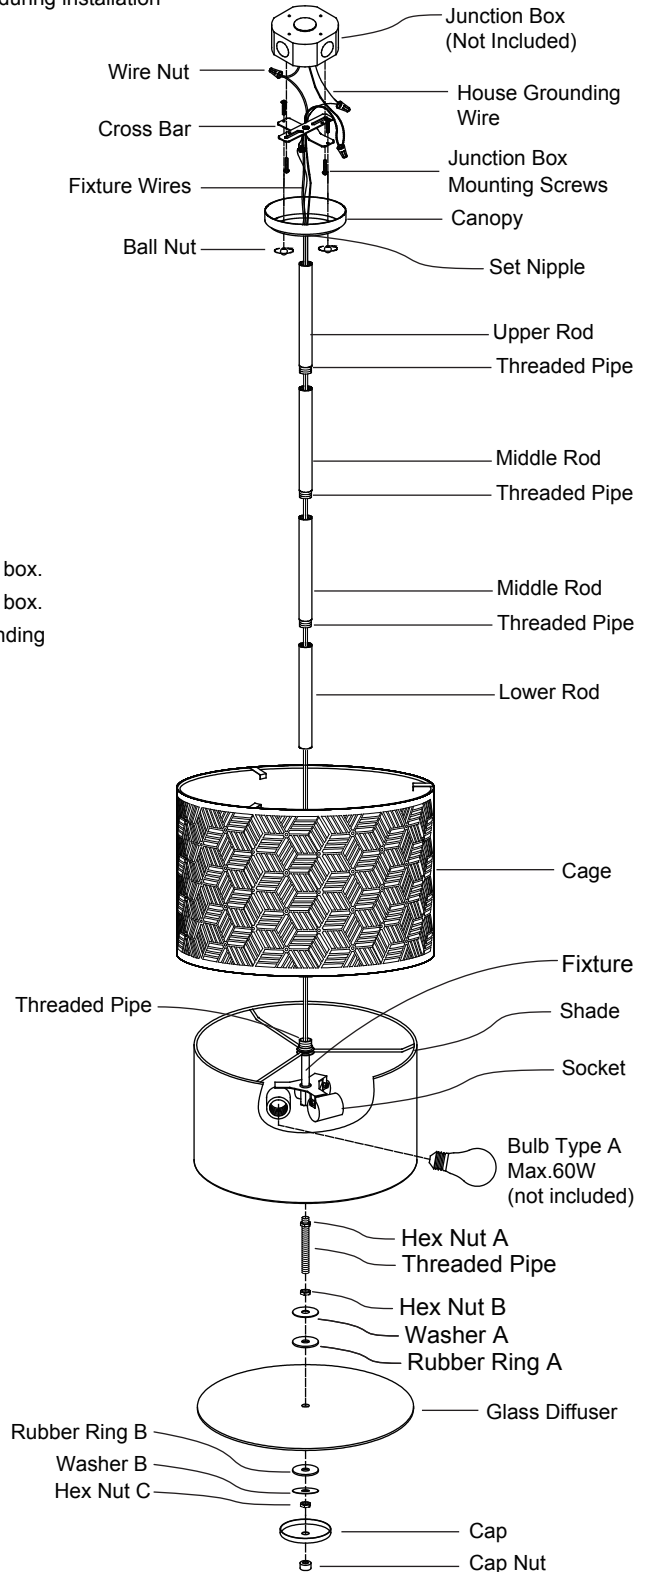

Questions, problems, missing parts? Before returning to the store,
contact Inlight Customer Service

info@getinlight.com

Retain this manual for future use.

INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.