


Parts:

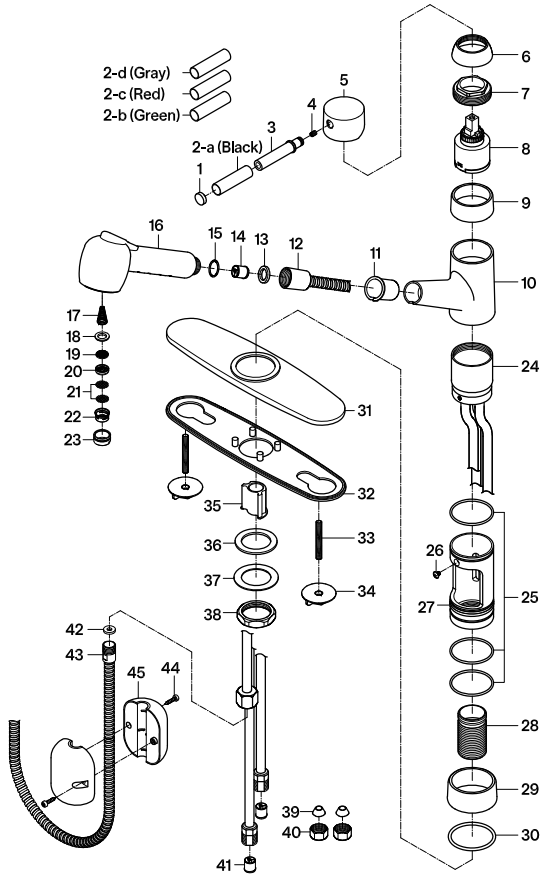

Replacement Parts:




Cartridge: KSRP3891C



Handle: GSH8881DKL

KINGSTON

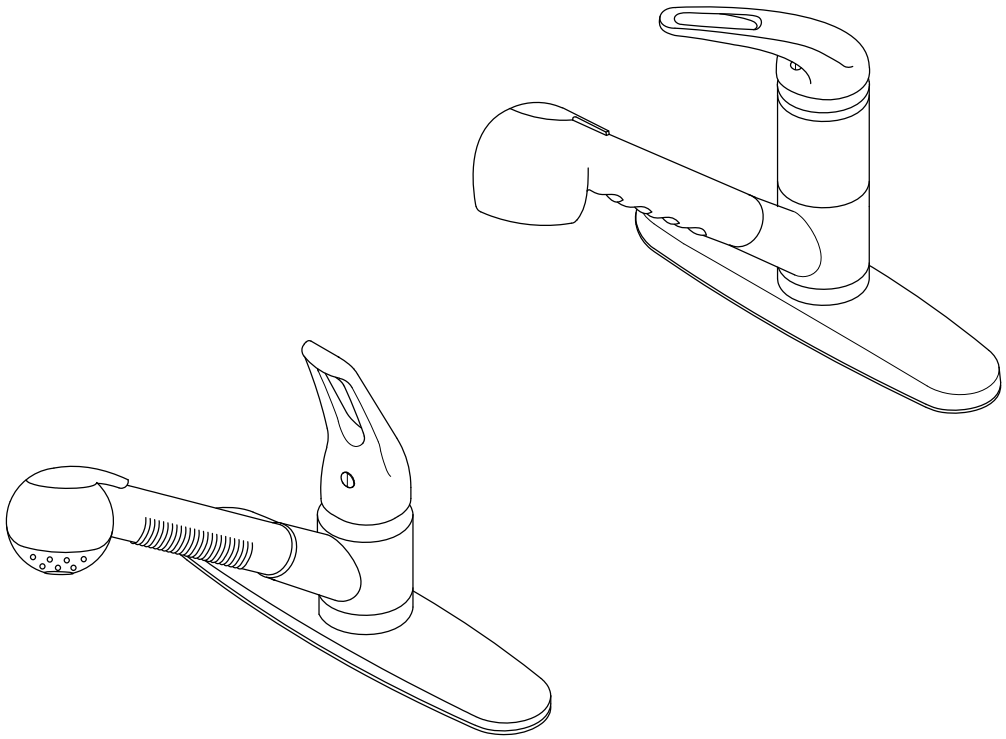

CARE AND MAINTENANCE OF YOUR FAUCET

Your KINGSTON faucet has been finished to the most strict standards; however, due to the high content of minerals in the water, your finish may appear dull and tarnished after time. These are some do's and don'ts to maintain the luster on your faucet for many years to come.





DO
1. Use a silicone based caulking when installing.
2. Clean your faucet with only a mild soap and water solution.
3. Dry your faucet after using it.
4. Give it a coat of Carnauba Wax periodically.

DON'T
1. Use plumbers putty when installing the faucet.
2. Use any abrasive cleaning agents.

It may seem like a very simple and short list but it is that simple to maintain your faucet, looking shiny and new.

If your faucet is already looking somewhat dull and tarnished, before replacing it, try cleaning it with a 50/50 solution of vinegar and water, you may need to soak some rags and wrap around those stubborn areas, leave
overnight and rinse completely in the morning, apply Carnauba wax once you have removed the mineral deposits.

Parts:

Bolt & Lock Nut	Cone Washer & Coupling Nut	Washer & Lock Nut	Counter Weight & Screw
			
2 Pcs	2 Pcs	1 Pc	1 Set

NOTICE

Failure to follow all directions may cause leaks which may result in water damage

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 1-877-2-KBRASS
TECHNICAL SUPPORT E-mail: service@kingstonbrass.com
12775 Reservoir Street, Chino, CA 91710


KINGSTON

INSTALLATION INSTRUCTIONS
Pull-Out Kitchen Faucet


BEFORE BEGINNING INSTALLATION:

1. Flush plumbing lines to clear any debris.
2. Shut off both supply lines after flushing.

Need Tools:

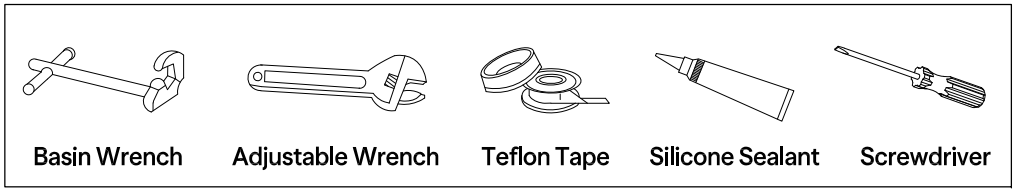


1

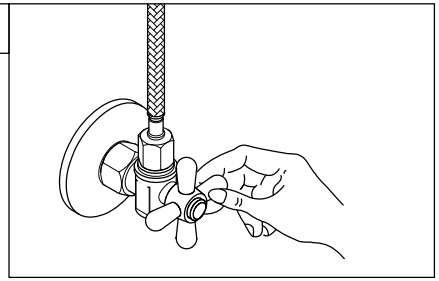


1. Shut off hot and cold water supply under sink. Plug sink drain with cloth to avoid losing small parts.
Remove old faucet.

2

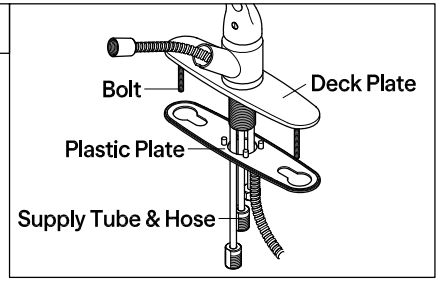


2. After applying a bead of silicone based caulking to the underside of the plastic plate, set at the desired location.

3

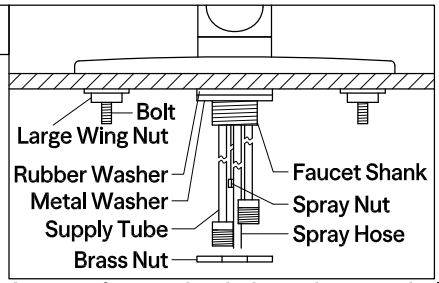


3. Insert faucet shank through center hole and secure by threading large wing nuts on the screws that secure base plate. Insert washers and thread lock nut on center shank of the faucet, use a basin wrench to tighten.

4

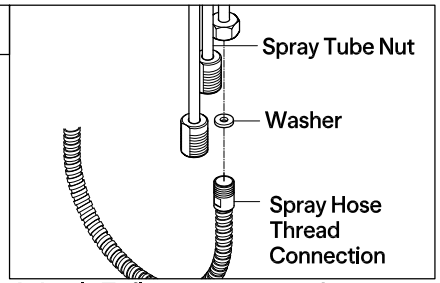


4. Apply Teflon tape to spray hose threads.
After inserting rubber washer into the faucet's spray hose tube, thread spray hose into the spray hose tube.

5

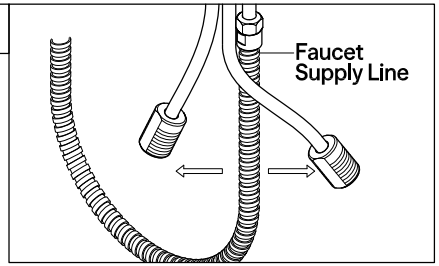


5. Bend the supply lines to allow space to thread the supply hoses. Bend one tube at a time while gradually moving the point of contact along the tube to prevent kinks from forming.
NOTE: Kinked lines will void warranty.

6

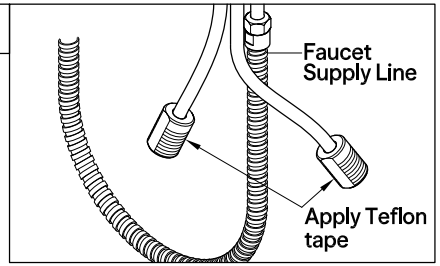


6. Apply Teflon tape to inlet shanks and connect supply lines.

7

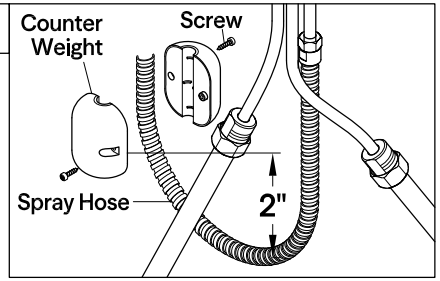


7. Install counterweight set on the spray hose, place at least 2" higher than the bend on the hose, attach with screws tightly.

8

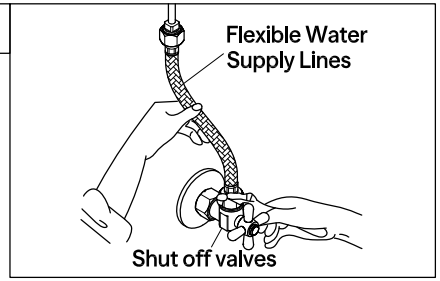


8. Apply Teflon tape to the threads of the faucet shank and the shut off valves. Connect water supply line.

9

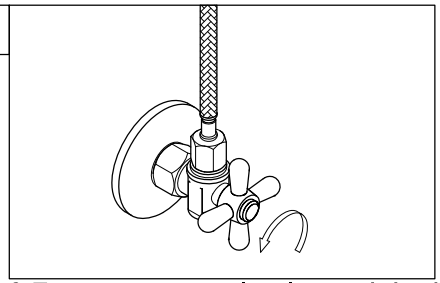


9. Turn on water supply valves and check for leaks, especially all supply line connections.

10

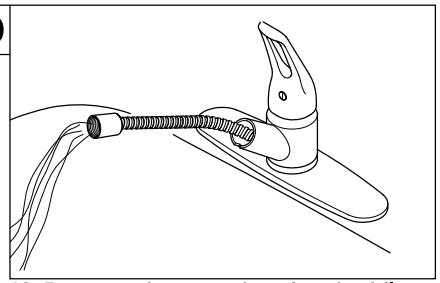

10. Remove the spray head and, while holding the hose over the drain, turn on the faucet for at least one minute. This will help clear the line of any debris. Be sure to check for leaks during this process.

11

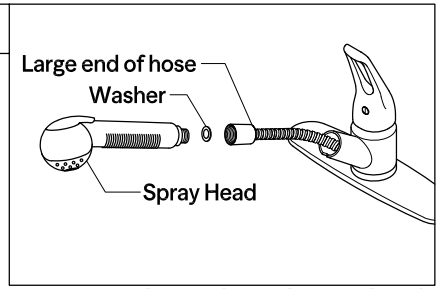

11. Insert washer and attach spray head, insert spray head onto faucet body.

Warning!!!

- Do not over-tighten nut during installation.
- Over-tighten may crack the valve and cause severe leak.

©2025 LVC Kingston LLC. All Rights Reserved.
2026-10-G