

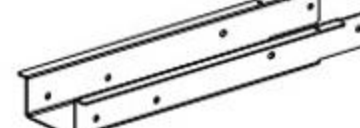
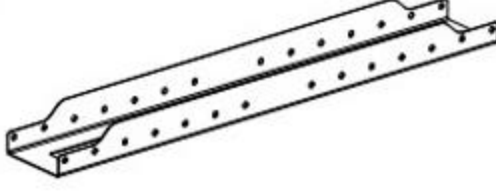
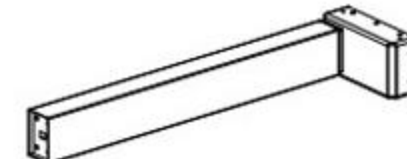
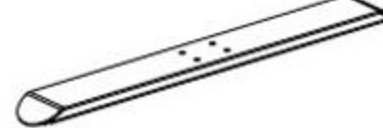












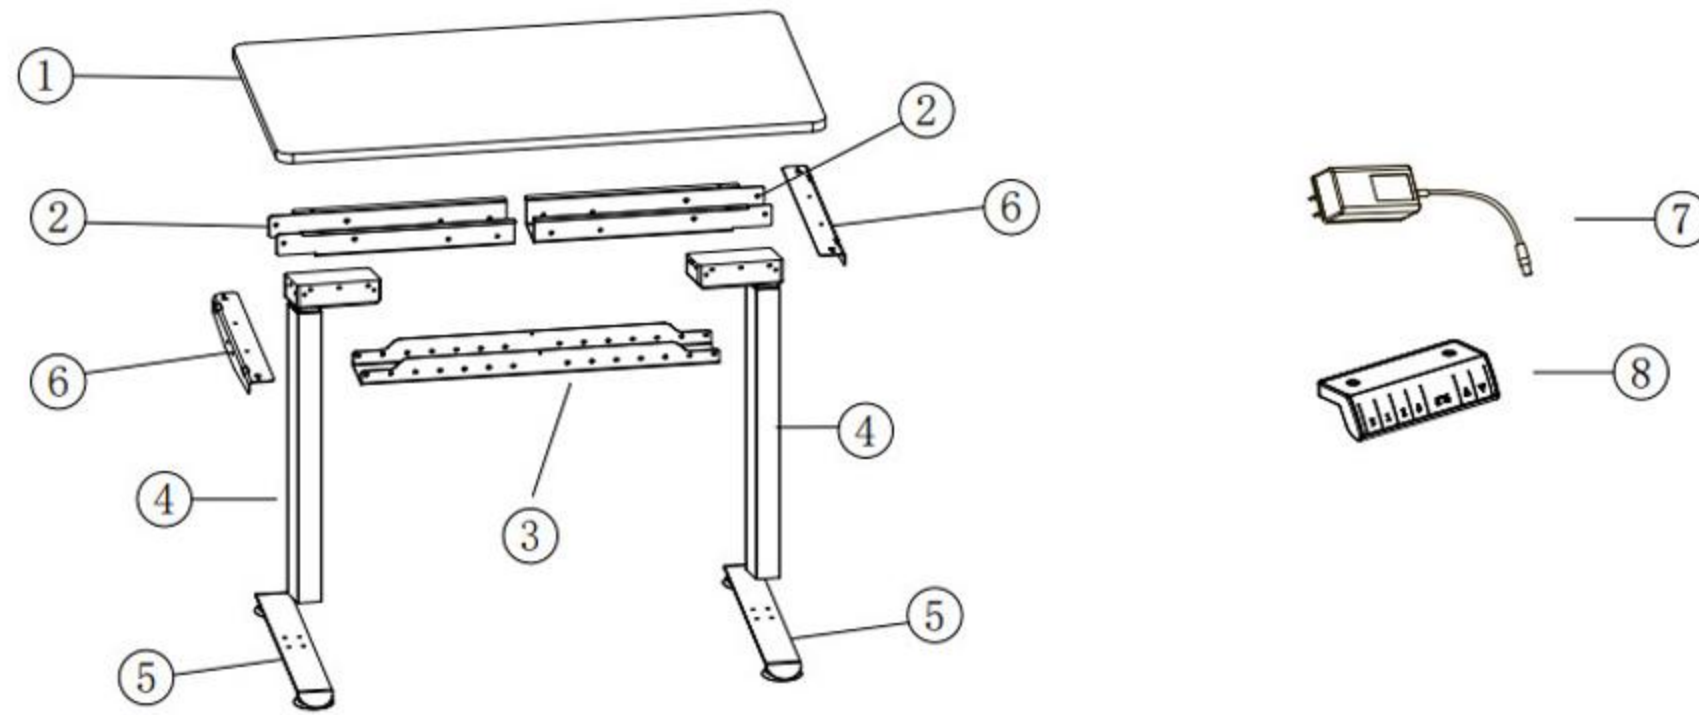

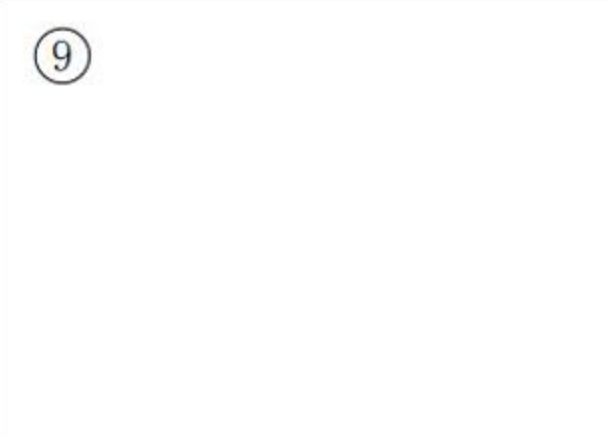Electric adjustable desk installatllation drawing

Parts List








①  Table board(×1)	②  Wire box on both sides(×2)	③  Intermediate trunking(×1)
④  Column(×2)	⑤  Footing(×2)	⑥  Tabletop bracket(×2)
⑦  Adapter(×1)	⑧  Controller(×1)	⑨ 


Screw package list

A  Screws M8×10(×8)	B  Nut(×8)	C  Screws M6×12(×28)	D  Screws ST4×15(×16)
E  Shim ring(×8)	F  Adjustable leveling feet(×4)	G  T-txpe wrench(×1)	H  Cross screwdriver(×1)

Spare screw package list

A  Screws M8×10(×1)	B  Nut(×1)	C  Screws M6×12(×2)	D  Screws ST4×15(×2)
E  Shim ring(×1)			


Installation step 1

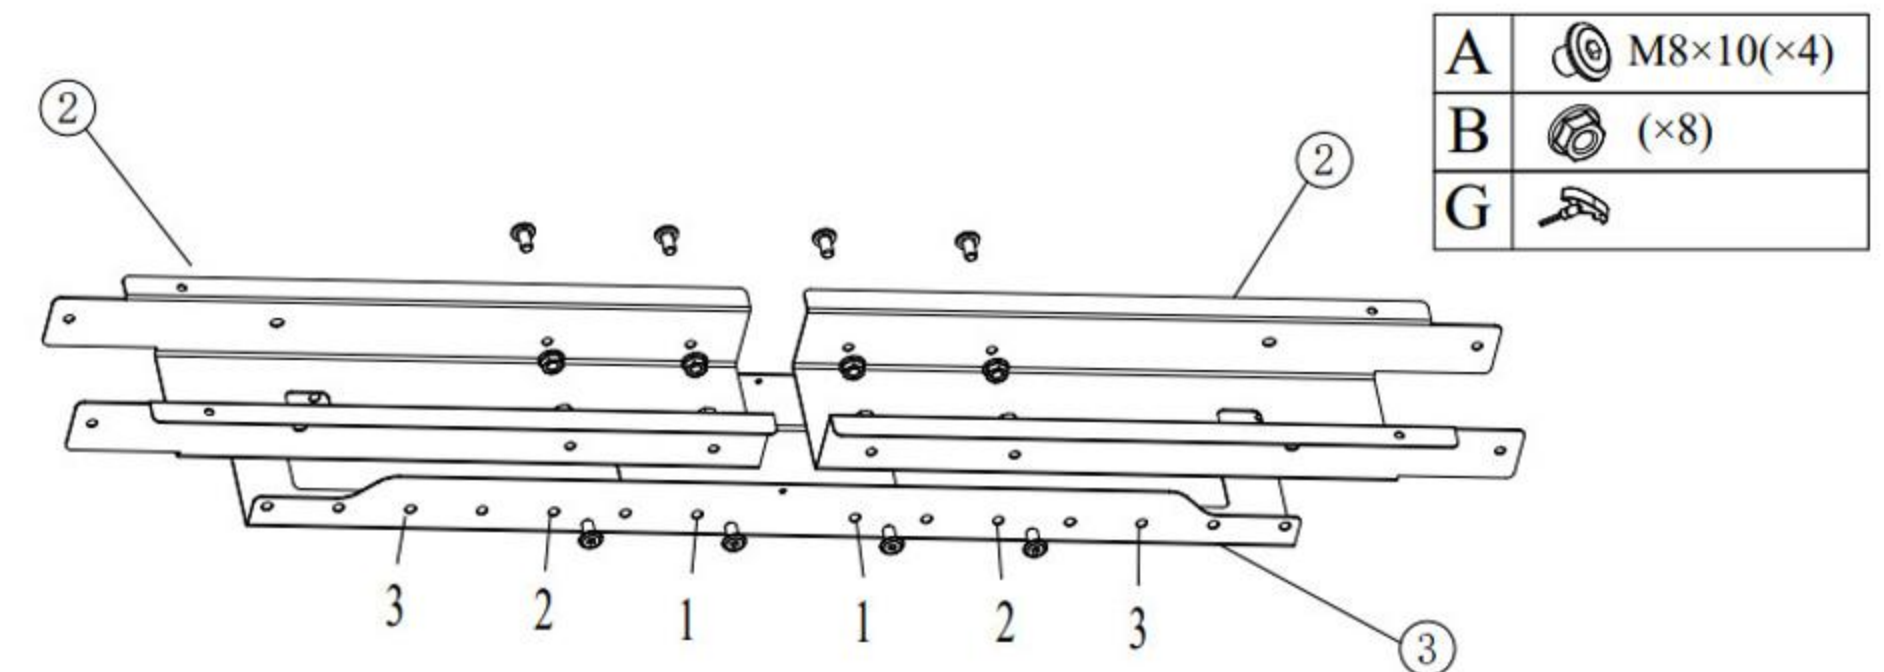




Installation Notes:

- The holes on both sides are symmetrically matched and fixed with A and B.
Fixed hole 1 :Use with 1200 ×600 desktop.
Fixed hole 2 :Use with 1400 ×600 desktop.
Fixed hole 3 :Use with 1600 ×700 and 1800 ×800 desktop.

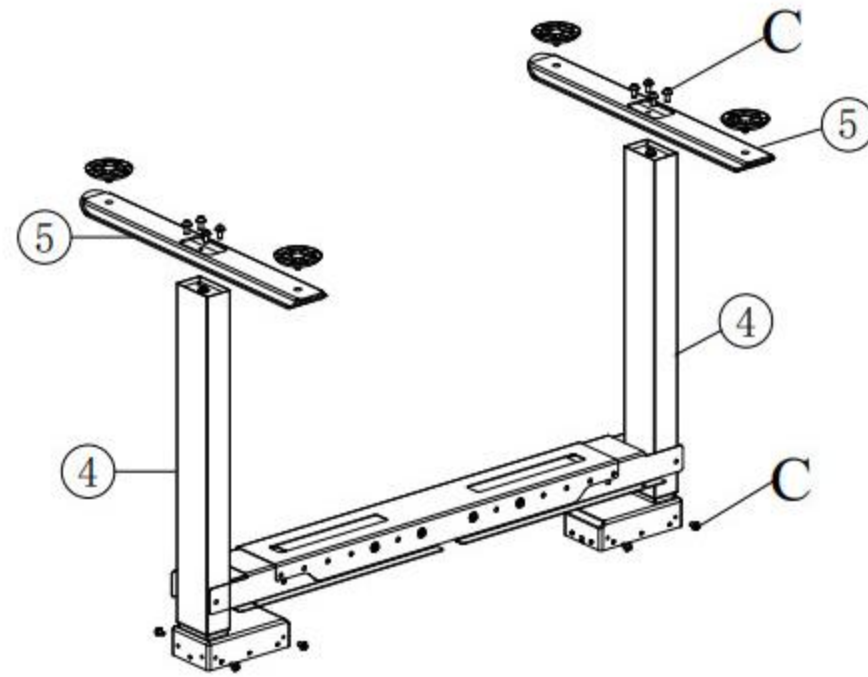Installation step 2





C	 M6×12(×8)
F	 (×4)
G	

Installation Notes:

1. Install the column on the components in step 1 and fix them with C.
2. Install the table legs on the column and fix them with C.
3. Install the adjustable on the table legs.

Installation step 3

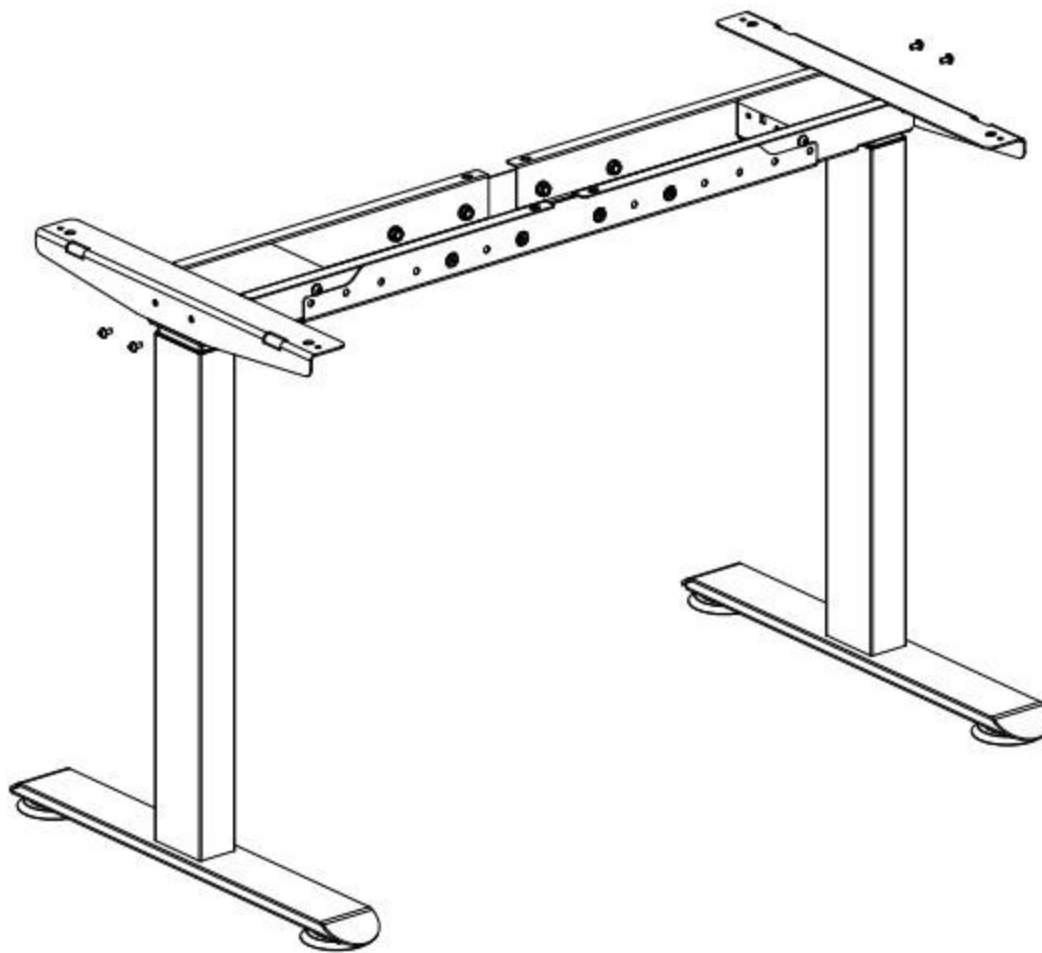

C	 M6×12(×4)
G	


Installation notes:





1. Install ⑥ on step 2 and secure with C.

2. Connect ⑦ and ⑧.

3. After the power supply is turned on, press and hold the button to reset, then lift and lower one back and forth before installing the table board.

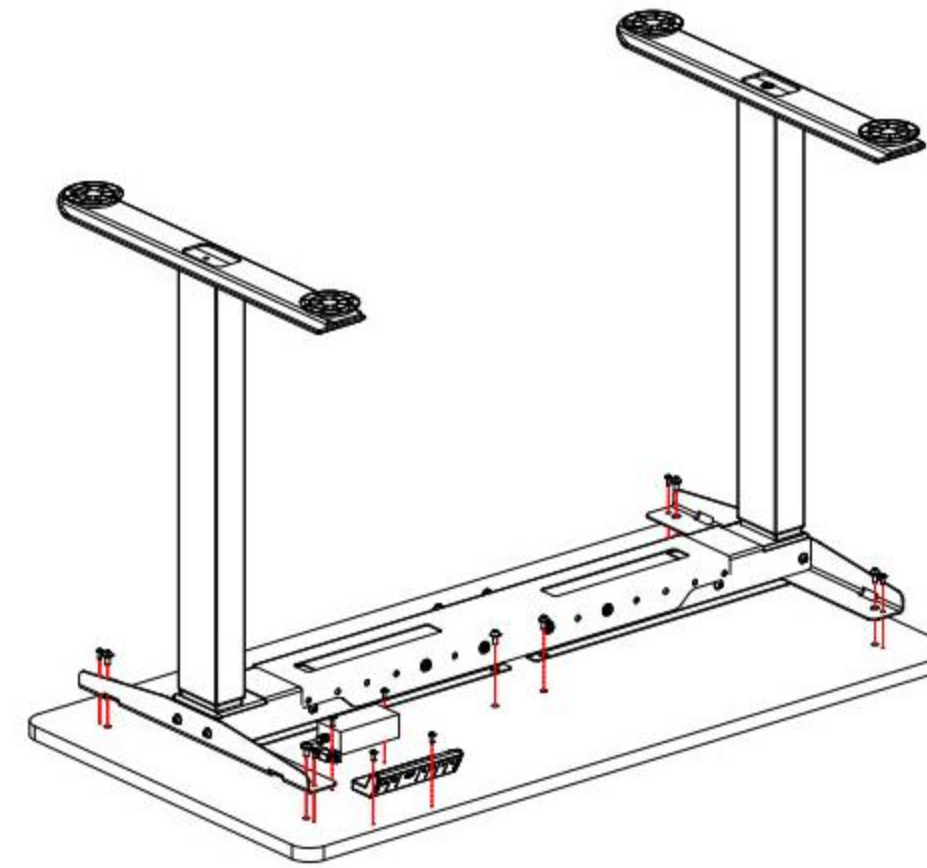Installation step 5




C	 M6×12(×8)
D	 ST4×15(×8)
G	
H	


Installation Notes:

1. Install ① on step 4 and secure with C and D. (C can be replaced with D and E for use.)
2. Use E to fix ⑧ and ⑨ on the desktop board.

Complete

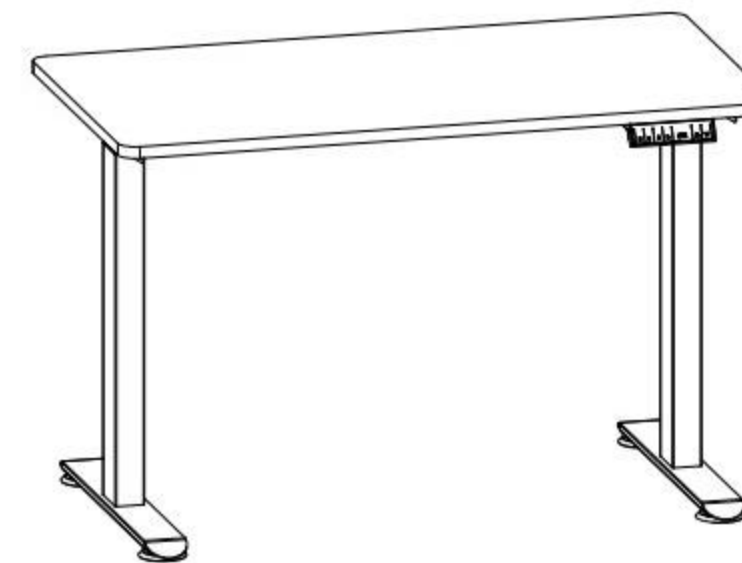


Instructions for use:

1. Press  to reset the lowest position or error code duration.
2. Memory position saving: Run the desktop to the desired position, press the S key, the display screen will flash, and then press the corresponding number key.
3. Short press the number keys to reach the set height, and press any key to stop the operation during operation.

Instructions for the desk legs


As shown in the figure, our product comes with two different styles of table legs for customers to choose from. Customers can select the appropriate table legs according to their personal preferences for installation, and the unselected legs can be kept as spare parts. If the rhombus-shaped table legs are chosen, they can be installed in place of position ⑤.

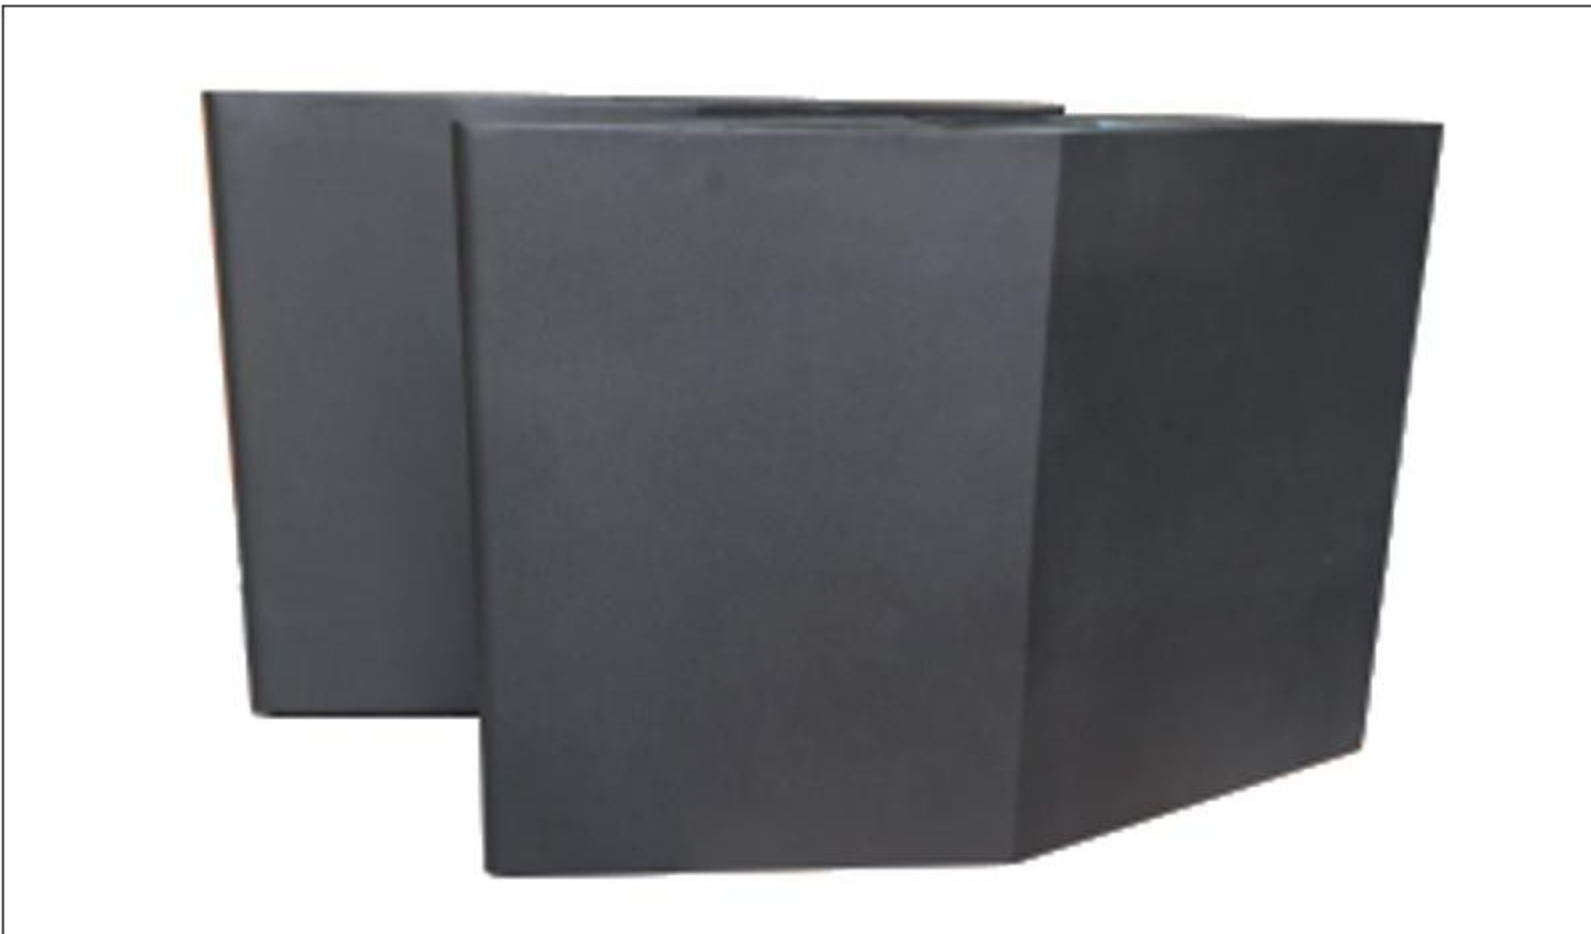

The installation of drawers

Step 1

To remove the drawer, as shown in the diagram, press down on the lock catch on one side while simultaneously pressing up on the lock catch on the other side, and then you can take the drawer out.

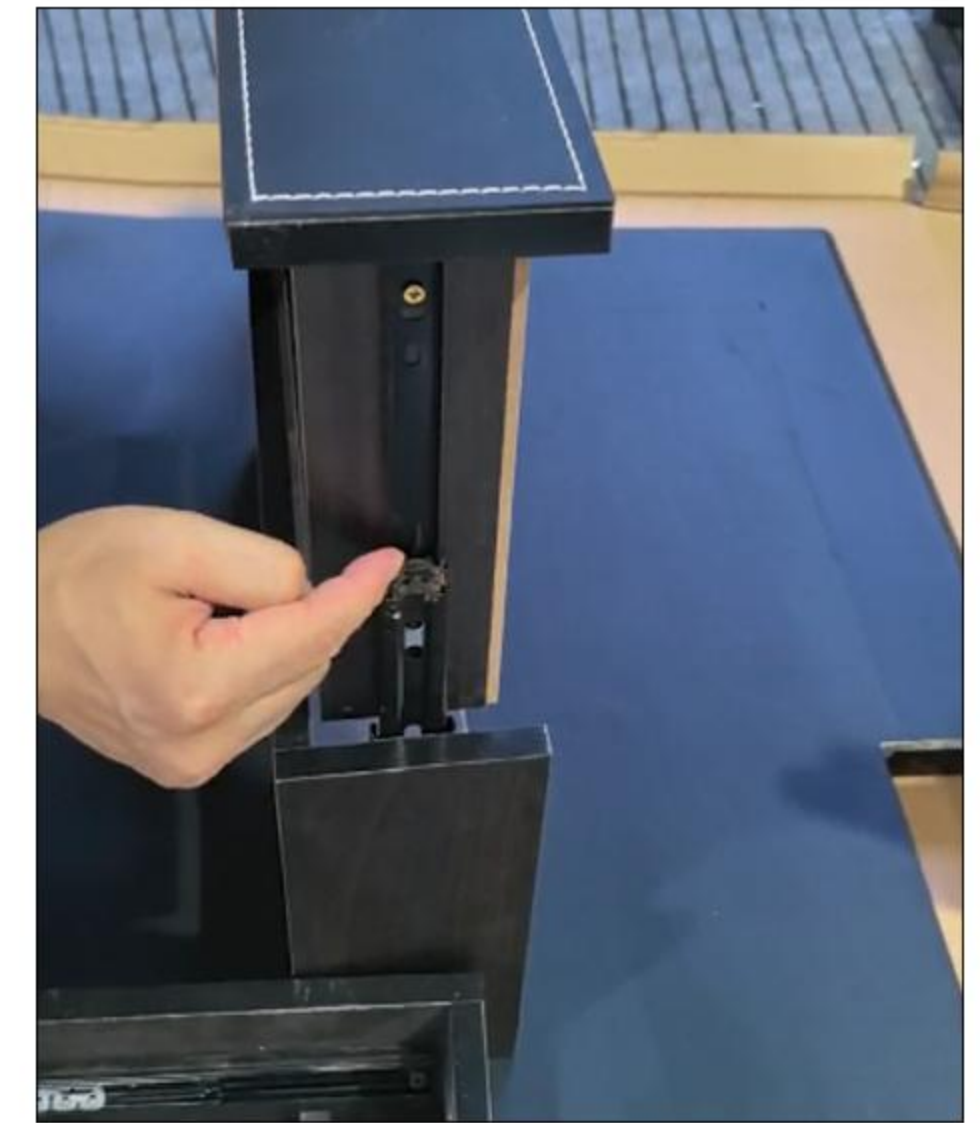

Step 2

Locate the corresponding positions on the underside of the desktop. After roughly measuring and positioning, align the pre-drilled holes at the bottom of the drawer with the mounting points on the desktop, and secure it with screws to complete the installation. For the other drawer, follow the same procedure.

