


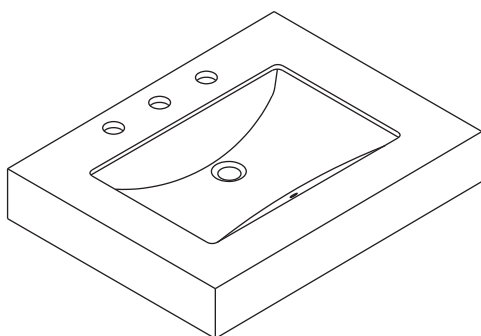

Two installation options based on your purchase:

1. With cabinet: Place the basin directly on the floor-standing cabinet top. Metal brackets are not needed.

2. Standalone: Use the included metal brackets to mount it securely on the load-bearing wall. This natural marble product must be installed onto a load-bearing wall or solid wall only. Hollow/cavity walls and wooden structural walls are not load-bearing and are not suitable for installation.

Notice:


1. Follow the installation instructions. Please confirm all accessories are preset before installation.
2. Do not fully tighten the screws during initial assembly. Fully tighten screws only once all pieces which are correctly assembled.
3. If you encounter any problems during installation, please contact our customer service.
4. Please unbox the item from the side with an open-label and put a carpet on the floor to avoid scratching it.



Recommended installers : 2



Put a carpet on the floor
before unpacking



Estimate installation time:
30 minutes

Components - fittings

Please check you have all the panels listed below.


Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.

Item no.	Reference Image	Qty	Item no.	Reference Image	Qty
A		x1	2		x8
B		x1	3		x8
1		x8			


1



① 8pcs



Bring your own tools

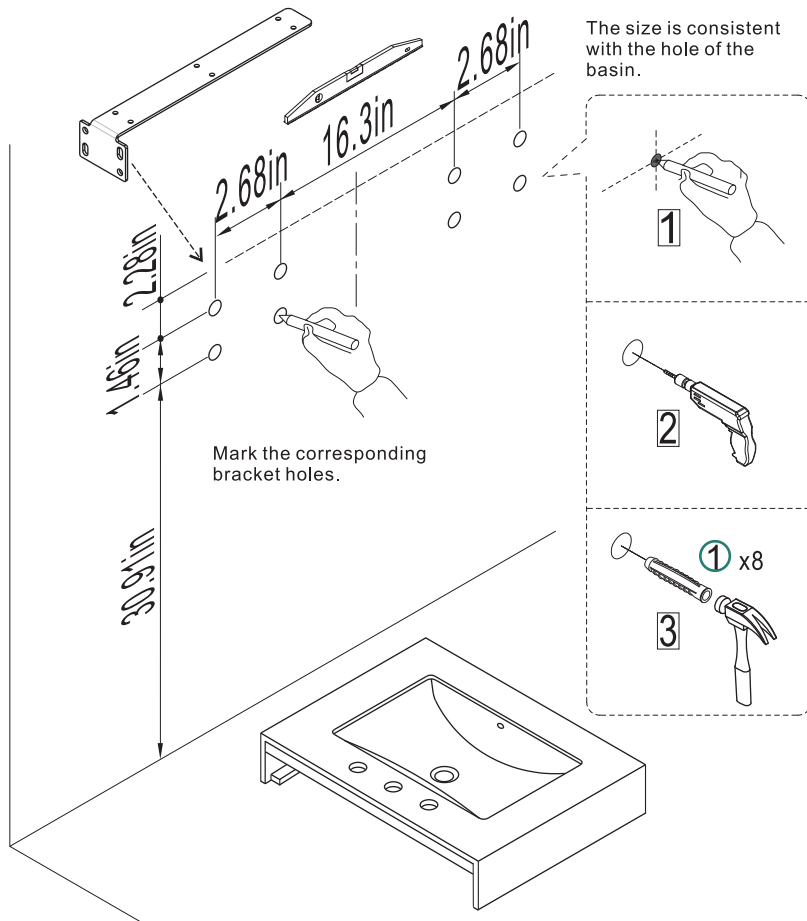

For wall-mounted installation customers only.

WARNING: To prevent falling down this product must be used with the wall attachment device provided.

WARNING: Assess the suitability of the wall to ensure that the fastening devices will withstand the forces generated.


WARNING: The maximum load-bearing capacity of this furniture is:40-60kg, please do not overload! Load-bearing capacity primarily depends on the installation method and wall structure.

Always identify the wall type first and hire professional installers using fasteners specifically designed for that wall type.

2



Ⓐ 1pc




Ⓑ 1pc




② 8pcs



③ 8pcs




Bring your own tools

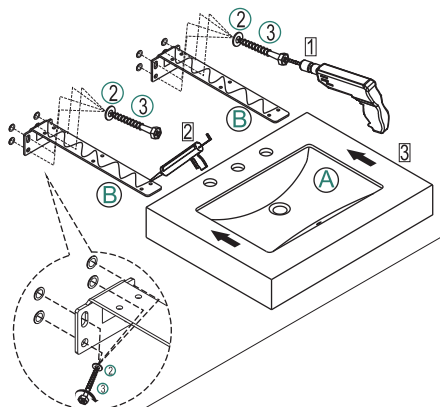



For wall-mounted installation customers only.

This natural marble product must be installed onto a load-bearing wall or solid wall only. Hollow/cavity walls and wooden structural walls are not load-bearing and are not suitable for installation.




After setting up the tabletop, a circle of glass glue can be applied to enhance its stability and improve its appearance.

3

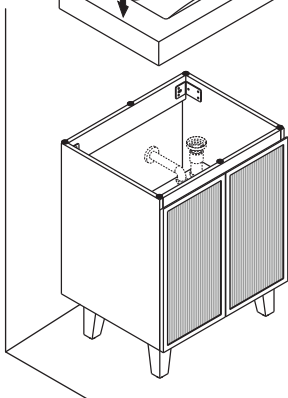

For walls without adequate load-bearing capacity, please opt for a suitably sized floor-standing cabinet, which delivers greater functionality.



If the base/back panel does not fit, you may trim it as needed.

Installation of drain assembly

Pop-up Waste Installation


STEP 1

Install Pop-up Waste with over flow.

STEP 2

Connect the drain pipe.

This product does not include faucet and drainage accessories. The content on this page is provided as installation suggestions only. Please carry out the installation according to the requirements of the product you actually purchased.

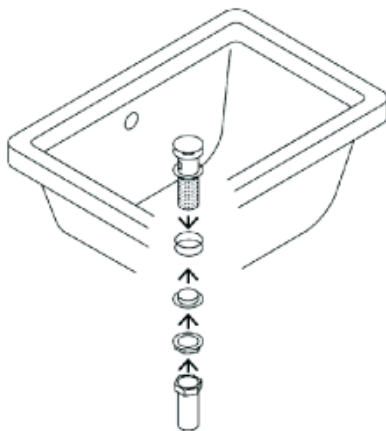

Always fully close the faucet after use!

Failure may cause:

Water Overflow

Continuous flow with blocked drain floods cabinetry, floors, and ceilings below, causing property damage and liability for compensation.

Personal Injury

Water accumulation significantly increases slip/fall risks (especially for children/elderly).

Cabinetry Damage

Water infiltration leads to swelling, warping, hardware corrosion, and countertop cracks.

Hidden Hazards

Persistent leakage erodes wall structures, breeds mold, and incurs high repair costs.

We strongly recommend that you:

- ✓ Confirm faucet is fully closed after each use;
- ✓ Regularly inspect faucet/hoses for leaks;
- ✓ Shut off angle valve immediately and seek repair if malfunction occurs;
- ✓ Cut off main water supply when leaving home long-term.

Disclaimer: Users bear full responsibility for damages caused by faucet left open or delayed repairs.

