



INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.

Installation Guide

4-LIGHT KITCHEN ISLAND PENDENT

SKU #

IN-0335-4-WD

Model #

FSL01584



Questions, problems, missing parts?

Contact the customer service department at info@getinlight.com

We commit to respond to emails within 24 hours - and sooner, if possible!

We are devoted to solving problems and offering the best service to our customers.



**PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING
INSTALLATION AND RETAIN FOR FUTURE REFERENCE.**



ATTACH YOUR RECEIPT HERE

Purchase Date _____

Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purpose, this matter should be referred to Inlight Co. Ltd.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: RISK OF ELECTRICALSHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordancewith the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton,installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

WARNING: RISK OF BURN

- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all lamp manufacturer's warnings, recommendations and restrictions for: driver type, burning position, mounting locations/methods, replacement, and recycling.

CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.

Warranty

Inlight offers a 1 year warranty from the date of purchase which covers repairs or replacements of defective parts of the housing, optics, and electronics. Contact the Customer Service Team at info@getinlight.com or visit www.getinlight.com




TURN OFF ELECTRICITY


At main fuse box (or circuit breaker box)
Before removing the old fixture



REQUIRES 2 PEOPLE

Assistance will be required to support the fixture during installation

- 1** Secure the mounting bracket to the junction box (not included) with mounting screws. The preassembled mounting nipple on the mounting bracket should protrude outward.
 - 2** Remove cap nut and hex nut from mounting bracket assembly.
 - 3** Attach the iron rack B onto fixture using screws as shown.
 - 4** Attach the iron rock A onto Iron rack B using decorative screws as shown.
 - 5** Choose desired hanging length for the light fixture. Suggested mounting height over a table or island is 30 inches from the table/island top to the bottom of the fixture. Assemble the necessary rods using the 6 inch rod(s) and/or 12 inch rod(s).
 - 6** Pass fixture wires and ground wires through the rod assembly. Attach the rod assembly to fixture.
 - 7** Pass fixture wires and ground wire through the fixture loop. Thread the fixture loops to the end of each rod.
 - 8** Connect the fixture loops to the chain links on the underside of the ceiling canopy by using open chain link.
 - 9** Use Wire nuts (supplied) to connect the wires.
 - a. Attach the fixture grounding wire to the mounting bracket with the green grounding screw, and then connect it to the house grounding wire with a wire nut.
 - b. Connect the supply white wire to the fixture supply wire from fixture identified with the label "N".
 - c. Connect the supply black wire to the fixture supply wire from fixture identified with the label "L".Carefully put the wires back into the junction box.
 - 10** Attach the ceiling canopy to the crossbar assembly. The lanyard will push into the junction box when the Ceiling Canopy is Attached to the ceiling. Secure with the previously removed hex nut. Then, attached the lock ball over the round ceiling canopy.
 - 11** Insert 60-watt max. medium-base bulb or CFL/LED equivalent (none included) into socket. Restore electricity.
- 

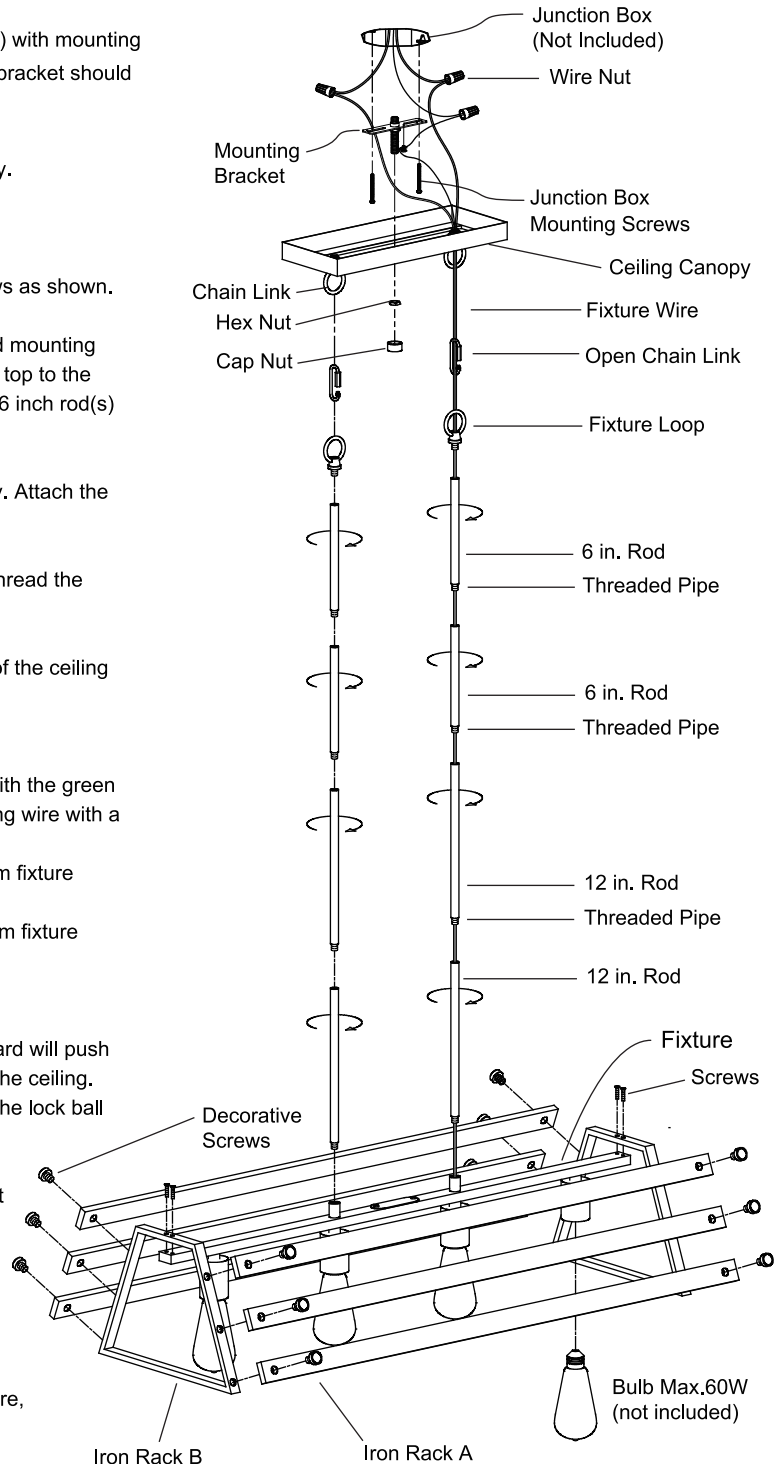

Questions, problems, missing parts? Before returning to the store,
contact Inlight Customer Service

info@getinlight.com

Retain this manual for future use.

 is registered trademarks of Inlight Co. Ltd. All Rights Reserved.

Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.