

PLANTER BASE LAMP ASSEMBLY GUIDE

Please identify ALL PARTS with parts list PRIOR to starting assembly.

PLEASE READ ALL INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING FIXTURES.


If for some reason you are missing parts or have problems with your fixture **DO NOT CALL OR RETURN TO THE RETAILER.** Call for direct assistance

IMPORTANT NOTICE:


Extra color match screws may be included in parts bag for your convenience.

WE SUGGEST THE USE OF ADDITIONAL WEIGHT SUCH AS 50 LBS. OF RIVER ROCK INSIDE PLANTER BOTTOM BEFORE PLANTING SOIL TO ADD WEIGHT TO PLANTER PROVIDING SUFFICIENT STABILITY FOR OUTDOOR USE. THIS ROCK WILL ALSO HELP WITH DRAINAGE.


DRAIN HOLES CAN BE DRILLED IN PLANTER BOTTOM IF DESIRED.

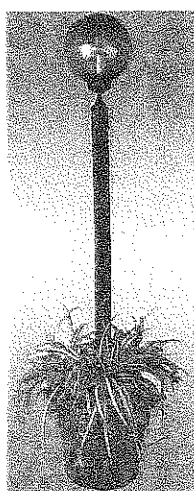


1 - 100 Watt

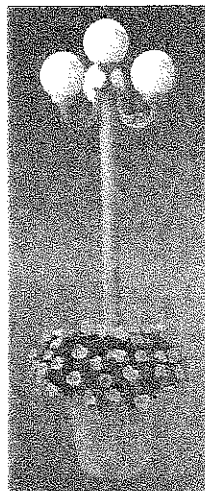

4 - 60 Watts

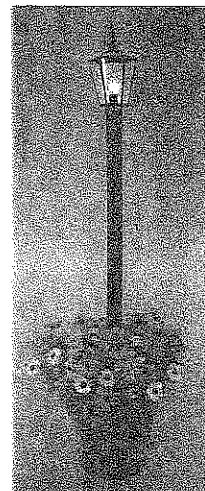

1 - 100 Watt

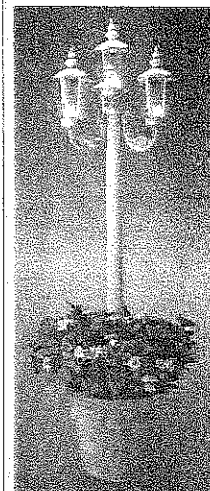

4 - 60 Watts

WARNINGS AND CAUTIONS: When using the outdoor portable lamp, safety should always be followed to reduce the risk of fire, electric shock or personal injury. (1) Read all instructions. (2) Use only three-wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance plug. (3) Ground Fault Circuit Interrupter (GFCI) protection should be provided on the circuit(s) or outlet(s) to be used for the wet location portable lamp. Receptacles are available having built in GFCI protection and are able to be used for this measure of safety. (4) Use only with an extension cord for outdoor use, such as an extension cord of type SW, SJW-A, SOW, SOW-A, STW, STW-A, STOW, STOW-A, SJW, SJW-A, SJOW, SJOW-A, SJTW, SJTW-A OR SJTOW OR SJTOW-A. (5) **CAUTION: Risk of electrical shock. Do not use with extension cord near water or where water may accumulate. Keep light at least 16 feet away from pools and spas.** (6) Save these instructions.










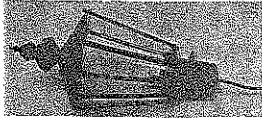


DANGER!! Risk of electric shock. Be sure that base cord and plug is not plugged into an outlet before proceeding with the following assembly instructions.

PLANTER BASE PARTS LIST:

QUANTITIES:

PHOTO AND DESCRIPTION:

Models: Models: Models: Models:

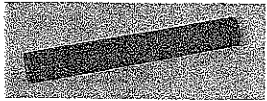







A		Tube A (1 indented hole, 3 plain holes)	2	2	2	2
B		Tube B (2 indented holes)	1	1	1	1
C		Planter Base	1	1	1	1
D		Planter Ring	1	1	1	1
E		Joiner	2	2	2	2
F		12" Globe	1	N/A	N/A	N/A
G		8" Globe	N/A	4	N/A	N/A
H		Lantern Globe	N/A	N/A	N/A	4
I		Park Style Multi Globe Fixture	N/A	1	N/A	1
J		Single Lantern Fixture	N/A	N/A	1	N/A
K		Single Globe Fixture	1	N/A	N/A	N/A
L		Sand Bag Weights	3	3	3	3

PLANTER BASE HARDWARE LIST:

QUANTITIES:

PHOTO AND DESCRIPTION (SHOWN ACTUAL SIZE):


Models: Models: Models: Models:

1			Silver Phillips Pan Head Sheet Metal Screw #8 X 1/2	1	1	1	1
2			Color Match Hex Drive Flat Head Screw #8 X 1/2	4	4	4	4
3			Color Match Pan Head Screw #8 X 1/2	1	1	1	1
4			Cord Retainer	2	2	2	2

TOOL REQUIRED:
No. 2 Phillips Screwdriver



TOOL TIP SHOWN ACTUAL SIZE



STEP - BY - STEP ASSEMBLY INSTRUCTIONS: PLANTER BASE LAMP

STEP 1:

Snap Wire PLANTER RING (B) into indent ledge around center of PLANTER BASE (C) as shown.

STEP 2:

Fasten one of two TUBE A (A) into PLANTER BASE (C) bottom as shown with PHILLIPS PAN HEAD SHEET METAL SCREW #8 x 1/2 (1). Make sure to use round hole of 3 hole end of TUBE A (A) (not indented hold end) to fasten inside PLANTER BASE (C). Only one screw is needed to fasten tube to Planter Base. Take care to align round hole of TUBE A (A) and PLANTER BASE (C) cord channel with cord retainer holes in it. This will ensure all screw heads and cord exit will be on the back side of the assembled product.


NOTE: PHILLIPS PAN HEAD SHEET METAL SCREW #8 x 1/2 (1) will make its own hole in PLANTER BASE (C). Push hard and turn with short Phillips screw driver.

STEP 3:

Fasten JOINER (E) to indented hole end of TUBE A (A) with COLOR MATCH HEX DRIVE FLAT HEAD SCREW #8 x 1/2 (2).

DO NOT TIGHTEN SCREW SECURELY AT THIS TIME!

STEPS 1-3

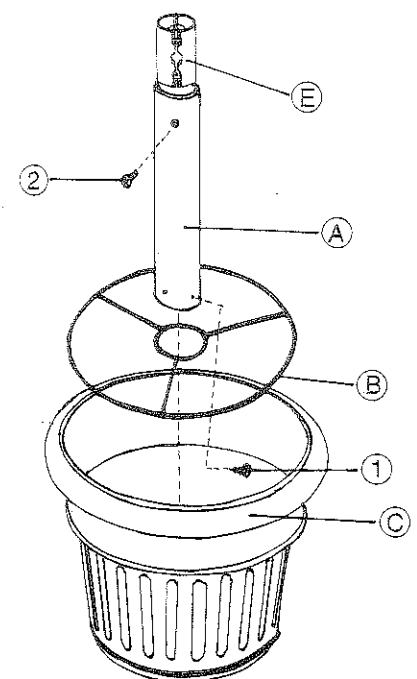

STEP - BY - STEP ASSEMBLY INSTRUCTIONS: (Continued)

STEP 4:

Fasten second JOINER (E) to one indented hole end of TUBE B (B) with COLOR MATCH HEX DRIVE FLAT HEAD SCREWS #8 x 1/2 (2).

DO NOT TIGHTEN SCREWS INTO JOINERS UNTIL BOTH ENDS OF TUBES ARE FITTED ONTO JOINERS.

STEP 5:

Feed electrical cord that extends from bottom of fixture (SINGLE GLOBE (K), LANTERN (J), or MULTI-GLOBE PARK STYLE (I), through TUBE A (A) through 2nd joiner and TUBE B (B) through 1st joiner and TUBE A (A) and through bottom hole in planter base assembly as shown.

STEP 6:

Assemble TUBE B (center tube) (B) to 1st JOINER (E) in first TUBE A (A) in planter base assembly. Assemble 2nd TUBE A (A) to JOINER (E) in TUBE B (B) as shown. Tighten screws (2) in all tubes and joiners until tubes are tightly connected.

ASSEMBLY TIPS: Holes in tubes and joiners can be perfectly aligned by inserting an awl or ice pick into the assembled tube and joiner holes before fastening with color match hex drive flat head screws. Start both screws into joiner before tightening. This will ensure perfect seating of flat head screws into indented holes. Tightening screws into joiner will spread joiner inside of tube to make a secure tight connection of tubes. Tighten screws with hex drive tool supplied until they can not be tightened further to make a tight connection between tubes.

STEP 7: Assemble electrical fixture to top of TUBE A (A) and secure with COLOR MATCH PAN HEAD SCREW #8 x 1/2 (3) into round threaded hole in top of TUBE A (A).

STEP 8:

Screw an incandescent bulb into socket. Be sure to use bulb(s) with wattage no greater than specified for this fixture. Wattage labels are located next to each socket on fixture and also next to photos on the front of this instruction sheet. Mount globe (or globes on park style fixture) onto holders by turning in a clockwise direction. Plug the cord into a GFCI outlet and turn on the three-way dimmer switch located in center body of top fixture.

STEP 9:

Spread CORD RETAINER (4) around lamp cord and snap retainer into holes in wire channel in bottom of planter base. Repeat for 2nd CORD RETAINER (4).

Place 3 SANDBAGS (L) in bottom of planter and see "IMPORTANT NOTICE", page 1, of these instructions.

STEP 10:

Assemble pagoda assembly onto outside top of lantern roof by loosening ball head screws and removing pagoda assembly from shipping position inside of lantern cage. Install correct wattage incandescent bulb into socket. Reassemble Pagoda assembly onto outside of roof and fasten with ball head screws to lantern roof.

SEE ENCLOSED SEPARATE ASSEMBLY INSTRUCTIONS FOR GLOBE PAGODAS ON PARK LANTERN.

STEPS 4 - 7

