ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

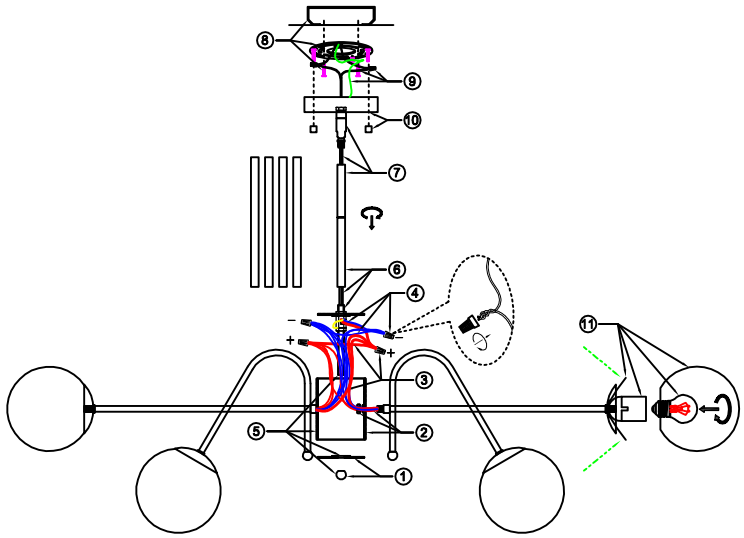

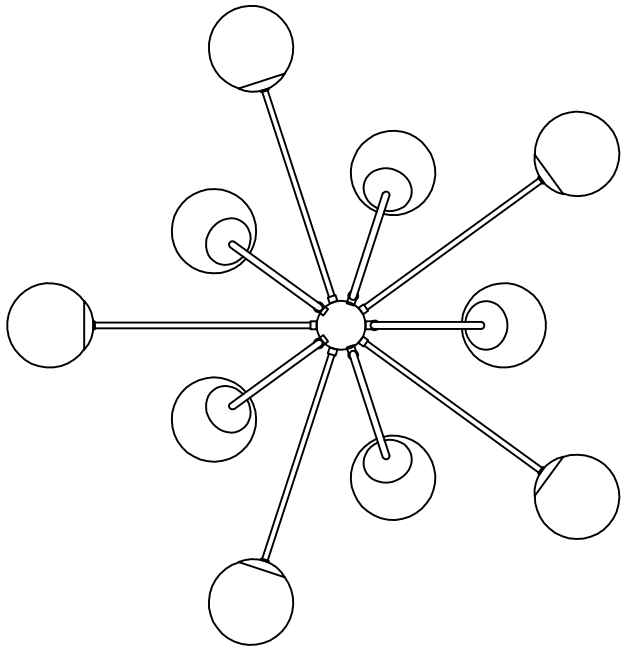

Before You Begin:

- Ensure power is turned off at the circuit breaker before installation.
- Read all instructions carefully.
- Installation should be performed by a qualified electrician if you are unfamiliar with wiring.

Step-by-Step Installation:

1.Loosen the ball nut and remove the round cover.
2.Insert the two types of arms through the side holes of the center hub in an staggered pattern, then tighten with the nuts.
3-4.Connect the arm wires / lead wires and the main fixture wires in four groups as follows:
-Using a wire connector, connect five of the black socket wires and the one end of the black lead wire.
-Using a wire connector, connect five of the white socket wires and the one end of the white lead wire.
-Using a wire connector, connect the other five black socket wires and the other end of black lead wire, and connect the main black fixture wire (hot) together.
-Using a wire connector, connect the other five white socket wires and the other end of white lead wire, and connect the main white fixture wire (hot) together.
Ensure no bare wire is exposed to prevent shock.
5.Pass the threaded tube through the center hub and the round cover, then secure with the ball nut.
6.Feed the fixture wires and ground wire through the downrod. Then tighten the downrod onto the fixture body securely. Downrods can be combined to achieve the desired length.
7.Feed the fixture wires and ground wire through the canopy swivel assembly, then thread the swivel onto the downrod. (Suitable for sloped ceilings.)
8.Secure the mounting plate to the junction box using the mounting screws.
9.Connect the supply wires to the fixture main wires using wire connectors.
·Use wire connectors to connect the black (hot) wire to the black wire, the white (neutral) wire to the white wire, and the ground wire to the grounding terminal.
·Ensure no exposed conductors remain outside wire connectors or outside the junction box.
10.Place the canopy over the mounting plate and secure it with the decorative nuts.
11.Screw the light bulb (not included) into the socket as indicated and test for proper operation.
Then press the spring clip and insert the glass shade into the spring clip to secure it.

Safety Instructions:

To avoid fire, shock, and serious personal injury, follow all instructions carefully.
1. Do not install or use the light fixture if any part is missing or damaged.
2. To avoid possible electrical shock, be sure electricity is turned off at the main fuse or circuit breaker box before wiring.
3. Make certain no bare wires are exposed outside the wire connectors.
4. All wiring must conform to national and local electrical codes.
5. Follow the recommended instructions for the proper method of wiring your new light fixture. If you feel you do not have enough electrical wiring knowledge or experience, have your light fixture installed by a licensed electrician. Any electrical work not described in this manual should be performed by a licensed electrician.