

# Installation Instructions

 Minute Hands



 Hour Hand

 Screw

# XII

**Step 1.**  
Align the hour and minute hand with the XII center, then install them gently in parallel and in sequence

**NOTE: BLACK SIDE UP, hour hand under the minute hand**

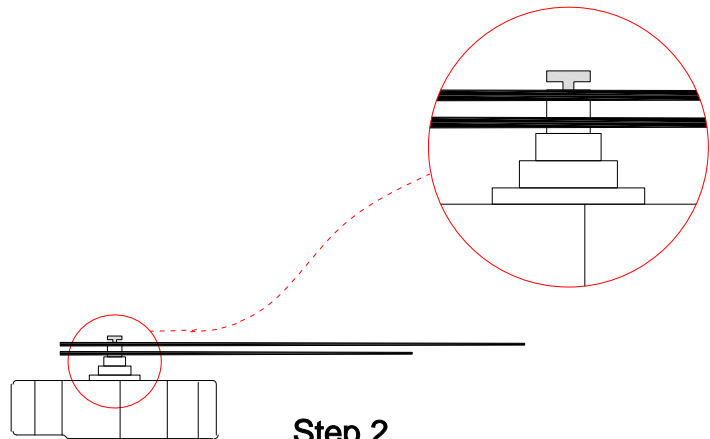


**Step 2.**  
View parallel condition from the side after the hands installed.

**NOTE: Keep 2-3 MM (2/25-3/25 IN) between the hands**

## Step 3.

How to set time:

1. Insert AA batteries and check if the built-in pinion is running.
2. Use the time dial, turn clockwise to set the time.

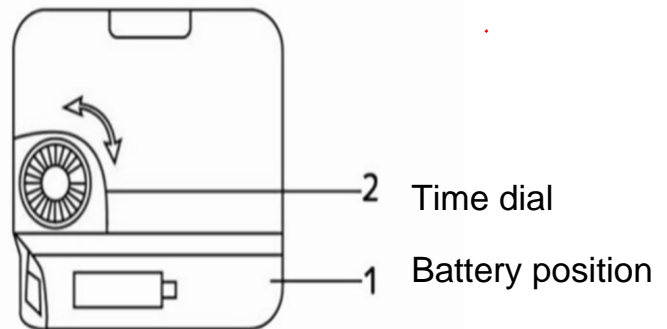

## WARNING:

1. **DO NOT** set time by moving the hands in front. Set time only by the time dial in the back.
2. **DO NOT** contrarotate to set time, it will cause the clock stop working.
3. **DO NOT** press down the hands too much, it will cause the clock to go slow or stop working finally if the hands are too close.
4. **Wait 10 minutes** to check the operation of the minute hand because there is **NO SECOND HAND**.