



Storebox

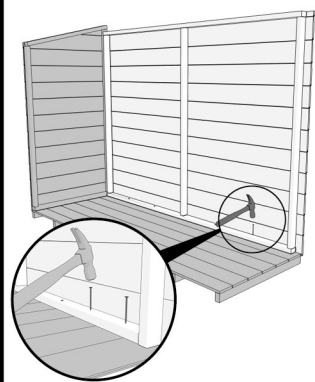


1.a Lay the floor down in the desired position.

1.b Check that this is level using a spirit level before proceeding.

1.c Each floor joist should be as near as possible be supported along its full length to prevent the floor from dipping in the middle.

1.d Ensure 65mm nails are driven through the side and gable panel base rails, through the floor boards in a position where they will finally penetrate the floor joist.




1d.

Important

- The floor panel must be laid on a firm & level base.
- The underside of this floor must be treated with a quality wood preserver.
- Before starting assembly, you may have to remove transport blocks (marked x) from the bottom of some panels.



Standard Sheds - 80mm Coach Screws
Heavy Duty Sheds - 100mm Coach Screws
x8

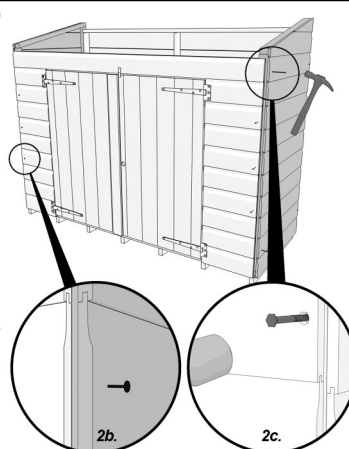


2.a Position one end gable panel on to one end of the floor panel.

2.b Offer up a side wall panel and secure this to the gable by using the 38mm nails through the sides in to the gables.


2.c Then use the coach screws provided, through the pre-drilled holes in the gable, from the outside.

2.d Place the second gable panel in position and secure this to the side panel, again using the coach screws provided.



Important


Check that the sides are at right angles to the gables and to the floor, then tighten all coach screws to secure the sides and the gables. (fig 1)
The floor panel must be laid on a firm and level base.



The gables will be taller than the sides to allow for the roof to sit on top of the framing.
Make sure the panels are flush with the corner of the floor to ensure they are properly aligned.

1. Base


3. Roof Panel

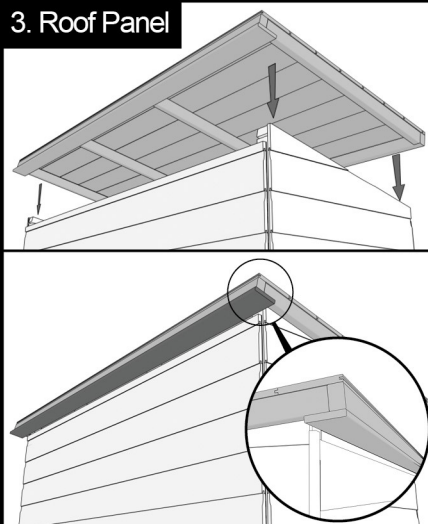

3.a Place the roof panel in position, ensuring that the end with the underside soffit already fastened on the roof is at the back (high side) of the building.

3.b Proceed to nail the roof to the sides and the gables using the 65mm nails provided.

Important
Before nailing roof into position, check that the overhang is equal at each side and at each end.



4. Roof Felt

Please be aware that certain sizes of building may need the roll of felt cutting in to more than two pieces.


4.a Nail the low side soffit (cut bargeboard) to the underside of the roof at the front (low side) (Image A). The soffit board will either be attached to the roof of in the polytube pack.

4.b Roll out the roofing felt starting at low side.

4.c Roll out the next width of roofing felt, ensure that this overlaps the previous layer by approx 150mm. Make sure that the last width of felt overlaps the high side of the shed, tack in place using the clout nails provided.



Important
Each width of felt should overlap each gable by approximately 75mm.

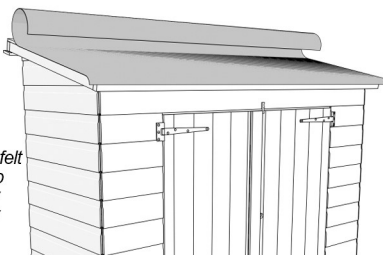


5. Bargeboards


5.a Fit the two shorter (gable) bargeboards to the roof panel, trapping the overhanging ends of the roofing felt in between the bargeboard and the roof to provide a weather seal.

5.b Fit the longer bargeboard to the roof panel on the high side again trapping the felt to make a weather seal.

Important: There is no bargeboard provided for the lower edge of the roof. This is to allow any rain water to run off the roof. Take care not to mix up the front bargeboard with the low side soffit. The soffit will be the shorter of the two.
Please be aware that the bargeboards may need cutting to size.

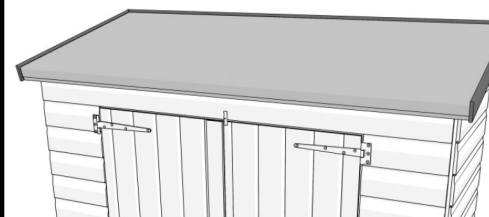


6. Corner Strips

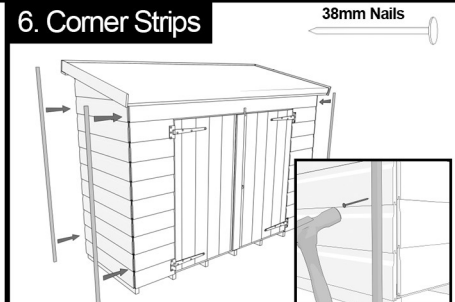

6.a Secure the corner strips at each corner of the shed with the 38mm nails provided.

Important:
Please do not confuse these corner strips as window beading. We do not provide window beading as standard with our buildings.
Also please be aware that these corner strips may need cutting to size.

A. The soffit will come pre attached to the roof or in the polytube pack. If attached to the roof, carefully prize off with a claw hammer and affix to the underside of the roof using the 38mm nails.

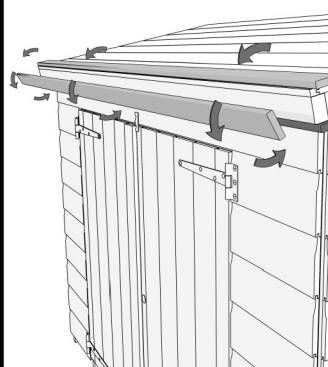

Lean to Pent Sheds 10x8 and Larger: To comply with legal transportation requirements in an economic way, the floors of these models are transported to the site in two parts. Sometimes on a 10x8 Pent model, the roof will be in two halves. You may find it easier to join the two halves of the panels first. (Image D)

Side Panels Made in Two or More Sections: (i.e. 12ft sides and above) These are attached using the 65mm nails provided through the internal framework on an angle. You may be supplied a cover strip to cover the external joint. (Image E)

Two Tier Staging: If you have two tier staging with your garden shed please construct it as it is portrayed. (Image B)

Treat your building annually: Although it may come with a factory basecoat you should treat your new garden building inside and out shortly after installation with a good quality water resistant treatment. This process should then be repeated annually with care taken to brush the treatment into all wooden components involved within the construction of the building, inside and out.

Ensure nothing is in contact with your building: Any overhanging tree or hedge growth poses a threat to your garden building and should be cut back at regular intervals. If a tree branch makes contact with your building it may pierce the roofing felt and encourage water ingress. You should also take care not to allow plants to grow too close to the walls of your building to prevent leaks.

Check and replace any damaged felt: If you do find any damage sustained to your roofing felt over time it is essential that you act upon this without delay. Should you discover a rip or tear in the felt it is recommended that this area be stripped from the roof and a new covering of high grade, heavy duty, mineral felt (which can be purchased online and/or at most retail DIY stores) be affixed immediately.

You should also ensure that your new building is covered on your household insurance policy, as we cannot be held responsible for damage caused by storms or vandalism.

For more help and advice on installing and maintaining your garden building please visit our comprehensive help centre at: www.tigersheds.com/helpcentre.asp

Check List

- x1 Floor
- x2 Gables (sloped)
- x2 Sides (Rectangular)
- x1 Roof Panel
- Roofing Felt

- Found in Polytube
- x3 Bargeboards
 - Soffit (Attached to Roof)
 - x4 Corner Strips
 - Fixing Pack