

Features

- Brass construction
- 1.5 gpm flow rate
- Red/Blue indexing
- ADA compliant
- One-piece, self-contained ceramic disc valve controls both volume and temperature control
- Temperature memory allows the faucet to be turned on and off at any temperature setting
- Flexible supplies for easy installation

Installed component/s: Flexible supply hoses.



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF 61

NSF 372

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

OBC

All applicable US Federal and State material regulations

See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



| | |
|----|-----------------|
| CP | Polished Chrome |
|----|-----------------|

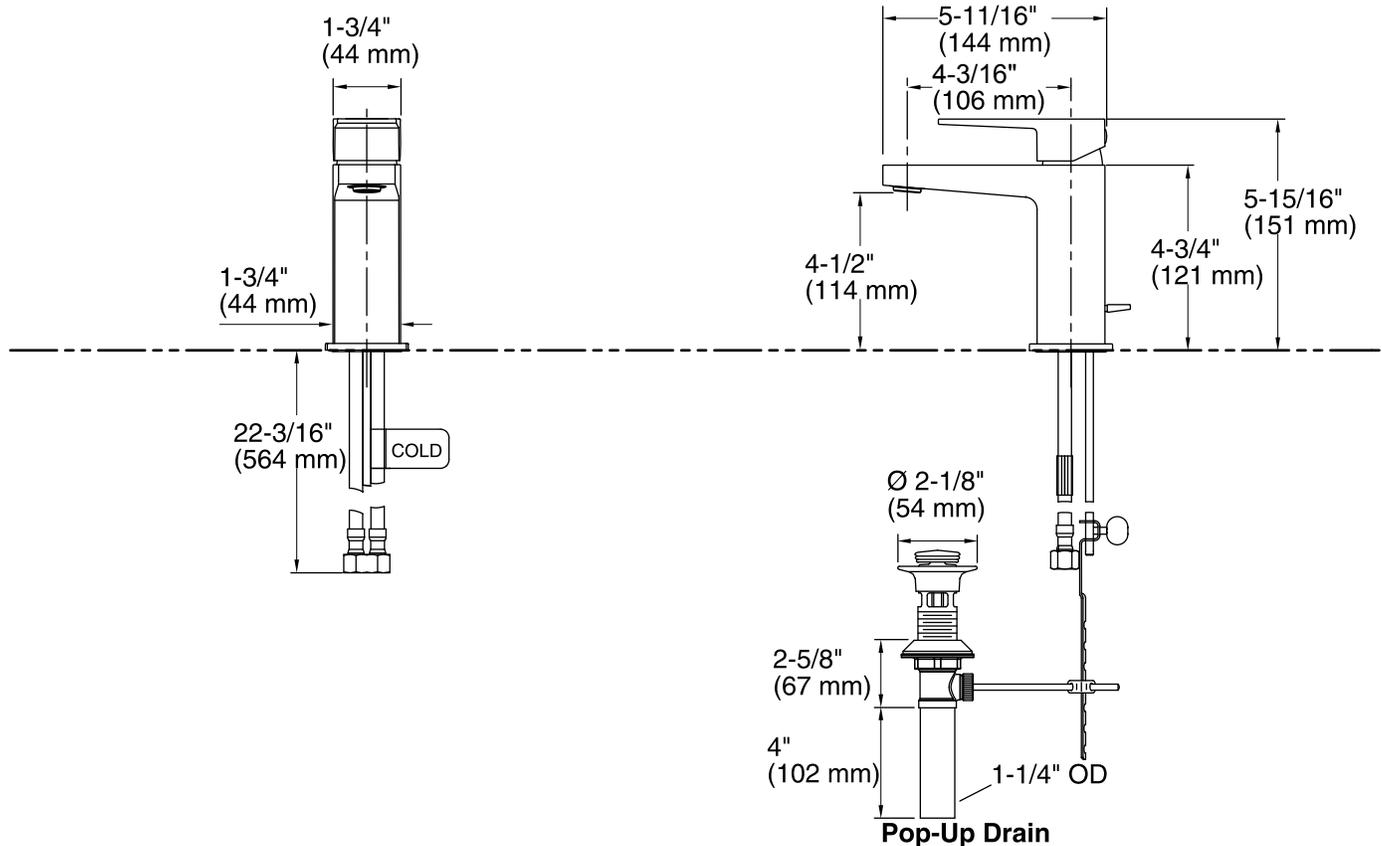

Technical Information

All product dimensions are nominal.

| | |
|---------------------------|------------------|
| Valve body: | Plastic |
| Spout reach: | 4-3/16" (106 mm) |
| Drain included: | YES |
| Drain with overflow: | YES |
| Drain tailpiece included: | YES |

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.