


# CHANDELIER



# INSTALLATION MANUAL

## TOOLS REQUIRED

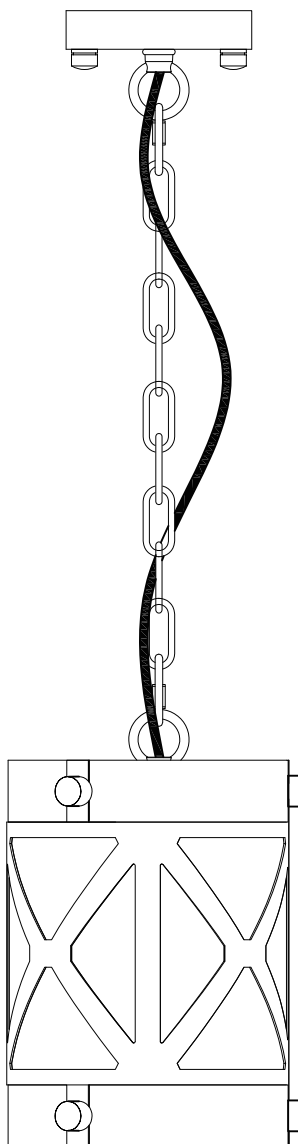


Ladder



Pliers




Wire Strippers



Screwdrivers

# 01


## PACKING LIST



**A** Canopy × 1



**B** Chain × 1

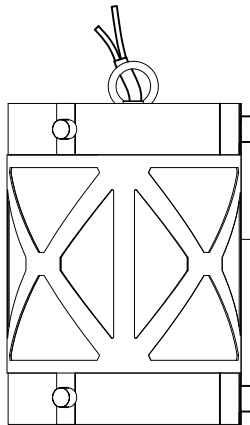


**C** Light Assembly × 1

# 02

## INSTALLATION KIT

**AA**

1X



Mounting Bracket

**BB**


1X



Ground Screw

**CC**

2X



Outlet Box Screw

**DD**

2X



Knurled Nut

**EE**

3X



Wire Nut

**FF**

1X



Gloves

### NOTE:

1. BB has already been pre-installed in AA, and AA/BB/DD have already been pre-installed in A.
2. Some extra hardware may be included, and the quantity listed above is the number required for installation.



# 03

## MOUNTING AND WIRE

### 1. Take out and install the Mounting Bracket

Step 1: Loosen the Knurled Nut (DD) from Canopy (A), and take out the Mounting Bracket (AA).


Step 2: Install the Mounting Bracket (AA) onto the Outlet Box with the Outlet Box Screws (CC).

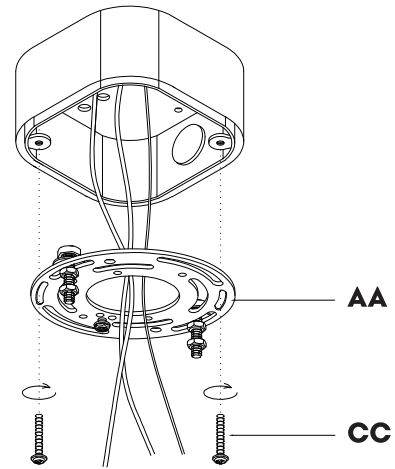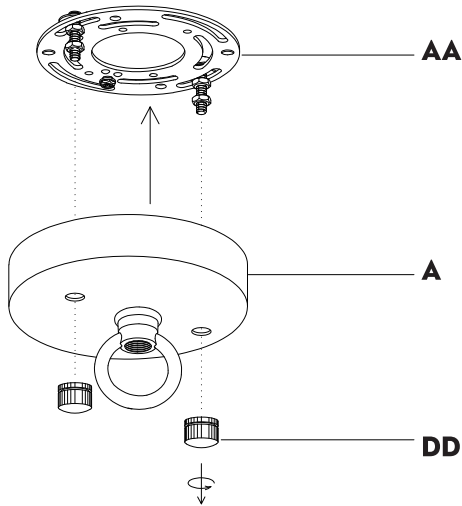

### 2. Connect the Wire and the Chain

Step 1: Pass the Wire of the Light Assembly (C) through the Chain (B) and Canopy (A).

Step 2: Unscrew the movable buckles at both ends of the Chain (B) and fasten them separately onto the rings of Canopy (A) and Light Assembly (C).

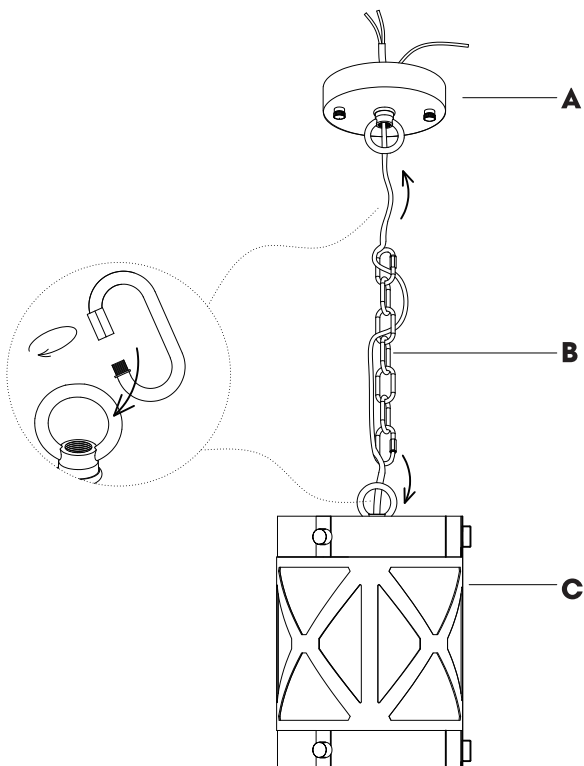


### 3. Connect the Wires

Step 1: Wrap the ground wire from the outlet box around the Ground Screw (BB) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.


Step 2: Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

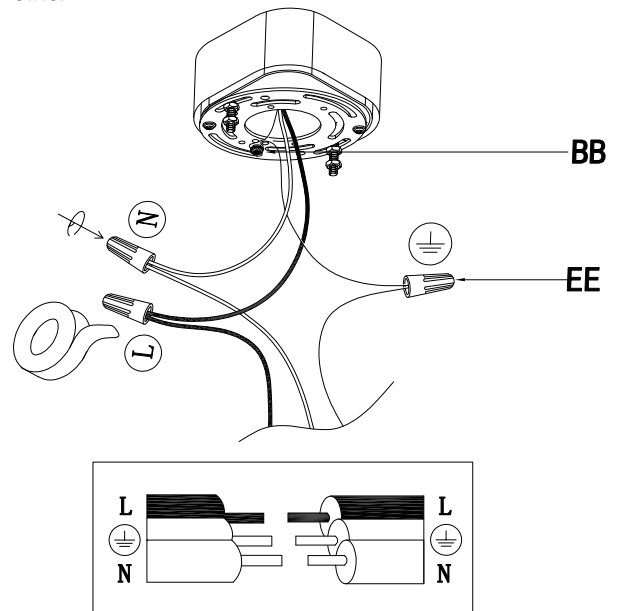


## 4. Install the Canopy

Install the Canopy (A) onto the Mounting Bracket (AA) using the Knurled Nut (DD).

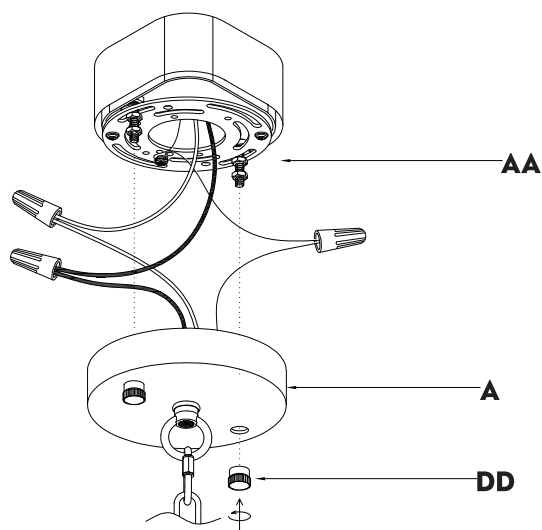

## 5. Install the bulb

Install the E26 bulb (not included) × 1, Max 60W each.

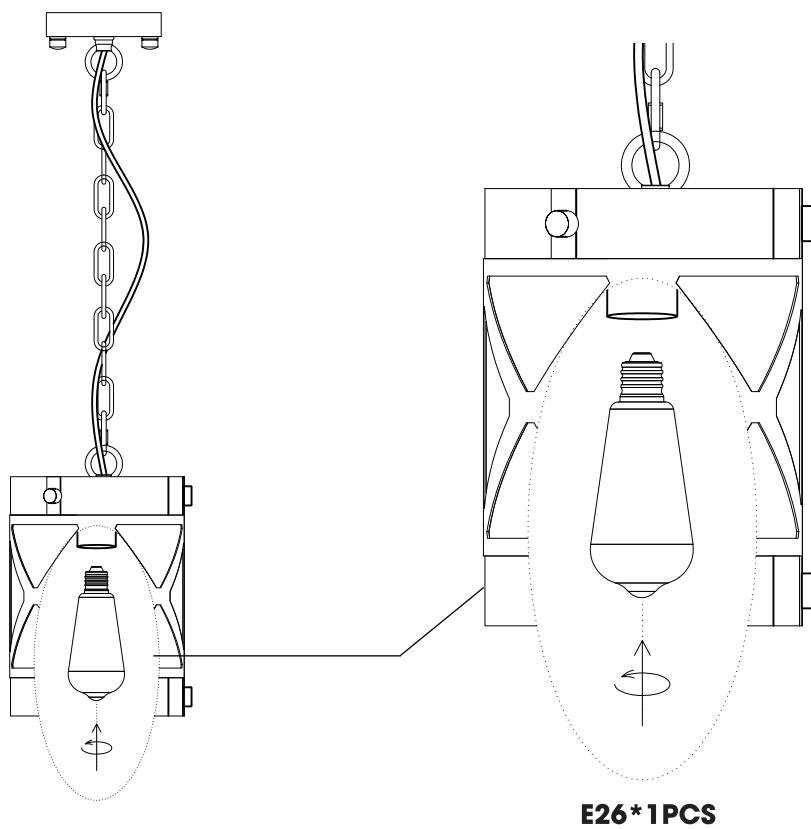

NOTE:

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).