



Outdoor
Living Today

ASSEMBLY MANUAL

8x12 Space Master

Bevel

Stock Code:

SM812-CEDAR

SM812-METAL

SM812-PLY

Version #1.4

Nov 13, 2025



CONTACT

ADDRESS

9393 287th Street,
Maple Ridge, British Columbia,
Canada V2W 1L1

PHONE & FAX

Toll Free: 1-888-658-1658

Fax:

ONLINE

Email: olmsupport@outdoorlivingtoday.com

Web: www.outdoorlivingtoday.com

What You Need to Know

Thank you for purchasing a 8x12 P Space Master.

Please take the time to identify all the parts prior to assembly.

IMPORTANT INFORMATION

It is the sole responsibility of the customer to check with your local municipal or county by-laws before ordering this product to confirm it complies with building codes in your area.

If the product is elevated, any structural and building code requirements are solely the customer's responsibility, and should be abided by.

Snow load ratings vary by geographical location. If heavy or wet snowfall occurs, it is advisable to sweep snow off roof frequently. In areas with high or gusty wind conditions, it is advisable to install the structure securely to the ground.

Have a regular maintenance plan to ensure screws, doors, windows and parts are tightly affixed.

All structures purchased from Outdoor Living Today are covered for a period of one year for defects in manufacturing and workmanship. Costs incurred for customer installations are not included.

Failure to use supplied parts included in this kit could result in poor product performance and may void your warranty. Please contact Outdoor Living Today's Customer Toll Free Line if you plan to deviate from our written instructions.

Warranty

In the event of a missing or broken piece, please contact Outdoor Living Today Customer Support at olmsupport@outdoorlivingtoday.com within 30 days of the delivery of your purchase. It is our commitment to you to courier replacement parts, free of charge, within 10 business days of this notification. Replacement parts will not be provided free of charge after the 30 day grace period.

Customer agrees to hold Outdoor Living Today and any Authorized Dealers free of any liability for improper installation, maintenance and repair.

What to do Before my Shed Arrives?



Become familiar with this assembly manual and determine if you can complete the project yourself or will require a professional contractor.



One helper is recommended to assist in constructing your shed. It generally takes two people two days to assemble a shed. If you're hiring a contractor, their rate should be in line with that duration of work.



Clear the construction area and ensure a clear pathway for delivery when the freight company arrives. Remove all debris: roots, grass, rocks, etc.



Excavate the site. Contact your local utilities company to ensure there are no gas or electric lines buried in the area before digging.



Decide on the type of foundation you will be using: Concrete slab, or 4-6 inches of crushed gravel with paver stones or 4x4 stringers.


You can find the footprint for your shed on Page 3 of your Assembly Manual.




If doing the assembly yourself, have all the necessary tools ready to go and in working condition. A list of required tools can be found after the parts list.

Foundation Types for 8x12 Garden Shed

1.



Concrete Foundation



Floor Frame




Completed Foundation

Concrete Slab Foundation:


- Slab must be at least the same size as assembled floor frame (136 1/2" x 96") or larger.
- 6" Deep foundation.
- 1.7 Cubic Yards of concrete required.
- A concrete slab will have the longest durability out of your foundation options.

Once level, a concrete slab is the easiest surface to build on.


2.



Gravel Foundation

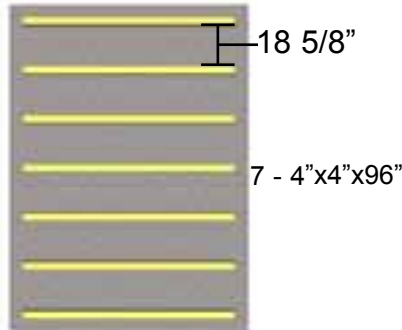

Gravel Foundation with treated stringers




Completed Foundation

Gravel with 4x4 Pressure Treated Stringers:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 2.1 Cubic Yards of gravel required, approximately 19 wheelbarrows.
- 7 - 4x4 Pressure Treated Stringers 8' long required.
- Evenly spaced, with one at each end of floor frame.

Saves money on materials, easy to level and work with.

3.




Gravel Foundation

25 Patio Stones



Gravel Foundation with Patio Pavers



Completed Foundation


Gravel with Patio Paver Stones:

- Excavate at least 6" deep, and 6" wider than floor frame on each side.
- 2.1 Cubic Yards of gravel required, approximately 19 wheelbarrows.
- 25 patio pavers (8" x 8" or larger).
- Center patio paver stones underneath floor runners and underneath seams in floor joists.


Patio paver stones are widely available from most landscape stores.

8 x 12 SPACE MASTER HARDWARE SHEET

Hardware Kit - BASE KIT (Provided)

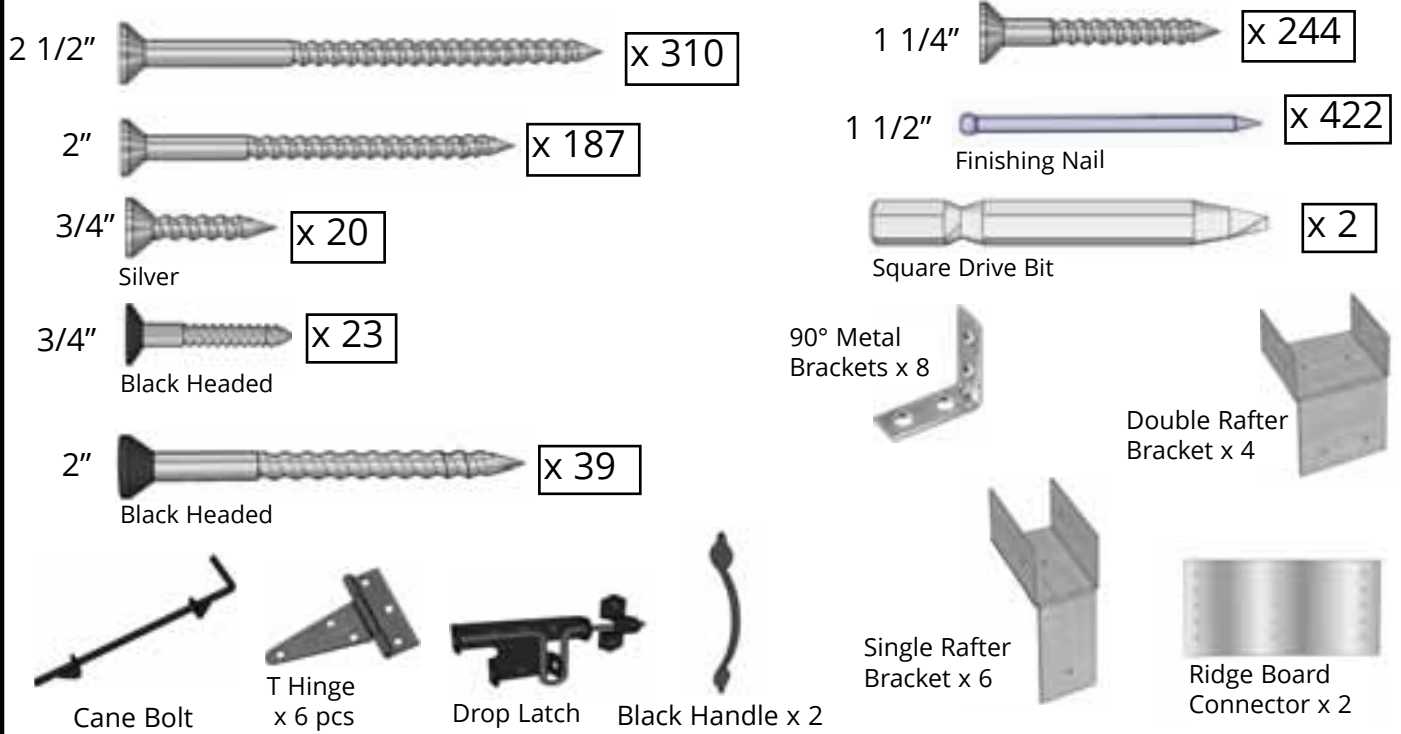

Hardware Kit - CEDAR ROOF (Provided)

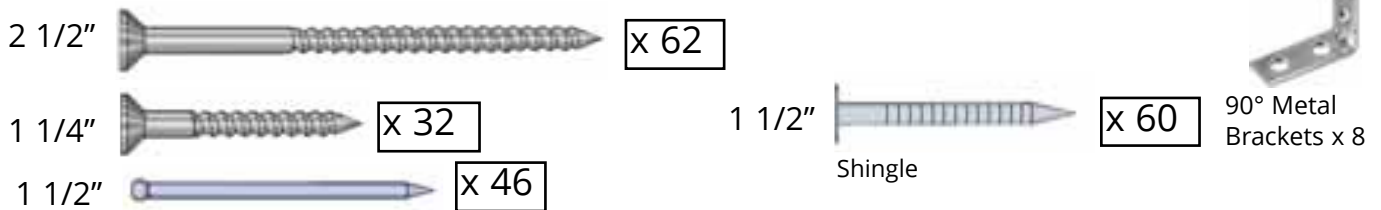

Hardware Kit - METAL ROOF (Provided)



Hardware Kit - PLYWOOD ROOF (Provided)



Tools Required (Not Provided)



Hammer



Screw Gun/Drill



Tape Measure



Wood Clamp



3/8" Wrench



Level



Pliers



Ladder



1/8" & 3/8" Drill Bits



Utility Knife

Safety Equipment Required (Not Provided)



Safety Glasses



Work Gloves




Assembly Manual shows instructions for the 8x12 Space Master and three different roof options. Please proceed to correct roof section depending on your selected roof type after rafter installation.



Regular Maintenance & Tips to Prolong the Life of Your Shed.

Before/During Assembly:

- 1.) Paint each face and edge of your plywood floor with a latex exterior paint.
- 2.) Caulk wall seams if gaps appear.
- 3.) Caulk around window framing (if applicable).
- 4.) Caulk perimeter between floor plywood and bottom wall plate.
- 5.) Caulk channels in lap siding at the top of your door above the trim, just a drop in each channel.
- 6.) Caulk edge of door threshold (if applicable).
- 7.) Optional: Install a Sill Gasket between floor runners and foundation.
- 8.) Optional: Install an 8" strip of roofing paper below Cedar Ridge Caps for Cedar Roof Sheds.

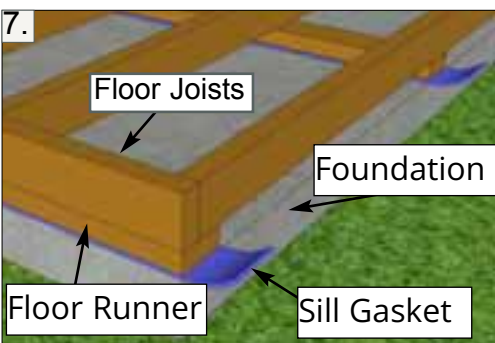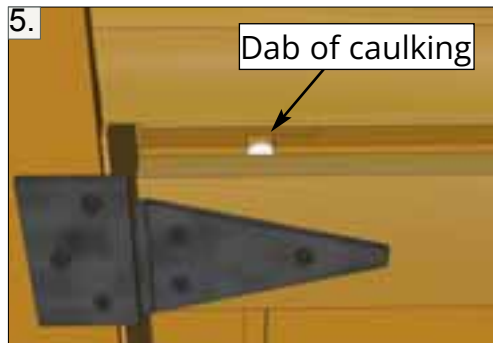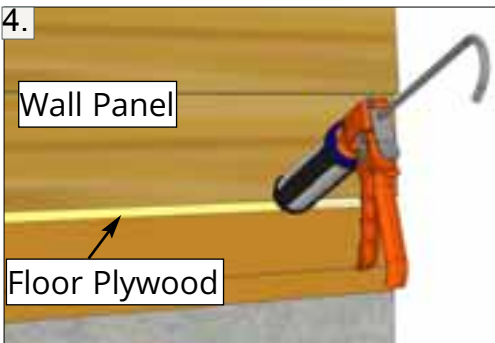

Routine Maintenance:

- Routinely check all fasteners are tight (ex. Door Hinges, Nails)
- Brush off dirt from walls.
- Brush off snow from roof regularly.
- Routinely remove needles and leaves from roof.


Painting/Staining

- Your cedar shed, if left untreated, will weather to a silvery grey colour.
- Painting or staining your structure is highly recommended and will prolong the life of your shed.
- You do not need to wait to paint or stain your shed, the wood in your kit has been dried and can be stained or painted immediately.
- Consult your local paint store for the best paint or stain for cedar.
- Optional: stain the inside of your shed. (Note: this will remove the fresh cedar smell.)

A. Floor Section

Exploded view of all parts necessary to complete Floor Section.

Identify all parts prior to starting. Note: Floor Footprint is 136 1/2" wide x 96" deep.

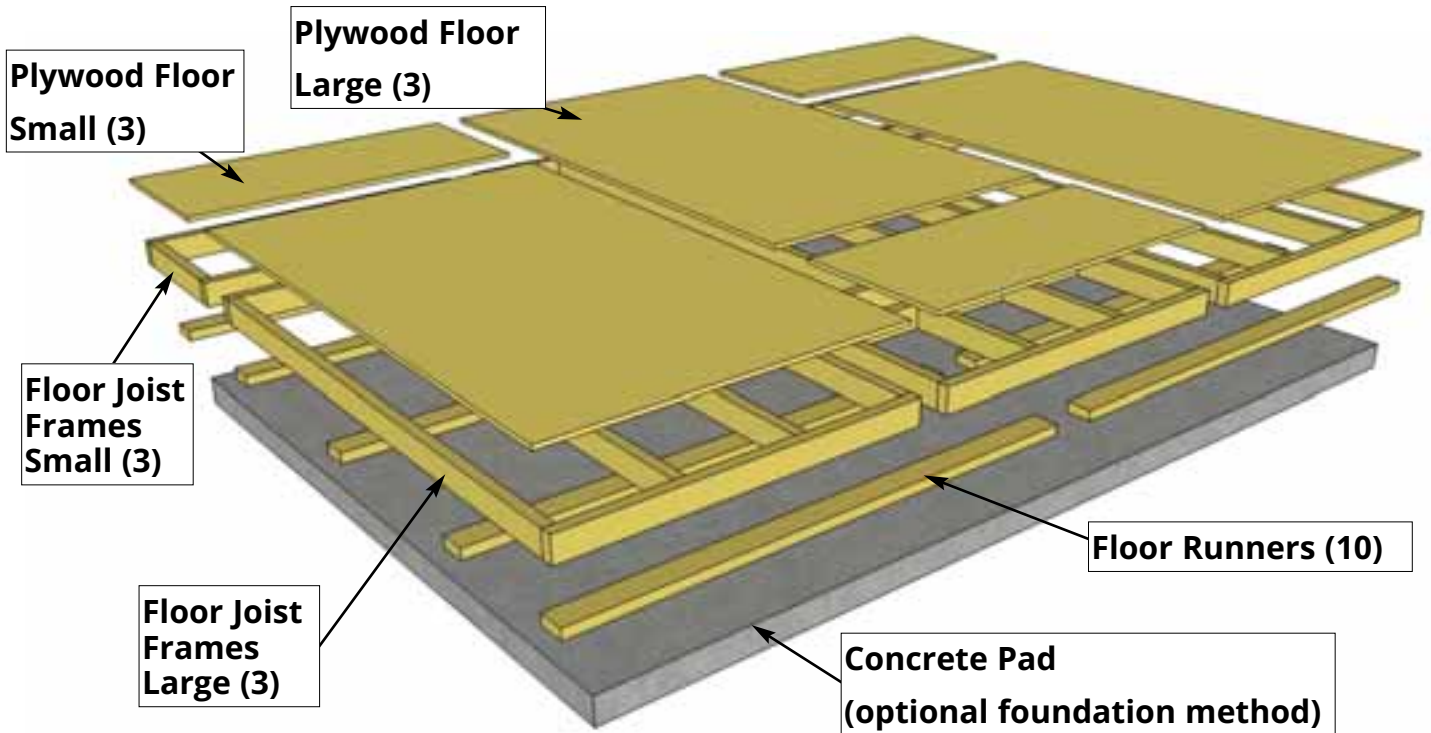


Flush with framing




A1. Lay out **Large Floor Joist Frame and 2 Floor Joists** as illustrated above. Position Joists equally in Floor Joist Frame. Use **Small Floor Joist Frame** as a template to determine joist position. Position Joist so flush with framing.

You can find the Square Drive Bit for the screws in with the Hardware Kit Bag.


Parts	Hardware
Floor Joists (1 1/2" x 3 1/2" x 71 7/8") x 6	S1 - 2 1/2" Screws x 58 total
Floor Joist Frames - Large (45 1/2" x 75") x 3	
Floor Joist Frames - Small (45 1/2" x 21") x 3	

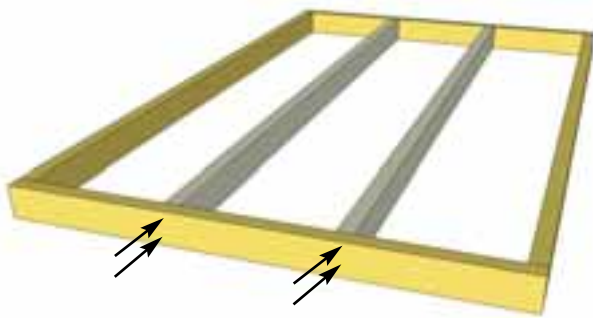

A2. When correctly positioned, attach each Joist with **4 - 2 1/2" Screws** (2 per end). **You can find the Square Drive Screw Bit in the Hardware Kit Bag.**

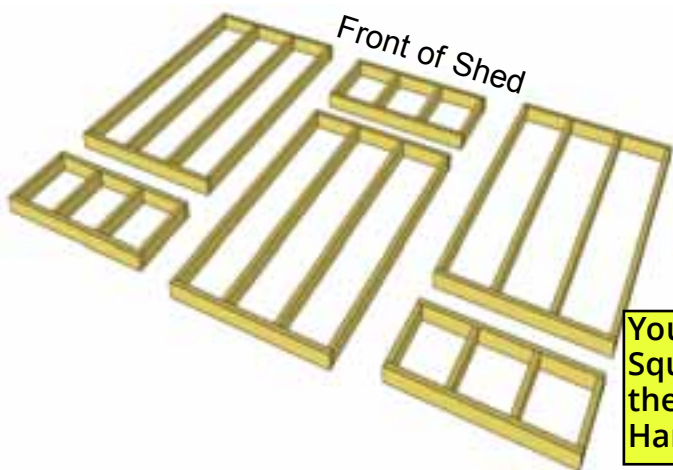


You can find the Square Drive Bit for the screws in with the Hardware Kit Bag.

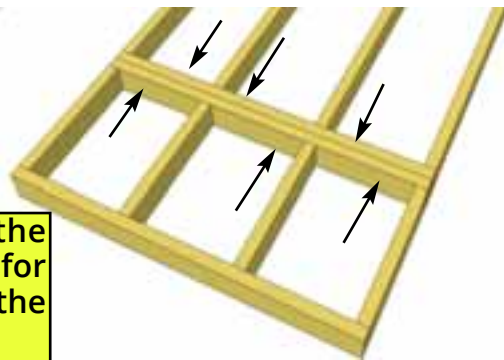



A3. Lay out **Floor Joist Frames** as illustrated. There are 3 larger and 3 smaller Frame Sections. The Footprint for the floor when attached together will be 136 1/2" wide x 96" deep.

A4. Attach each large and small floor joist frame together with **6 - 2 1/2" Screws** per section.

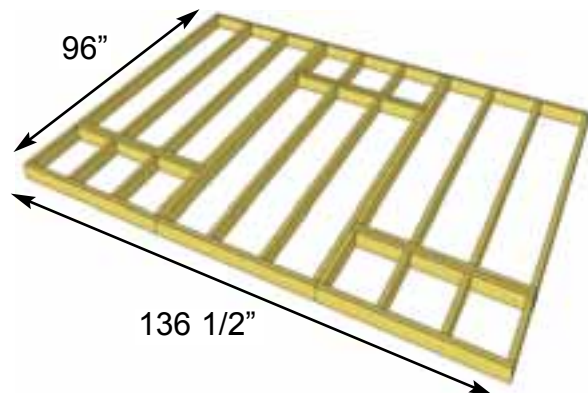

A5. Complete all large and small frame attachments. Screw each completed section together with **8 - 2 1/2" Screws**.


A6. When completed, your floor footprint should be 136 1/2" wide x 96" deep.

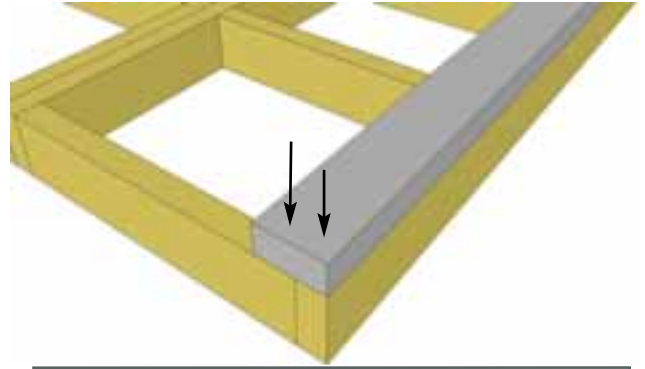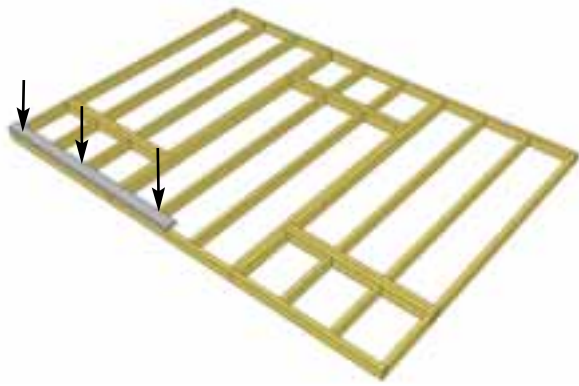

A7. Attach **Floor Runners** to completed floor frame. There are 2 Floor Runners per 136 1/2" side and 5 completed Runners in total. Use **6 - 2 1/2" Screws** per Runner.

Parts	Hardware
Floor Runners (1 1/2" x 3 1/2" x 68 3/16") x 10	S1 - 2 1/2" Screws x 60 total


A8. Make sure Runners are flush with outside and front and rear floor framing but not overhanging.

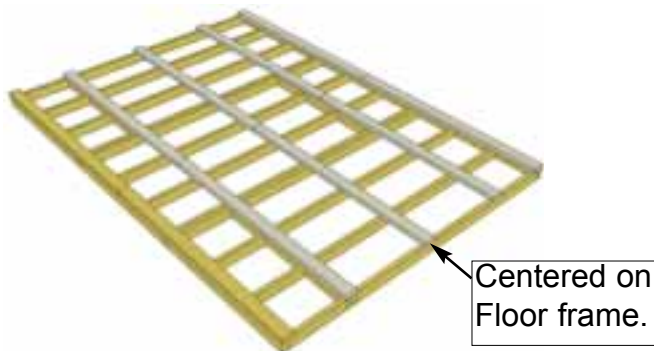

A9. Complete remaining Floor Runners.


Foundations

Note: The floor will be flipped over and the floor runners will sit on your foundation. It is important to note, that having a level foundation is critical. Choosing a foundation will vary between regions. Typical foundations can be concrete pads or patio stones positioned underneath the floor runners.


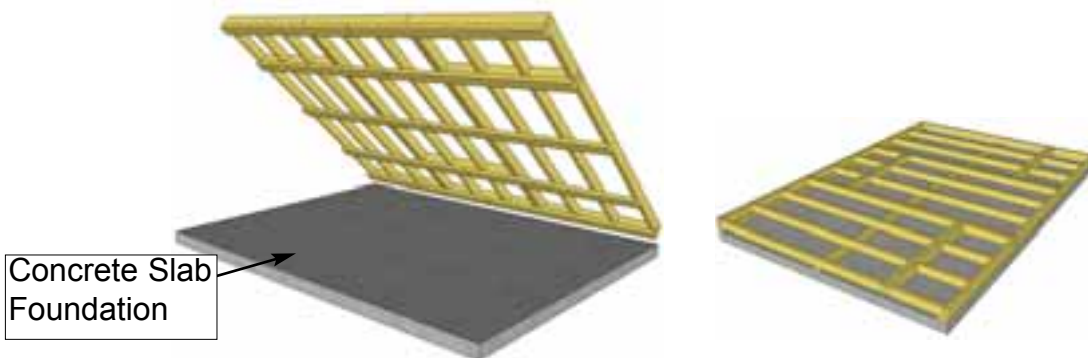


A10. With Floor Runners attached, carefully flip the floor over and place on your foundation.

Caution: you will need 2 people to assist you. Be careful when laying floor down not to bend or twist floor. When in place, level floor completely.

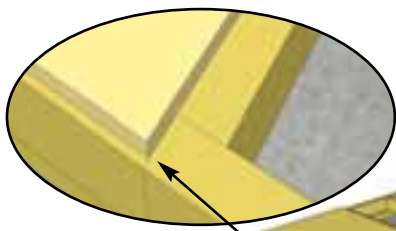

Important - Make sure floor is level before moving on to wall section. Use a level to confirm, and shim floor joists as required.

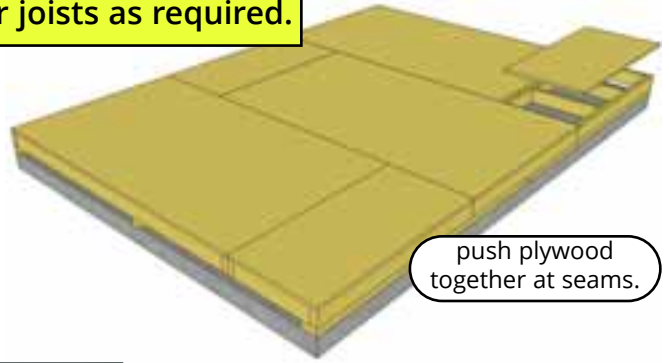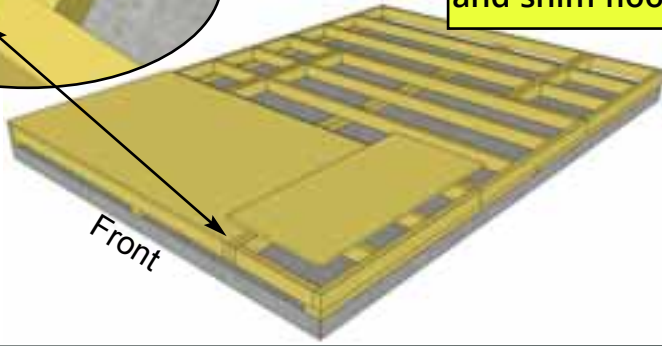


push plywood together at seams.


A11. Position all **Large & Small Plywood Floor** pieces on top of completed floor joists. The Plywood is cut slightly smaller than Floor framing. Keep Plywood seams tight.

<p><u>Parts (Steps 11 - 12)</u> Plywood Floor - Large (45 3/8" x 74 7/8") x 3 Plywood Floor - Small (45 3/8" x 20 7/8") x 3</p>	<p><u>Hardware</u> S2 - 1 1/4" Screws x 70 total (approx)</p>
---	--

Hint: Use a chalk line to mark location of floor joists to determine screw placement.

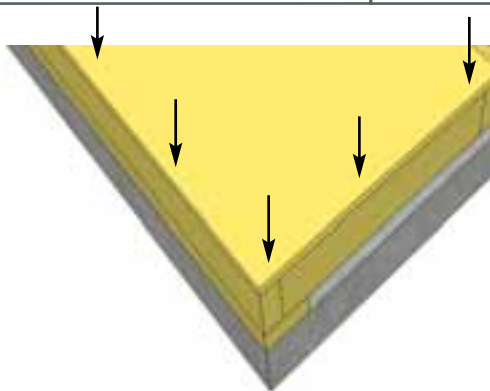



A12. With Plywood positioned correctly on floor framing, attach with **1 1/4" Screws**. Use screws every 16".

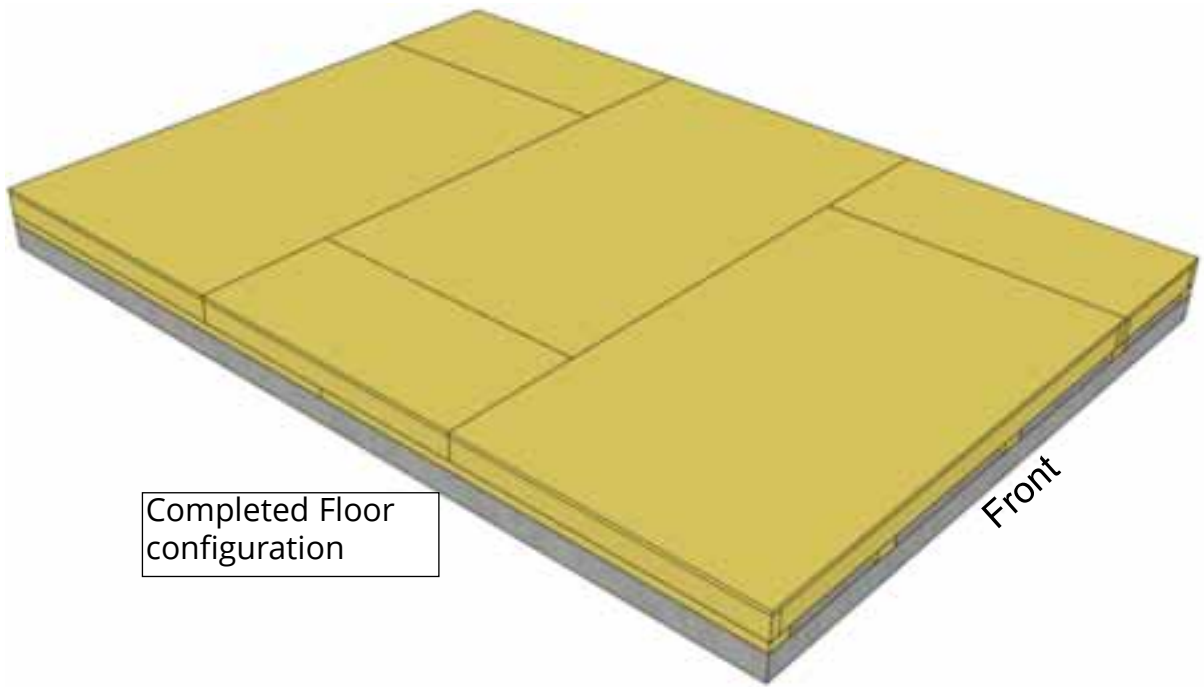

Completed Floor configuration

B. Wall Section


Exploded view of all parts necessary to complete the Wall Section. Identify all parts prior to starting.

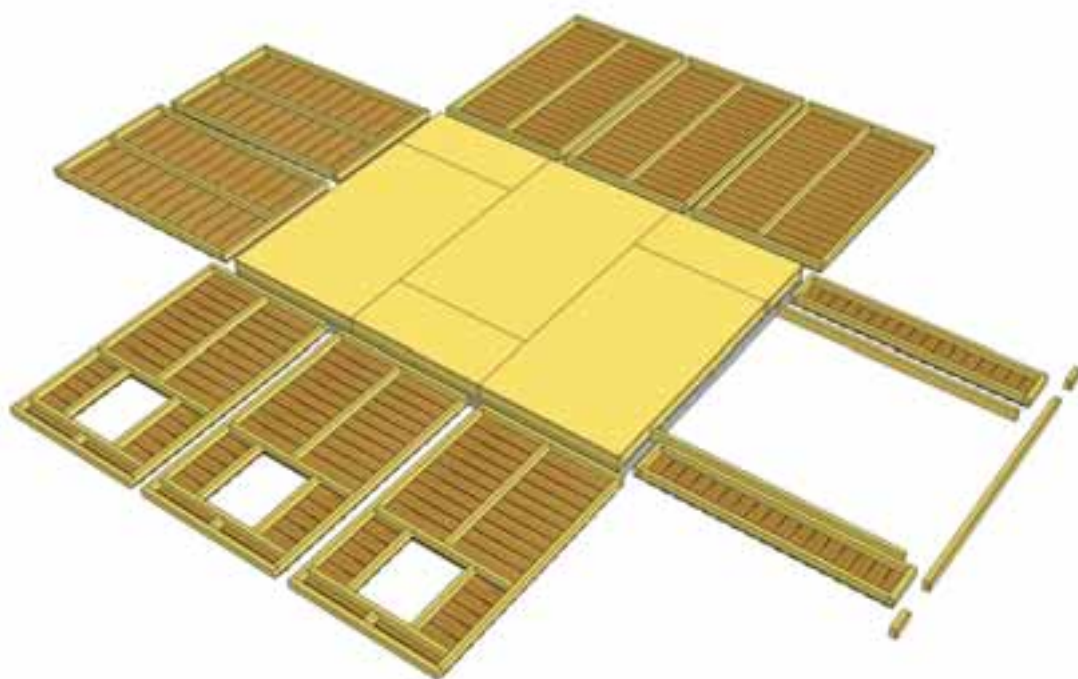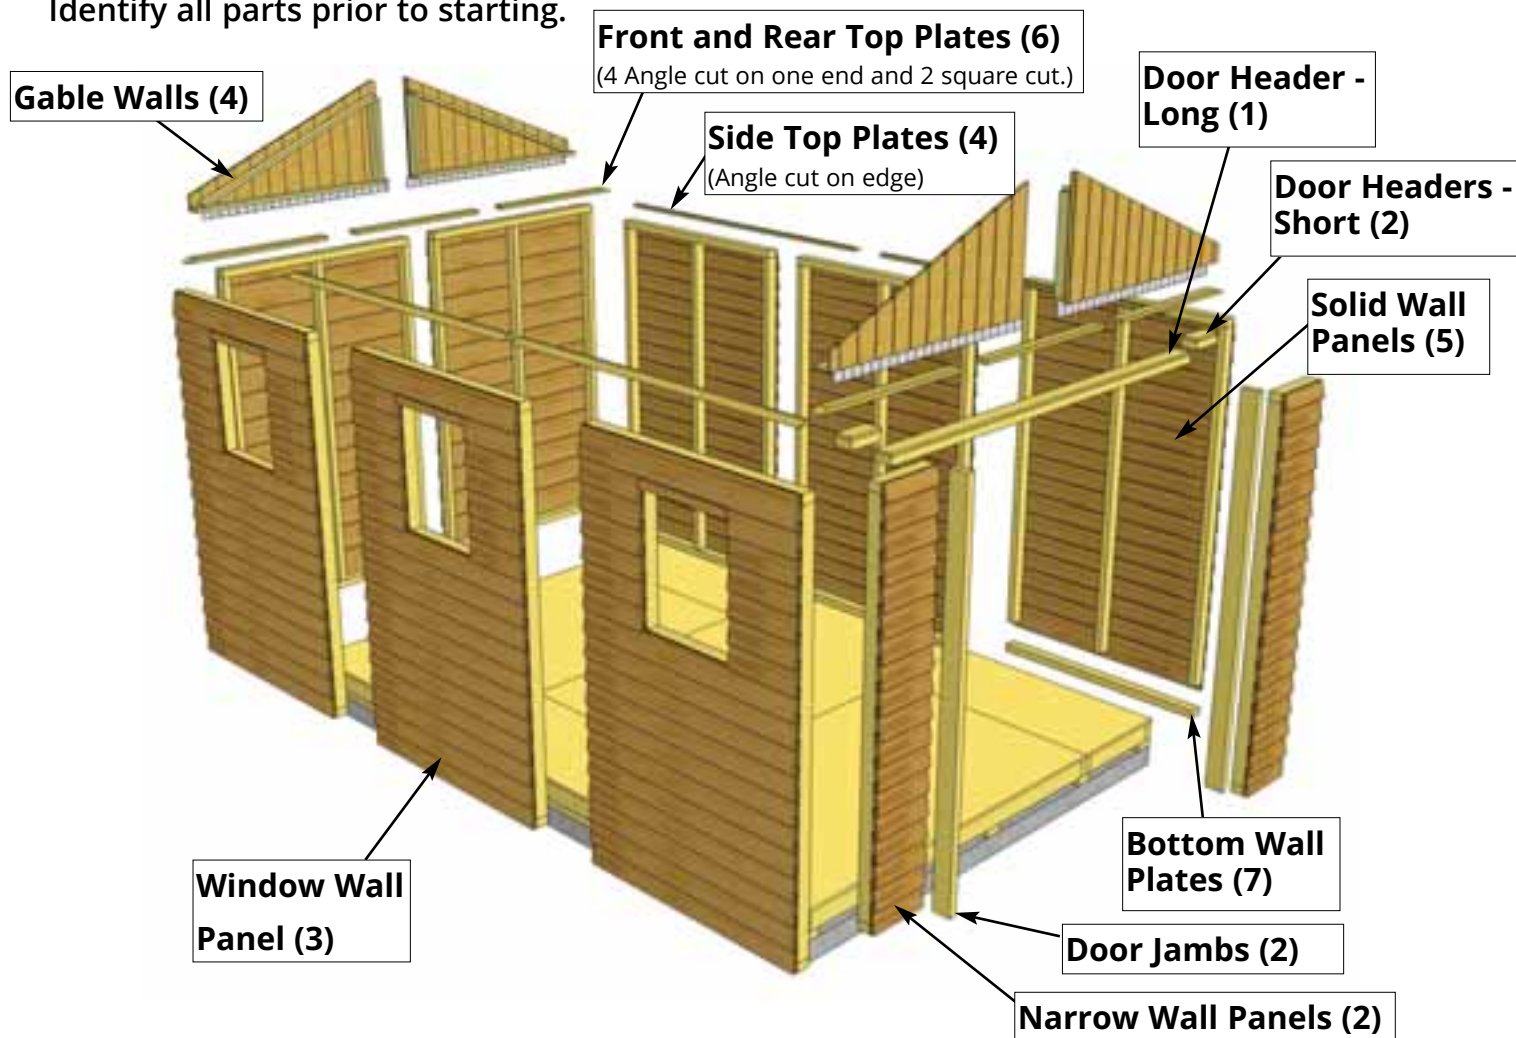

B1. Lay out all the wall panels and become familiar with their location.

On Standard Kits, there are **5 Solid Wall Panels** and **2 Narrow Wall Panels**, and **3 Window Wall Panel**.



Make sure to position panels right side up so water is directed away from and not into shed. Look at window wall panel to compare and determine proper wall position.

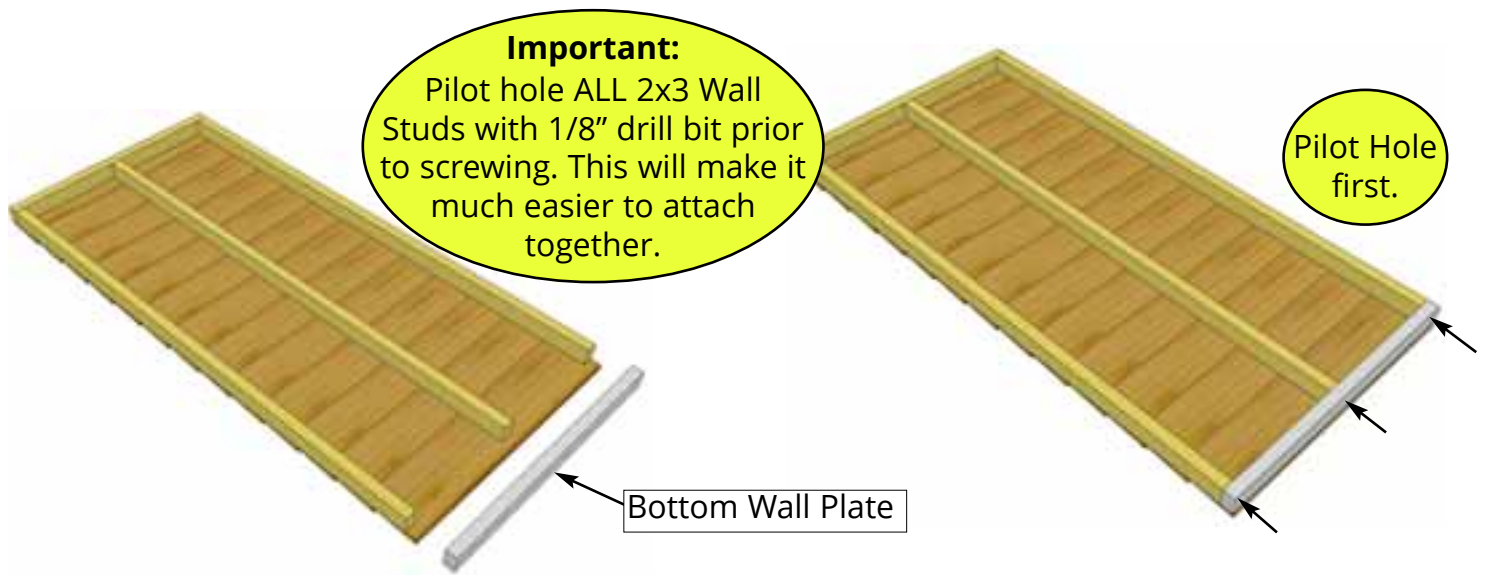

B2. For each **Solid Wall Panel**, carefully lay panel face down. Position and attach a **Bottom Wall Plate** to bottom of wall studs of each wall panel with **3 - 2 1/2" Screws**. Position so plates are flush with framing.


Parts
Solid Wall Panels (45 1/2" x 75") x 5
Bottom Wall Plates (1 1/2" x 2 1/2" x 45 1/2") x 5

Hardware
S1 - 2 1/2" Screws x 15 total

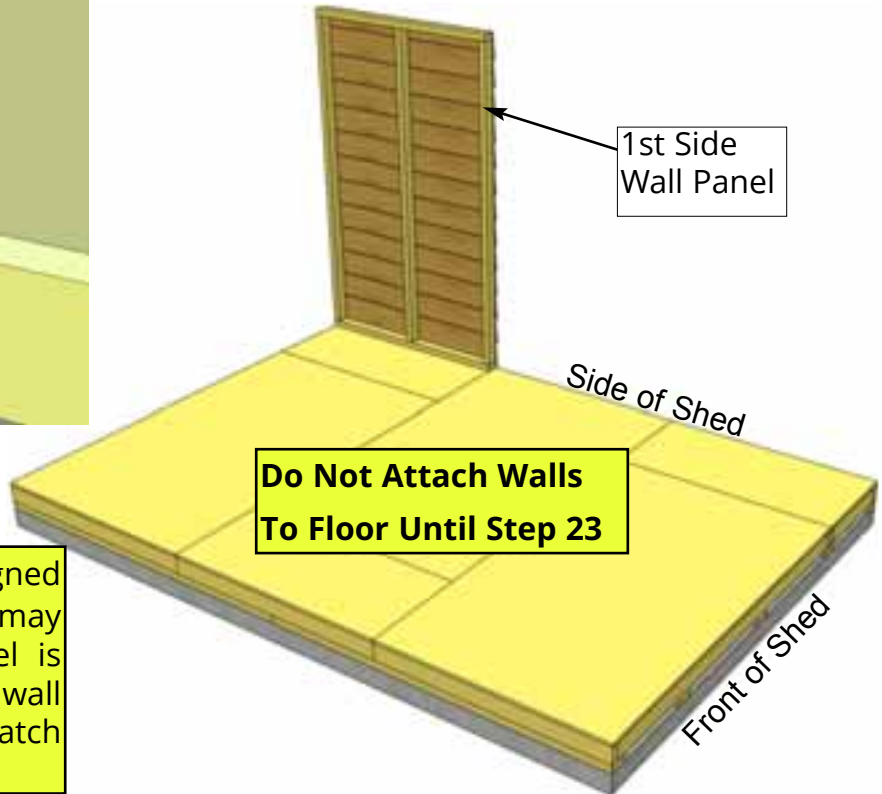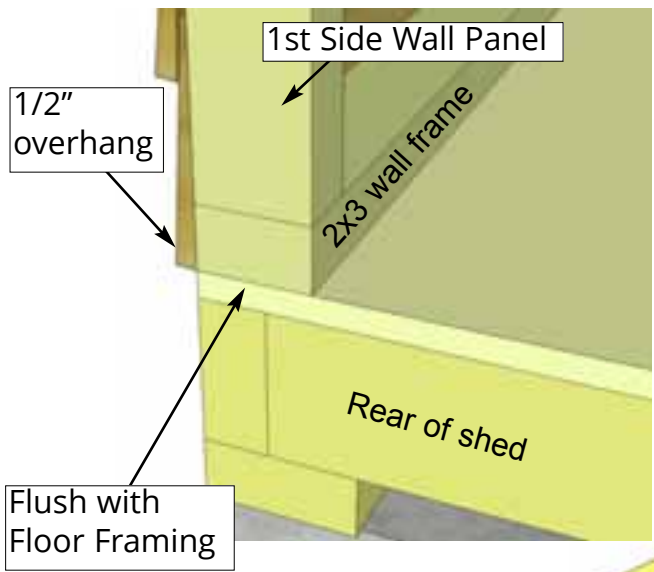


Important - Make sure all walls are aligned in their upright position. If not, water may leak into your shed. Unsure if panel is facing up or down? Compare solid wall siding to window wall siding and match orientation.

B3. Starting at Rear Corner, position a Solid Side Wall panel on top of Plywood Floor. The Wall Panel bottom framing will sit flush with Floor framing. Wall siding will overhang the floor. The Side Wall panels will sit flush at the end of the Plywood Floor with the Rear Wall panels sandwiched between them. **Note:** Siding will overhang the Floor by approximately 1/2".



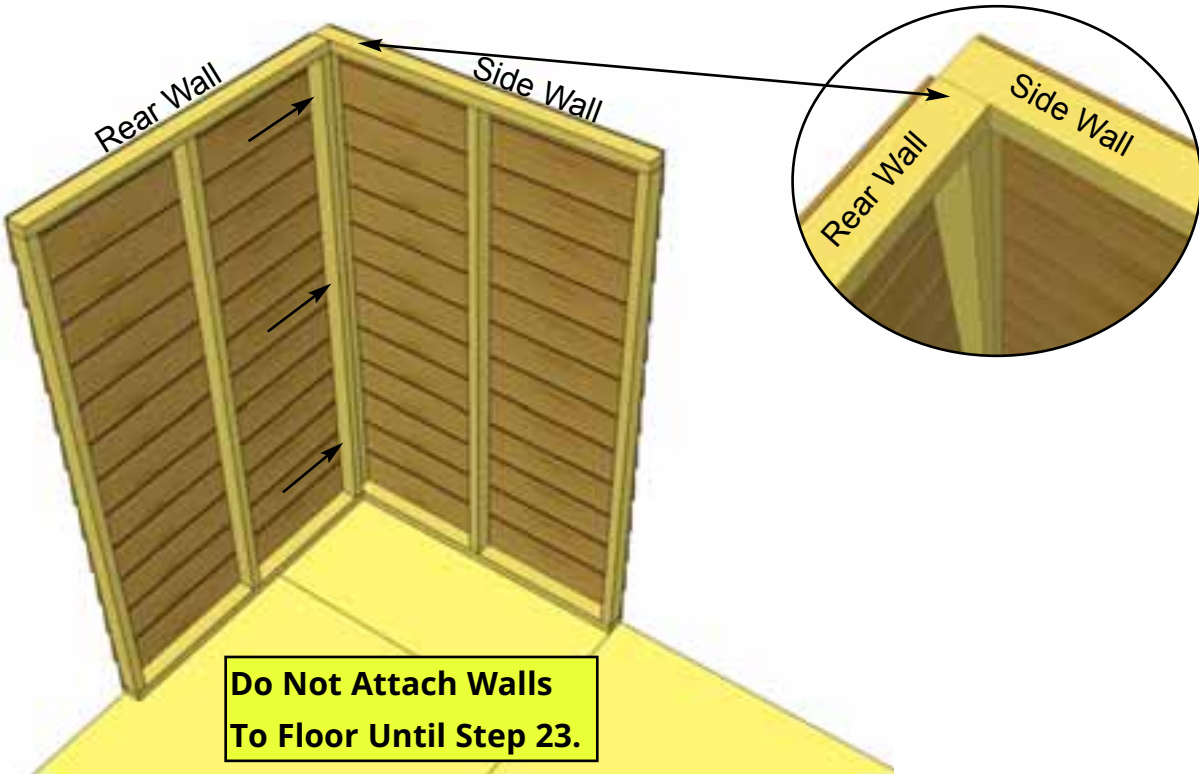


B4. Position a Rear Wall into place on plywood floor. Butt both vertical wall studs of Side and Rear Walls together and attach with **3 - 2 1/2" Screws**. Screw at the bottom, middle and top of stud to secure properly.

Hardware (Steps 16 -18)
S1 - 2 1/2" Screws
 x 18 total


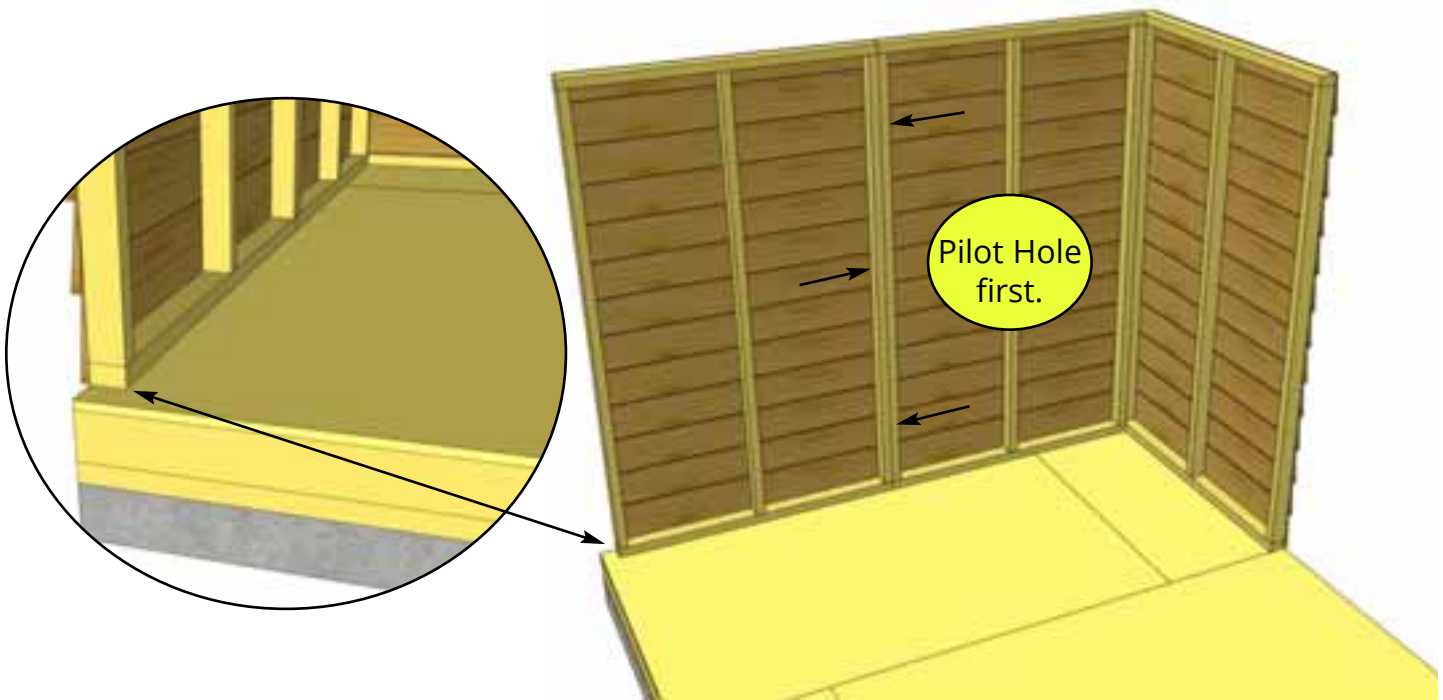


B5. With the corner wall attachment complete, position a second Rear Wall panel in place so bottom 2x3 wall framing is sitting flush with outside floor joists and plywood floor. Wall siding should overhang floor by approximately 1/2". When positioned correctly, attach both Rear Wall panel studs together as shown.

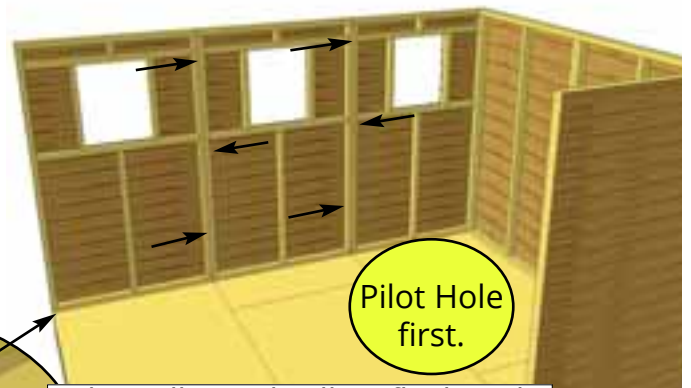
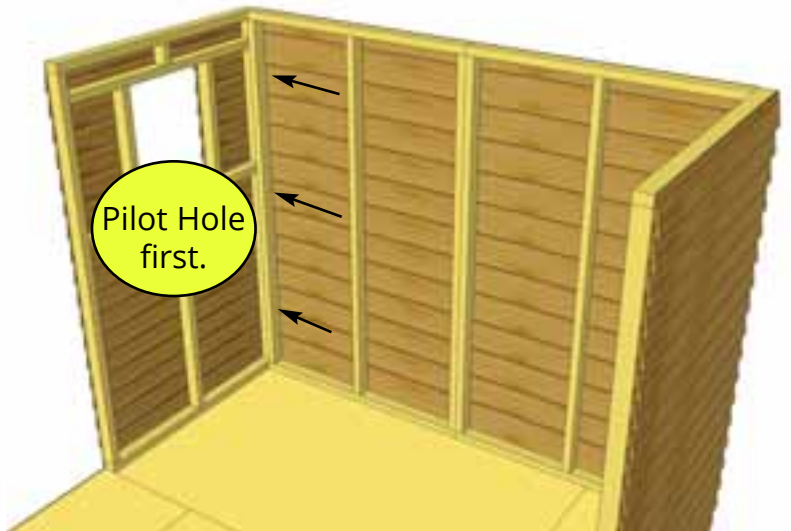


Side Wall Panel will sit flush with Floor framing at Front of Shed.

Front of Shed

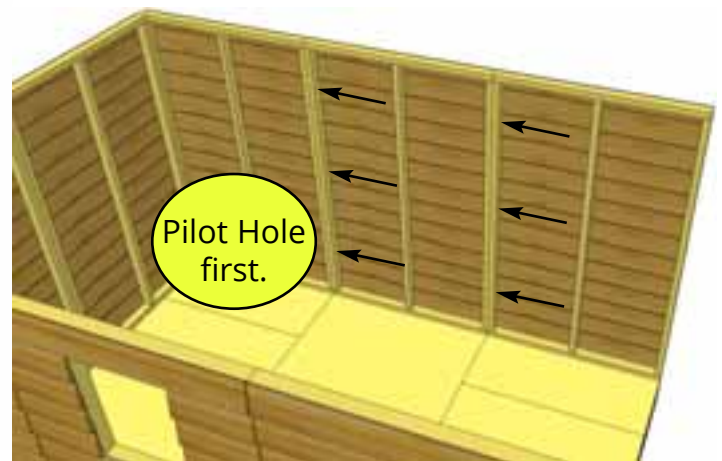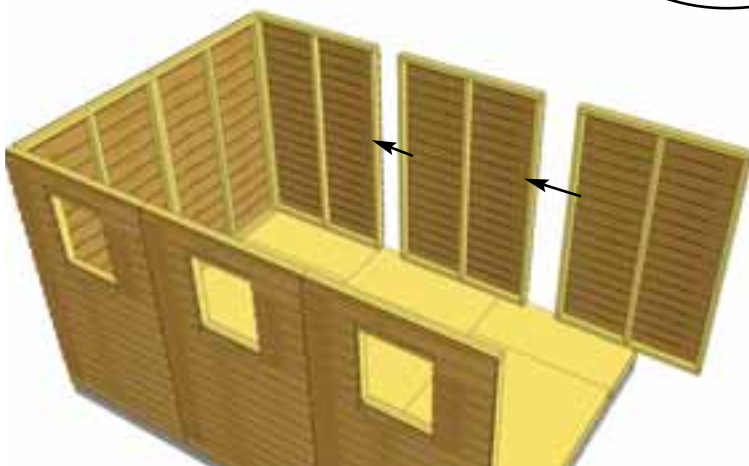



B6. Complete all Side and Rear Solid Wall and Window Wall attachments as per **Steps B3 - B5.**

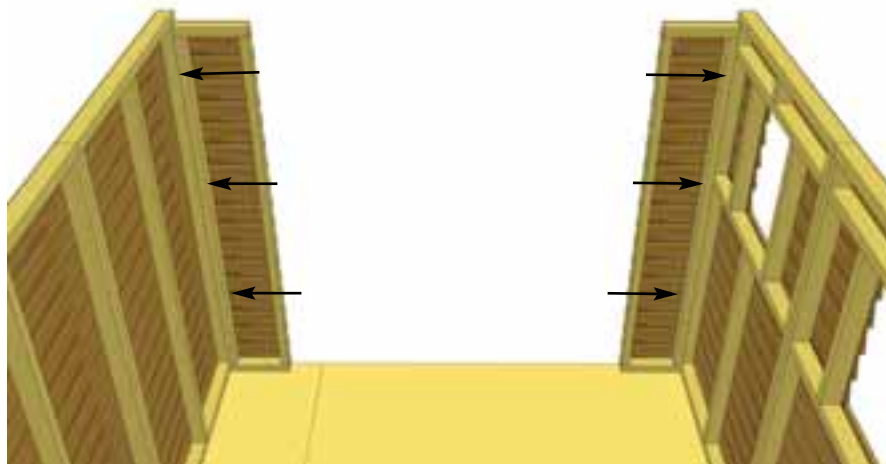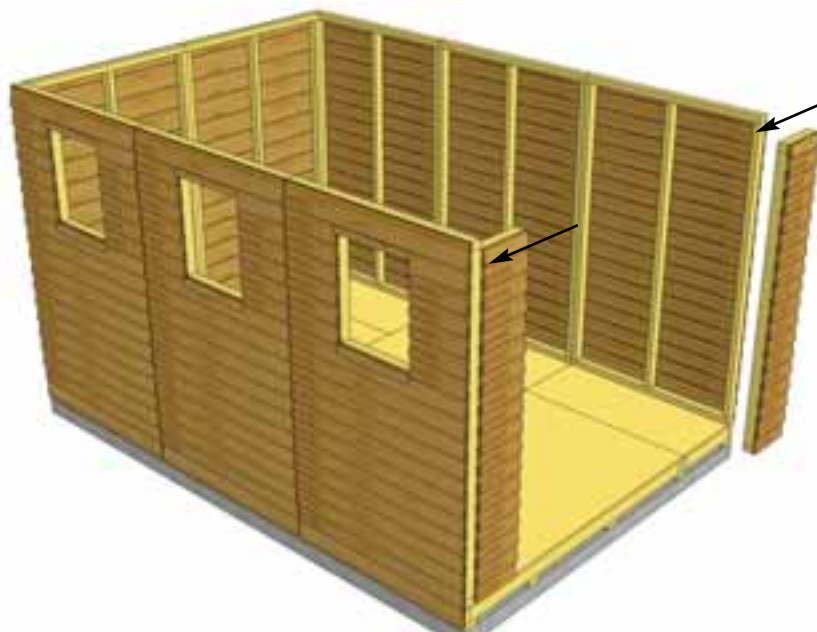

B7. Position and attach both **Narrow Walls** as per **Steps B3 - B6**.

Parts
Narrow Walls
 (12" x 73") x 2


Hardware
S1 - 2 1/2" Screws x 6 total

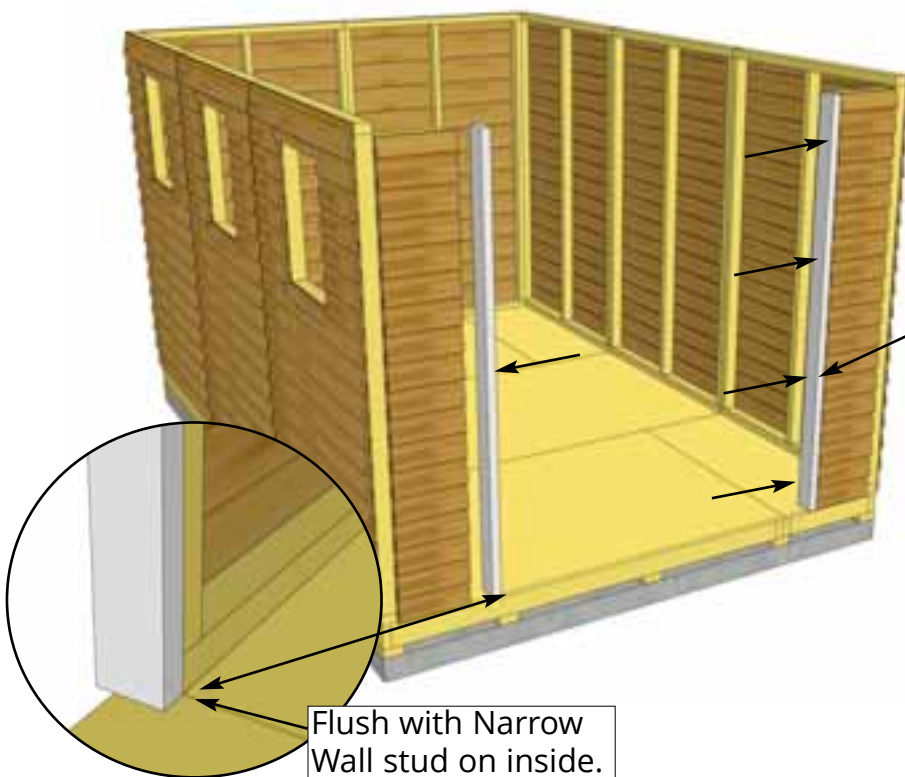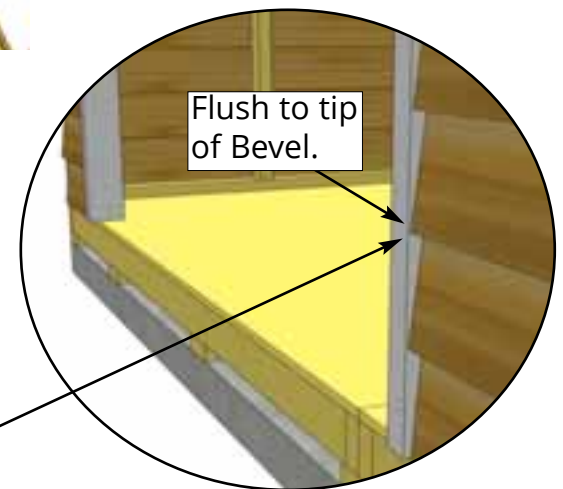

B8. Attach **Vertical Door Jambs** to Narrow Wall studs in door opening with **4 - 2 1/2" Screws** each. Position so Jamb is flush with tip of bevel siding on front Narrow Walls. Complete both sides.

Parts
Vertical Door Jambs
 (1 1/2" x 3 1/2" x 73") x 2


Hardware
S1 - 2 1/2" Screws x 8 total

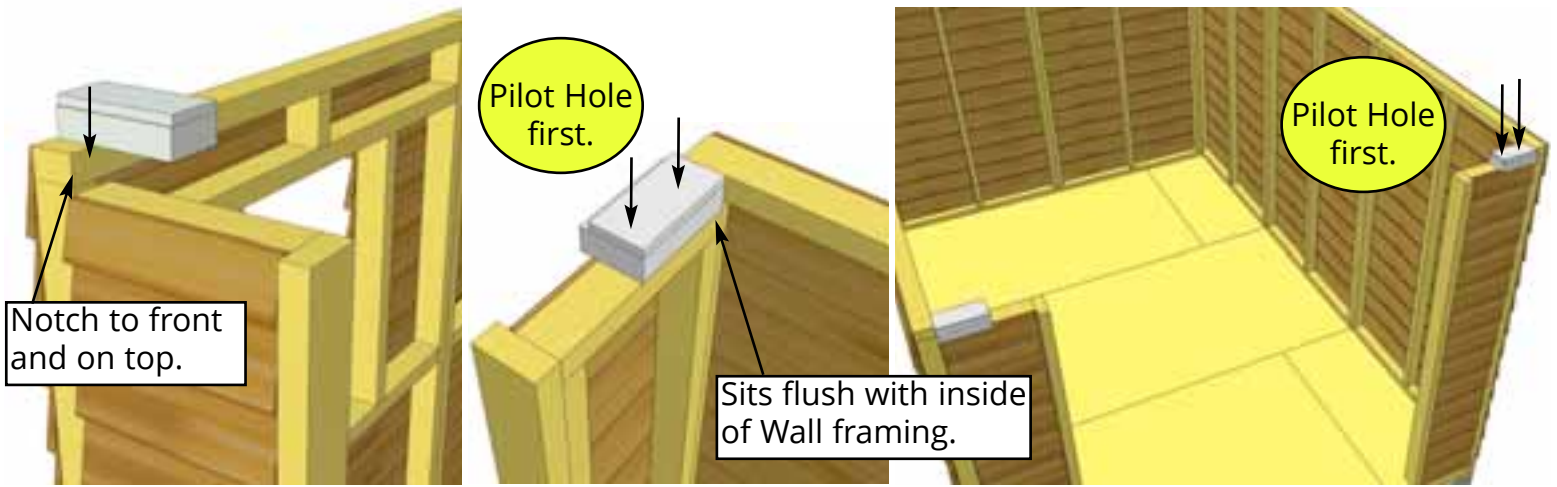

B9. Attach **Short Door Headers** to Narrow Walls with **2 - 2 1/2" Screws** per piece. Header is 3 1/2" wide at bottom and has a 1/2" thick x 3" wide strip of wood stapled to the top creating a notch or dado effect. This notch needs to be positioned on the top facing the front. The notch is necessary to hold the drip cap that will be installed above the door in **Step E8**.
Pre-drill to prevent splitting!

Parts
Door Headers - Short
 (2" x 3 1/2" x 6 1/2") x 2


Hardware
S1 - 2 1/2" Screws
 x 4 total

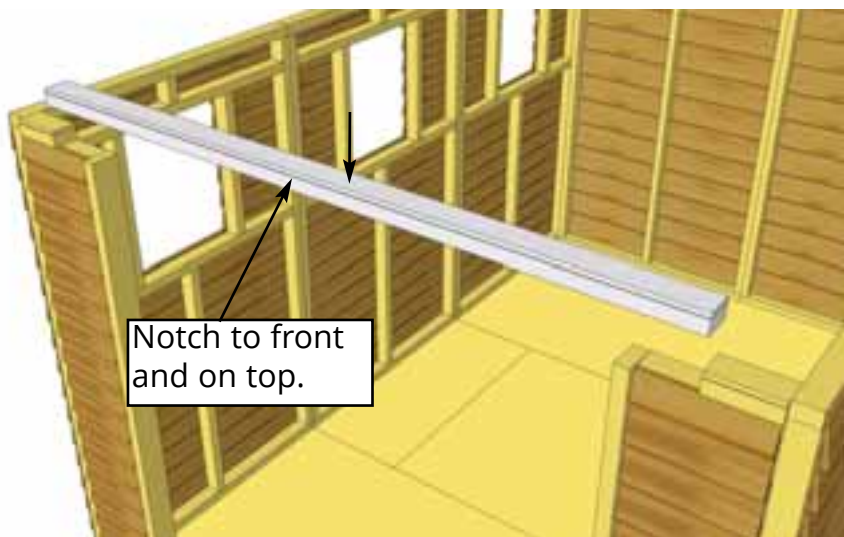


B10. Attach **Long Door Header** to Vertical Door Jambs and Narrow Walls with **2 - 2 1/2" Screws** per side. Position the notch on the top facing the front as per **Step B9**.
Pre-drill to prevent splitting!

Parts
Door Header - Long
 (2" x 3 1/2" x 78") x 1


Hardware
S1 - 2 1/2" Screws
 x 4 total

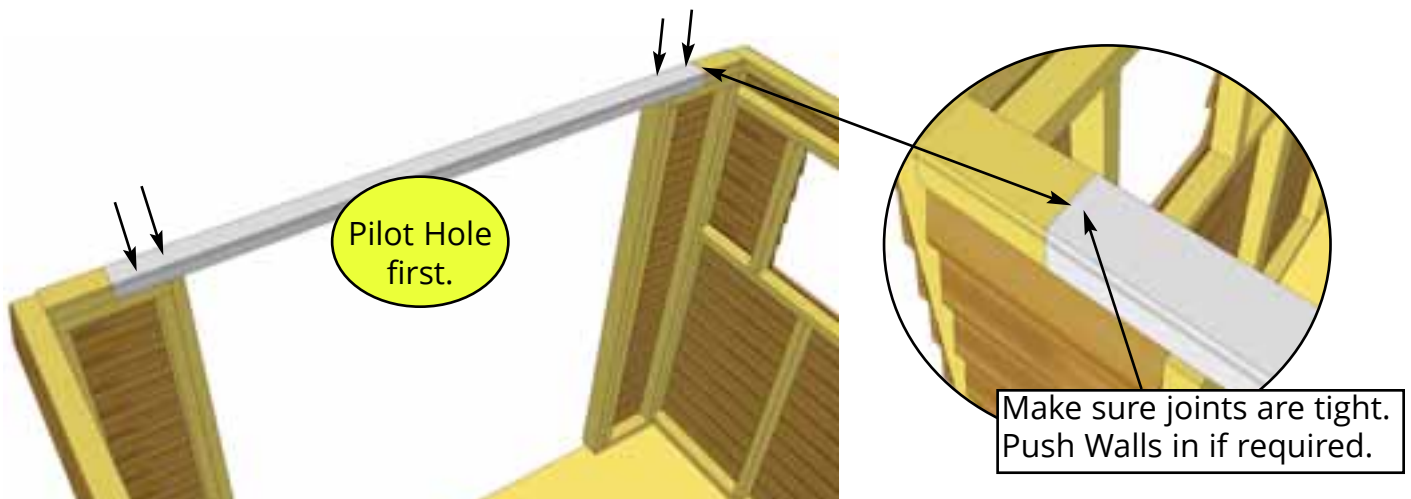

Advice: Prior to fastening walls and installing rafters, take time to confirm your walls are level, square and plumb. Measure diagonal at top and bottom of walls corner-to-corner. This should be approximately 159 7/8". More importantly, if measurements are not within 1/4", your walls are not square. Adjusting now will make it easier to install roof section.


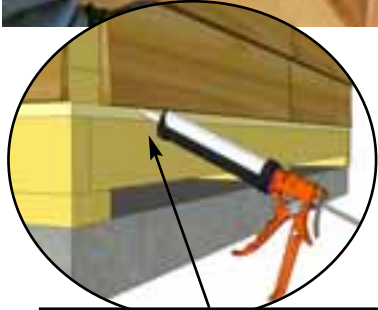


Optional - Caulking seams will help prevent moisture from entering your shed. **Caulking not included in kit.**

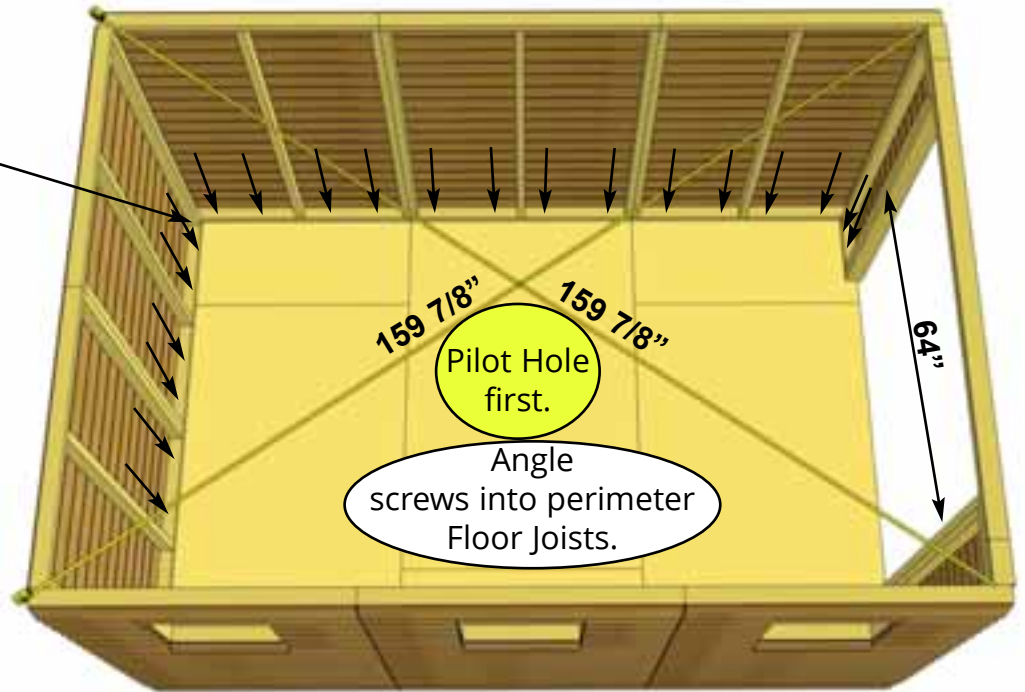

B11. When all walls are attached together, check alignment with the floor. Bottom of wall frames should sit flush with outside of floor framing, with siding overhanging by approximately 1/2". Confirm 64" wide door opening at bottom. When positioned correctly, fasten Bottom Wall Plates to floor using **4 - 2 1/2" Screws** per wall panel.


Hardware
S1 - 2 1/2" Screws
 x 36 total

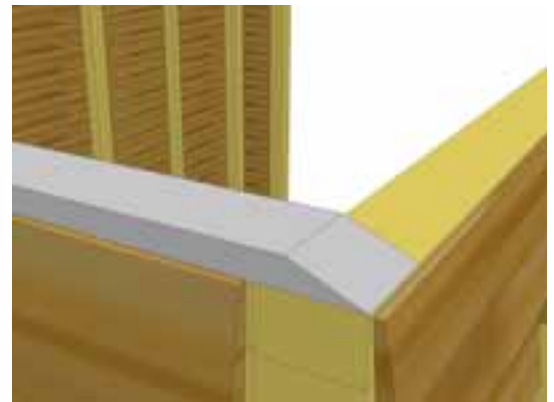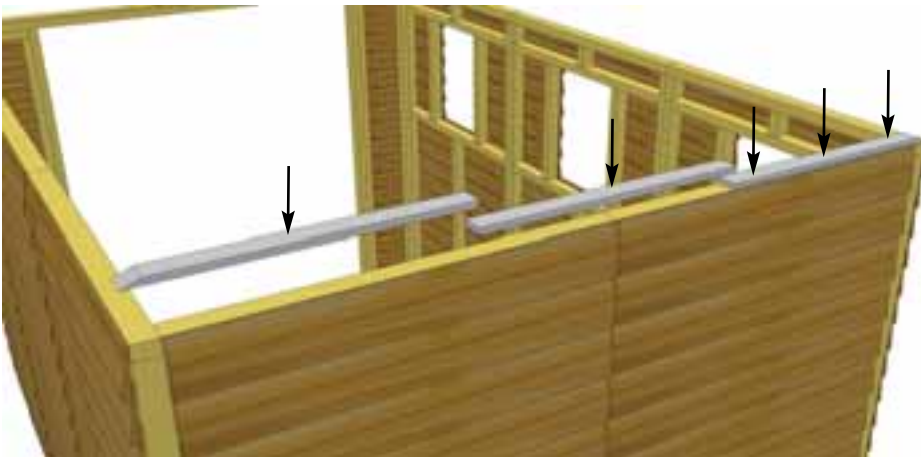


B12. Position **Rear Top Plates** on top of wall studs so they are flush on the inside. Together, the plates should be centered evenly on the wall left to right. Attach by screwing down into top wall framing with **3 - 2" Screws** per plate.

Parts (Steps B12 - B13)
Front & Rear Wall Top Plates - 4 Angle Cut End, 2 Straight Cut
 (3/4" x 2 1/2" x 32") x 6
Side Wall Top Plates - Angle Cut Edge
 (3/4" x 2 1/2" x 65 3/4") x 4




Hardware (Steps B12 - B13)
S3 - 2" Screws
 x 34 total

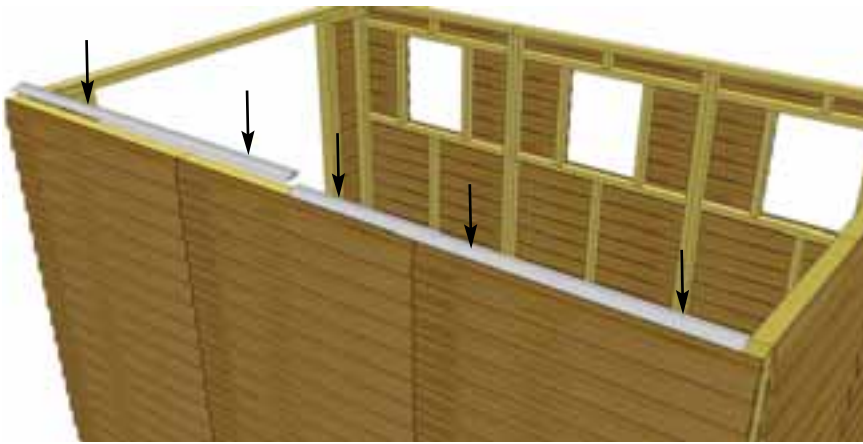

B13. Next, attach the **Side Wall Top Plates**. The Side Wall Top Plates are angle cut down the length. Once again, position Top Plates on wall frame so they are flush. Side Wall Top Plates will fit between Front & Rear Plates. Attach with **4 - 2" Screws** per plate. Complete all other **Side & Front Top Plate** attachments the same.

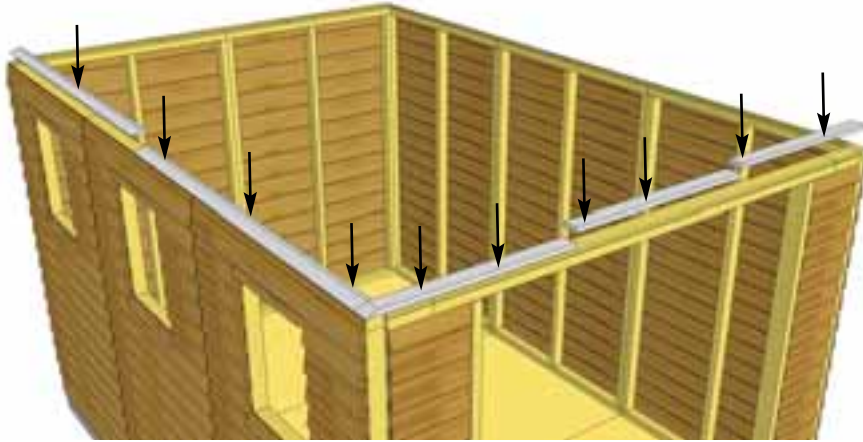

Male / Female Gable Siding Overlap.

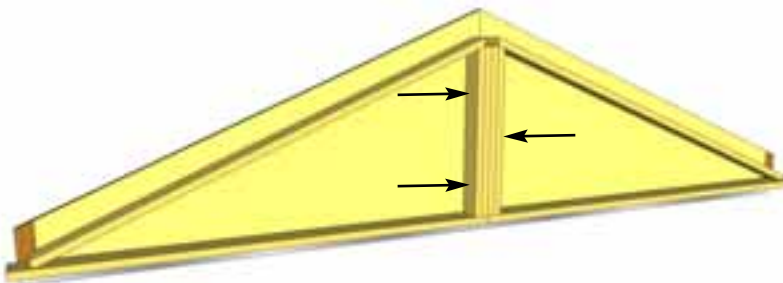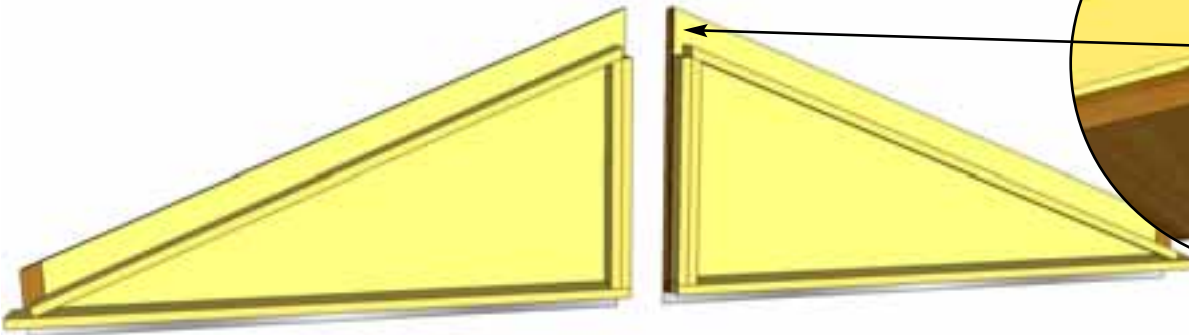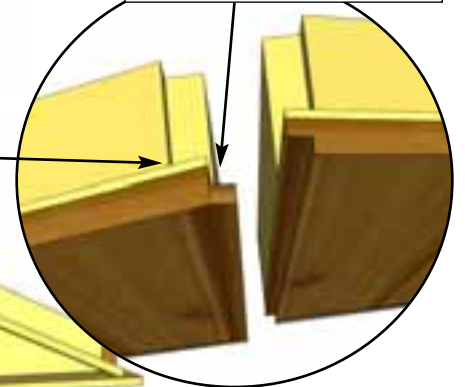

B14. Locate **Triangular Gable Half Walls** for both ends of the shed. Align framing and wall siding lap together. Screw center wall framing of each piece together with **3 - 2 1/2" Screws**. **Note:** Prior to attaching, try each combination of Gables for best fit.


Parts

Triangular Gable Half Walls x 4

Hardware

S1 - 2 1/2" Screws x 6 total



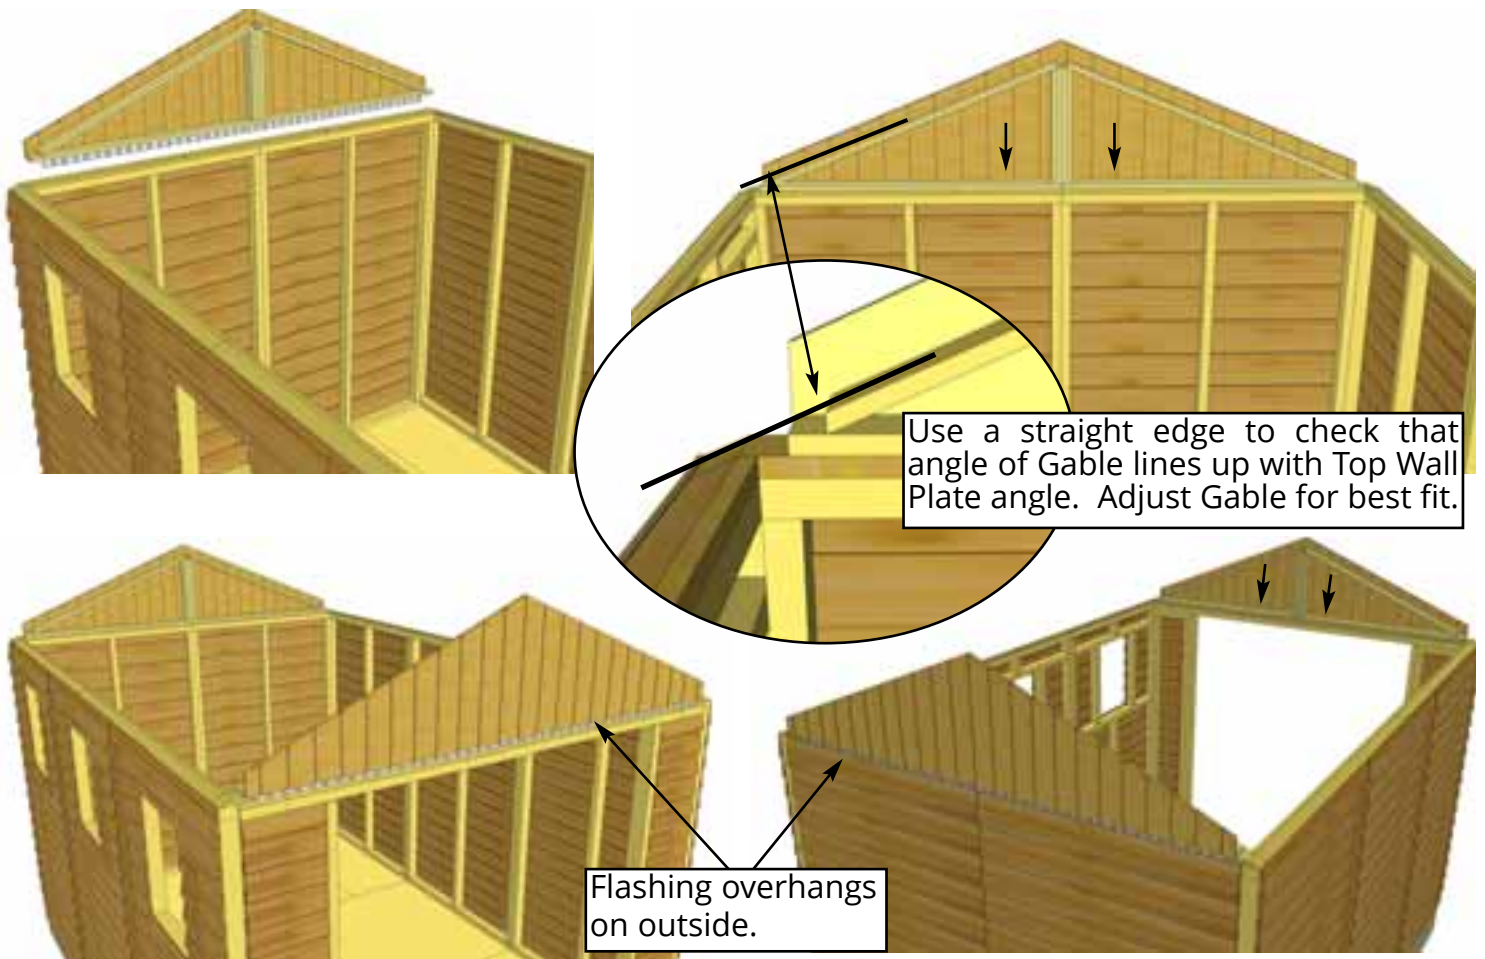



B15. Place completed Gable section so framing sits flush with the inside of the Top Wall Plate. It should also be centered side-to-side on the Top Wall Plate. Gable Flashing overhangs wall on the outside. Temporarily attach to Gables and Top Wall Plate with **2 - 2" Screws**. Gables may need slight adjustment in **Step C10** when attachment will be completed with an additional 6 Screws. Screw from the bottom of Gable framing down into Top Wall Plate and Wall Framing. Complete Gable positioning and attachment on the other side. **Hint:** Use a straight edge to check the angle of the Gable framing and Top Plate. Both angles should line up (see diagram above).

Hardware

S3 - 2" Screws x 4 total

C. Rafter Section

Exploded view of all parts necessary to complete the Roof Section.
Identify all parts prior to starting.

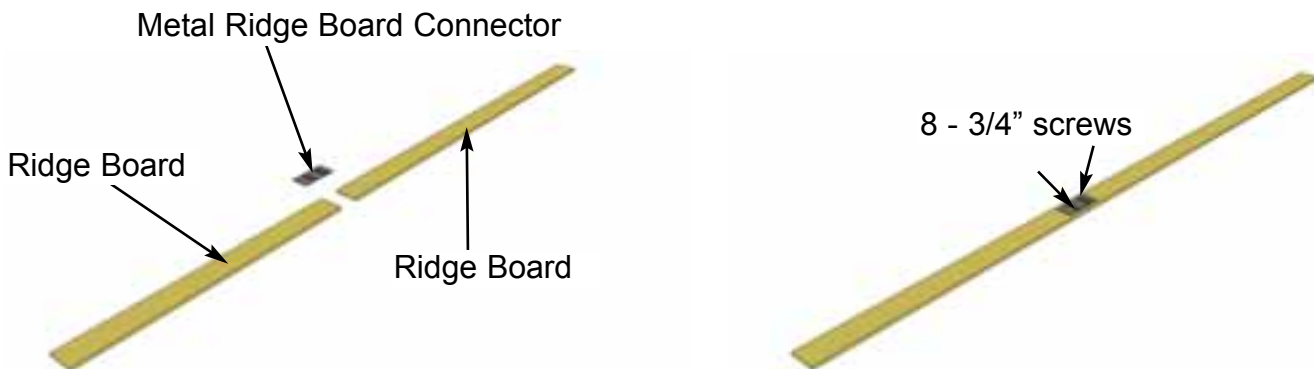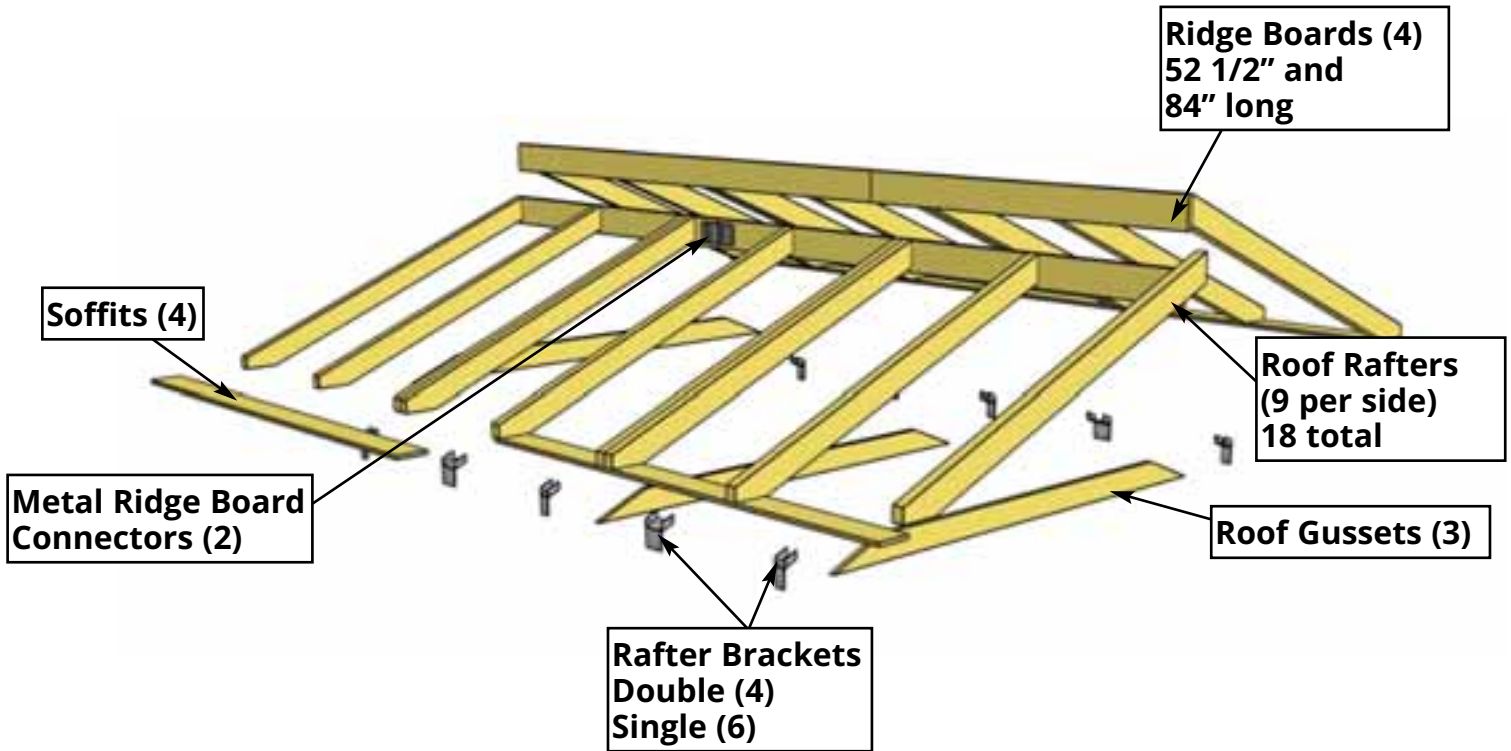



C1. Locate (1 each) **Long & Short Ridge Boards** and attach together with a metal **Ridge Board Connector** using **8 - 3/4" Screws**. Total Length when connected is 136 1/2". Connect other set of Ridge Boards the same. Position metal Ridge Board Connector evenly on Ridge Boards.

Parts
Ridge Boards - Long (3/4" x 4 1/2" x 84") x 2
Ridge Boards - Short (3/4" x 4 1/2" x 52 1/2") x 2



Hardware
SS2 - 3/4" Screws x 16 total
Y9 - Ridge Board Connector x 2 total

C2. Locate 9 **Rafters**, 2 **Soffits** and a completed Ridge Board. Lay out on level ground as shown to the right. Double up Rafters as illustrated. Screw doubled up Rafters together with **3 - 2 1/2" Screws** per piece.



Parts (Steps 29 - 31)	Hardware (Steps 29 - 31)
Rafters (1 1/2" x 3 1/2" x 56 1/2") x 18	S1 - 2 1/2" Screws x 12 total
Soffits (1/2" x 4 1/2" x 68 1/4") x 4	S2 - 1 1/4" Screws x 28 total
	S3 - 2" Screws x 28 total

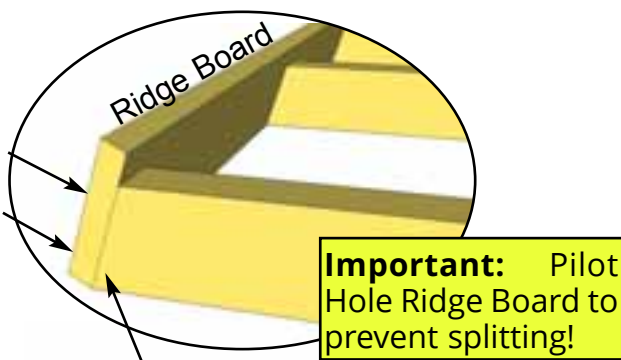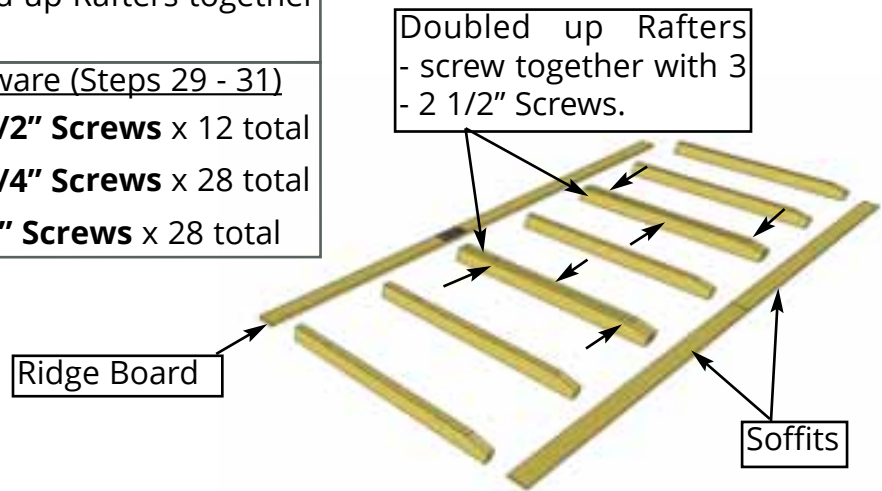


C3. Attach completed Ridge Board to ends of both outside Rafters with **2 - 2" Screws** per end. Measure and position interior Rafters as illustrated below. When positioned correctly, attach Ridge Board to remaining Rafters with **2 - 2" Screws** Rafter end.

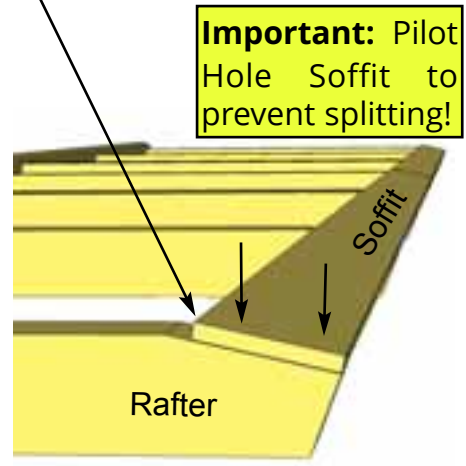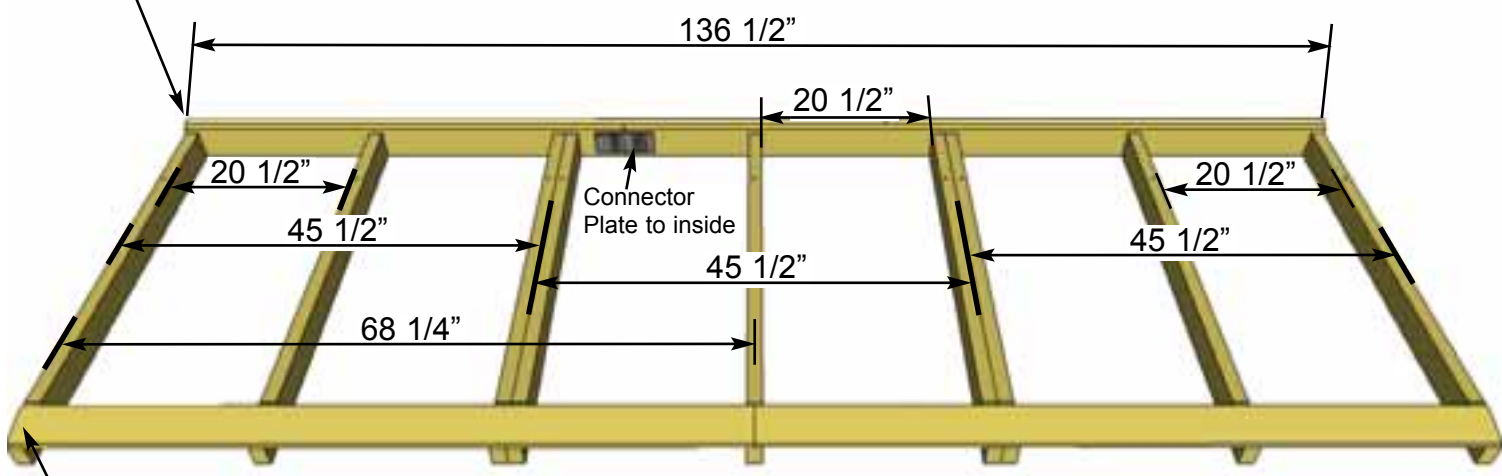

C4. Attach end of a Soffit flush to ends of outside rafters with **2 - 1 1/4" Screws** per Rafter end. Drill pilot holes in Soffit to prevent splitting. Complete both outside Rafter / Soffit connections first. Measure and position interior Rafters as illustrated above. When positioned correctly, attach Soffit to remaining Rafters with **2 - 1 1/4" Screws** per Rafter. Flip completed rafter section over. Complete 2nd Rafter section now as per the 1st, but with the following exception - **When attaching Ridge Board to Rafter ends, make sure Metal Ridge Board Connector is positioned so offset to first Rafter Section. See Step C9 for illustration.**

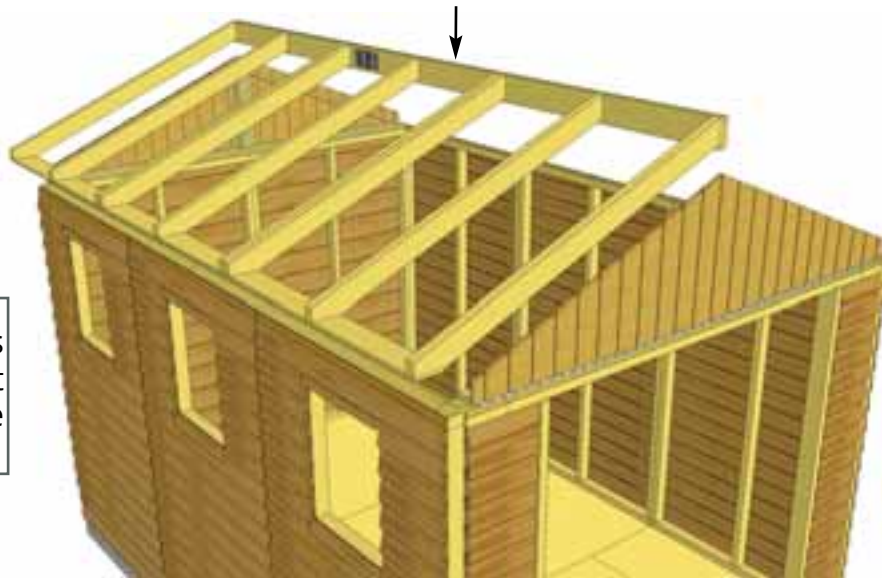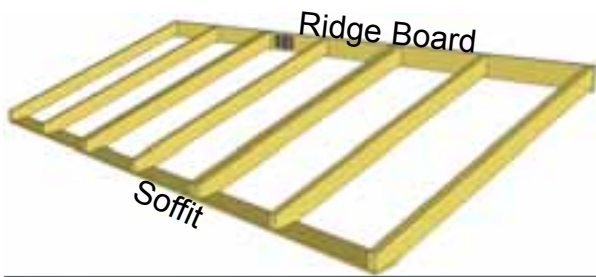


C5. Flip Rafter Section over so Soffit is facing down. Starting with one side, lift completed Rafter Section up and place on gable framing.

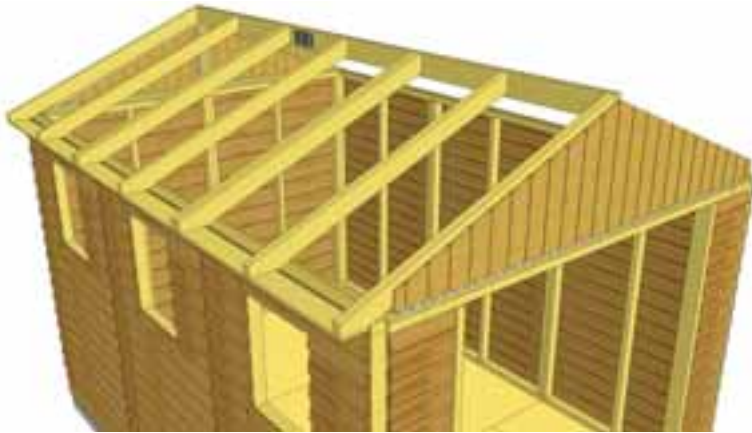


Rafter should rest on gable framing.

Gable Notch

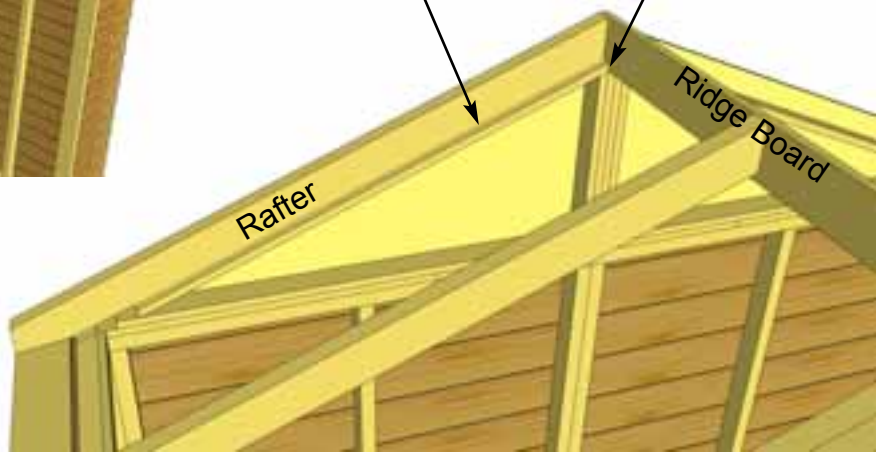

C6. Slide Rafter Section up on gable framing until bottom of Ridge Board slips into gable notch.




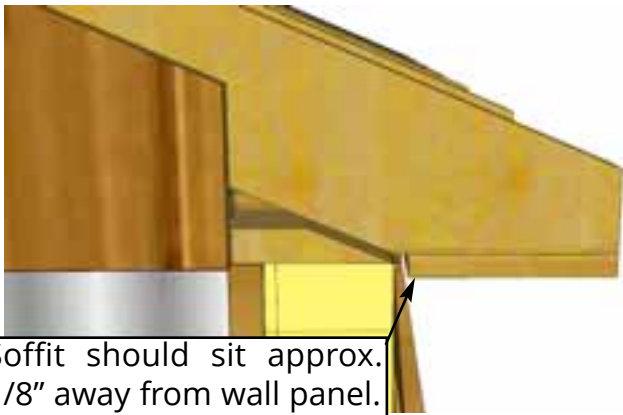


Soffit should sit approx. 1/8" away from wall panel.



C7. When Rafter Section is correctly positioned, outside rafters will sit equally on gable framing and Soffit will sit approximately 1/8" away from wall panels.

C8. Place second completed Rafter Section on gable walls as per **Steps C5 - C7.**

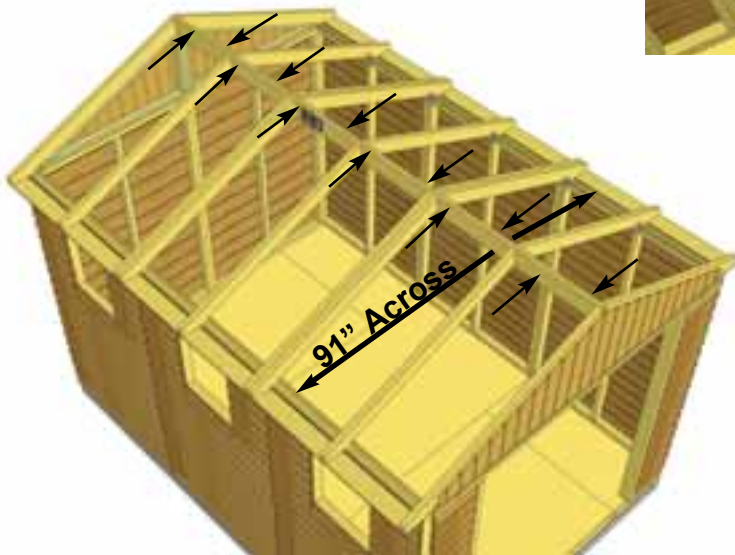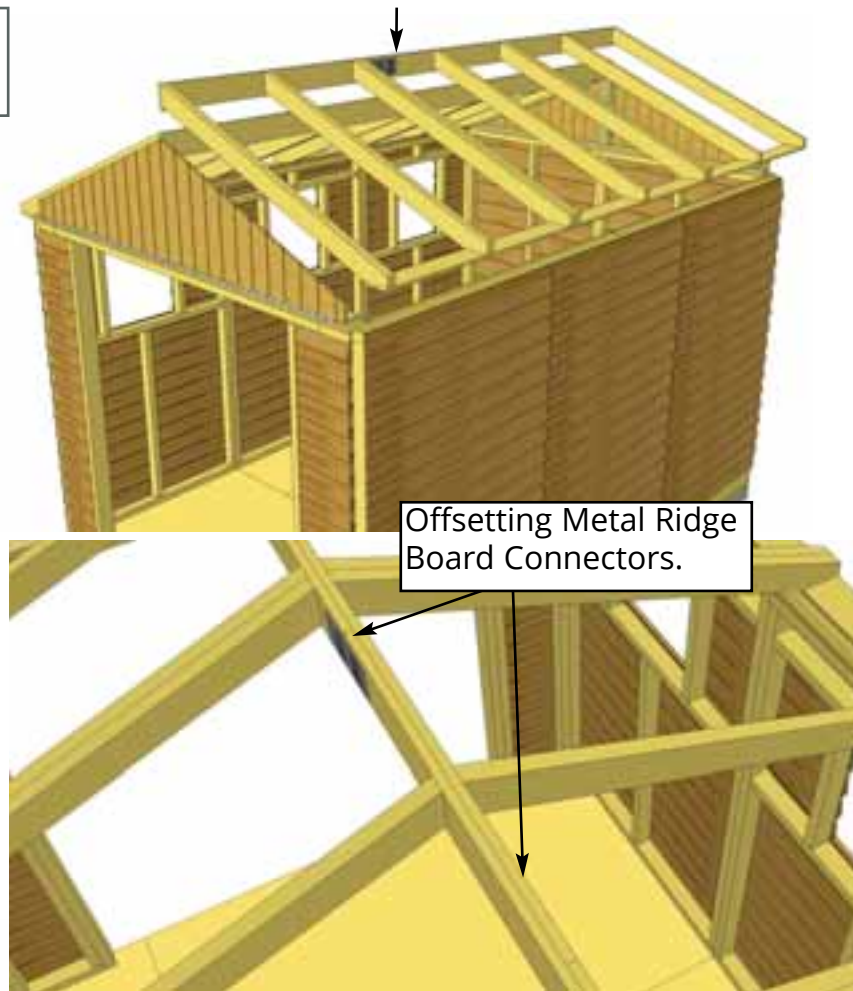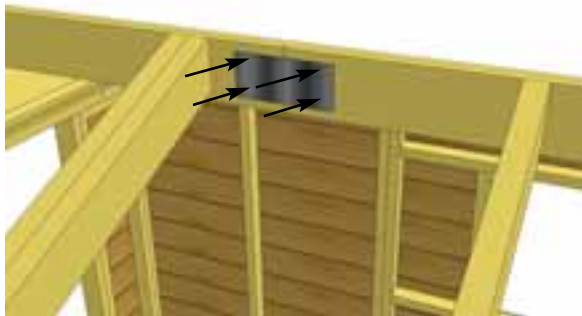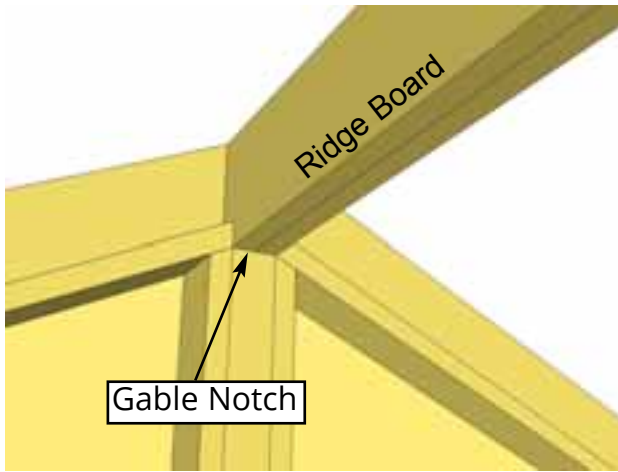

C9. At the peak, align Ridge Boards so they are flush together and secure them with **12 - 1 1/4" Screws**. **Important:** If there is a gap between Ridge Boards, have a helper push the Side Walls closer together from outside. Walls should be 91" apart at top from inside of wall plate to opposite wall plate. To completely secure Ridge Boards, place **1 1/4" Screws** into any of the remaining metal Ridge Board Connector holes. Complete both sides.


Hardware



S2 - 1 1/4" Screws x 20 total (approx.)

C10. With both Ridge Boards connected, completely secure Gable framing to walls and rafters. Use **4 - 2" Screws** per Rafter. Use an additional **6 - 2" Screws** to secure Gable to wall. **Note: you may have to remove the 2 temporary screws in Gable from Step 27 and reposition Gable for best fit prior to completing Gable attachment.**

Hardware

S3 - 2" Screws x 28 total

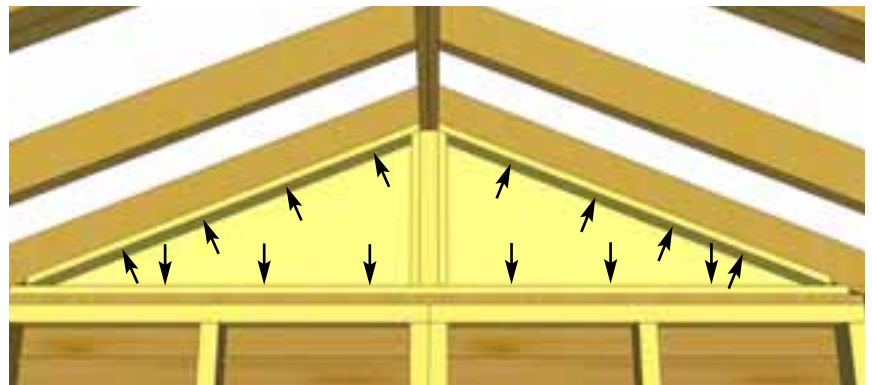

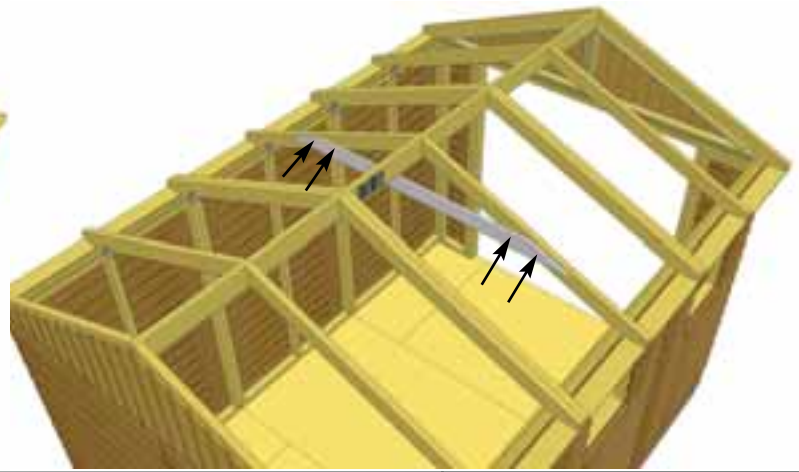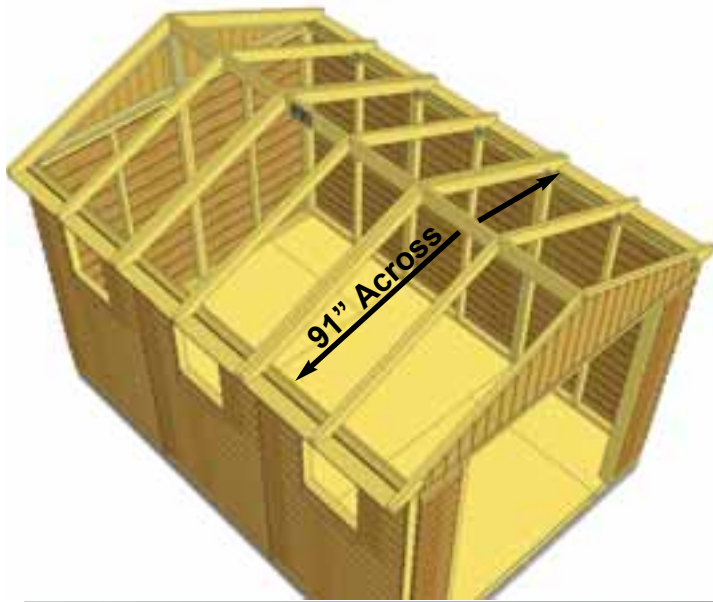


C11. Roof Gussets are positioned on mid rafters. Have two helpers push the Side Walls at the top from the outside of shed until inside to inside measurement between the Top Plates is 91". Slide Gusset up on side of Rafters. Gusset must be below top edge of Rafter. Use level to square Gusset and attach to Rafters with **4 - 2" Screws**. Pilot hole each Gusset end with 1/8" drill bit.

Parts (Steps C11 - C12)

Roof Gussets
(3/4" x 3 1/2" x 72") x 3

Hardware (Steps C11 - C12)

S3 - 2" Screws
x 12 total

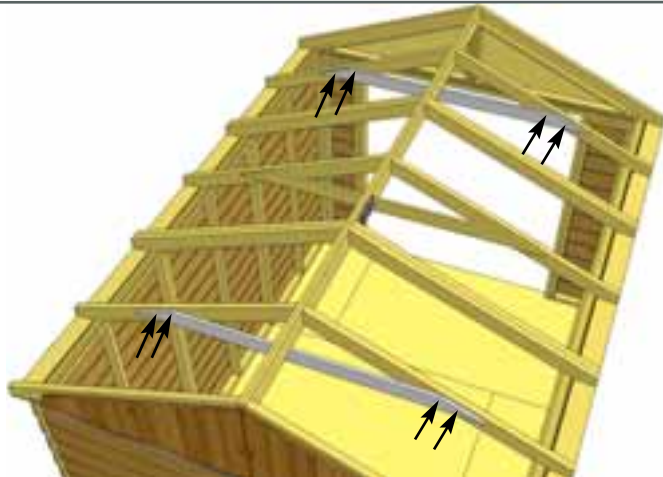

C12. Complete remaining 2 Gussets as per **Step C11**.

C13. Attach all Single and Double Rafter Brackets where rafters meet Top Wall Plates inside of shed. Attach with **2 - 1 1/4" Screws** and **2 - 2" Screws** per **Single Rafter Bracket** and **6 - 2" Screws** per **Double Rafter Bracket**. Have two helpers hold the Side Walls at the top from the outside of shed to keep the inside-to-inside measurement between the Top Plates at 91".


Hardware

Y30 - Single Rafter Brackets x 6 total

Y31 - Double Rafter Brackets x 4 total


S2 - 1 1/4" Screws x 12 total

S3 - 2" Screws x 36 total

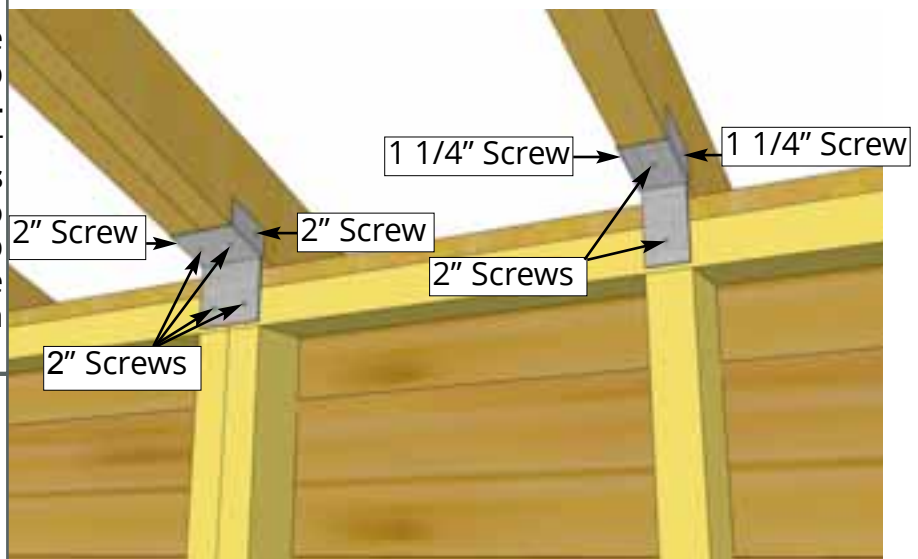


D. Roof Section - Cedar

Exploded view of all parts necessary to complete the Roof Section. Identify all parts prior to starting. (Roof Filler Shingles Missing)

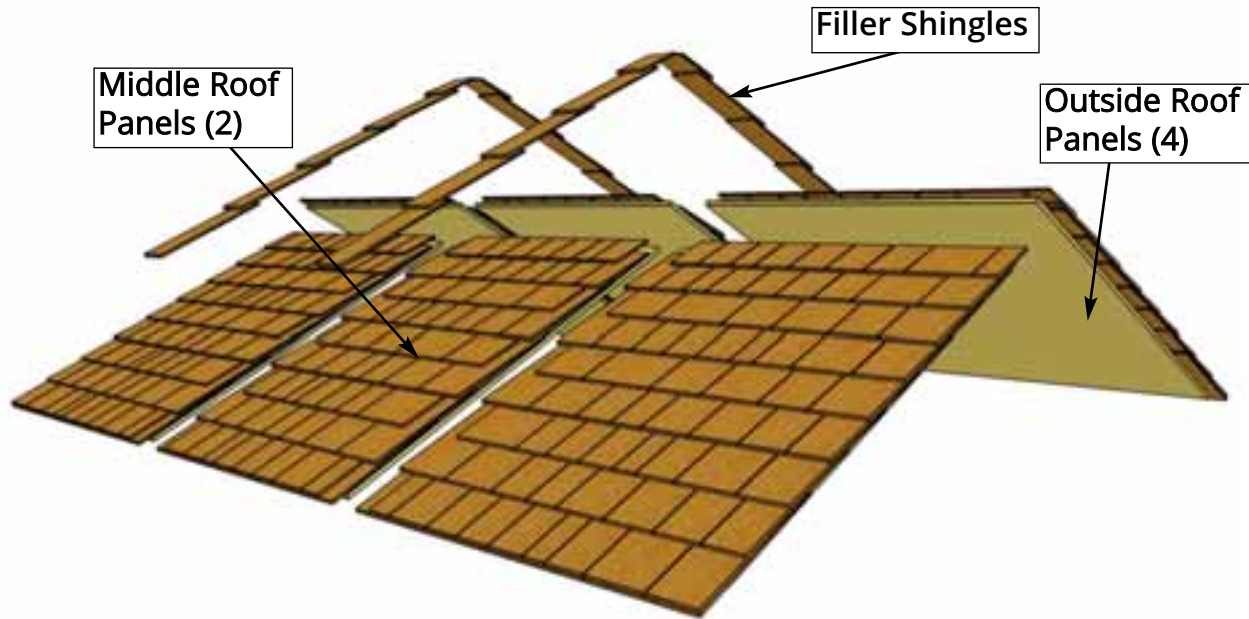


Exploded view of upside down roof panels.

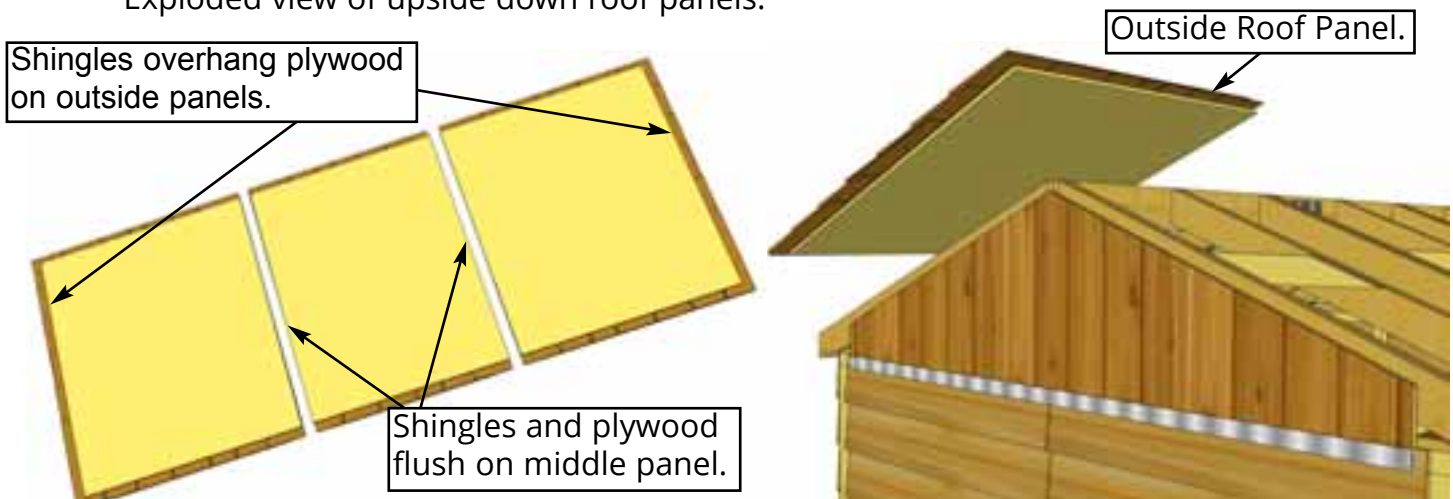


D1. Identify all Roof Panels. There are 4 Outside and 2 Middle Roof Panels. Outside Panels will have shingles overhanging the plywood on one side. Lift up and place an Outside Roof Panel on Rear Rafters.

Parts (Steps 41 - 45)
Outside Roof Panels
 (51" wide) x 4
Middle Roof Panels
 (45 1/2" wide) x 2

Hardware (Steps D1 - D5)
S1 - 2 1/2" Screws
 x 12 total

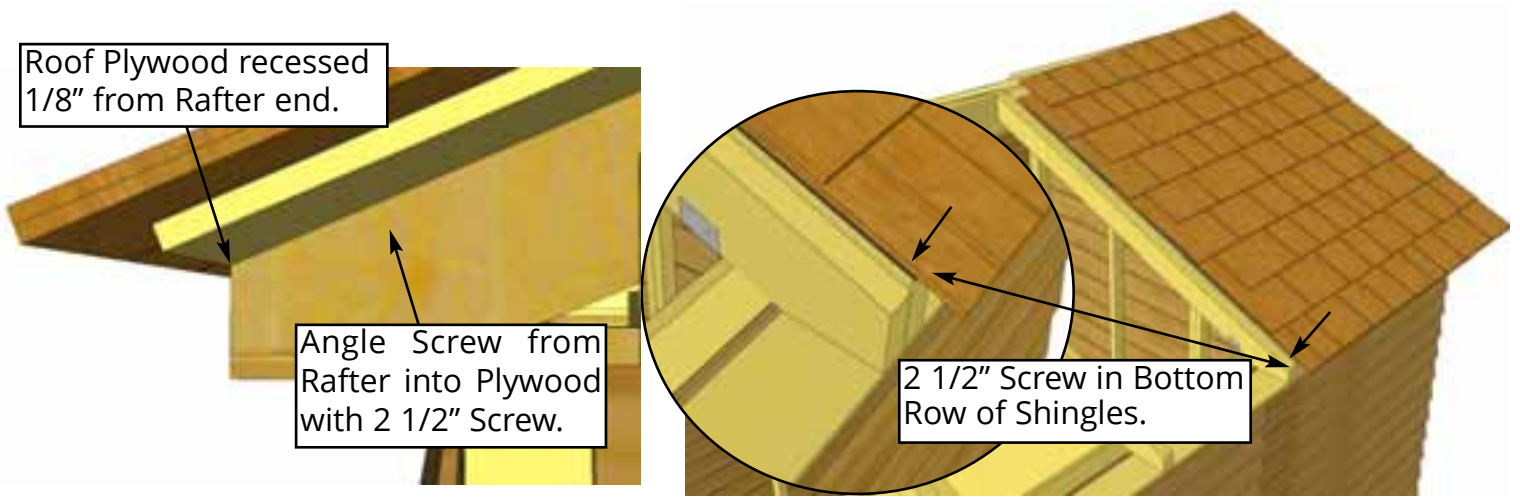


D2. Place **Outside Roof Panel** so it sits flush on 3rd Rafter from the outside (doubled up Rafter). Plywood on roof should be recessed 1/8" from end of Rafter at bottom, and flush with seam of doubled up Rafters. From the outside, screw down through bottom row of shingles into Rafter with **1 - 2 1/2" Screw**. Angle **1 - 2 1/2" Screw** from outside Rafter into roof plywood.

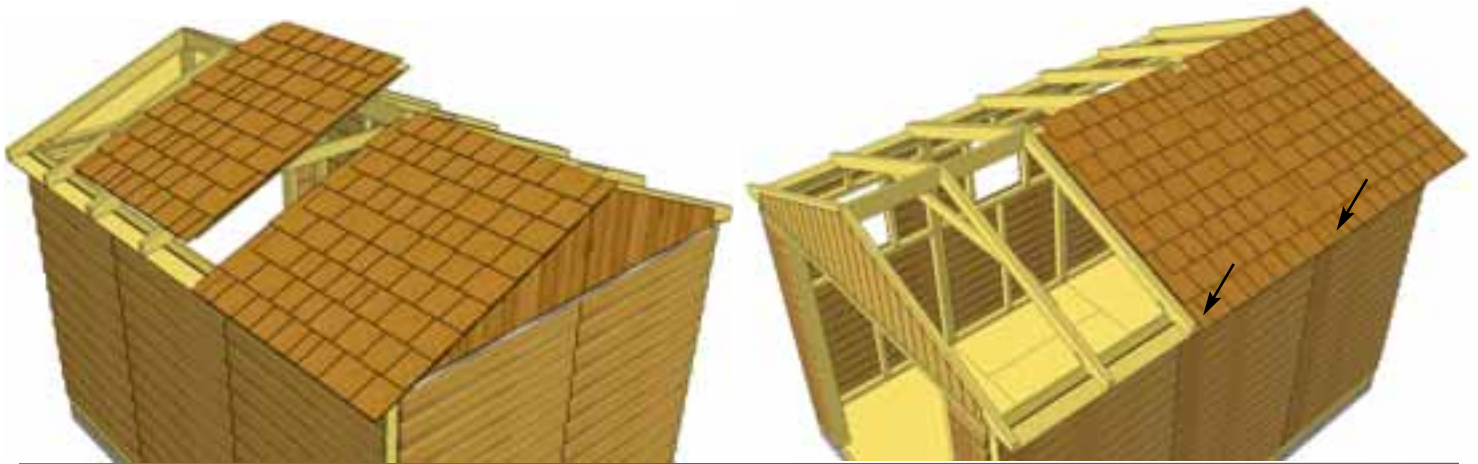

D3. Locate a **Middle Roof Panel** (roof plywood flush with outside of shingles), and place on middle Rafters. Align panel as per **Step D2** and screw panel down to Rafters with **2 - 2 1/2" Screws** in the bottom row of shingles.



D4. Lift up, position and attach 2nd **Outside Roof Panel** on Rafters as per **Step D2**.

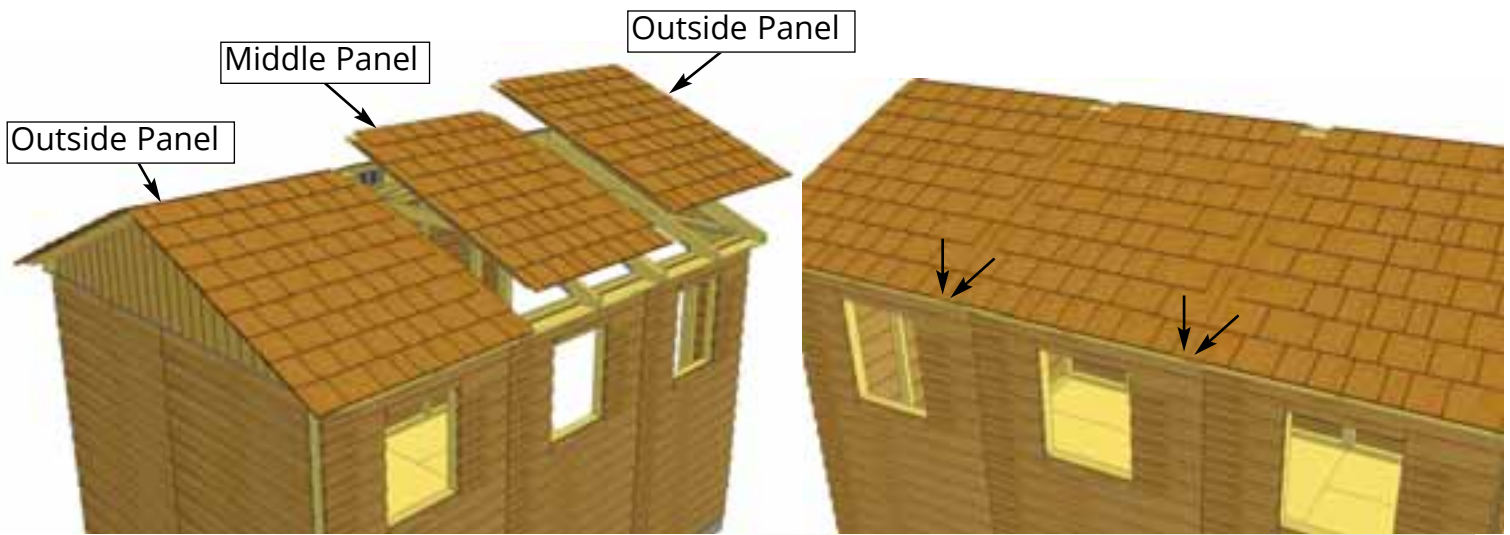

D5. Position and attach Roof Panels on the other side as per **Steps D1 - D4.**





D6. Roof **Filler Shingles** are included to cover roof seams. Starting at the bottom, slide the first Long Shingle in until flush with other bottom shingles.

Parts (Steps D6 - D8)
Filler Shingles - Long x 16
Filler Shingles - Short x 4

Hardware (Steps D6 - D8)
S1 - 2 1/2" Screws x 32 total
N2 - 1 1/2" Shingle Nails x 8 total

D7. Screw first filler shingle down to rafters using **1 - 2 1/2" Screw** per panel (2 in total). Make sure to screw into both rafters.

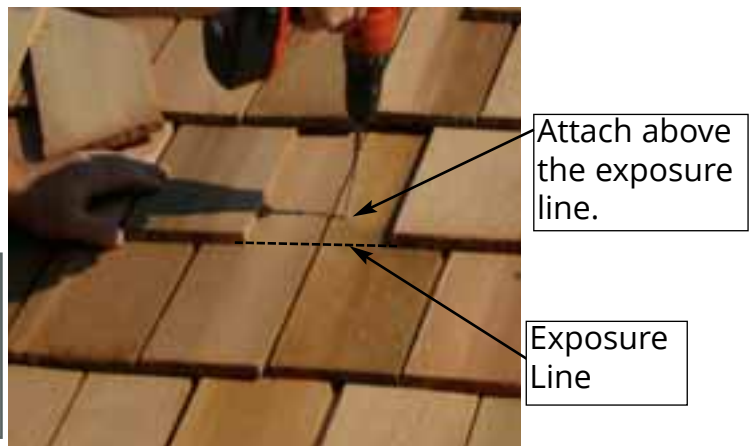

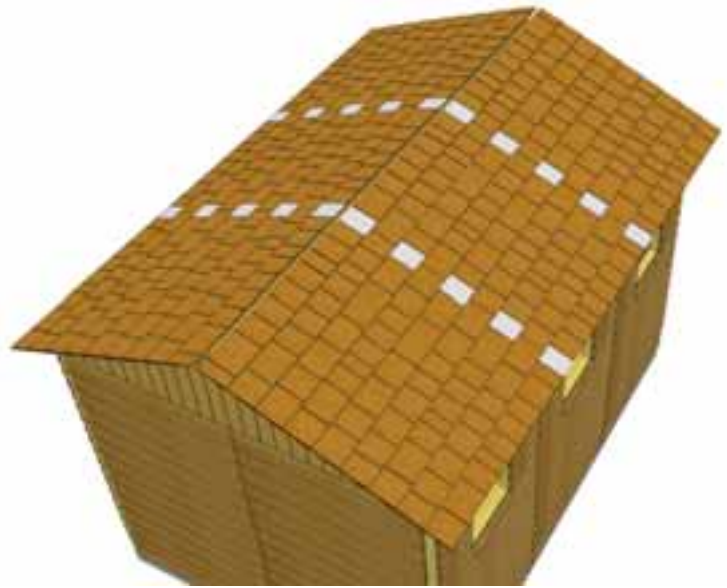




D8. Slide in another filler shingle and attach as per **Step D7**. On your last row of shingles, attach smaller filler shingle with **2 - 1 1/2" Shingle Nails** near the top, to be covered by Ridge Caps in **Step D11**. Complete all four rows of filler shingles where roof seams meet in the same way.

D9. Inside the shed, position **2 - 90° Metal Brackets** onto the roof plywood and outside rafter and secure with **4 - 1 1/4" Screws** each. Complete for both Gables - there are 4 Brackets per Gable.

Hardware

Y2 - 90° Metal Bracket x 8 total

S2 - 1 1/4" Screws x 32 total

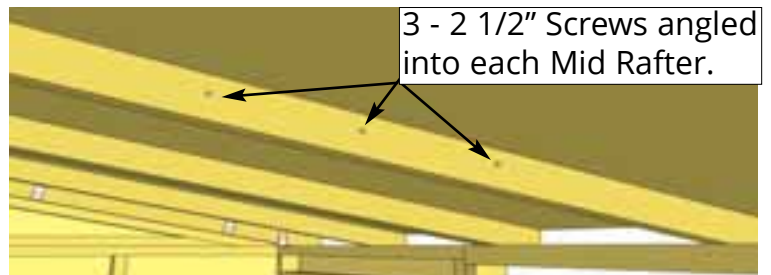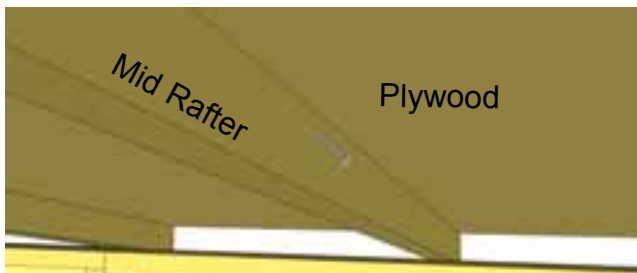
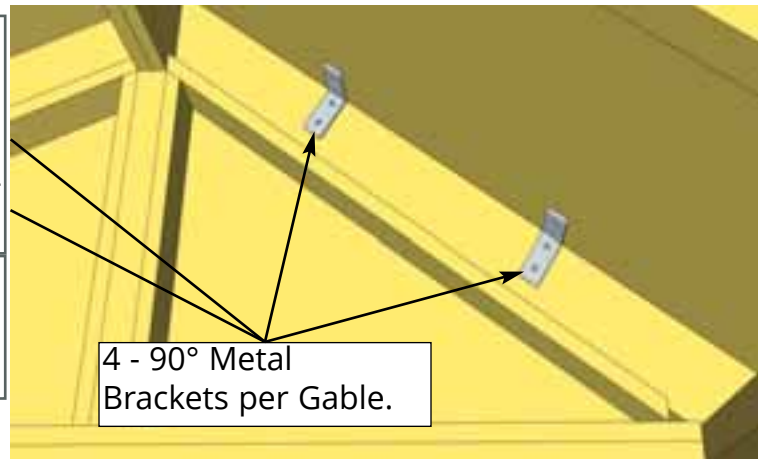


D10. To further secure roof panels, from the inside, drill pilot holes in each Mid Rafter (3 per Rafter) on an angle. Using **3 - 2 1/2" Screws**, secure rafters to roof plywood. **Note:** from outside, have a helper push roof panel down so plywood sits flush against rafter when securing.


Hardware

S1 - 2 1/2" Screws
x 18 total

Alternate Ridge Cap seams
(Offsetting angle cut at peak)

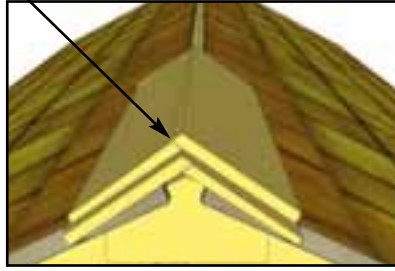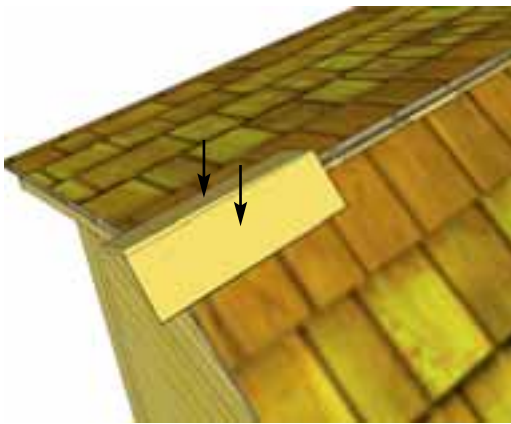



Important: Butt (thick) end of Ridge Cap will be facing towards the outside of shed.

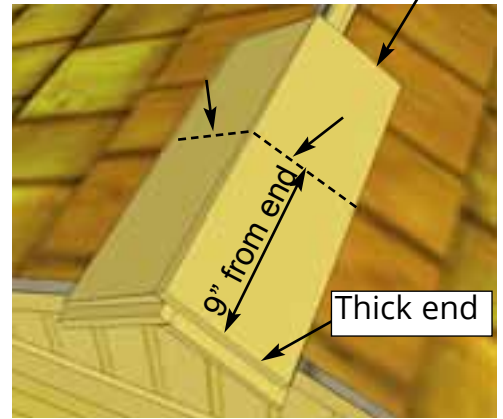


D11. Place 1st **Roof Ridge Cap** on roof peak overhanging shingles by approximately 1". Attach with **2 - 1 1/2" Shingle Nails** 9" from end. Place 2nd Ridge Cap 1" back from 1st cap. Attach with **2 - 1 1/2" Shingle Nails** 9" from end. Alternate each Ridge Cap seam as you proceed.

Parts (Steps D11 - D12)
Roof Ridge Caps x 22

Hardware (Steps D11 - D12)
N2 - 1 1/2" Shingle Nails
x 46 total

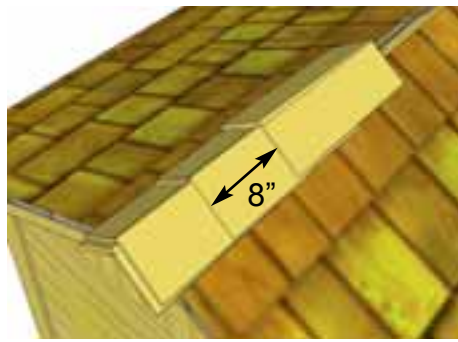
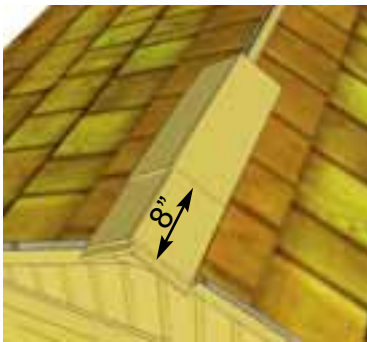


D12. Place 3rd Ridge Cap 8" back from 2nd (enough to cover shingle nails). Attach 3rd Ridge Cap as per **Step D11**. Continue to position and attach Ridge Caps until half the roof is complete. From opposite side, position and attach Ridge Caps as described above. One Ridge Cap is cut shorter to fit in the center of the roof. Attach center cap with **4 - 1 1/2" Shingle Nails**.

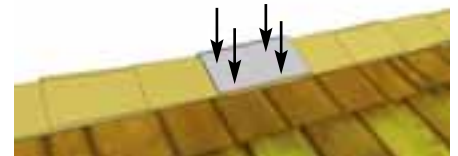

D. Roof Section - Metal



Exploded view of all parts necessary to complete the Roof Section.
Identify all parts prior to starting.

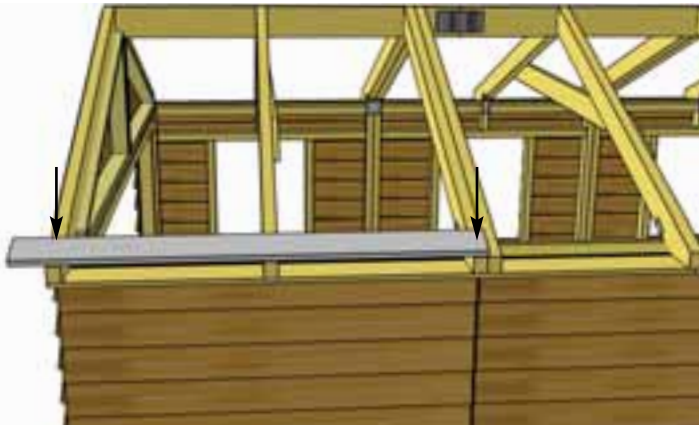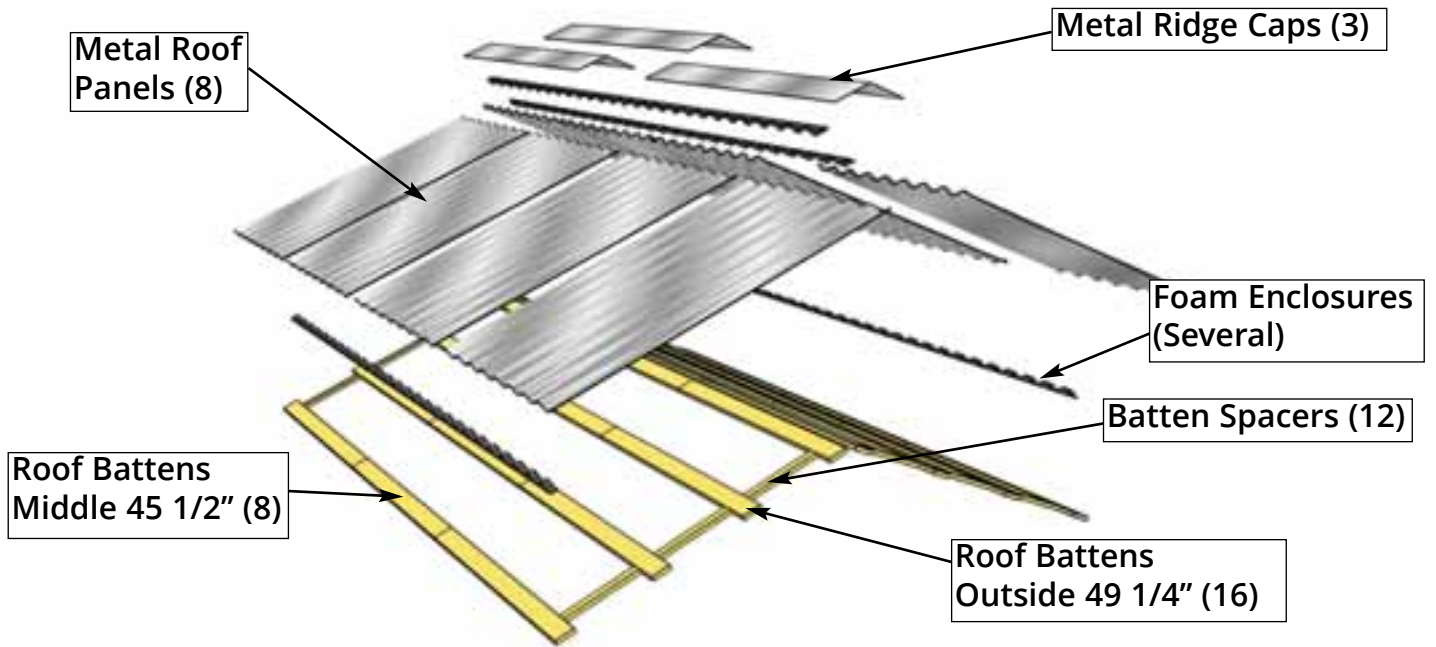


D1. Locate first row of **Roof Battens**. Starting with an **Outside Batten** place on **Rafters** 1/8" up from **Rafter** end. **Batten** should rest on center of double rafter. Pre-drill 1/8" pilot hole before attaching. Attach with **2 - 1 1/4"** screws. Next place **Middle Batten** between double rafters and attach with **2 - 1 1/4"** screws. Next attach 2nd **Outside Batten** with **2 - 1 1/4"** screws.

Parts (Steps D1 - D5)
Roof Batten Outside
 (3/4" x 3 1/2" x 49 1/4") x 16
Roof Batten Middle
 (3/4" x 3 1/2" x 45 1/2") x 8
Batten Spacers
 (3/4" x 1 1/2" x 14 1/8") x 12


Hardware (Steps D1 - D5)
S2 - 1 1/4" Screws
 x40 total

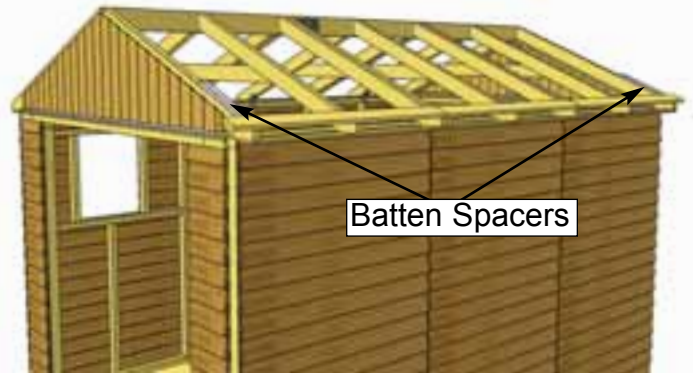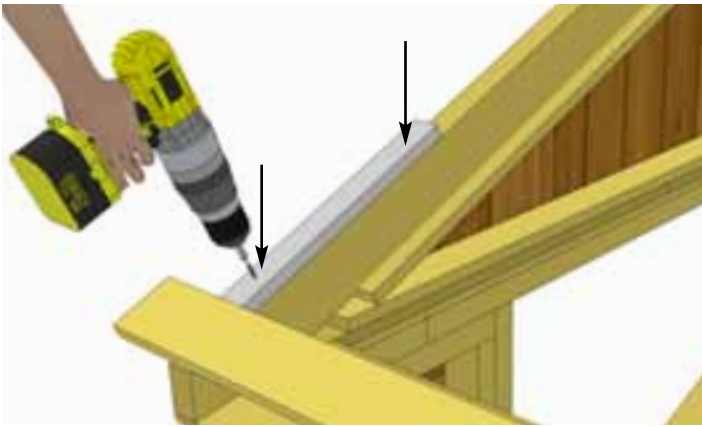


D2. Locate **Batten Spacers**. Place 1 **Batten Spacer** above **Outside Battens** lengthwise along outside Rafter. Attach each Batten Spacer to outside Rafter with **2 - 1 1/4" screws** (4 total)

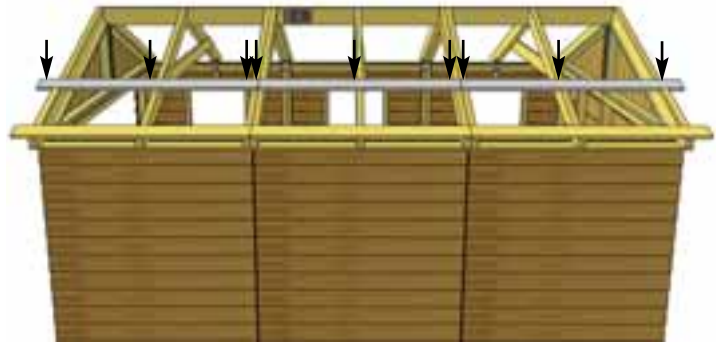




D3. Locate 2nd row of **Roof Battens**. Place Batten flush against Batten Spacers. Ends of Batten should line up as the 1st row did in **Step D2**. Attach each Batten as per **Step D2**.

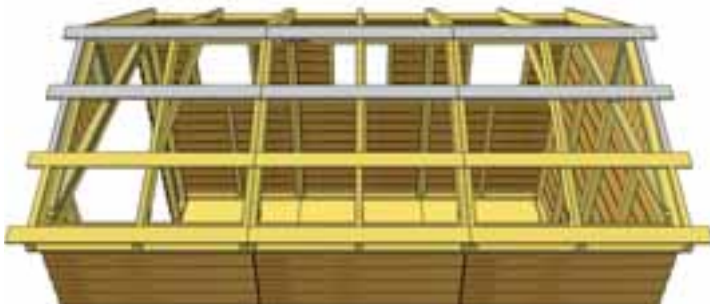

D4. Repeat **Steps D1 - D3** to complete remaining 2 rows of **Roof Battens**. Place **Batten Spacers** between each row.

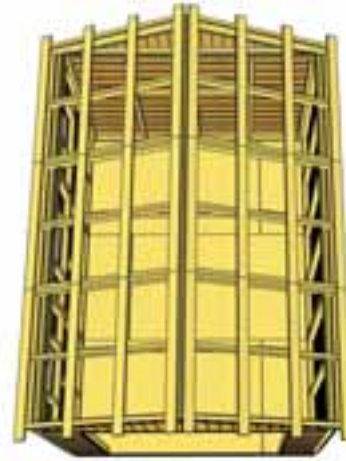

D5. Complete attachment of **Battens** to 2nd Rafter section as per **Steps D1 - D4**.

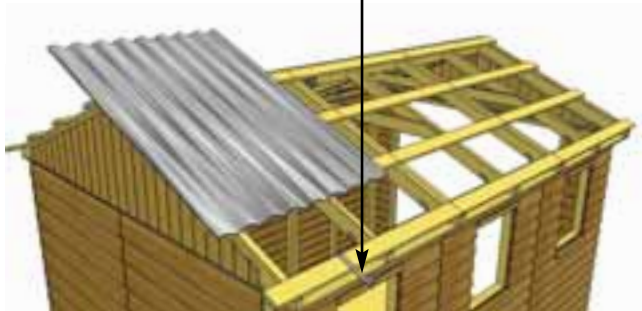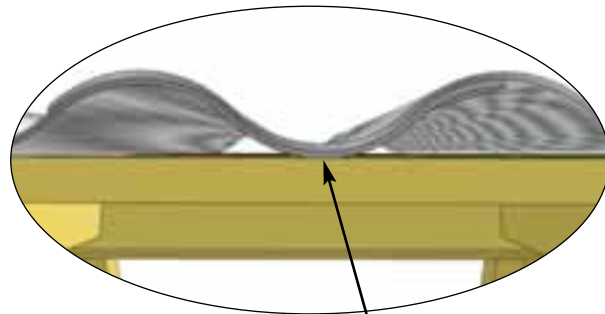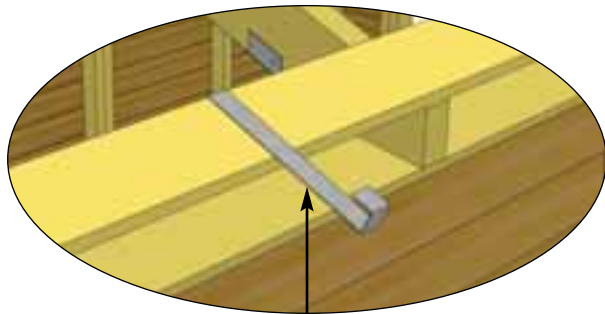

D6. Locate 4 **Metal Roof Panels** and 4 **Metal Roof Hangers**. To temporarily hold the Metal Roof Panels in place, hook a Metal Roof hanger onto the lowest Batten, approximately where the center of the panels will be. Place first Metal Roof Panel onto Battens and into Metal Roof Hanger. Do not fasten panels down until **Step D12**. Place remaining 3 panels and hangers on the same way. Metal Roof Panels will overlap each other.

Parts (Steps D6 - D18)

Metal Roof Panels

(39" wide x 58"long) x 8

Metal Ridge Caps

(60" long) x 3

Foam Roof Enclosures

(Several Pieces)

Hardware (Steps D6 - D18)

Metal Roof Screw


(3/8"x2") x 36 total

Metal Ridge Cap Screws


(5/16" x 7/8") x 12 total

Silicone Caulking

(1 Tube)

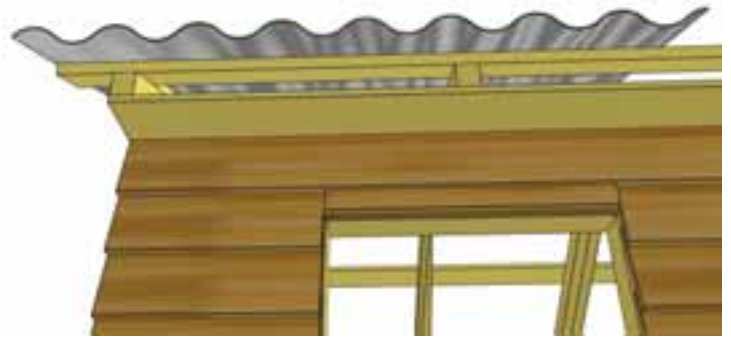

D7. Do not attach **Metal Roof Panel** onto **Rafters** until all panels are positioned and spaced. **Metal Roof Panel** should overhang on the side by approximately 3/4". In the meantime, have your helper hold the panel in place so it doesn't slide off. Locate 2nd roof panel.

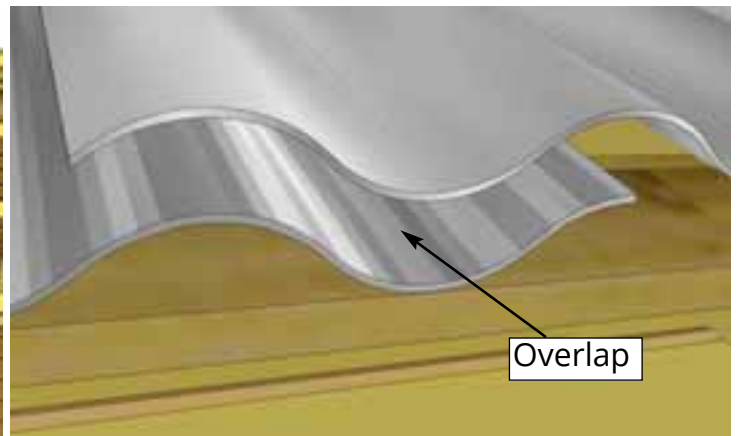


D8. Place 2nd **Metal Roof Panel** on **Rafters** and overlap panel with the first outside panel as shown above. Temporarily position panel at top and bottom as per first panel.




D9. Place remaining 3rd and 4th **Metal Roof Panels** on **Rafters** as per **Steps D7 - D8**. Overlap **Metal Roof Panels** to achieve desired width.




D10. Once **Metal Roof Panels** are spaced correctly from side-to-side and top-to-bottom, lift panels up and run a bead of caulking down the overlapping seams of each pane to seal the joints.

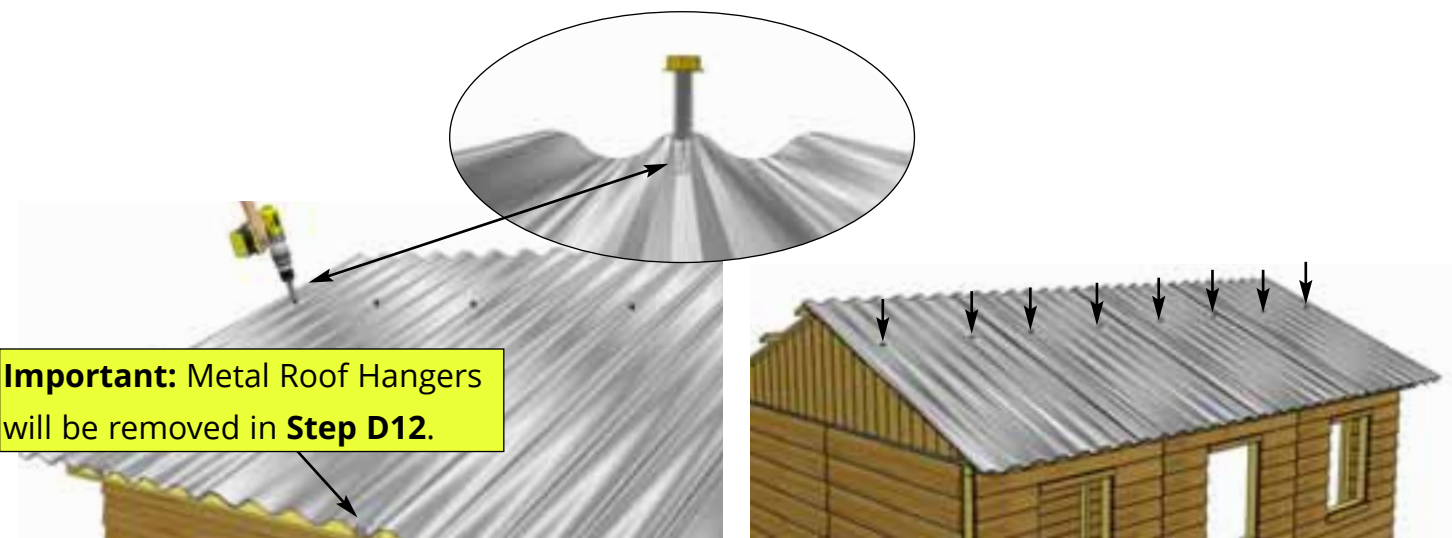


D11 Using **8 - 2" Metal Screws** and **1/4" Nut Driver** (included), partially secure Metal Roof Panels to 2nd row of battens from top. Only fasten screws halfway so that Metal Roof Hangers can be removed. Metal screw is self-tapping, screw into center of Battens at peak of Roof panels.

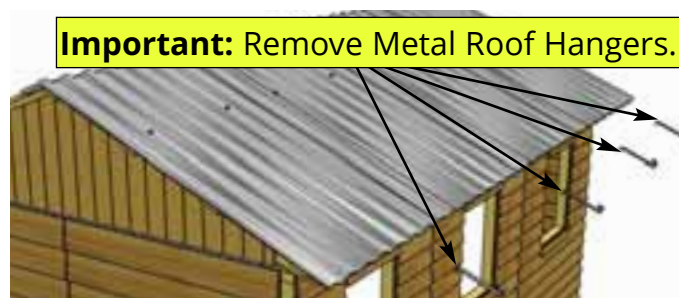

D12. Before fully securing roof panels, remove Metal Roof Hangers from Roof.

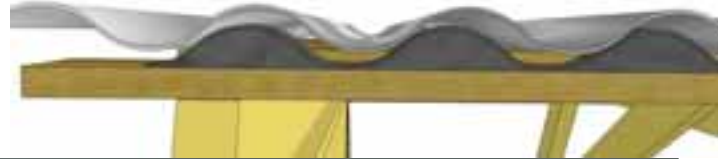


D13. Before attaching roof panels down, insert **Foam Enclosures** between **Metal Roof Panels** and **Battens**.




Screw into peak of
Metal Roof Panel




D14. Using **2" Metal Screw** and **3/8" Nut Driver** (included), secure outside **Metal Roof Panel** down to each **Batten**. Metal screw is self-tapping. do not overtighten! Screw through the peak of the **Metal Roof Panel** not the valley. Use a total of 18 screws to secure **Metal Roof Panels** to lower 3 rows of **Battens**.

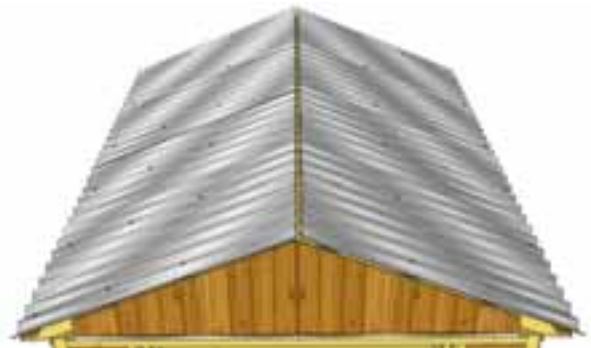

D15. Complete the opposite metal roof as per **Steps D1-D14**.

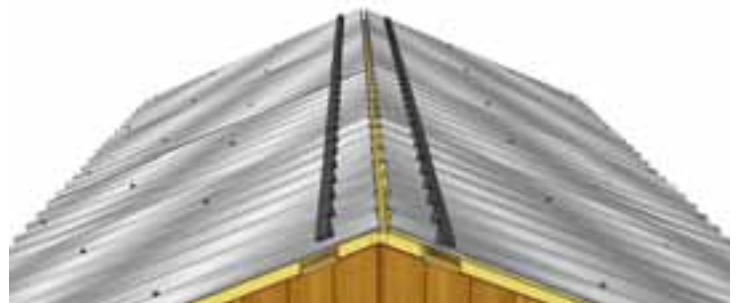

D16. Before attaching **Metal Ridge Caps**, place strips of **Foam Enclosures** near to top. **Foam Enclosures** will prevent moisture from coming in from the top. Complete for both sides.

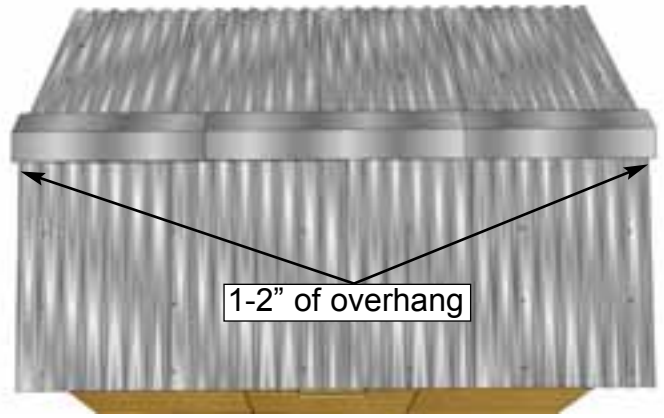

D17. Place all three **Metal Ridge Caps** on apex of roof. Evenly space from front to back. **Metal Ridge Caps** will overlap each other. Overhang the cap by approximately 1-2" past each end.



D18. When **Metal Ridge Caps** are correctly positioned, secure with **12 - 2"** long self-tapping metal screws. Screw into final **Batten** with **1/4" Nut Driver**. Do not overtighten!




D19. Attach **Facia Nailing strips** (3/4" x 2 1/2" x 51") to the underside edge of **Roof Battens** with **4 - 1 1/4"** screws per piece. **Nailing Strip** will make it easier to attach Front and Rear Facia in **Step E**. Complete front and rear strips (4 pieces total).

D. Roof Section - Plywood

Exploded view of all parts necessary to complete the Roof Section.
Identify all parts prior to starting.


**Roof Plywood
Large (4)**

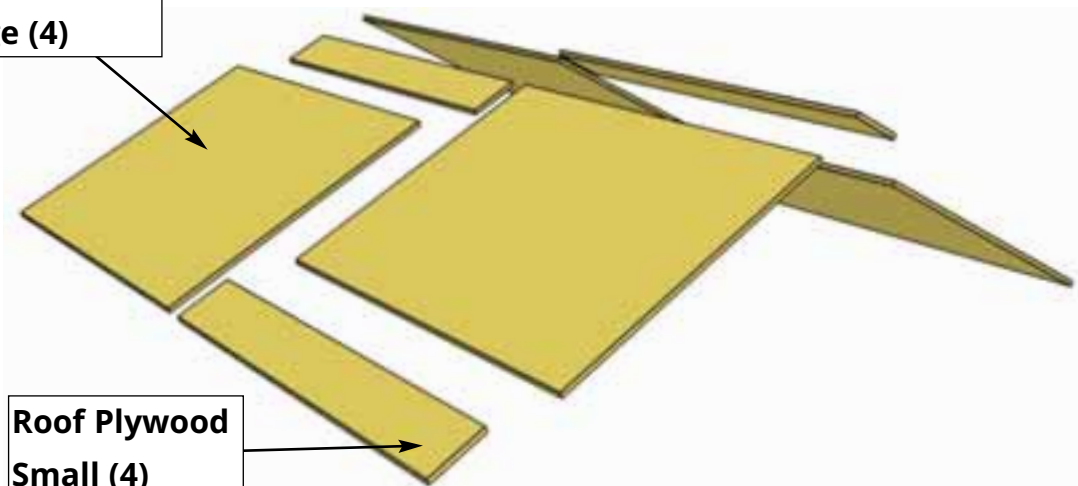

**Roof Plywood
Small (4)**


Exploded view of upside down roof panels.

Large plywood roof panels
(2/side) 5/8" x 48" x 72"

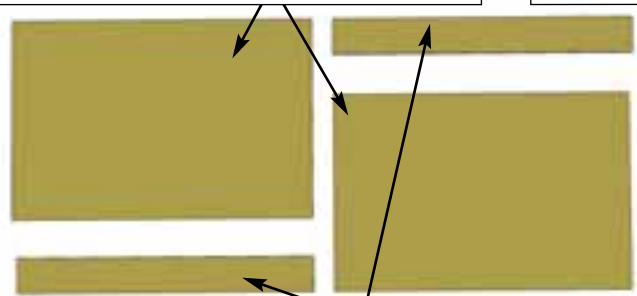

Small plywood roof panels (2/side)
5/8" x 8 1/2" x 72"

Back approx. 1/8"

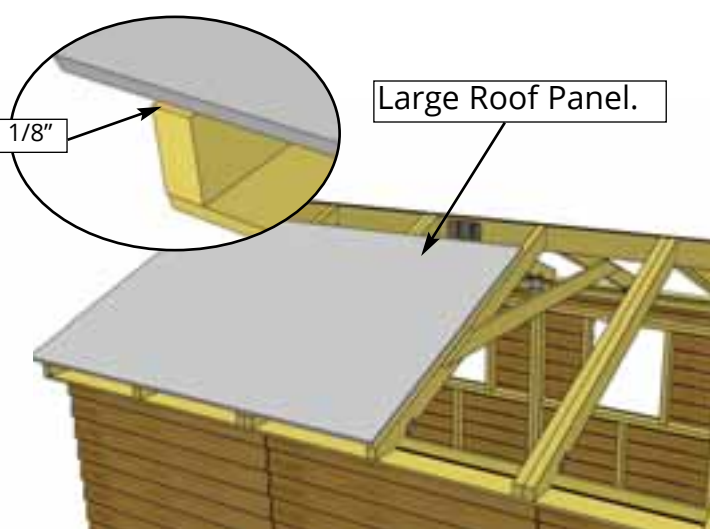

Large Roof Panel.


D1. Identify all Roof Panels. There are 4 Large and 4 Small Roof Panels. 2 of each sized panel are used per side. Locate one large sheet of Roof Plywood . Position on right side of shed. Recess plywood back approximately 1/8" from end of rafter.

Parts
Large Roof Panels (5/8" x 48" x 72") x 4
Small Roof Panels (5/8" x 8 5/8" x 72") x 4

Hardware
1 1/4" Screws x 84 total




D2. Plywood will overhang the front rafter by 4". On opposite side, plywood will be centered on 5th rafter still being supported by second rafter nailing cleat.

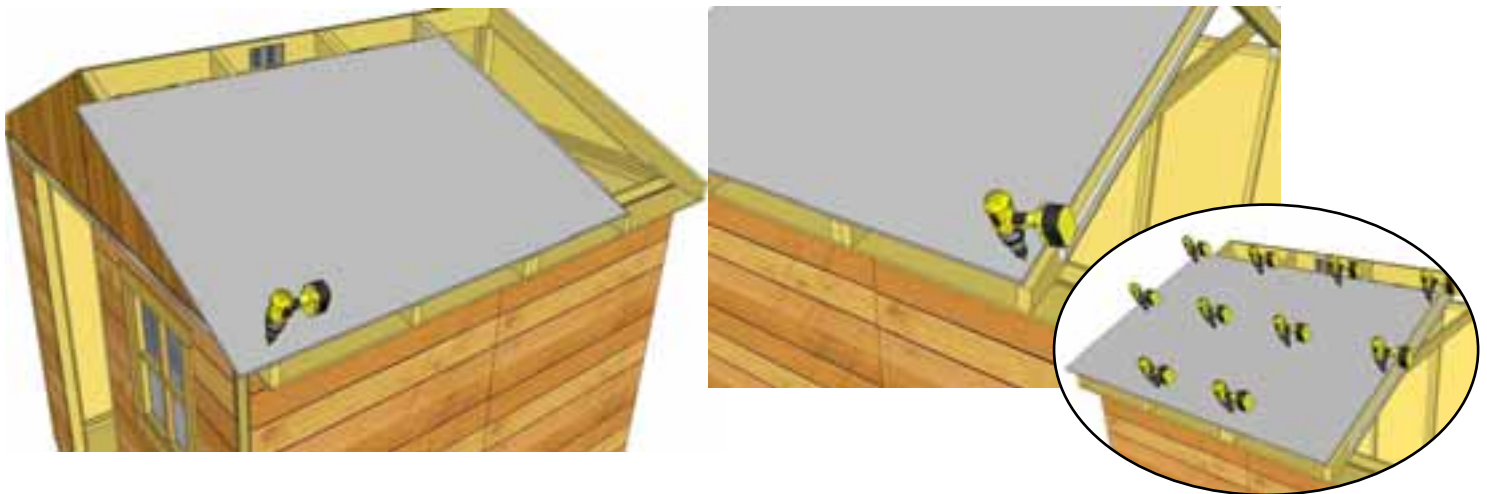

D3. With Roof Plywood correctly positioned on rafters, attach with **12 - 1 1/4"** screws. On 5th rafter, be sure to angle screw to hit the meat of the rafter.



D4. Locate remaining Roof Plywood to complete the side (3 pieces). **Small Roof Panel (5/8" x 8 5/8" x 72")**, **Large Roof Panel** . Position remaining roof panels as per **Step D3**.

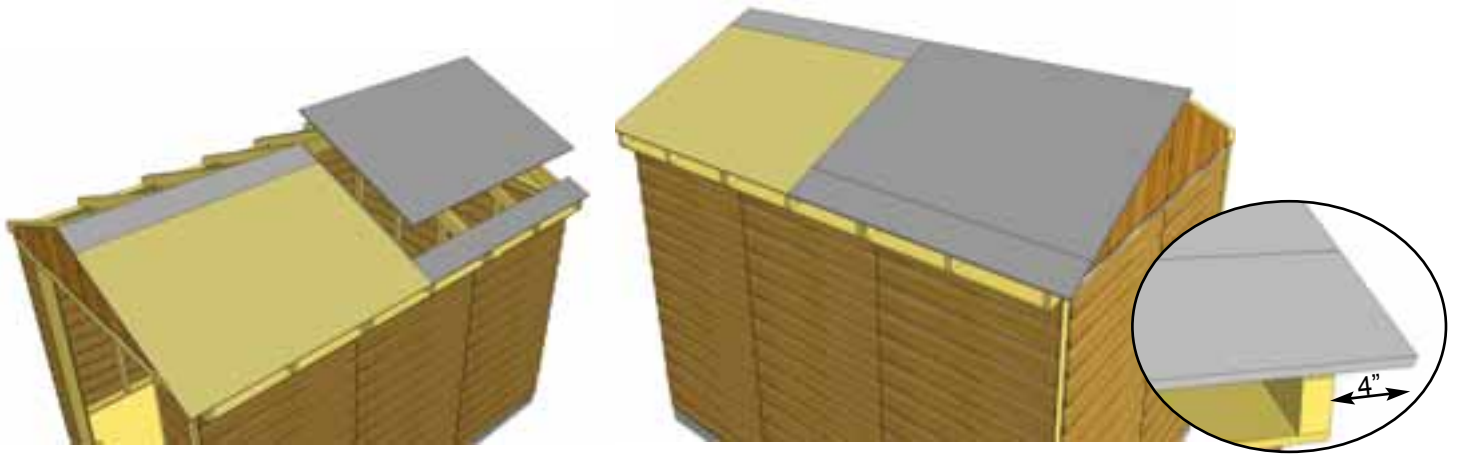

D5. Secure **5/8" x 8 1/2" x 72" Small Roof Panel** on outside rafters with **8 - 1 1/4"** screws. Plywood will overhang outside rafter by 4" once again. Place last roof plywood piece (**5/8" x 48" x 72"**) on rafters.




D6. Secure with **12-1 1/4"** screws.



D7. Repeat steps for opposite side of roof. Secure left side Plywood Roof Panels as per **Steps D1 - D6**. Plywood panels can be positioned in a different pattern but the two large panels must meet on rafter with nailing cleats.

Important:


Plywood roof panels must be covered with water proof roofing paper or equivalent material now. Roofing paper and roofing material is not supplied in this kit. Leaving plywood roof panels unprotected will result in water damage to the shed as well as delamination of the plywood.

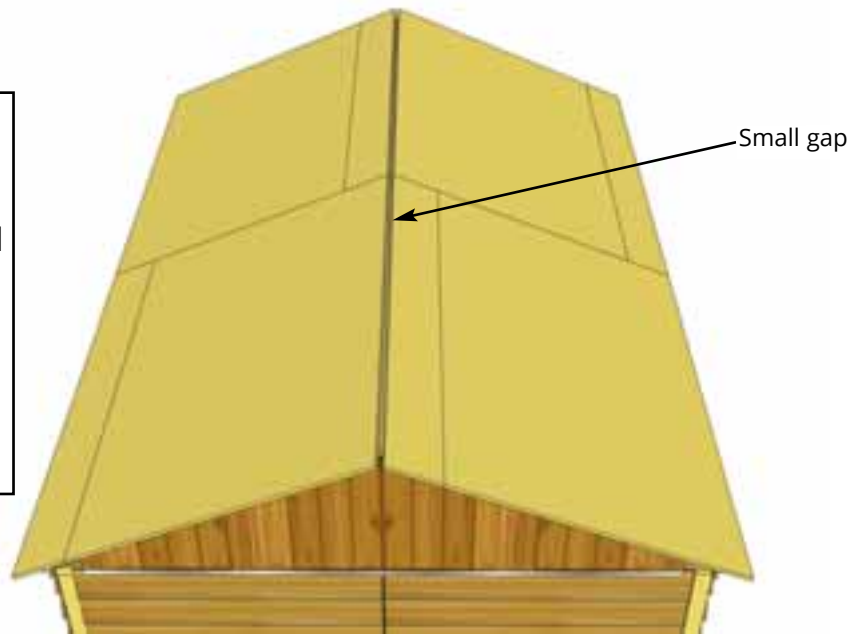


E. Miscellaneous Section

Exploded view of all parts necessary to complete the Miscellaneous Section. Identify all parts prior to starting.

Note: Not shown: Rear Gable Trim, Rear Narrow Trim, Rear Gable Detail Plate, Interior Door Stops, 1 Interior Cane Bolt

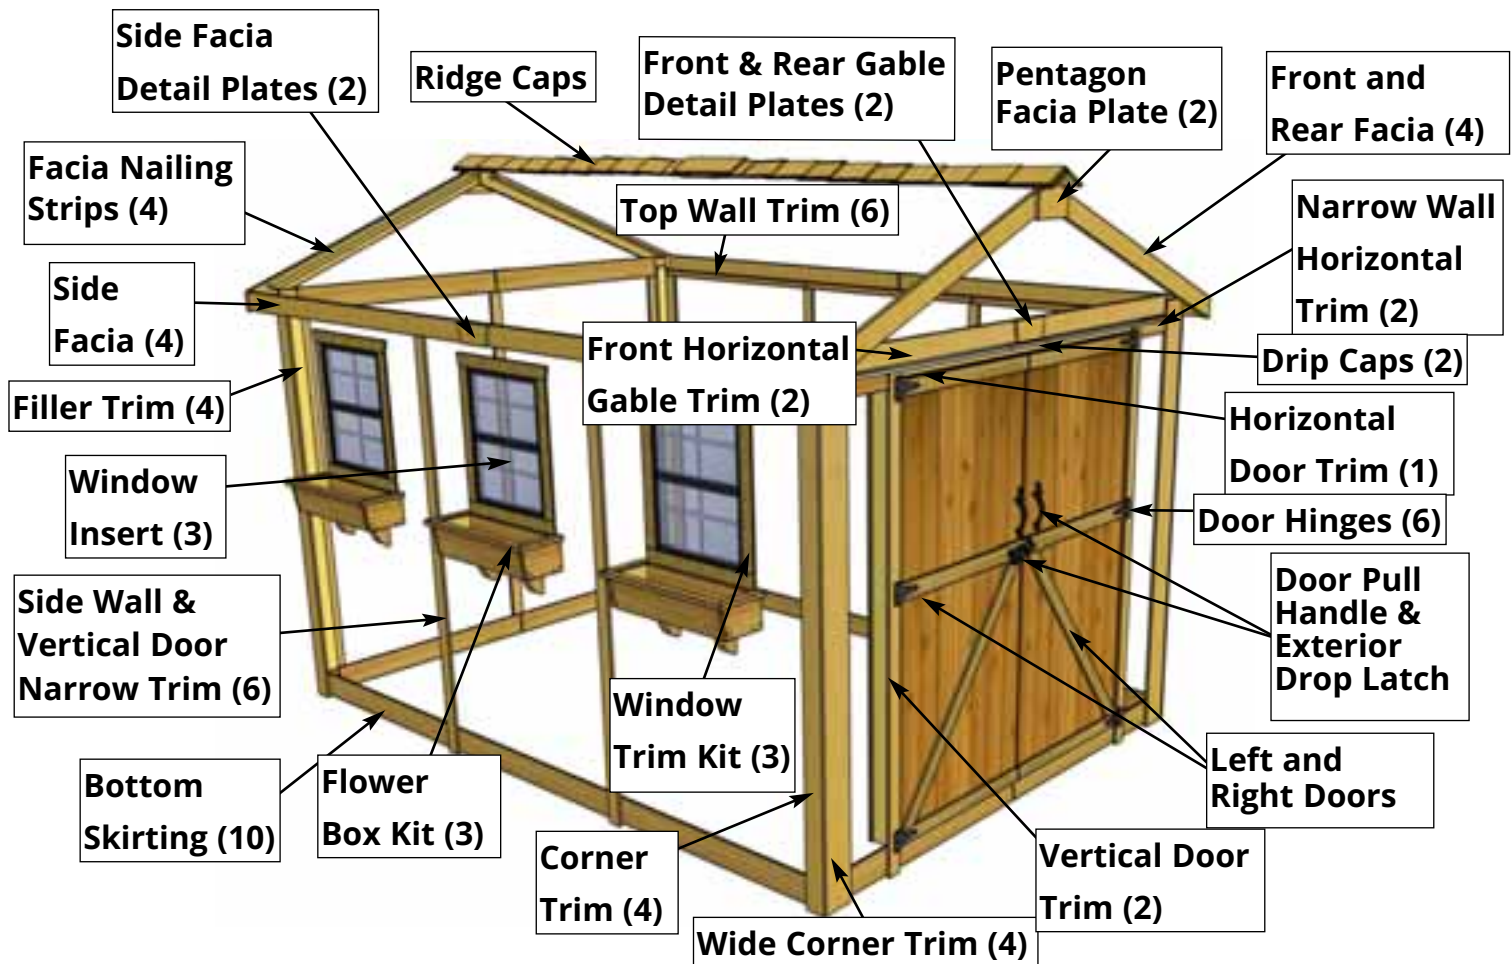

Expert Advice: When installing trim, sort pieces according to color and pieces that are most pleasing to the eye. Start with least visible side of shed and use the least desirable pieces first. Install trim to most visible side of shed as your skill installing trim improves.

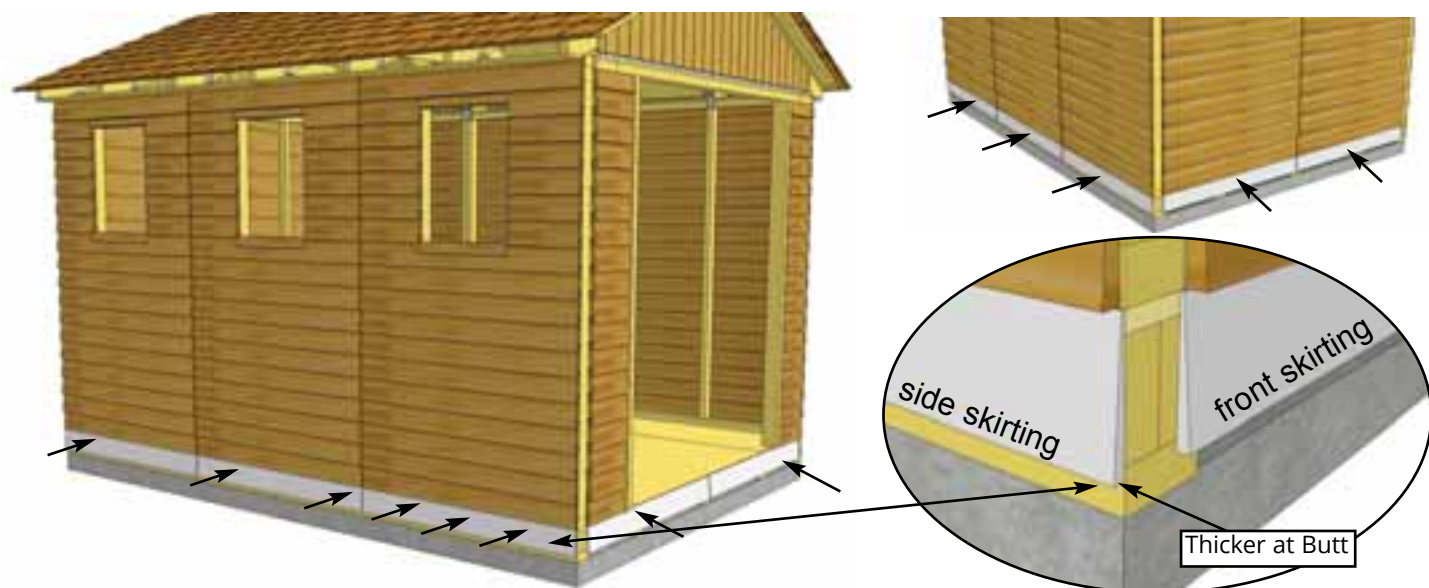


E1. Attach **Bottom Skirting - Bevel** around the base of the shed. Bevel is thicker at butt and thinner at top of board. Skirting will hide floor framing. Gaps on side will be covered by Wide Trim pieces later. Start with Side Skirting pieces first and attach with **4 - 1 1/2" Finishing Nails** per piece.

<u>Parts</u> Bottom Skirting - Bevel (3/4" x 4 1/2" x 45 1/4") x 10
<u>Hardware</u> N1 - 1 1/2" Finishing Nails x 40 total



E2. Check the wall seams for visible gaps prior to attaching filler trim and apply caulk where needed. Caulking gaps will help prevent moisture from entering and will help the longevity of your shed. **Caulking not included in kit.**

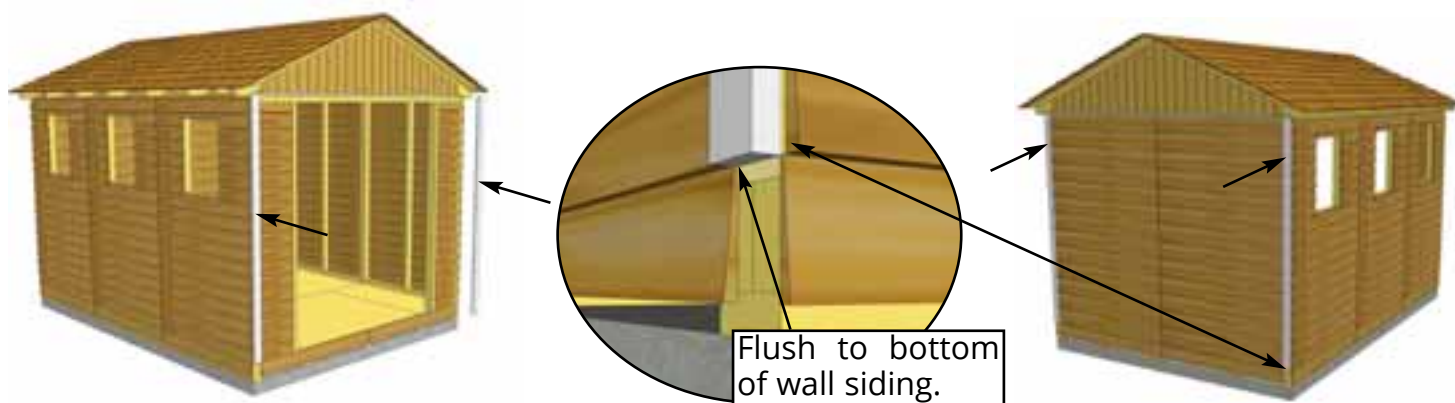

E3. Attach **Filler Trim** to each corner side wall. Align Filler Trim so it sits flush with the bottom of the last piece of Wall siding. Attach with **8 - 1 1/2" Finishing Nails** per piece.

<u>Parts</u> Filler Trim (7/8" x 2 1/2" x 75") x 4

<u>Hardware</u> N1 - 1 1/2" Finishing Nails x 32 total





E4. Trim out Window Wall and Side Solid Walls by attaching **Top Wall Trim**. Position with thick end of Bevel downward at top of wall, tight against Soffits. Attach with **4 - 1 1/2" Finishing Nails** per piece.

Parts

Top Wall Trim (Bevel)
(3/4" x 1 1/2" x 45 1/4") x 6

Hardware

N1 - 1 1/2" Finishing Nails x 24 total

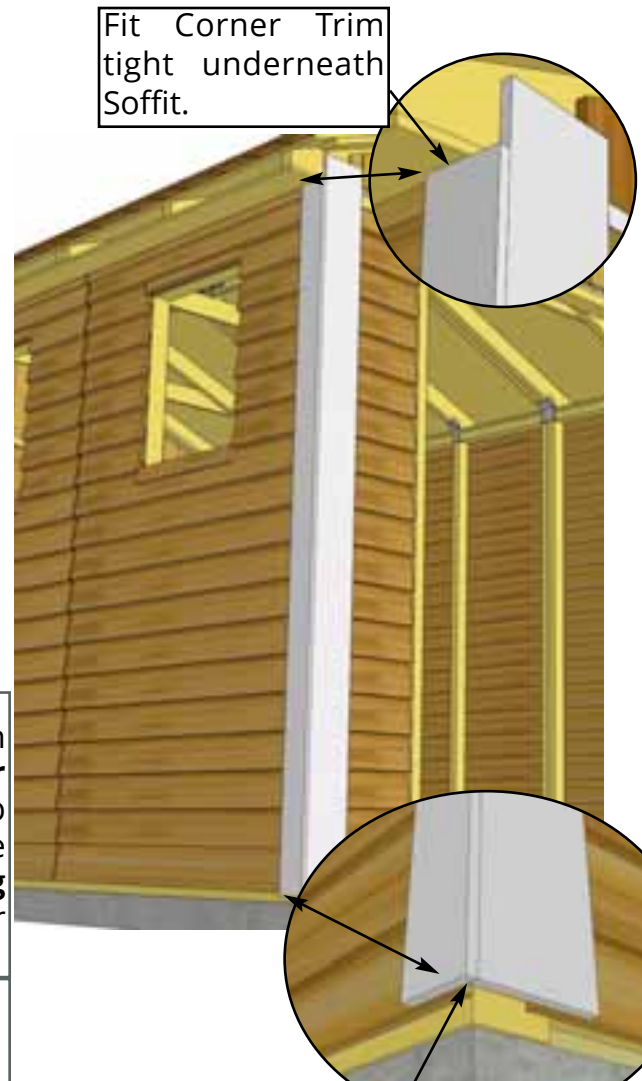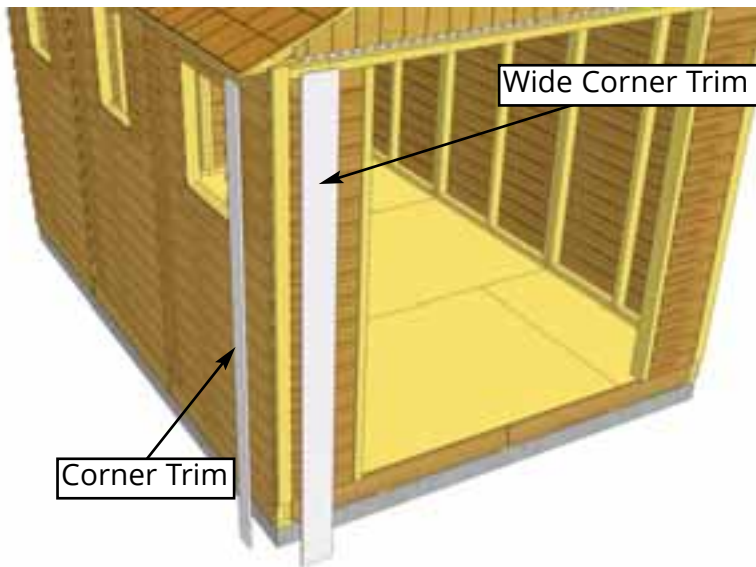

E5. To trim out corners, start with a **Corner Trim**, align tight underneath Soffit and Rafter. Align **Wide Corner Trim** with bottom of Corner Trim. Corner Trim will cap the Wide Corner Trim. Do a dry run in each corner before attaching to confirm positioning. Use **8 - 1 1/2" Finishing Nails** per piece to secure. Complete other front corner the same.

Parts

Corner Trim
(1/2" x 3 1/2" x 79") x 4
Wide Corner Trim
(1/2" x 5 1/2" x 82") x 4

Hardware

N1 - 1 1/2" Finishing Nails
x 64 total

Align bottoms of both corner trim pieces flush.



E6. Trim out rear corners with remaining pieces of **Corner Trim** and **Wide Corner Trim**. Align and attach with **8 - 1 1/2" Finishing Nails** per piece as per **Step E5**.




E7. Attach **Rear Horizontal Gable Trims** to the back of the shed. Position over gable and wall seam with thick end of Bevel downward. Use **5 - 1 1/2" Finishing Nails** to secure each piece.

Parts

Rear Horizontal Gable Trim - Bevel
(3/4" x 4 1/2" x 45 1/4") x 2

Hardware

N1 - 1 1/2" Finishing Nails x 10 total

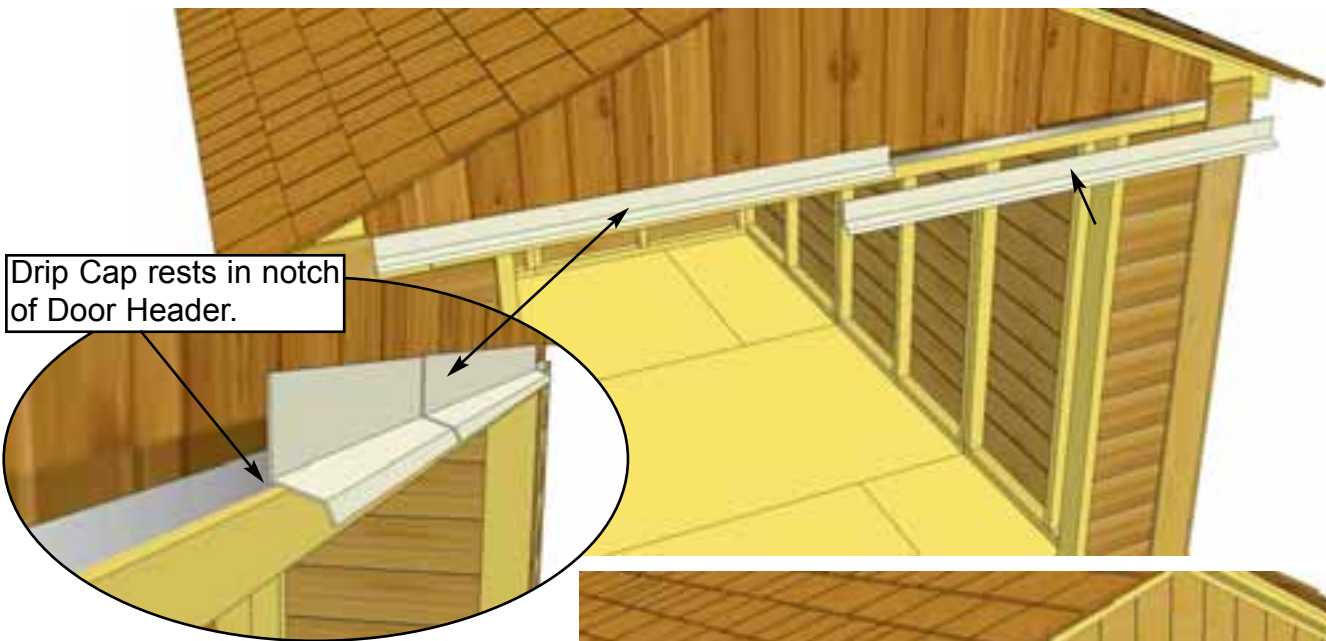



E8. Position **Drip Caps** so they are overlapping above doorway, resting in the notch of the Door Header. Attach each Drip Cap with **2 - 1 1/2" Finishing Nails** per piece. With Drip Caps secured place **Front Horizontal Gable Trims** over the Drip Caps and attach each with **5 - 1 1/2" Finishing Nails**.

Parts

Metal Drip Caps x 2
Front Horizontal Gable Trim
 (1/2" x 4 1/2" x 45 1/4") x 2

Hardware

N1 - 1 1/2" Finishing Nails
 x 14 total

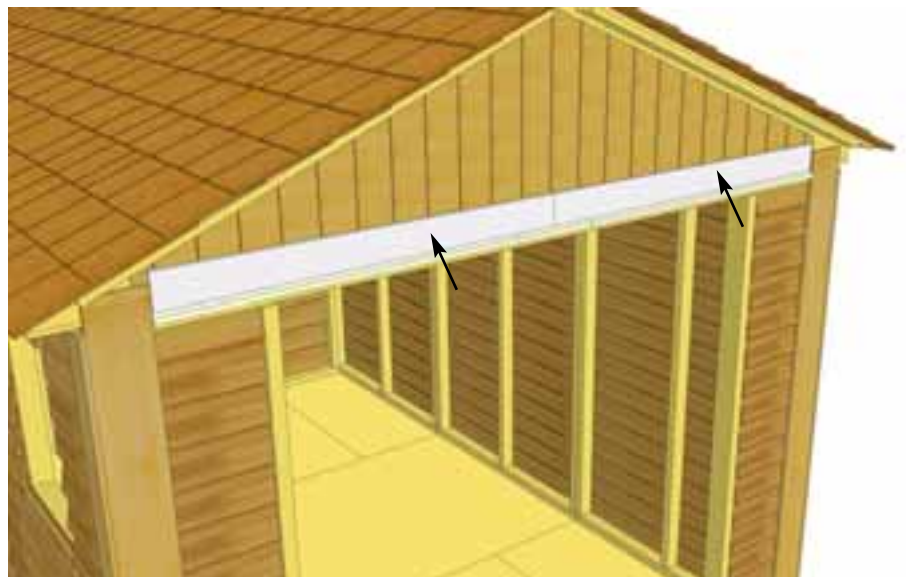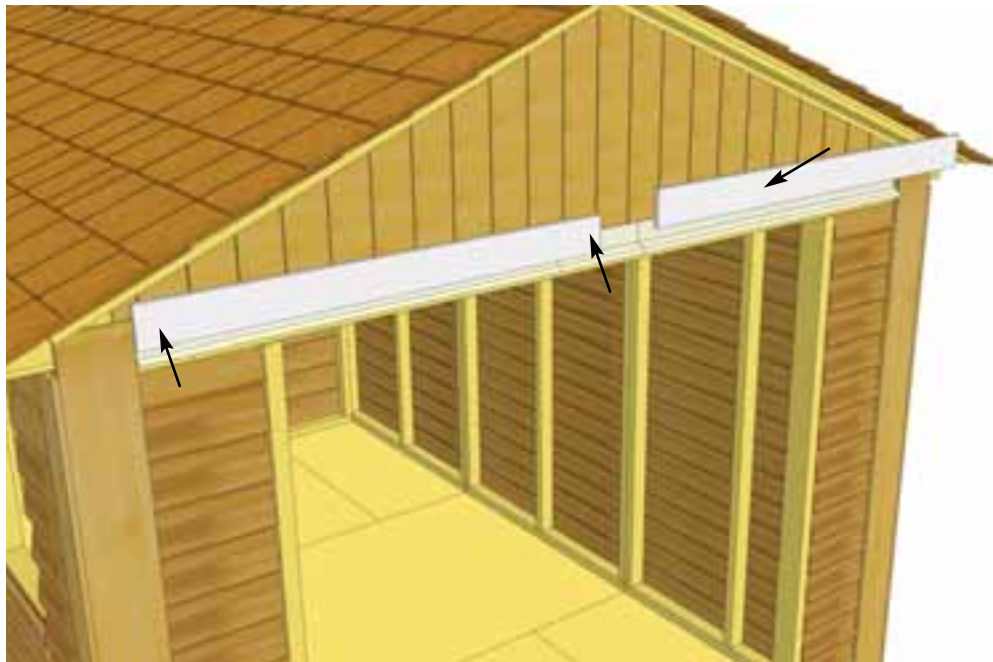




E9. Attach **Side Wall Narrow Trim** where wall panels come together and leave a seam. Position trim equally on wall seam and tight underneath Soffit and Rafter. Use **8 - 1 1/2" Finishing Nails** per piece to secure.

Parts
Side Wall Narrow Trim
 (1/2" x 2 1/2" x 79") x 4


Hardware
N1 - 1 1/2" Finishing Nails x 32 total

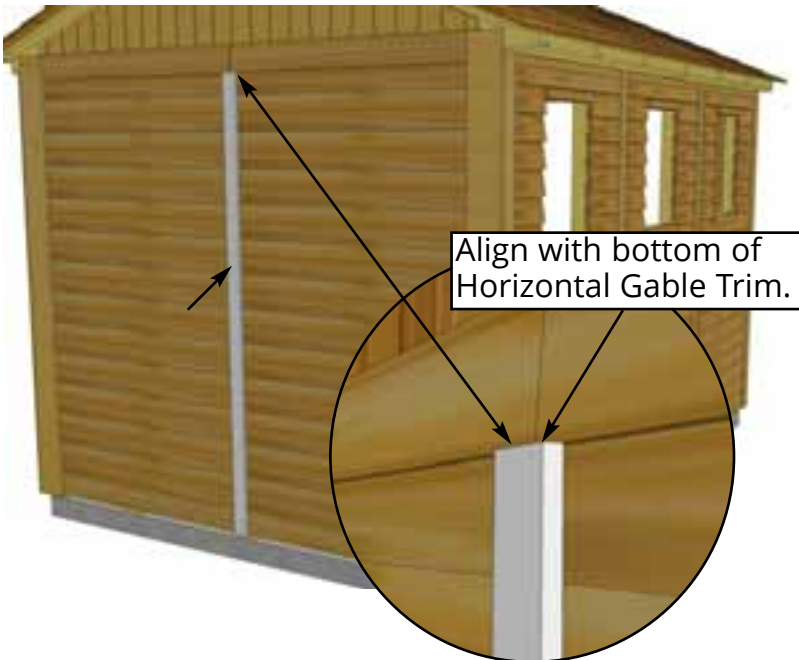

E10. Attach **Rear Wall Narrow Trim** where wall seams come together on back of shed. Position equally on wall seam and flush with the bottom of the Horizontal Gable Trim. Secure with **8 - 1 1/2" Finishing Nails**.

Parts
Rear Wall Narrow Trim
 (1/2" x 2 1/2" x 77 1/2") x 1


Hardware
N1 - 1 1/2" Finishing Nails x 8 total

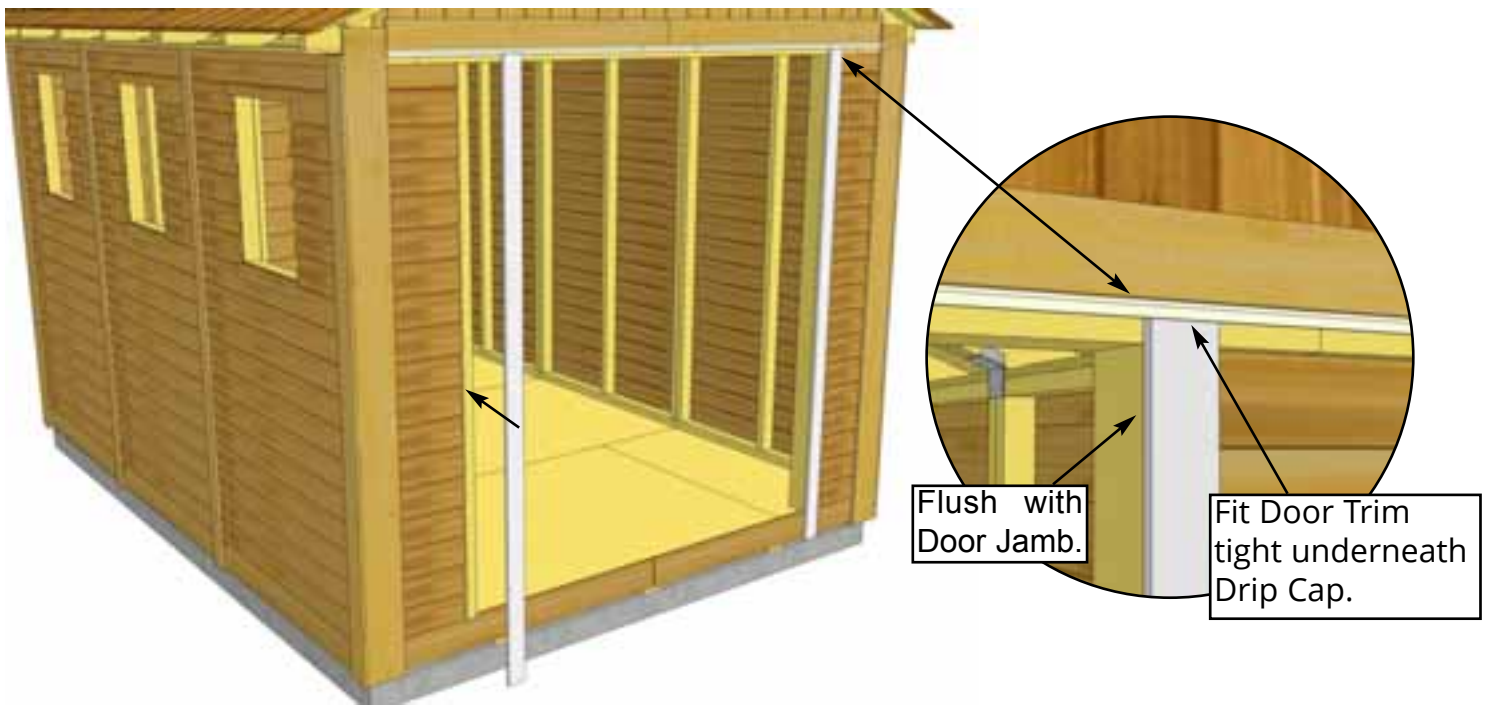

E11. Attach **Vertical Door Trim** on both sides of the doorway. Position flush with Door Jamb and tight under the lip of the Drip Edge. Secure with **8 - 1 1/2" Finishing Nails** per piece.

Parts
Vertical Door Trim (1/2" x 2 1/2" x 79") x 2

Hardware
N1 - 1 1/2" Finishing Nails x 16 total

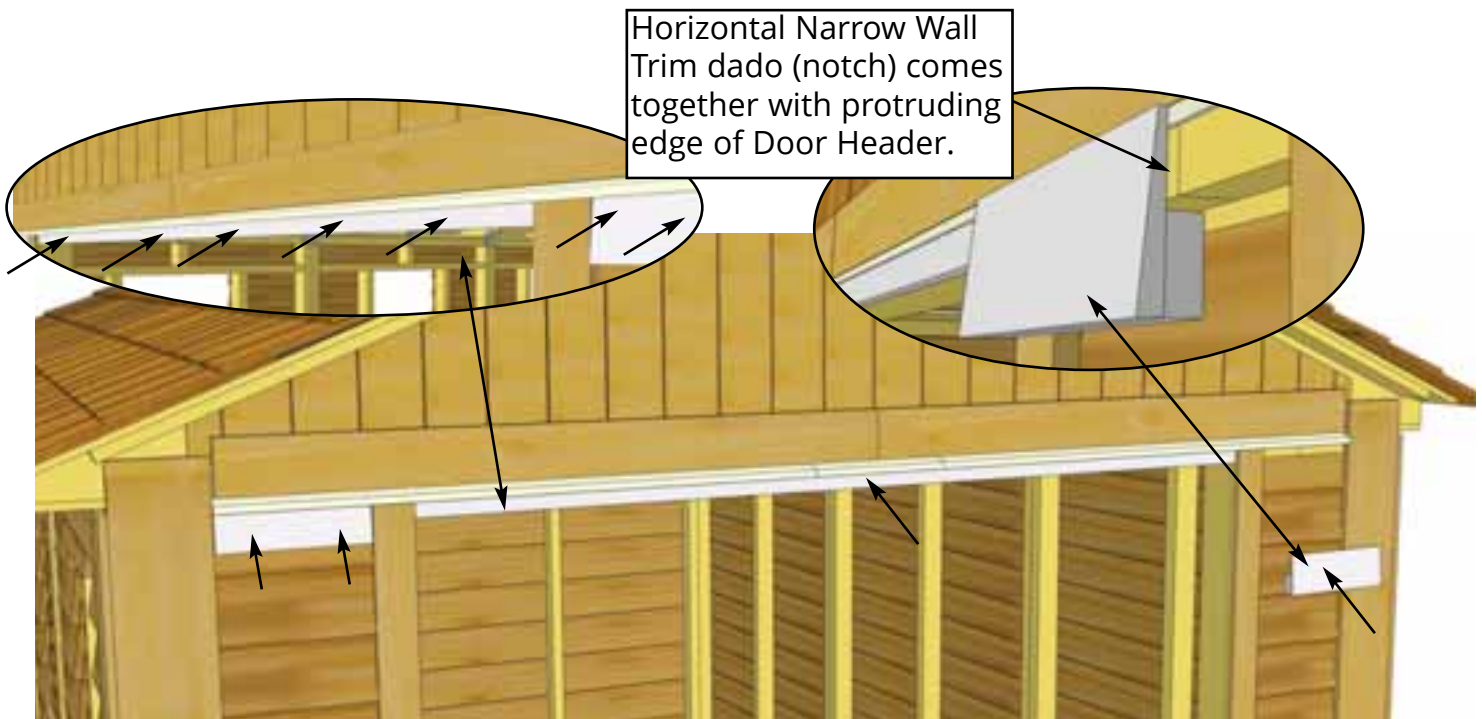

Horizontal Narrow Wall Trim dado (notch) comes together with protruding edge of Door Header.

E12. Attach **Horizontal Door Trim** and **Horizontal Narrow Wall Trim** onto the exposed part of the Door Header, and tight under the lip of the Drip Cap. Secure Horizontal Door Trim with **5 - 1 1/2" Finishing Nails** and the short Narrow Wall Trims with **2 - 1 1/2" Finishing Nails** per piece.

Parts
Horizontal Door Trim (1/2" x 1 1/2" x 64") x 1
Horizontal Narrow Wall Trim (7/8" x 3" x 9") x 2 - *Dado Edge*


Hardware
N1 - 1 1/2" Finishing Nails x 9 total



E13. Attach **Facia Nailing Strips** to the underside edge of the plywood roof. Align corner of Nailing Strip with edge of roof plywood. Secure each Strip with **3 - 1 1/4" Screws**. Complete all four pieces, two on each side of the shed.

Parts
Facia Nailing Strips
 (3/4" x 2 1/2" x 51") x 4


Hardware
S2 - 1 1/4" Screws x 12 total

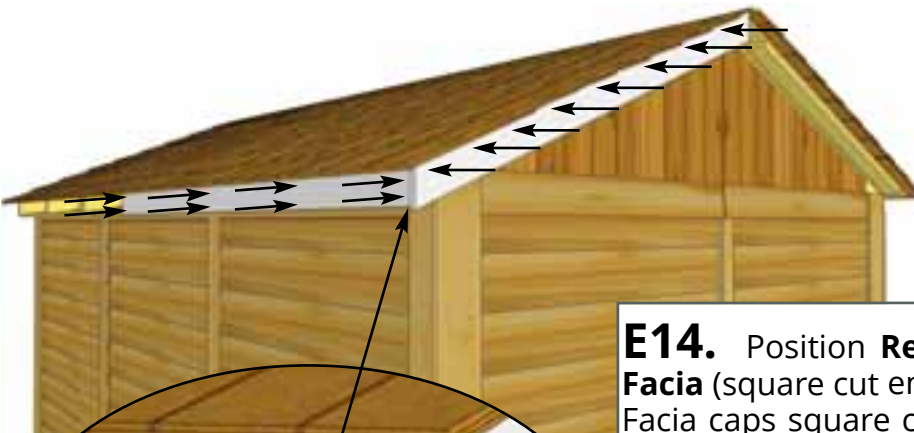

E14. Position **Rear Facia** (angle cut on ends) and **Side Facia** (square cut ends) in corner. Line Facia up so angle cut Facia caps square cut Facia. Attach angled Facia to Nailing Strip with **8 - 1 1/2" Finishing Nails** per piece. Gap where facia boards come together at peak will be covered in **Step E16**. Do a dry run using Side Facia to help you correctly position before attaching.

Parts (Steps E14 - E15)
Front & Rear Facia - Angle Cut Ends
 (3/4" x 3 1/2" x 58") x 4
Side Facia
 (3/4" x 3 1/2" x 71 3/4") x 4


Hardware (Steps E 14 - E15)
N1 - 1 1/2" Finishing Nails x 64 total

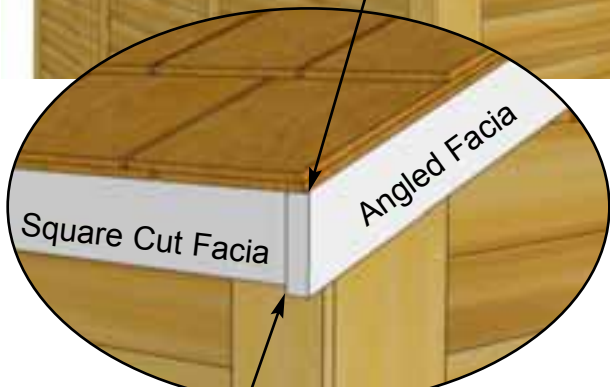

Angled Facia caps Square Cut Facia.



E15. Attach **Horizontal Door Trim** and **Horizontal Narrow Wall Trim** onto the exposed part of the Door Header, and tight under the lip of the Drip Cap. Secure Horizontal Door Trim with **5 - 1 1/2" Finishing Nails** and the short Narrow Wall Trims with **2 - 1 1/2" Finishing Nails** per piece.

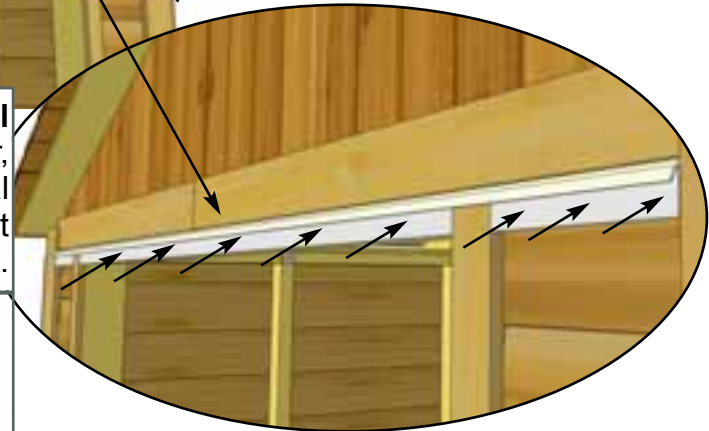

Parts	Hardware
Horizontal Door Trim (1/2" x 1 1/2" x 64") x 1	N1 - 1 1/2" Finishing Nails x 9 total
Horizontal Narrow Wall Trim (1/2" x 1 1/2" x 9") x 2	



Pentagon Facia Detail Plate

Facia Detail Plate

Horizontal Gable Detail Plate

E16. Attach **Pentagon Facia Plates** where Front & Rear Facias meet at the peak. Secure with **4 - 1 1/2" Finishing Nails** per piece. Attach **Facia Detail Plates** to cover seams where Side Facia pieces meet. Secure with **4 - 1 1/2" Finishing Nails** per piece. Attach **Horizontal Gable Detail Plates** to cover seams where Horizontal Gable Trims meet. Secure with **4 - 1 1/2" Finishing Nails** per piece.




Parts
Pentagon Facia Plates (1/2" x 5 1/2" x 8") x 2
Facia Detail Plates (1/2" x 3 1/2" x 8") x 2
Horizontal Gable Plates (1/2" x 4 1/2" x 8") x 2
Hardware
N1 - 1 1/2" Finishing Nails x 24 total

Note: illustration of Hinge may not be accurate.

The # of screw holes in the hinge may vary from three to four depending on model.


Attach Black Tee Hinges with 3/4" & 2" Black hardware provided

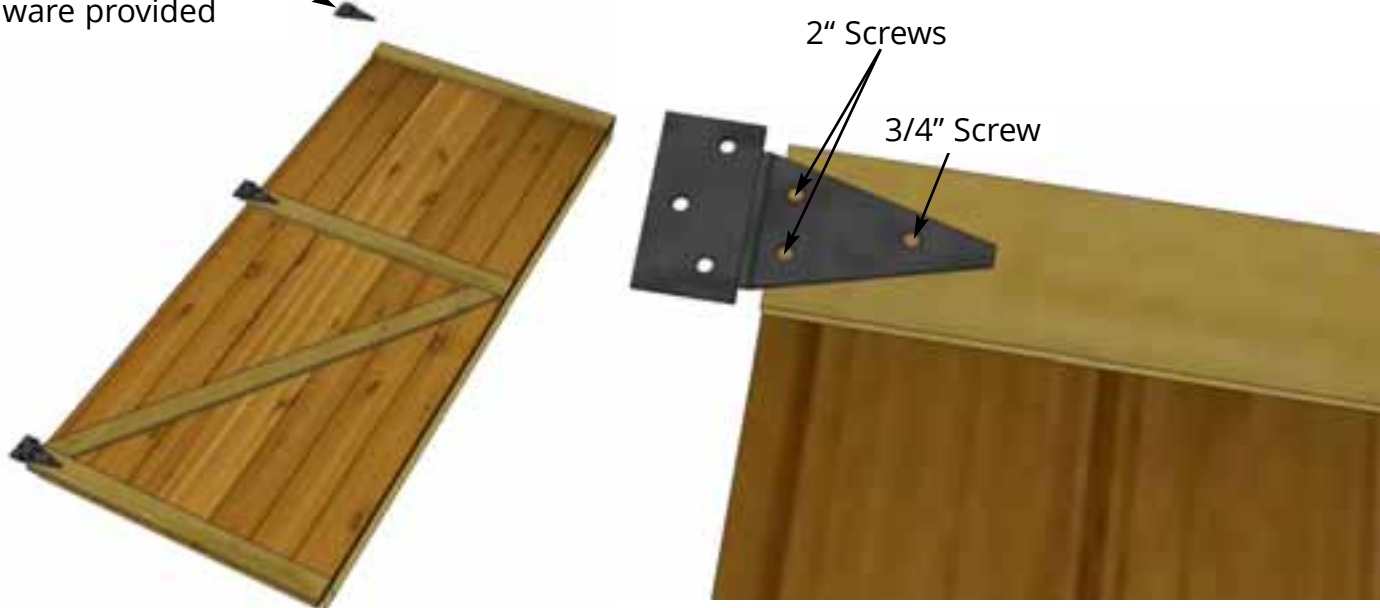

E17. Attach Door Hinges to both **Left** and **Right Side Double Doors**. Position Hinges equally on door trim as shown above and attach with Black 3/4" and 2" screws.

Parts (Steps E17 - E19)
Left Side Door
 (31 1/2" x 72") x 1
Right Side Door
 (31 1/2" x 72") x 1


Hardware (Steps E17 - E19)
Tee Hinges x 6 total
3/4" Black Screws x 6 total
2" Black Screws x 30 total

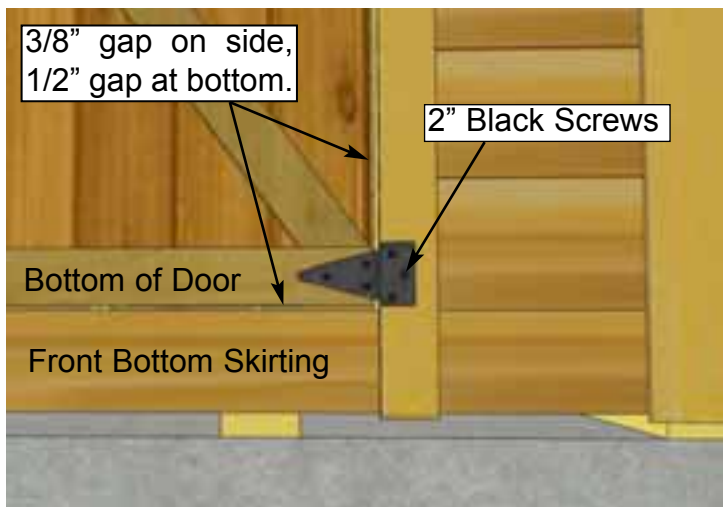

E18. Next, position and secure the Double Doors. Starting with **Right Side Door**, position so there is a 1/2" gap on bottom and approximately 3/8" on the side. Use a spare Shingle to shim door in place at the bottom. Secure hinges to Door Trim with **3 - 2" Black Screws** per hinge.
Hint: Do not attach all the 2" screws until both doors are positioned correctly into place. Use Screw Driver to tighten screws completely.



E19. Position **Left Side Door** as per **Step E18** and secure with 2" Black Screws. When satisfied with door positioning, complete all 2" Black Screw attachments. **Note:** Do not over tighten hinge screws when using screw gun. Tighten 3/4 of the way and use a Screw Driver to finish so as not to strip screws.

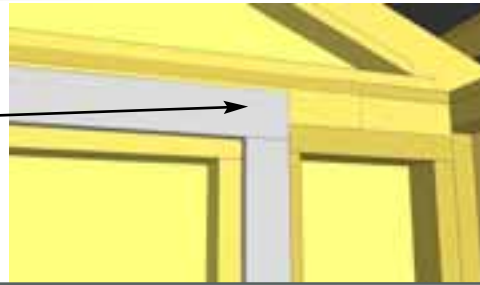




E20. Attach **Horizontal** and **Vertical Door Stops** to Door Header and Jambs. Start with Horizontal Stop first and then complete both Vertical Stops. Position so door gap is covered. Use **4 - 2" Screws** per piece to secure.

Parts	Hardware
Horizontal Door Stop (1/2" x 2 1/2" x 68") x 1	S3 - 2" Screws x 12 total
Vertical Door Stops (1/2" x 2 1/2" x 72") x 2	

E21. Close both doors and align so doors are straight. Attach **Door Threshold** with **4 - 2" Screws**, centering between doorway.

Parts
Door Threshold (3/4" x 2 1/2" x 62 1/2") x 1
Hardware
S3 - 2" Screws x 4 total

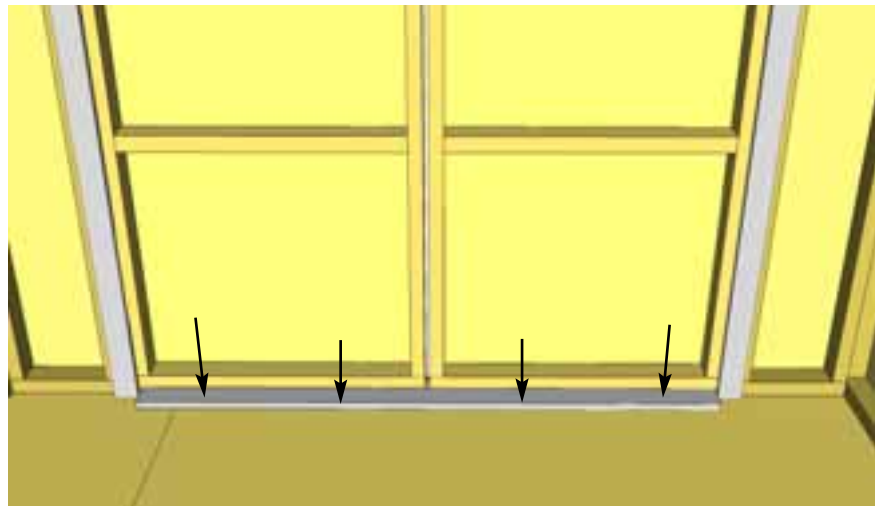

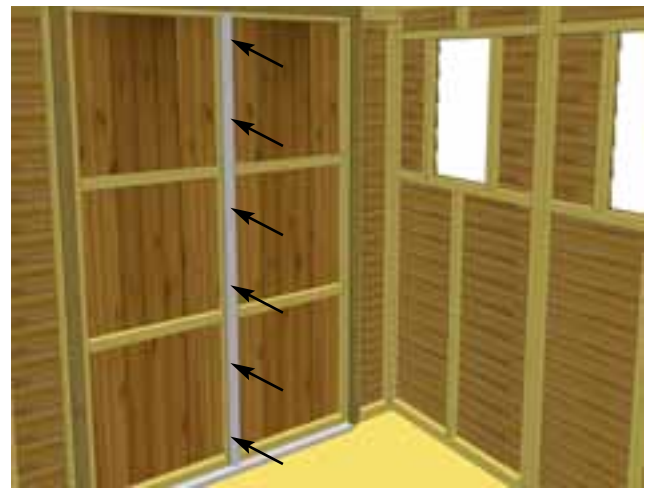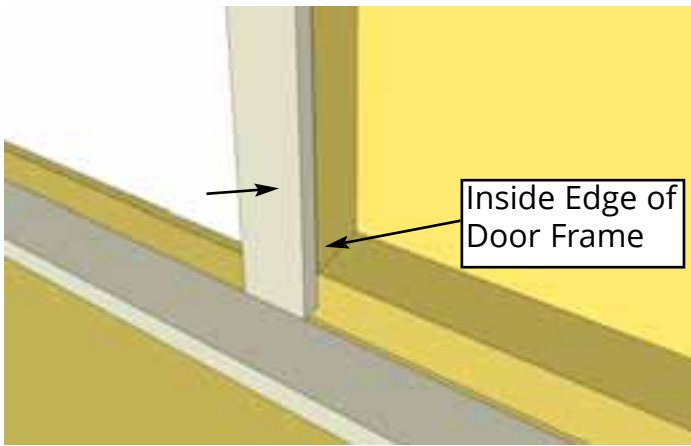


E22. Position and attach **Vertical Door Flange** on inside edge of door frame (**left door from outside**) using **6 - 2" Screws**.

Parts
Interior Door Flange
 (1/2" x 2 1/2" x 71") x 1

Hardware
S3 - 2" Screws
 x 6 total



Drill 1/2" Diameter Hole to accommodate rod of Cane Bolt.

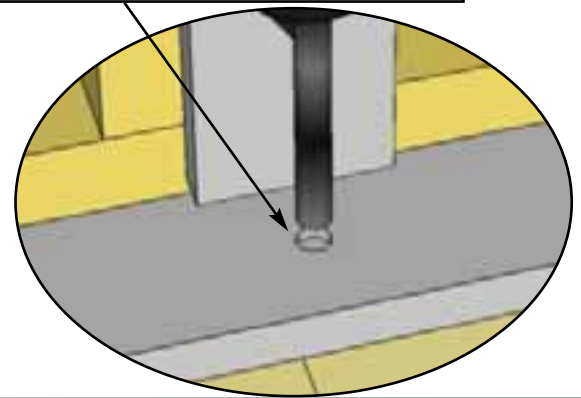



E23. The Interior **Cane Bolt** will be attached to Vertical Door Flange. To position Cane Bolt correctly, attach to flange first, close doors and mark hole to house Cane Bolt Rod. Open doors and drill hole where previously marked with 1/2" bit. Attach Cane Bolt with 3/4" black screws.

Hardware
Cane Bolt x 1 total
3/4" Black Screws x 6 total



E24. Attach **Door Handles** and Exterior Black **Drop Latch** to door. Attach Drop Latch as illustrated above with **5 - 2" Black Screws** & **1 - 3/4" Black Screw**. Note how female part of Drop Latch is positioned higher than male. Do a dry run first to position Drop Latch correctly. Attach each Door Handle with **4 - 3/4" Black Screws**, ensure screws connect with inner door stud.
Important: Drill pilot holes with 1/8" drill bit prior to securing with screws to prevent wood splitting.

Hardware
Door Handles x 2 total
Drop Latch x 1 total
3/4" Black Screws
 x 9 total
2" Black Screws
 x 5 total

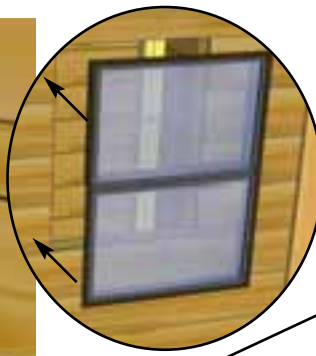
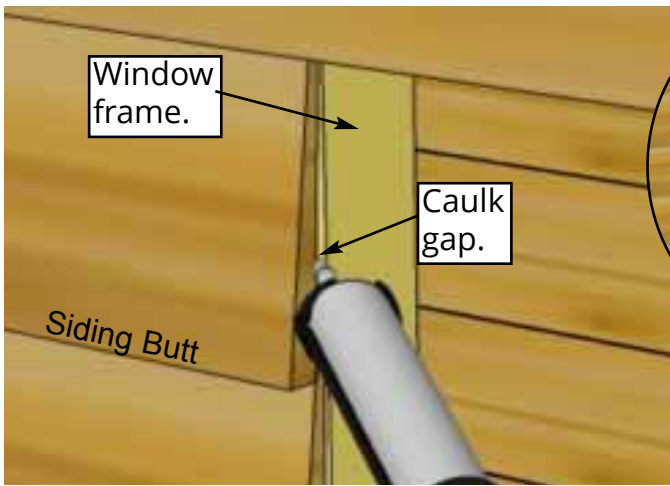


Screw insert into bottom (thick) part of siding.



E25. To reduce possible water from penetrating into the window cavity, caulk gap on both sides of window opening prior to installing **Window Insert**. Position insert in cavity and screw with **6 - 1 1/4" Screws**. On sides, make sure to screw insert into the thick butt of the siding only.

<u>Parts</u>
Window Insert x 3
<u>Hardware</u>
1 1/4" Screws x 36 total

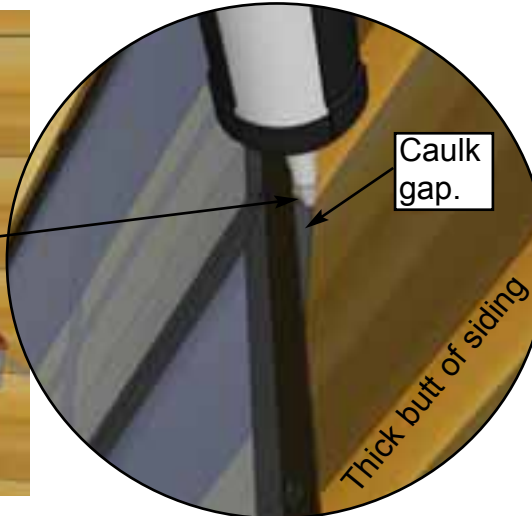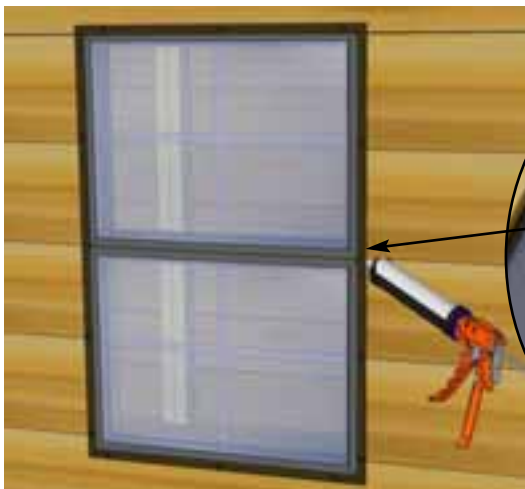

E26. Once Insert is attached, caulk the "triangular gap" between the Insert's outside flange and the siding. Also put a bead of caulking horizontally at top of window where the flange and siding meet. This additional caulking will also will reduce the chances of moisture entering into your shed.



Trim dado sits in flange.



E27. Position **Window Trim** around window doing a dry run first and attach with **4 - 1 1/2" Finishing Nails** per piece. Window trim has a small dado on reverse face. Outside flange of window will roughly sit in the dado to give a better fit.

<u>Parts</u>	<u>Hardware</u>
Window Trim Package x 3 (Top - 24 1/16" Long - <i>Angle Cut Ends</i>) x 1 (Sides & Bottom - 23" Long) x 3	N1 - 1 1/2" Finishing Nails x 32 total





E28. Assemble **Flower Box** with Assembly Instructions included on Page 43. Position completed Flower Box below bottom of window trim and secure with **2 - 2" Screws**. Screw from inside of box into the center Window Wall stud. Attach second screw 2" underneath first screw and once again into the wall stud.

<u>Parts</u>
Flower Box Kit x 3
<u>Hardware</u>
S3 - 2" Screws x 6 total


Outdoor Living Today Flower Box Assembly Instructions

Parts Lists:



A - Base, Rear & Front Box Frames	(3pcs)	3/4" x 5 1/2" x 23"
B - End Cap Frames	(2pcs)	3/4" x 5 1/2" x 7" / 8"
C - Front Trim	(1 pc)	3/4" x 1 1/2" x 26"
D - Side Trims	(2 pc)	3/4" x 1 1/2" x 8 3/4"
E - Brackets	(2 pc)	1 1/2" x 5 1/2" x 5 1/2"
F - 1 1/4" Screws	(15 pc)	
G - 1 1/2" Nails	(10 pc)	

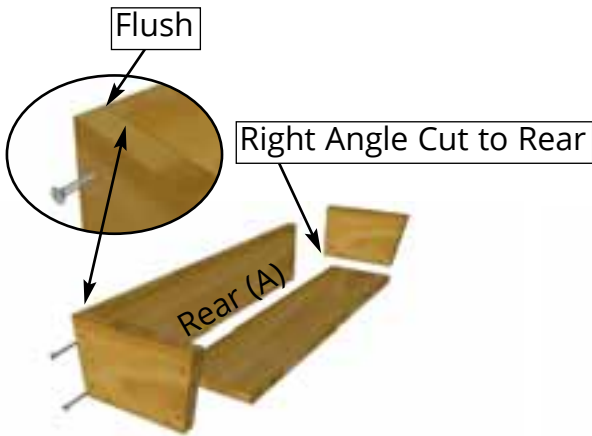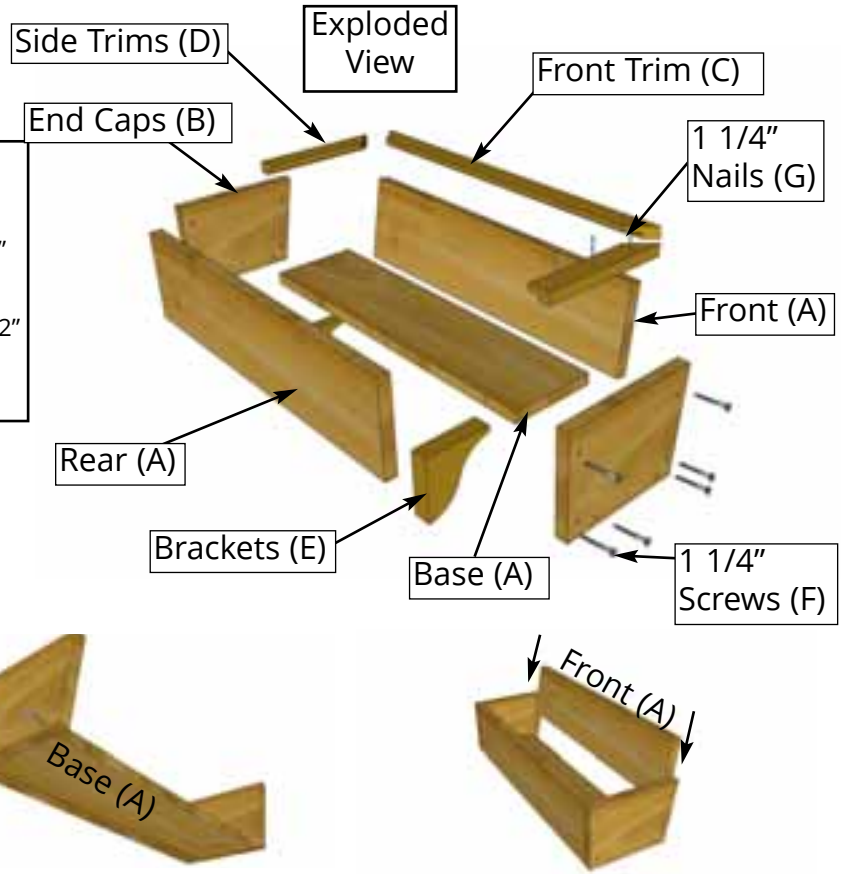

1. On a table position Rear Box and End Cap Frames together so flush at top. Fasten together with 2 - 1 1/4" screws. Place Base Frame tight against Rear and End Cap and flush at bottom. Secure with 2 - 1 1/4" screws. Complete attachment of remaining End Cap Frame. Slide Front Frame between End Caps.

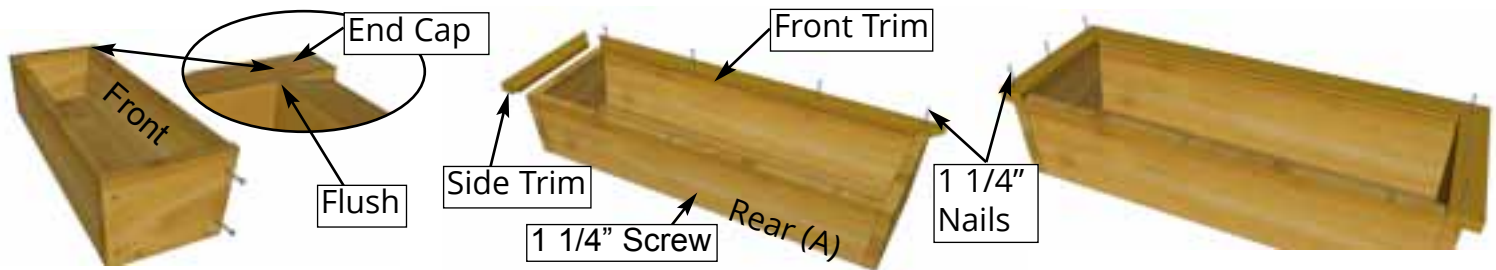

2. Position Front Frame Piece flush with End Cap. Attach both ends with 2 - 1 1/4" screws. Pilot hole Rear Box Frame near bottom center and secure to Base edge with 1 - 1 1/4" screw. Evenly position Front Trim (mitre cut on end and dado cut on inside bottom) tight against front frame and nail down with 4 - 1 1/4" nails. Position Side Trims as per Front and secure with 3 - 1 1/4" nails per side.

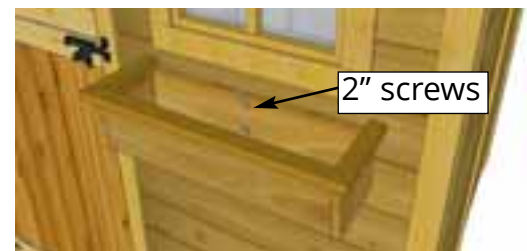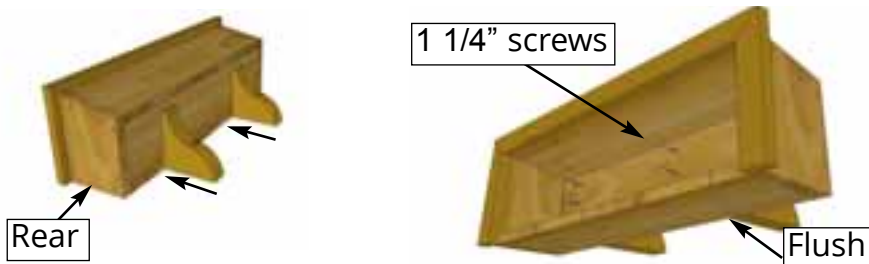

3. On a flat surface, flip Flower Box on it's rear face. Evenly space Brackets and secure through Base Frame and into the Brackets with 2 - 1 1/4" screws per Bracket. Position completed Flower Box beneath window trim and screw from inside of box into the center wall stud with 2 - 2" screws. (2" screws supplied with Base Kit.)



Outdoor Living Today



Congratulations on assembling your 8x12 Space Master!

Note: Our Sheds are shipped as an unfinished product. If exposed to the elements, the lumber will weather to a silvery-gray color. If you prefer to keep the lumber looking closer to the original color, we suggest that you treat the wood with a good oil base wood stain. You may also wish to paint your new shed rather than stain it. In both cases we recommend that you consult with a paint and stain dealer in your area for their recommendations.

We hope your experience constructing our **8x12 Space Master** has been both positive and rewarding. We value your feedback and would like to hear back from you on how well we are doing in the following areas:

- 1. Customer Service**
- 2. On Time Shipping**
- 3. Motor Freight Delivery**
- 4. Quality of Materials**
- 5. Assembly Manual**
- 6. Overall Satisfaction**



The materials contained in this Assembly Manual may be downloaded or copied provided that ALL copies retain the copyright and any other proprietary notices contained on the materials. No material may be modified, edited or taken out of context such that its use creates a false or misleading statement or impression as to the positions, statements or actions.

Please call, write or email us at:

Canadian Address
9393 287th Street
Maple Ridge, British Columbia
Canada V2W 1L1

United States Address
P.O. Box 96
Sumas, Washington
USA 98295

Toll Line: 1.888.658.1658 | Fax: 1.604.462.5333 | sales@outdoorlivingtoday.com

Toll Line: 1.888.658.1658 | Fax: 1.604.462.5333 | sales@outdoorlivingtoday.com