



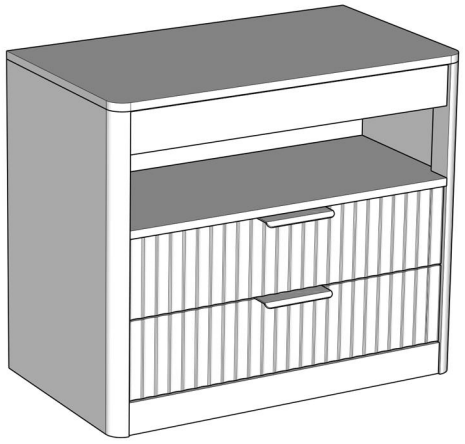


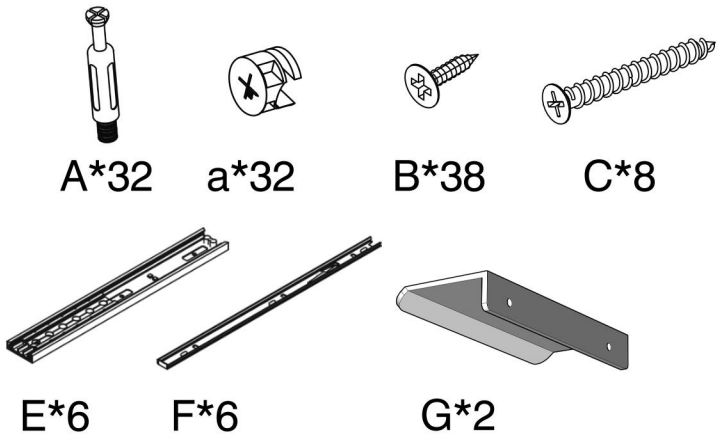


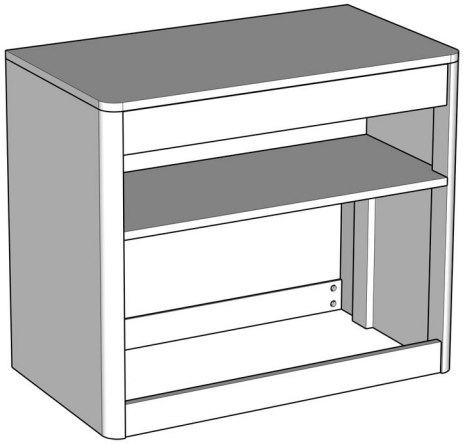

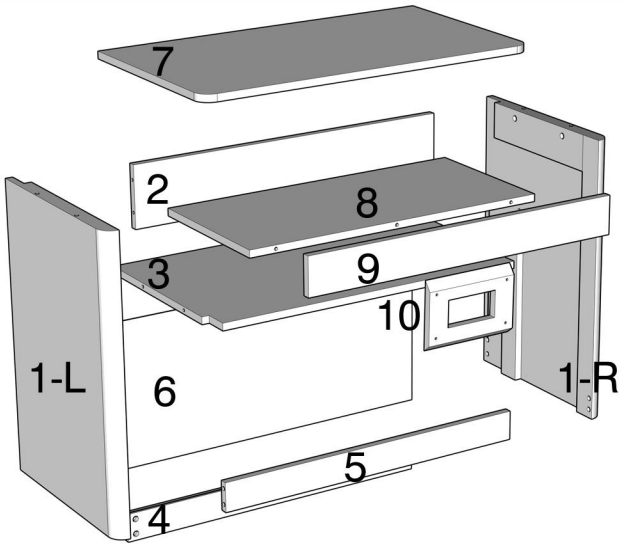

1-L, Left Side Panel
1-R, Right Side Panel
2, Rear Reinforcement Plate
3, Fixed Partition
4, Lower Rear Reinforcement Plate
5, Front Baffle
6, Back Panel
7, Top Panel
8, Movable Drawer Panel
9, Front Baffle
10, Socket Mounting Plate

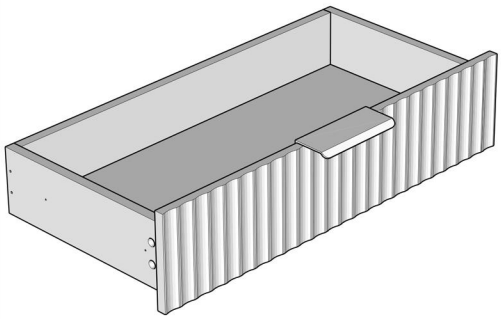

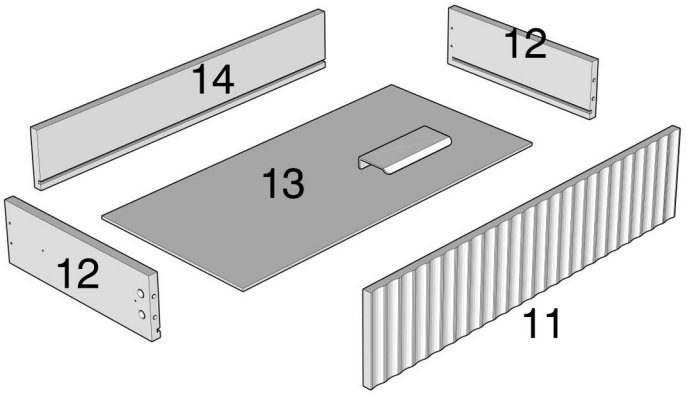


11. Drawer Front Panel


12. Drawer Side Panel

13. Drawer Bottom Panel


14. Drawer Back Panel

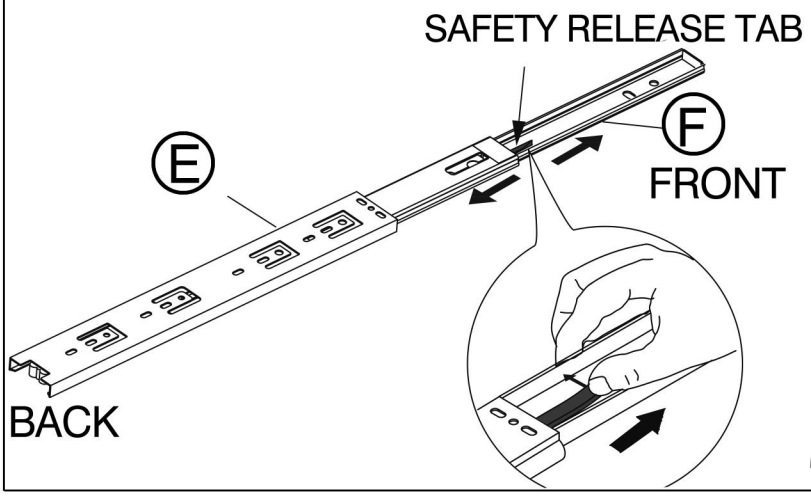

E and F are shipped together to maintain the oil for the ball bearings. Note that you need to tip up the safety release tab to take out the F part prior to assembly

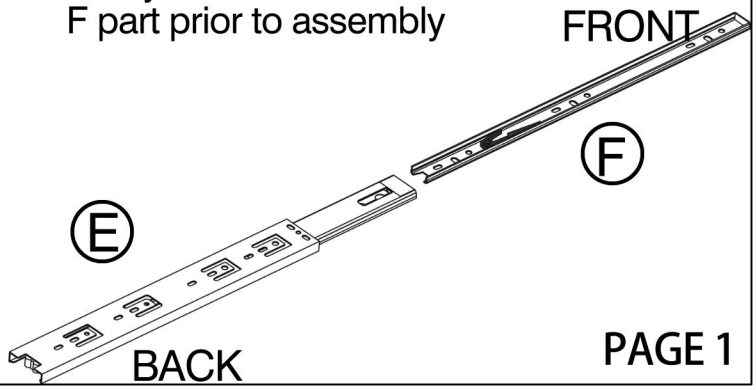


STEP 1

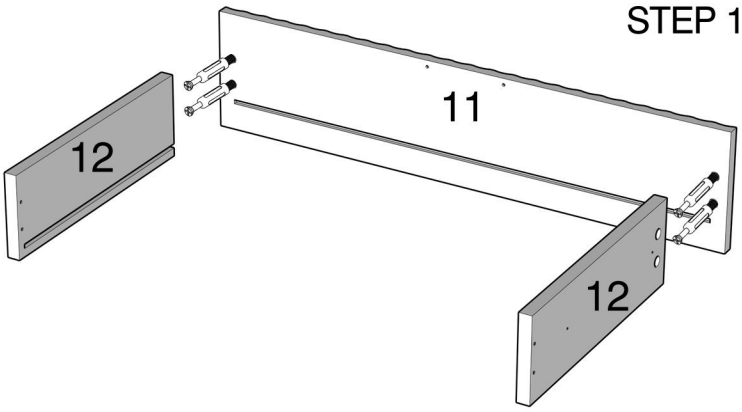


Use 4 screws (A+a) to connect panels 11 and 12.

Screw A+a method

After splicing the two boards, the screw a should be turned 180 ° to lock it securely

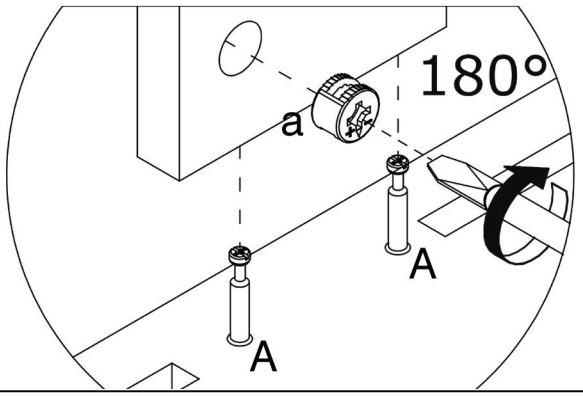


STEP 2

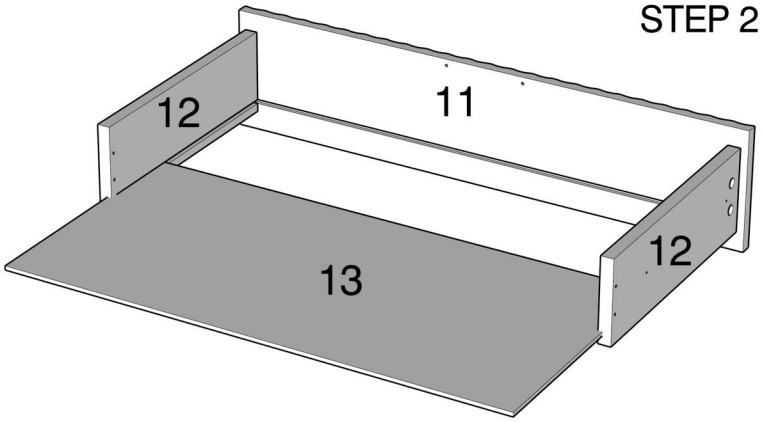


Insert the 13 along the groove

STEP 3

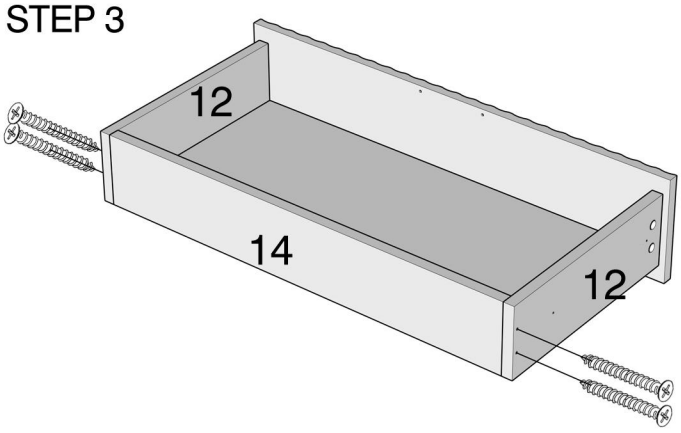


Screw C*4 passes through plate 12 to fix plate 14

STEP 4

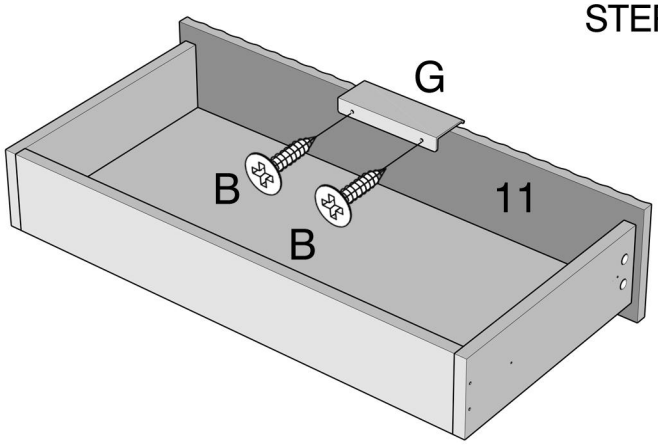

Screw B passes through accessory G (handle) and is secured to panel 11.


STEP 5

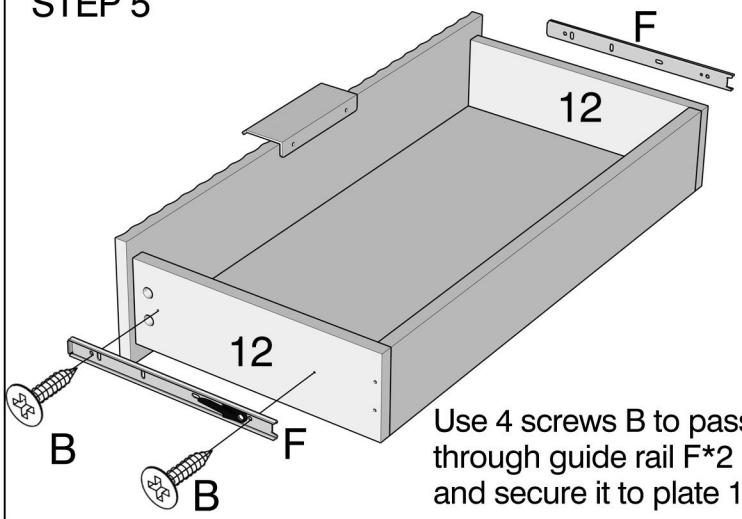

Use 4 screws B to pass through guide rail F*2 and secure it to plate 12.


Repeat steps 1 to 5 to install the other drawer.

STEP 6

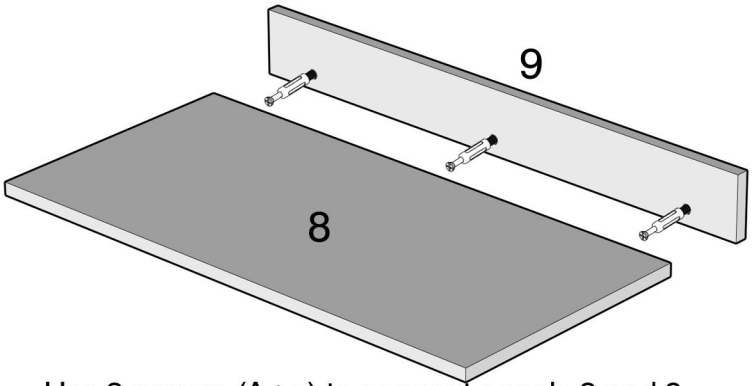


Use 3 screws (A+a) to connect panels 8 and 9

STEP 7

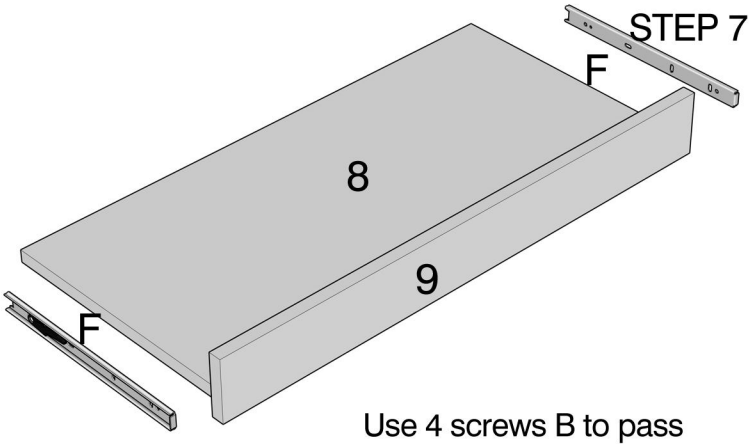


Use 4 screws B to pass through guide rail F*2 and secure it to plate 8

STEP 8

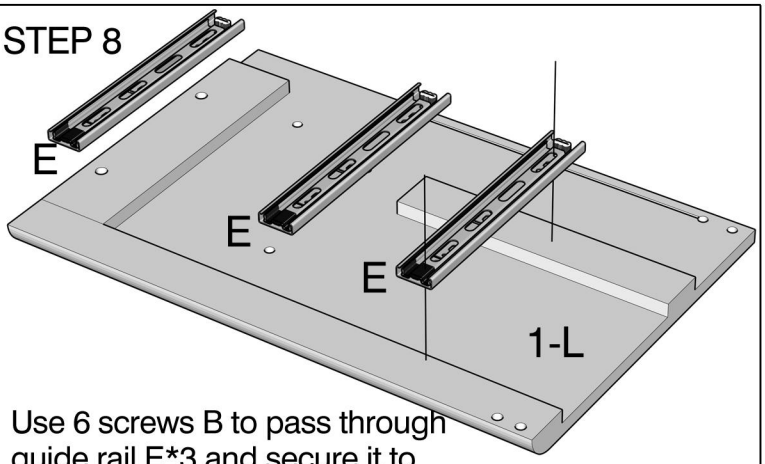

Use 6 screws B to pass through guide rail E*3 and secure it to plate 1-L.1-R also requires the installation of guide rails E (x3).


STEP 9

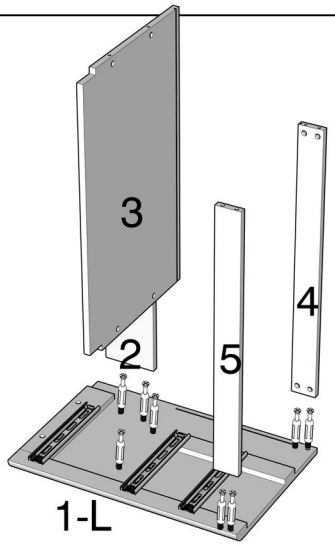


Use 8 screws (A) to connect boards 2, 3, 4, and 5 to board 1-L.

STEP10

Panel 6 (Back Panel) is inserted along the groove.

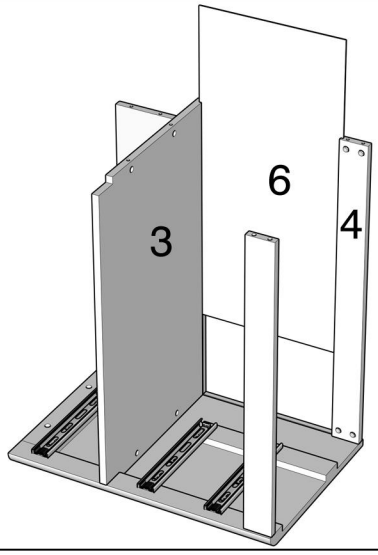



STEP 11

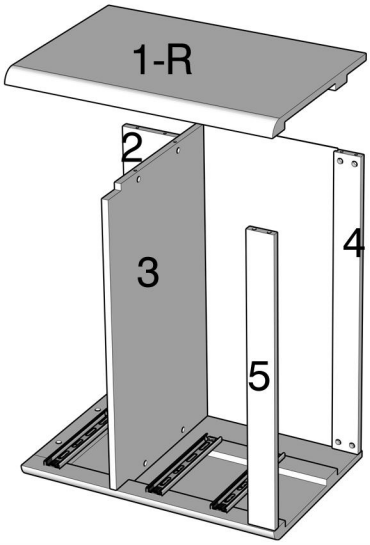

Use 8 screws (A) to connect boards 2, 3, 4, and 5 to board 1-R.


STEP 12

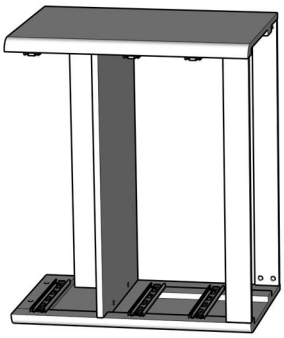

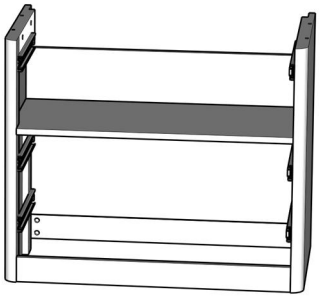


Invert the framework.

STEP 13

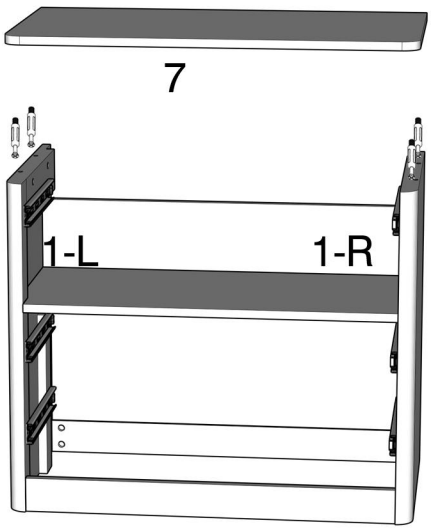


Use 4 screws (A) to connect boards 7 to board 1-L-R

STEP 14

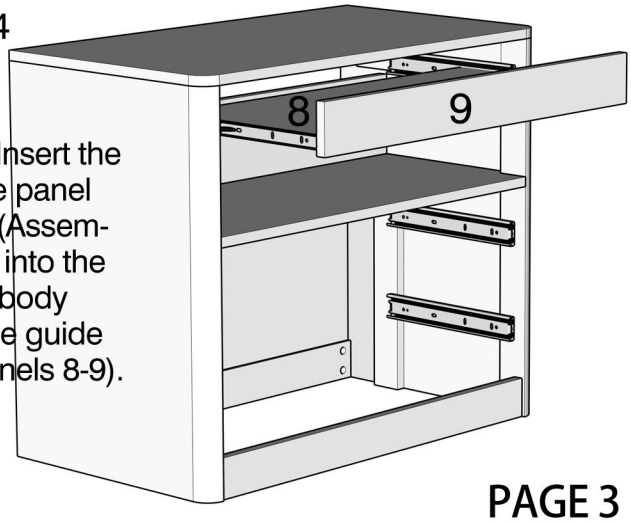

Step 7: Insert the movable panel section (Assembly No.) into the cabinet body along the guide rails (Panels 8-9).


STEP 14

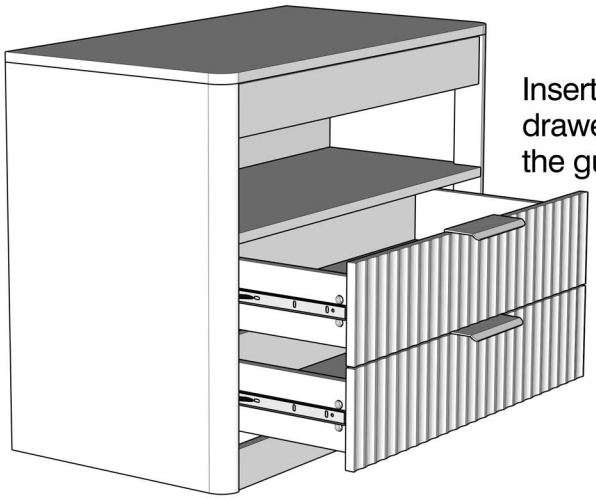

Insert the three drawers along the guide rails.

STEP 15

Move to the back of the cabinet and use 4 screws (B) to secure Panel 10.

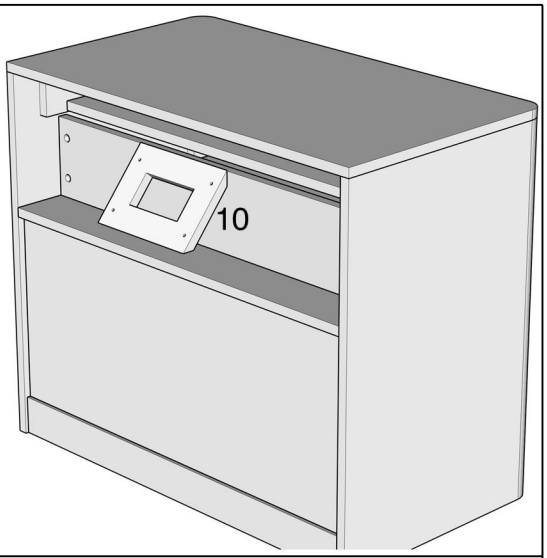

STEP 16



Use two screws (B) to mount the embedded socket onto the desktop, ensuring that the socket's cable is routed through the cable routing holes in panel 10

STEP17

Congratulations on completing the installation!

After installation, please take a moment to check the following: ensure the drawer slides run smoothly, and confirm that all panels are securely connected.