

Pent Shed Assembly Manual

Pressure Treated Tanalised Timber for Longer Lasting Life!

Ready To Build - 8ft Range

Version 1.5

Thank you for purchasing your Total Shed.

All of our sheds are made from only the finest selected timber which are (Tanalised), specially pressure treated for a longer and lasting durable life span to the elements.

Each shed is carefully packed and delivered on a pallet ready to be assembled.

**FEATURES NEW FLEXIBLE,
INTER-CHANGEABLE DESIGN
FOR YOUR INDIVIDUAL STYLE.**

2 Persons Recommended for Assembling Shed

Tools Required:



DRILL DRIVER



HAMMER



HAND SAW



STANLEY KNIFE

PLEASE NOTE: Use extreme caution when using any tools. Always wear safety gear where necessary. It is advisable that at least 2 or more persons assemble the shed for health and safety purposes. We are not responsible for any injuries caused whilst assembling this shed.

Ready to Build Shed



**DELIVERED FLAT PACKED IN
EASY TO INSTALL SECTIONS**

Featured Build of the Pent 6ft x 8ft Shed

Includes 4x8ft to 20x8ft Instructions

Check List: See your shed size for details.
Your delivery should contain the following:

FEATURES NEW FLEXIBLE, INTER-CHANGEABLE DESIGN FOR YOUR INDIVIDUAL STYLE.

If your thinking of mixing it up then just a few key points to bare in mind.

All 4ft panels can be placed in any order but 2ft panels must always be tted on far left of shed build. Take a few moments to study the manual and how your shed should look after each step.

8ft Range

4ft x 8ft Pent Shed

- x3 Blank (4ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x4)
- x2 Floor (4x4)
- x6 Felt Strips (4ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x1 Pent Roof Top (4ft)
- x6 Corner Strips
- x7 Posts
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (5ft)
- x1 Instruction Manual



Checked and Signed by:

5ft x 8ft Pent Shed

- x2 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel (3ft)
- x2 Pent Roof (3x4)
- x2 Pent Roof (2x4)
- x2 Floor (3x4)
- x2 Floor (2x4)
- x4 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)
- x8 Corner Strips
- x11 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (6ft)
- x1 Instruction Manual



Checked and Signed by:

6ft x 8ft Pent Shed

- x3 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x4)
- x2 Pent Roof (2x4)
- x2 Floor (4x4)
- x2 Floor (2x4)
- x6 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x8 Corner Strips
- x12 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (7ft)
- x1 Instruction Manual



Checked and Signed by:

7ft x 8ft Pent Shed

- x3 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x2 Floor (4x4)
- x2 Floor (3x4)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x8 Corner Strips
- x13 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (8ft)
- x1 Instruction Manual



Checked and Signed by:

8ft x 8ft Pent Shed

- x6 Blank (4ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x4)
- x4 Floor (4x4)
- x8 Felt Strips (4ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x2 Pent Roof Top (4ft)
- x8 Corner Strips
- x14 Posts
- x2 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (9ft)
- x1 Instruction Manual



Checked and Signed by:

9ft x 8ft Pent Shed

- x5 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x1 Window Panel (3ft Wide)
- x1 Single Door Panel
- x2 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x2 Pent Roof (2x4)
- x2 Floor (4x4)
- x2 Floor (3x4)
- x2 Floor (2x4)
- x6 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x1 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)



Checked and Signed by:

10ft x 8ft Pent Shed

- x6 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x4)
- x2 Pent Roof (2x4)
- x4 Floor (4x4)
- x2 Floor (2x4)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x10 Corner Strips
- x19 Posts
- x5 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)



Checked and Signed by:

11ft x 8ft Pent Shed

- x6 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x4 Floor (4x4)
- x2 Floor (3x4)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x10 Corner Strips
- x20 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)



Checked and Signed by:

12ft x 8ft Pent Shed

- x7 Blank (4ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x4)
- x6 Floor (4x4)
- x10 Felt Strips (4ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x3 Pent Roof Top (4ft)
- x10 Corner Strips
- x21 Posts
- x4 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (13ft)
- x1 Instruction Manual



Checked and Signed by:

13ft x 8ft Pent Shed

- x6 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x1 Window Panel (4ft Wide)
- x1 Window Panel (3ft Wide)
- x1 Single Door Panel
- x4 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x2 Pent Roof (2x4)
- x4 Floor (4x4)
- x2 Floor (3x4)
- x2 Floor (2x4)
- x8 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x2 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)



Checked and Signed by:

14ft x 8ft Pent Shed

- x7 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x4)
- x2 Pent Roof (2x4)
- x2 Floor (2x4)
- x10 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x3 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x12 Corner Strips
- x26 Posts
- x6 Diamond Caps



Checked and Signed by:

15ft x 8ft Pent Shed

- x7 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x6 Floor (4x4)
- x2 Floor (3x4)
- x10 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x3 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x12 Corner Strips
- x27 Posts
- x6 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (16ft)
- x1 Instruction Manual



Checked and Signed by:

16ft x 8ft Pent Shed

- x8 Blank (4ft Wide)
- x3 Window Panel (4ft Wide)
- x1 Single Door Panel
- x8 Pent Roof (4x4)
- x8 Floor (4x4)
- x12 Felt Strips (4ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x4 Pent Roof Top (4ft)
- x12 Corner Strips
- x28 Posts
- x6 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (17ft)
- x1 Instruction Manual



Checked and Signed by:

17ft x 8ft Pent Shed

- x7 Blank (4ft Wide)
- x1 Blank (3ft Wide)
- x2 Blank (2ft Wide)
- x2 Window Panel (4ft Wide)
- x1 Window Panel (3ft Wide)
- x1 Single Door Panel
- x6 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x2 Pent Roof (2x4)
- x6 Floor (4x4)
- x2 Floor (3x4)
- x2 Floor (2x4)
- x10 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top - Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top - Right (8ft Wide) (5ft + 3ft)
- x3 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x1 Pent Roof Top (2ft)
- x14 Corner Strips
- x32 Posts
- x8 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (18ft)
- x1 Instruction Manual



Checked and Signed by:

18ft x 8ft Pent Shed

- x8 Blank (4ft Wide)
- x2 Blank (2ft Wide)
- x3 Window Panel (4ft Wide)
- x1 Single Door Panel
- x8 Pent Roof (4x4)
- x2 Pent Roof (2x4)
- x8 Floor (4x4)
- x2 Floor (2x4)
- x12 Felt Strips (4ft Wide)
- x2 Felt Strips (2ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top- Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top- Right (8ft Wide) (5ft + 3ft)
- x4 Pent Roof Top (4ft)
- x1 Pent Roof Top (2ft)
- x14 Corner Strips
- x33 Posts
- x8 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (19ft)
- x1 Instruction Manual



Checked and Signed by:

19ft x 8ft Pent Shed

- x8 Blank (4ft Wide)
- x2 Blank (3ft Wide)
- x3 Window Panel (4ft Wide)
- x1 Single Door Panel
- x8 Pent Roof (4x4)
- x2 Pent Roof (3x4)
- x8 Floor (4x4)
- x2 Floor (3x4)
- x12 Felt Strips (4ft Wide)
- x2 Felt Strips (3ft Wide)
- x4 Floor Blocks (4ft Wide)
- x1 Pent Angle Top- Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top- Right (8ft Wide) (5ft + 3ft)
- x4 Pent Roof Top (4ft)
- x1 Pent Roof Top (3ft)
- x14 Corner Strips
- x34 Posts
- x8 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (20ft)
- x1 Instruction Manual



Checked and Signed by:

20ft x 8ft Pent Shed

- x9 Blank (4ft Wide)
- x4 Window Panel (4ft Wide)
- x1 Single Door Panel
- x10 Pent Roof (4x4)
- x10 Floor (4x4)
- x14 Felt Strips (4ft Wide)
- x1 Pent Angle Top- Left (8ft Wide) (5ft + 3ft)
- x1 Pent Angle Top- Right (8ft Wide) (5ft + 3ft)
- x4 Floor Blocks (4ft Wide)
- x5 Pent Roof Top (4ft)
- x14 Corner Strips
- x35 Posts
- x8 Diamond Caps
- x1 Fixing Kit
(Found in the polytube pack)
- x5 Roof Felt (21ft)
- x1 Instruction Manual



Checked and Signed by:


PRE-ASSEMBLY

4ft & 4ft FLOOR PANEL

Turn all floor panels upside down so frame posts are exposed.



ASSEMBLING THE 8FT FLOOR

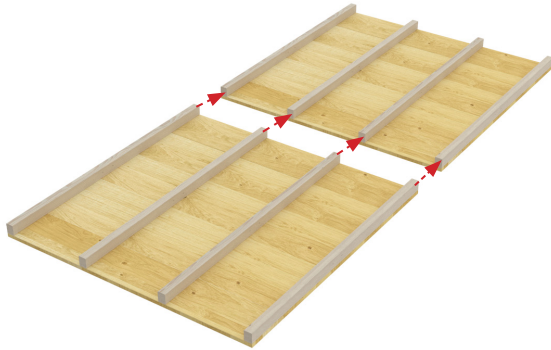

This process will be the same for any build this has a depth of 8ft. The 8ft will be constructed using two 4ft sections.

Before attaching the floor sections, you must first attach the frame posts provided. These will add strength to the roof and will make the process of adding the floor much easier.

Next, Use the screws provided to attach the frame posts to the floor sections. Screw a minimum of 4 screws into each of the frame posts.



INFORMATION

It is recommended that you turn the Floor section 180 degrees so that the bottom of the floor is as shown.

● = Drill Points using screws provided as shown




PRE-ASSEMBLY

4ft & 4ft ROOF PANEL

Turn all roof panels upside down so frame posts are exposed.



ASSEMBLING THE 8FT ROOF

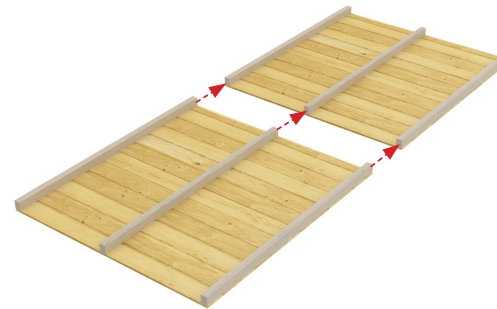

This process will be the same for any build this has a depth of 8ft. The 8ft will be constructed using two 4ft sections.

Before attaching the roof sections, you must first attach the frame posts provided. These will add strength to the roof and will make the process of adding the roof much easier.

Next, Use the screws provided to attach the frame posts to the floor sections. Screw a minimum of 4 screws into each of the frame posts.



● = Drill Points using screws provided as shown

REMEMBER Do not screw the 100mm screws all the way through, just enough for the frame post and post to attach.



STEP • 2

IMPORTANT

All Sheds With 4 or More Floor Panels have the smallest Floor Panel on the Right End.

As shown on this diagram.




FLOOR & BLOCK ENDS

Add the Floor Block Ends (Heavy Duty Posts)

2a. Place the 8ft (2x4ft) long Floor Block Ends provided on both ends of the floor alongside existing floor bearers as shown below.

2b. Fix together by screwing the Floor Blocks at each end as shown. Use the screws provided and make sure the ends are fixed securely. 3 screws on each end will suffice.

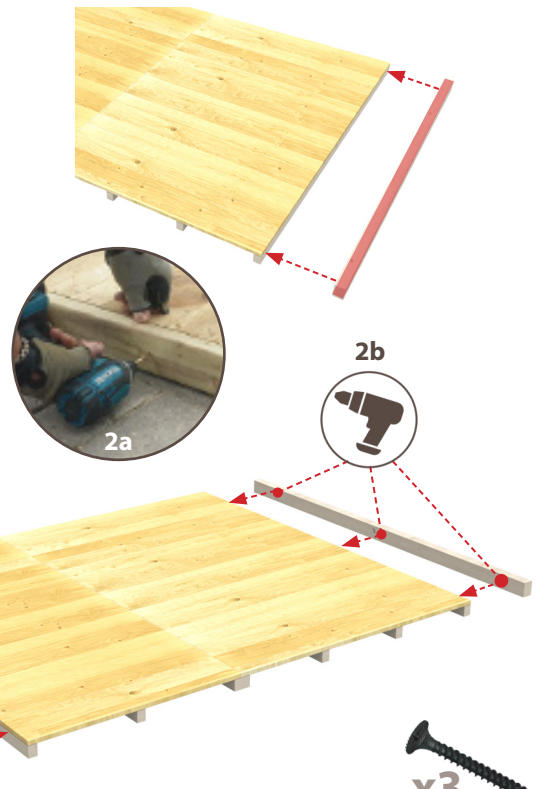

● = Drill Points using screws provided as shown

x3
4.0 x 70mm
Per Floor Block

STEP • 3

4ft LEFT SIDE PANEL

Place first panel against far left of shed floor as shown.

(4ft wide blank panel)




4FT LEFT SIDE PANEL

3a. Place the 4ft Blank Panel against the far right side of the shed floor. Make sure the panel stands firmly on the Heavy Duty Post (Floor Block)

3b. Now prepare the 2ft Blank Panel in order to create an 'L' shape in the corner with the two panels.

3c. DO NOT fix the panels at this stage to the floor. This is because you need to leave room for adjustments in the final stages of the shed build.

REMEMBER The Panel should sit on the Floor Block.

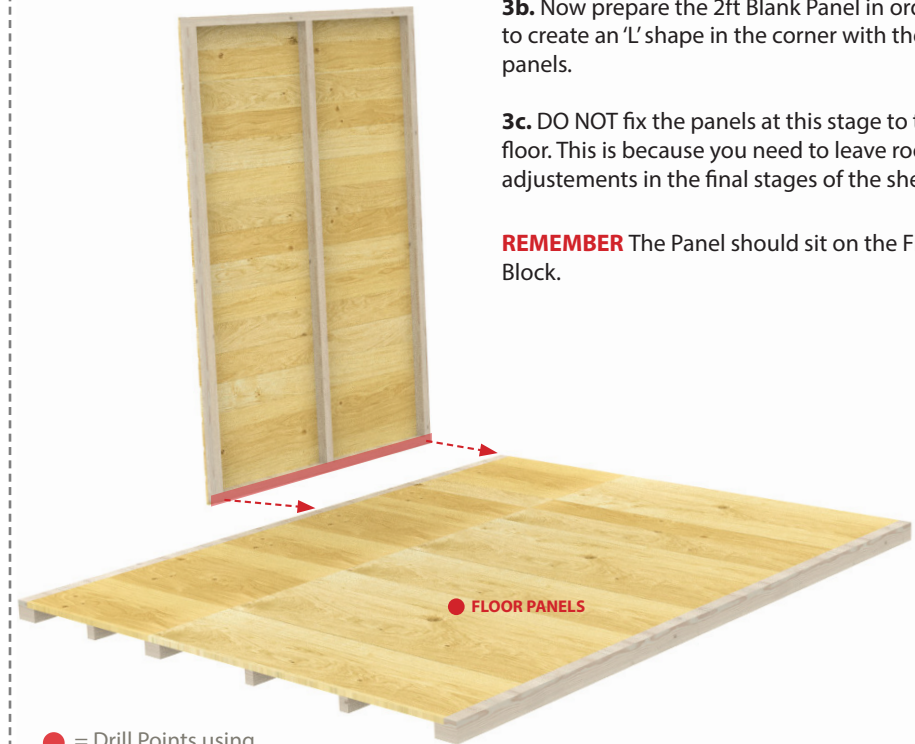

● = Drill Points using screws provided as shown

STEP • 4

SIDE & REAR PANELS



Fix 2ft and 4ft Wide Blank Sections. Create a Corner for Balance.

NOTE: Place panel to sit firmly on the side Floor Block. See Diagram 4b

SIDE & REAR PANELS

4a. Place a 2ft Blank Panel side as shown below. Repeat this step for all larger sheds. Please use reference on left for additional sections required according to your shed size.

4b. Screw the panels alongside the framework as shown in Diagram 4b.

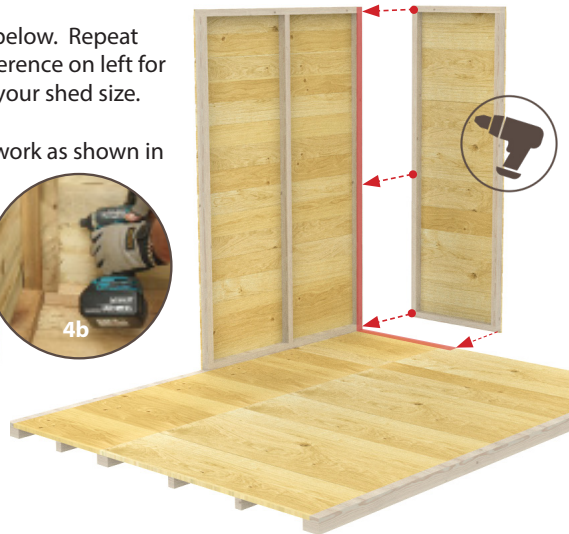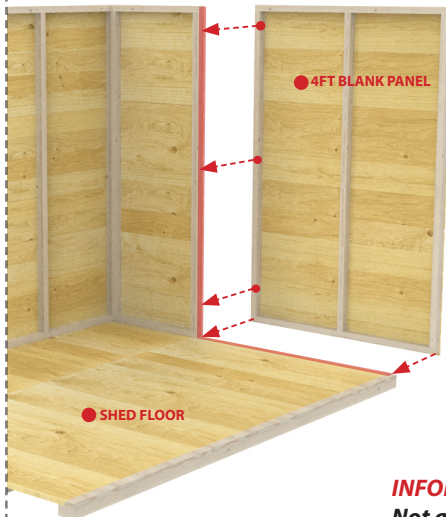

4c. Place the 4ft Blank Panel as shown along the side of the shed floor aligning with the edge of the side Floor Block. **REPEAT** this step until all back Blank Panels are in place.

INFORMATION

Not all Sheds will have the same panel arrangement. Please Ensure that the 4ft Panels are central for all builds.



● = Drill Points using screws provided as shown

STEP • 5

4ft LEFT SIDE PANEL

Fix 4ft Wide Blank Section
Back Panel 4ft Section




4ft LEFT SIDE PANEL

5a. Now place a 4ft Blank Panel as shown. Repeat this step for all other sheds. Please use reference on above for correct sections required according to your shed size.

INFORMATION

Repeat Step 4, making sure that the Blank Panel sizes corresponds with the floor size.

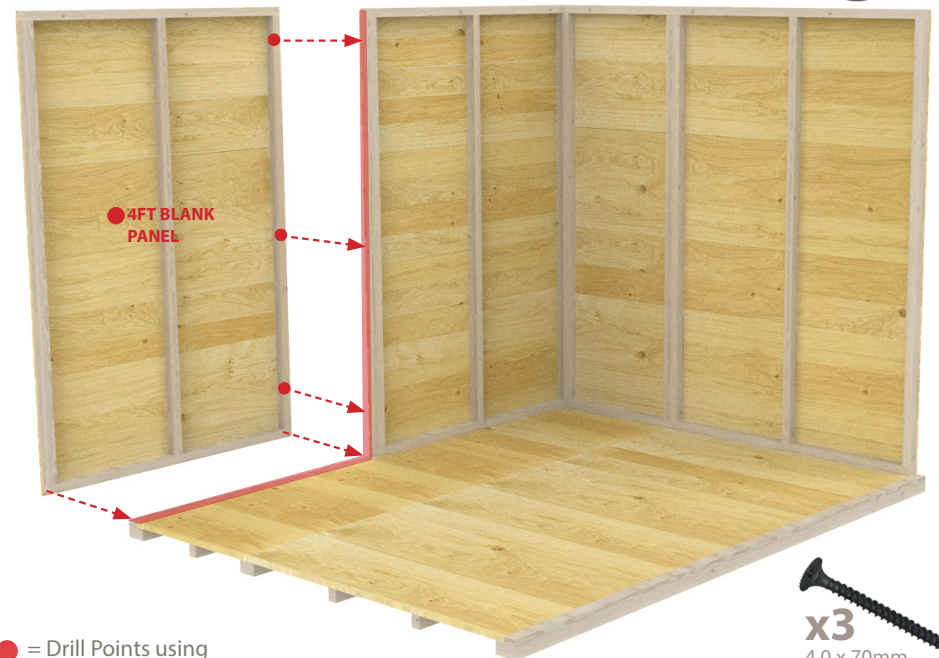

● = Drill Points using screws provided as shown

STEP • 6


4ft RIGHT SIDE PANEL

Fix 4ft Wide Blank Section Side Panel 4ft (Right)



4ft RIGHT SIDE PANEL

6a. Place the 4ft panel side against the corner of the back right of the 4ft floor as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the back 4ft blank panel.

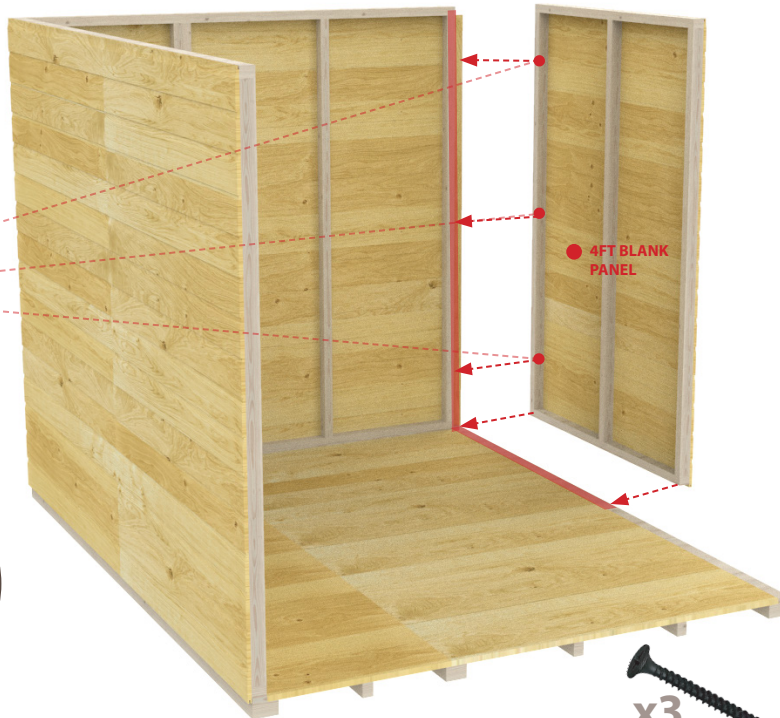

● = Drill Points using screws provided as shown

x3
4.0 x 70mm
Per Panel Edge


STEP • 7

4ft WINDOW SIDE PANEL

Attach 4ft Window Section to the Right Side Wall



4ft WINDOW SIDE PANEL

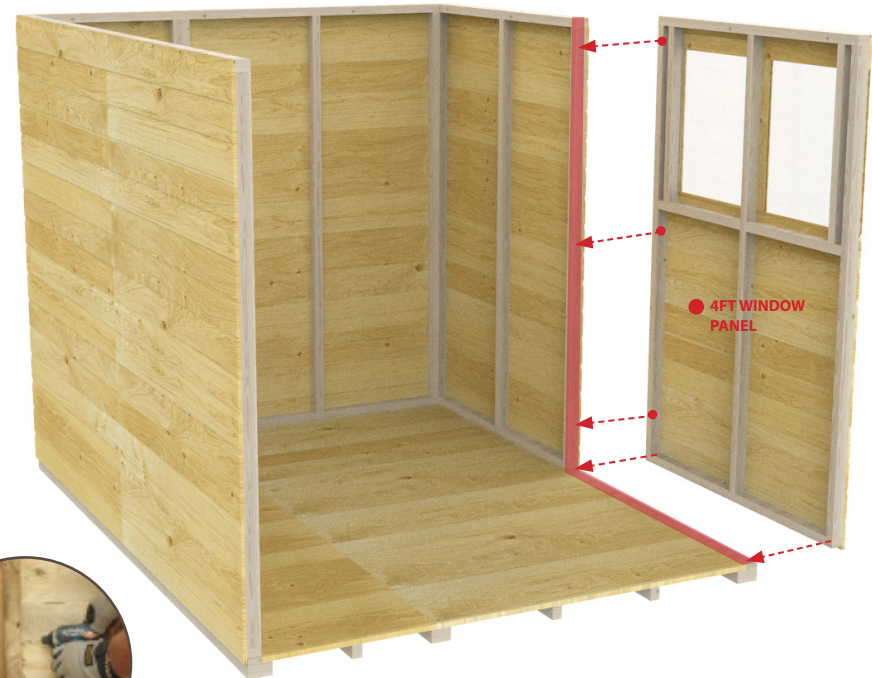

● = Drill Points using screws provided as shown

DO NOT screw the standing panels down to the floor just yet. Leave room for adjustments when the final frame is fitted.

x3
4.0 x 70mm
Per Panel Edge

STEP • 8


FRONT 2FT PANEL

Attach Front Panel
(2ft Blank Panel)



FRONT 2FT BLANK PANEL

8a. Place the 2ft Blank Panel against the corner of the left 4ft Blank Panel and on the 4ft Floor as shown making sure the panel is sitting firmly on the shed floor and the side meeting the framework of the left 4ft blank panel.

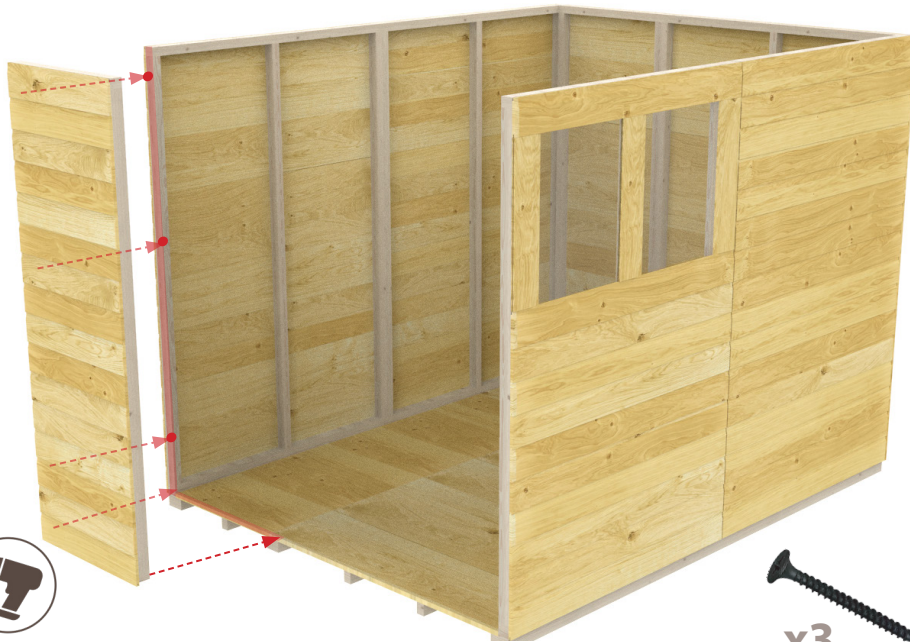

● = Drill Points using
screws provided as shown

x3
4.0 x 70mm
Per Panel Edge

STEP • 9

FRONT DOOR PANEL

Attach Front
Door Panel
(4ft Door Panel)




4ft DOOR PANEL

9a. Now place the 4ft Door Panel as shown. Fix together with screws to the right side panel framework.

DID YOU KNOW?

Door panels can be placed anywhere a 4ft panel is. The 4ft Door must be placed opposite the 4ft back panel and on top of a 4ft floor.

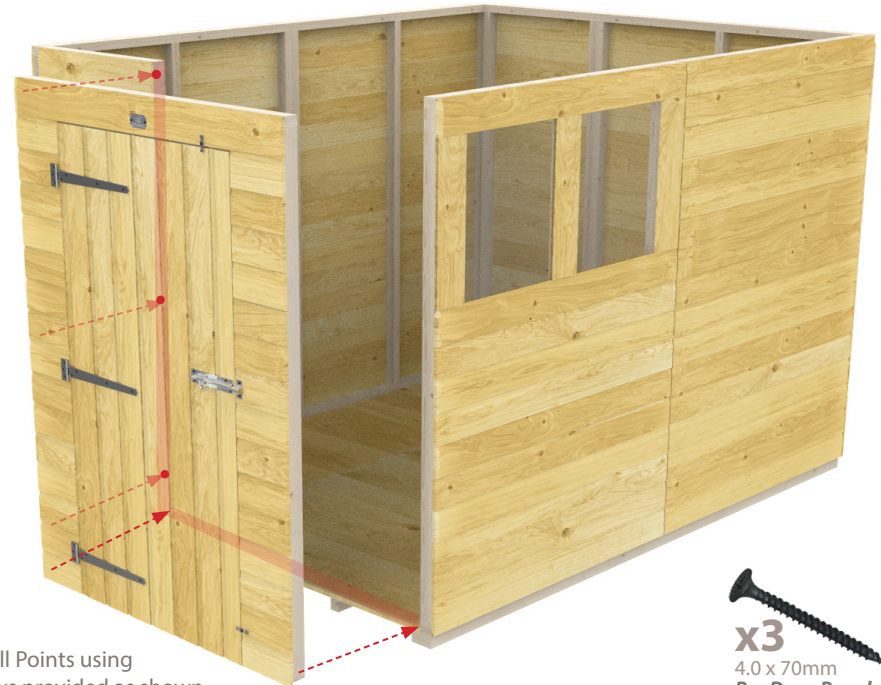

● = Drill Points using
screws provided as shown

x3
4.0 x 70mm
Per Door Panel

STEP • 10

SIDE PENT ANGLE TOPS

Now attach all the 8ft Side Tops of Pent Shed End Panels. (Over the top of both side panels).



8ft SIDE PENT ANGLE TOPS



10a. Now place the 5ft and 3ft slope together and use two 70mm screws to secure them together, making sure that they are in line.



10b. Once the Pent Angle Top has been constructed, use the screws to secure the Angle Tops to the sides of the Shed.



x4
4.0 x 70mm
Per Angle Top

● = Drill Points using screws provided as shown

STEP • 11

PENT FRONT TOPS

Place the front tops of shed in relation to the fronts panels



PENT FRONT TOPS


11a. Place the Pent Front Top sections in place. Use the corresponding sized tops with the correct sections. Make sure the correct section is placed on top of the correct front panel only as shown in the diagram.

11b. Adjust the panels so that the tongue & groove are fixed together in place correctly. Use a hammer to lightly tap in to the grooves to create a perfect fit.

11c. Attach the sections down by screwing through the inner framework of both panels.

INFORMATION :

Place the 4ft Pent Front Top on top of the 4ft Door panel (Each Pent Front Top should be placed on top of the correct sized front panel)

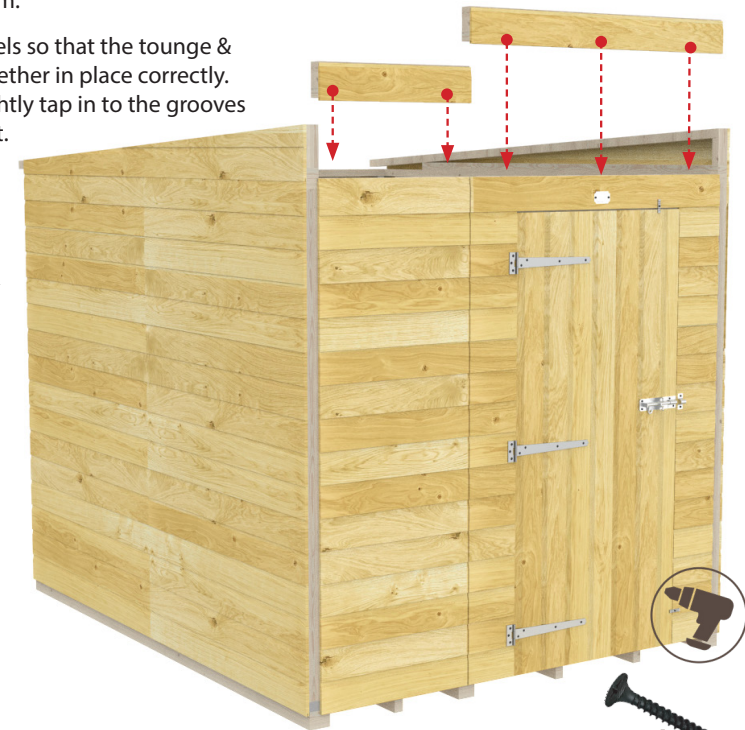

x2/3
4.0 x 70mm
Per Front Top

● = Drill Points using screws provided as shown

STEP • 12

PENT ROOF PANELS

Place 4ft Roof section.
Repeat for all Roof Panels
(2ft)




PENT ROOF PANELS

12a. Place the 4f Roof Panel in place. Repeat this stage for models as shown below. Repeat placing the roof panels corresponding to the panel size for the Floor Front an Rear.

12b. Screw the Roof Panel down by screwing into the sides of the frame posts. The Roof Panels will sit nicely inside of the Angle Tops as shown the next step.

Repeat this for all roof panels, making sure each panel is sitting on its corresponding sized front/back panel.

INFORMATION
Use these 100mm screws to secure the Roof panels together.

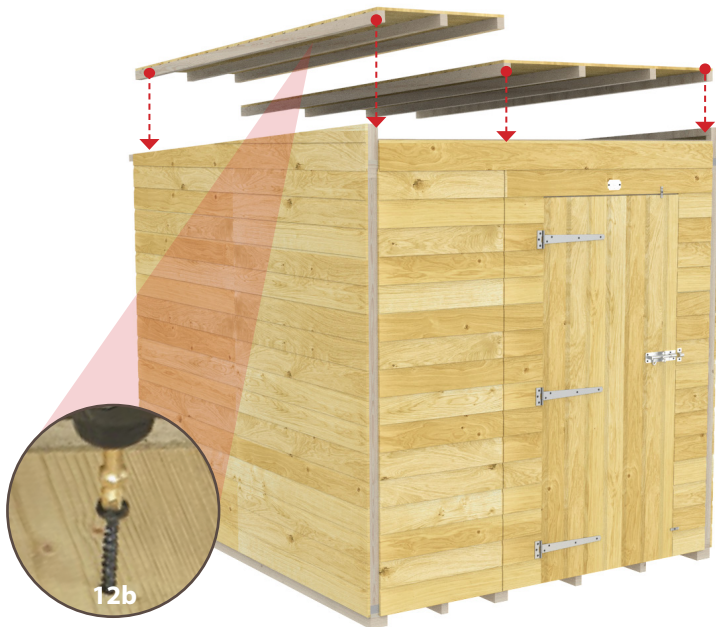

● = Drill Points using screws provided as shown

x4
4.0 x 100mm
Per Roof Panel

STEP • 13

SIDE & CORNER STRIPS

Hide the panel edges.
Cover the framework &
seams.



SIDE & CORNER STRIPS

13a. Use all the side/corner strips to finish off the shed, by covering any exposed framework and the panel joining seams.

13b. Fix the strips down by using 3 screws to secure them to the Shed. This will create a nice finish and hide any gaps on the outer walls of framework, front and back.



● = Drill Points using screws provided as shown

x3
4.0 x 70mm
Per Corner Strip

STEP • 14

CUTTING THE ROOF FELT

Use the felt table to cut your felt to the correct size

CUTTING THE ROOF FELT



14a. Use the Stanley knife to cut your felt into the correct size. Using the table below, find the **Build** size that you have and cut your felt down to achieve the size that you will need.

Example:

Pent Shed 6ft x 8ft

The 6 by 8 needs 5 sheets of felt. All at 7ft each.



		Build Depth				
		4ft (x2)	5ft (x3)	6ft (x3)	7ft (x4)	8ft (x5)
Build Length	4 ft	5ft	5ft	5ft	5ft	5ft
	5 ft	6ft	6ft	6ft	6ft	6ft
	6 ft	7ft	7ft	7ft	7ft	7ft
	7 ft	8ft	8ft	8ft	8ft	8ft
	8 ft	9ft	9ft	9ft	9ft	9ft
	9 ft	10ft	10ft	10ft	10ft	10ft
	10 ft	11ft	11ft	11ft	11ft	11ft
	11 ft	12ft	12ft	12ft	12ft	12ft
	12 ft	13ft	13ft	13ft	13ft	13ft
	13 ft	14ft	14ft	14ft	14ft	14ft
	14 ft	15ft	15ft	15ft	15ft	15ft
	15 ft	16ft	16ft	16ft	16ft	16ft
	16 ft	17ft	17ft	17ft	17ft	17ft
17 ft	18ft	18ft	18ft	18ft	18ft	
18 ft	19ft	19ft	19ft	19ft	19ft	
19 ft	20ft	20ft	20ft	20ft	20ft	
20 ft	21ft	21ft	21ft	21ft	21ft	

STEP • 15

ATTACH THE ROOF FELT

Use the felt lengths provided.

ROOF FELT



15a. Apply the roof felt as shown. Apply lower levels first to create correct rain run off positions.

15b. Using a hammer, tack down the felt with the tacks provided in a neat fashion.



15c. Trim down excess felt with a stanley knife. Remember to overlay the 1st felt to avoid rain leaks.

15d. Tuck and fold edges neatly and tack in place to hide any loose edges. Check that all areas are covered and there are no holes to avoid any rain water getting through your felt roof.



TACKS PROVIDED

STEP • 16

ATTACH FELT STRIPS

Create the Final Roof Edges. Final steps finishing off the roof.



FELT STRIPS

16a. Using the **Felt Strips** provided cover the edges of the roofs and ends of the roof felt. You will need to measure these and saw to fit to your requirements and create the perfect roof finish as shown below.

16b. Drill in the felt strips as shown on front and back of the shed to finish the roof off. Use the framework of the roof blocks to screw the felt strips down to. The felt strips will give your shed a neat finish for the roof and hide any overhang areas of the roof felt.



NOTE:

Location of the Felt Strips

16c. Felt Strips must be same height as roofing felt to allow rain water to run off. See Diagram on the right.

● = Drill Points using screws provided as shown

x2/3
4.0 x 38mm
Per Felt Strip

STEP • 17

DIAMOND CAPS

Add the Finishing Touch. (Optional)



DIAMOND CAPS



Congratulations

Timber is a naturally grown product and may shrink and warp when dried out, timber is a porous material which can absorb water. Although all of our buildings come pressure treated we strongly advise the building is re-treated with an oil/spirit based treatment inside and out to make the timber water repellent and to preserve the quality and life of the product.

x1
4.0 x 38mm
Per Diamond Cap