


## Details of accessories




## Installation instructions for Metal mount

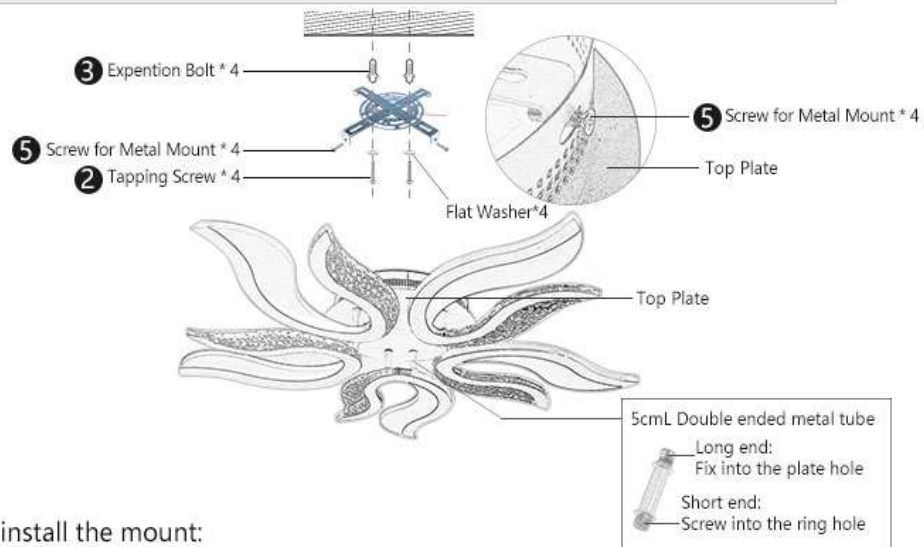

### Steps to install the mount:

- Step 1:** Take the mount to check the lighting location on the ceiling, and mark the screw hole with a marking pen.  
**Step 2:** Drill holes at marked locations with electric drills, and then use a hammer to drive the expansion bolts into the holes.  
**Step 3:** Fix the mount into the expansion bolts with tapping screws 【Each tapping screw should be set with one flat washer】  
**Step 4:** Assemble the lighting frame with screw rods, test the electricity on the ground, make sure the lamp works normally.  
**Step 5:** Connect the driver of the lamp with the power cord of the ceiling, and then fix the lamp to the metal mount with screws.

**\* Please watch the installation video on the details page**




Expansion Bolts

Tapping Screws

( Figure 1 )

"+" Metal mount  
(on the back of top plate)  
Screws & nuts

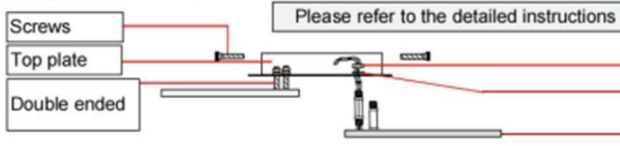

Screws

Top plate

Double ended

Hex Nut


Non Slip Washer

"U" Frames (total 5pcs)

Please refer to the detailed instructions on page 2 for installation of metal mount


( Figure 2 )

Combine the frames:  
Fix the lamp frames into the top plate hole with screw rods.  
The screws rods are in the accessory bag on the back of the top plate.



( Figure 3 )

Combine the frames:  
Fix the lamp frames into the top plate hole with screw rods.  
The screws rods are in the accessory bag on the back of the top plate.

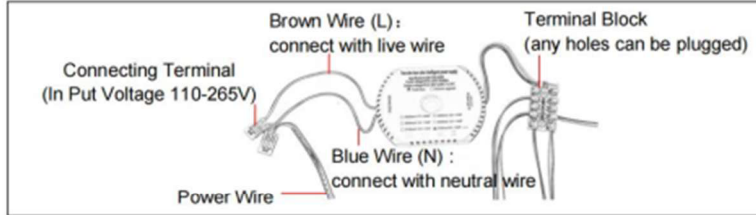

Brown Wire (L) : connect with live wire

Terminal Block (any holes can be plugged)

Connecting Terminal (In Put Voltage 110-265V)

Blue Wire (N) : connect with neutral wire

Power Wire


( Figure 4: Plug and Driver)

**Installation Steps:**

1. Install the "+" metal mount, Please refer to the detailed instructions on page 2.
2. Be very careful unpacking the parts. Take all of the plastic wrap off the frames.
3. Combine the "U" frames in fixed on the top plate according to the shown in figure 3.
4. Test circuit: Connect the power wires with a temporary wire for testing if the light is working properly before install it to the ceiling.
5. Installation: Fix the lamp body to the metal mount, connect the power wires with the connecting terminals.
6. Turn on the power and double check again, the installation is complete.

**Warning!**

- 1) Please install by professional.
- 2) The voltage available for 110-265V only.
- 3) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you cleanning the lighting fixture.
- 5) Keep away from acidic &corrosive material.



Pull the orange clip up to 90 degrees, and insert the wire,  
then pull the clip down  
and wire will be clamped tightly

( figure 5)

Page 1