

Features

- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Six transducers and a control amplifier with 25' (7.6 m) of wiring.
- User-friendly high-resolution color touch screen in polished chrome.
- Integral apron with removable access panel.
- Integral tile flange.
- Molded lumbar support for comfort.
- Textured bottom surface.
- Left-hand drain.
- 60" (1524 mm) x 32" (813 mm) x 21-1/4" (540 mm) with flange.

Material

- Acrylic

Installation

- Three wall alcove installation.



Codes/Standards

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
CSA C22.2 No. 218.2

KOHLER® One-Year Limited Warranty



See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar


No change in measurements if connected with drain illustrated. (K-11677)

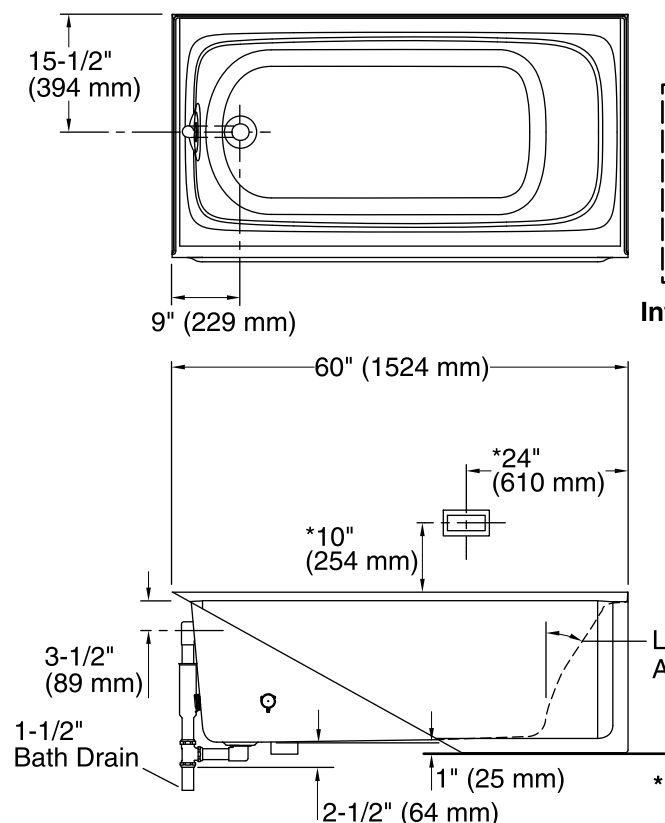


Integral Flange Detail

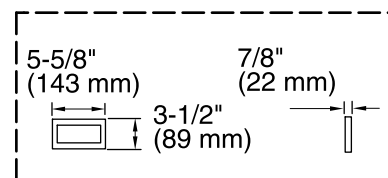

User Interface

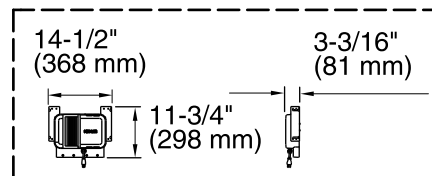

Control Amplifier

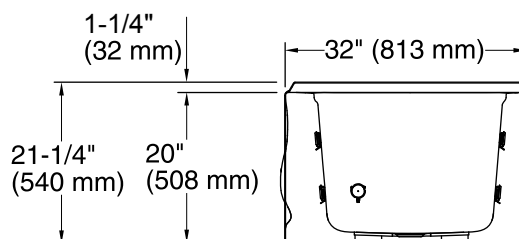

*Recommended User Interface Location

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Amplifier: 120 V, 15 A, 50/60 Hz

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Basin area, bottom: 45" x 22" (1143 mm x 559 mm)

Basin area, top: 54" x 25" (1372 mm x 635 mm)

Weight: 91 lbs (41.3 kg)

Minimum floor load: 45 lbs/ft² (219.7 kg/m²)

Water depth: 14" (356 mm)

Water capacity: 60 gal (227.1 L)

Electrical rating: Amplifier: 120 V, 50/60 Hz, 15 W

Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Control amplifier fits 16" (406 mm) center studs.

A grounded outlet within the wall framing must be within 24" (610 mm) of the planned control amplifier.

Cables are included, 25' (7.6 m) each.

Ensure that the bath, user interface, amplifier, and transducers are functional before completing the installation.