


En

High Voltage Landscape Light

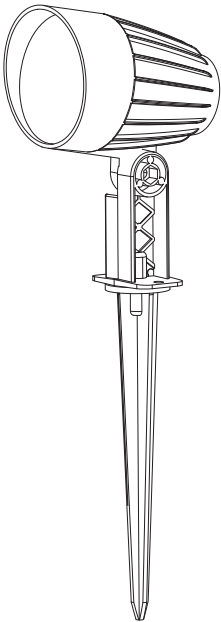

B04-25ASTA-RW-SZ-A

En

Thank you for purchasing products. To ensure a better shopping experience, please follow the instructions for use step by step.

If you have any questions about our products, please contact our customer service, our after-sales team will contact you at the first time and resolve any problems about the products.


Warning

- 1. The LED module can't be replaced, you need to replace the entire lamp if it damaged or reach the service life.
- 2. If the wire is damaged, the lamp can no longer be used and needs to be scrapped.
- 3. If the casing breaks or water enters, the lamp can no longer be used and needs to be scrapped.
- 4. Do not stare at the LED light-emitting surface closely for a long time, to prevent the hurt of the eye.
- 5. Under no circumstances should the luminaire be covered by a thermal pad or similar material.
- 6. The Lamp requires professional electrician to install.

En

- 7. The IP66 waterproof grade is just for rainproof, the lamp can not be immersed in water, otherwise it may cause leakage.

Product Structure and Size

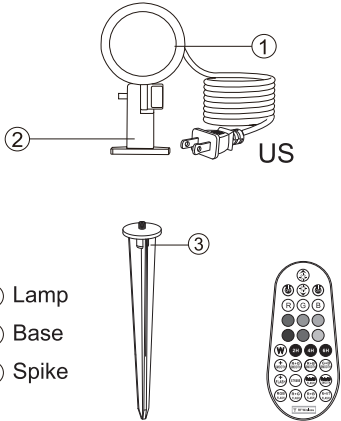

- ① Lamp
- ② Base
- ③ Spike

En

Installation Method



- ① Spike Installation: after fixing the lamp bracket and the base with screws, insert the spike, and then directly insert it on the lawn or unhardened ground.
- ② Base installation: after the lamp bracket and the base screw are fixed, they can be fixed on the hardened ground or wall with screws.


Warning

- 1. The landscape light has a built-in RF receiver. The remote control could control the product within 12 meters .
- 2. Please replace the remote control battery if the remote control is not sensitive or the control distance becomes shorter(may be the battery exhausted).

| Model  | Power | Lighting Range | Color Temperature | Beam Angle | IP Rating | Input Voltage | Ta         |
|--------|-------|----------------|-------------------|------------|-----------|---------------|------------|
| ASTA07 | 7W    | 2-3M           | RGBW              | 45°        | IP66      | AC120V/60Hz   | -25°C-40°C |
| ASTA15 | 15W   | 3-4M           | RGBW              | 45°        | IP66      | AC120V/60Hz   | -25°C-40°C |

## Functions

### Remote Control

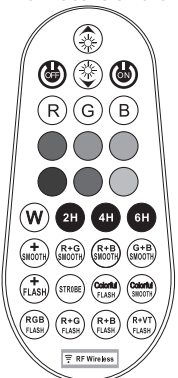

- Power off** **Power on**
- Brightness Up:** 6 levels of brightness (25%-40%-55%-70%-85%-100%)
- Brightness Down:** 6 levels of brightness (100%-85%-70%-55%-40%-25%)
- Gradient:** In any single-color light mode, press this button, it will change current color to gradient light. Press to adjust gradual change speed
- Red/Green Gradient:** Gradient Mode (R+G). Press to adjust gradual change speed
- Red/Blue Gradient:** Gradient Mode (R+B). Press to adjust gradual change speed
- Green/Blue Gradient:** Gradient Mode (G+B). Press to adjust gradual change speed
- Colorful Strobe:** Strobe mode (colorful). Press to adjust strobe speed
- Colorful Gradient:** Strobe mode (colorful). Press to adjust gradual change speed
- Colorful Jump:** Jump mode (colorful). Press to adjust the jump speed
- Stroboscopic:** In any single-color lighting mode, press this button to change the current color to strobe light. Press to adjust strobe speed
- RGB Jump:** Jump mode (R+G+B). Press to adjust jump speed

En

En

- Red/Green Jump:** Jump mode (R+G). Press to adjust jump speed
- Red/Blue Jump:** Jump mode (R+B). Press to adjust jump speed
- Red/Purple Jump:** Jump mode (R+VT). Press to adjust jump speed
- 2H** Timing Function: when the light works normally, press this button, it will work for 2 hours in the current mode then automatically turn off. (the light flashes twice in the working mode, indicating timer is started)
- 4H** Timing Function: when the light works normally, press this button, it will work for 4 hours in the current mode then automatically turn off. (the light flashes twice in the working mode, indicating timer is started)
- 6H** Timing Function: when the light works normally, press this button, it will work for 6 hours in the current mode then automatically turn off. (the light flashes twice in the working mode, indicating timer is started)

Monochrome: (R) red (G) green (B) blue (W) white



Memory Function: Lighting color remains as the previous setting when turned on again.

### Trouble Clearing

If the product does not work, please confirm whether it is caused by the following reasons.

- The landscape light does not turn on after turning on the power. Please make sure the remote control is aimed at the light, then press "ON".

En

- The input voltage does not match with the product. Please let a professional electrician to check whether the power supply voltage meets the voltage requirements of the light.
- If you still can't solve the problem according to the instructions, please stop using it and contact a professional electrician or directly contact customer service to get assistance.

### Routine maintenance

- Please clean the light regularly to ensure the product works well.
- Please make sure the power is off before maintenance.
- Please do not clean it with chemicals to avoid damage to the lamp.



Manufacturer: Shenzhen Oumeike Lighting Technology Co., Ltd.  
Address: No. 19-20, Anye Road, Yuanshan Street, Longgang District, Shenzhen, Guangdong, China

E-mail: infoous@163.com