


ASSEMBLY AND INSTALLATION INSTRUCTIONS

Model:CA2639-WP、 CA2639-2WP

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE

NOTES:1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

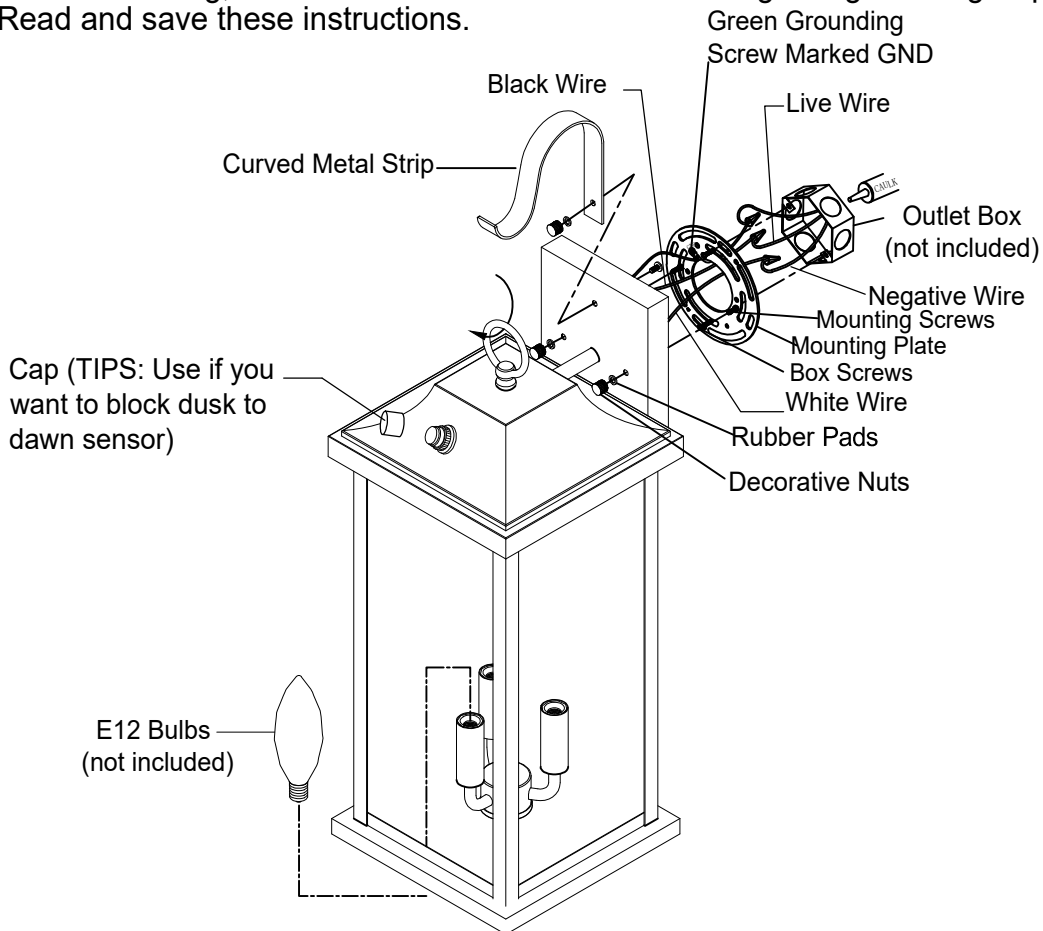

1. Take out the mounting plate and fix it to the outlet box with two box screws as shown in the figure

Note: The side of mounting plate marked "GND" must face out.

2. Install the curved metal strip as the figure shows, then secure it to the back plate with a screw and a decorative nut.

3. Install THREE E12 bulbs up to 40 Watts or CFL or LED equivalent (not included) in accordance with the fixture specification.

4. Pull out the wires and grounding wire from the outlet box. Make wire connections using wire nuts, as follows:

--Connect the hot wire (usually black) from the fixture to the hot (usually black) wire from the power source.

--Connect the neutral wire (usually white) from the fixture to the neutral (usually white) wire from the power source

--Attach the fixture grounding wire (usually green or bare wire) to the mounting plate with the green grounding screw marked GND. Then connect it to the house grounding wire with wire nut.

For safety purpose, wrap the connections with electrical tape, then carefully put the wires back into the outlet box

5. Attach the back plate to the mounting plate by inserting two mounting screws, then secure with two decorative nuts.

6. Turn on the power at fuse or circuit box to test the light fixture

CAUTION: With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.

Turn on the power at fuse or circuit box.