IMPORTANT SAFETY INSTRUCTIONS

1.Please carefully read these instructions before installation and retain for your future reference.
2. Professional electrician is needed for installation.

DANGER: To reduce the risk of electrical shock

1. For safety reasons, please turn off the power before installation.
2. Always disconnect this furnishing from supply main before cleaning or servicing.

WARNING - To reduce the risk of burns,fire, electrical shock or in jury to persons

1. We recommend that the surface fuse is withdrawn to prevent accidental switching on while work is in progress.
2. Close supervision is necessary when the mirror light is used by or near children,invalids or disabled.
3. Use mirror light only for its intended use as described in these instruction. Do not use attachments not recommended by the manufacturer.
4. Never operate the mirror light if it wire damaged . If it is not working properly, or if it has been dropped or damaged or dropped into water.
   Return the furnishing to a service center for examination or repair.
5. Keep the wire away form heated surfaces.
6. Never drop or insert any object into any opening.
7. This product contains glass parts. Care must be taken when fitting or handling these parts to prevent personal injury or damage to the products.
8. Ensure the mounting surface is dry and strong enough to allow for the safe fitting of this fixture.
9. Ensure that current building regulations are adhered to at all times should an additional electrical supply be required.
10. Care must be taken before drilling fixing holes to avoid any existing wiring or paperwork that may be concealed;
11. For household/residential use only. Do not use outdoors.
12. This luminaire must be mounted or supported independently of an outlet box. Suitable for damp locations.
13. Mounting furnishings at the correct height.(1.5m Max. from the ground)

INSTALLATION WARNING:

1）Risk of Electric Shock-Connect this furnishing to a properly grounded outlet only.

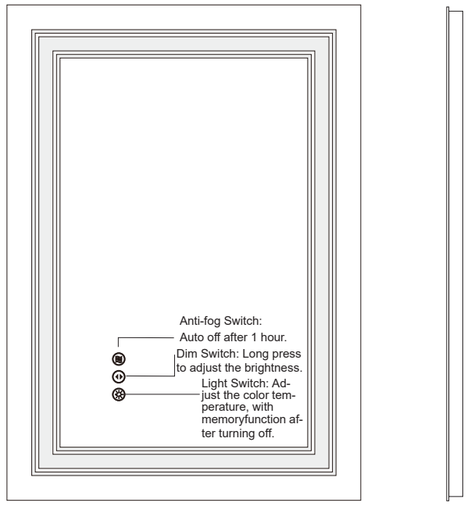
2) Grounding Instructions：This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

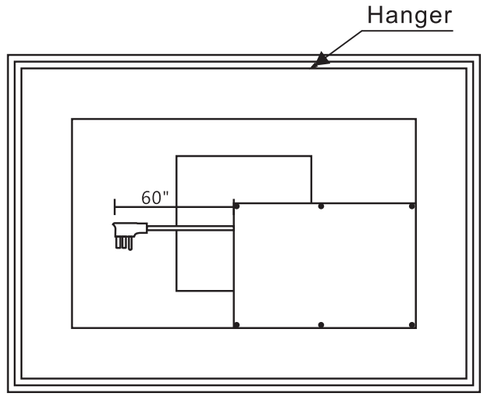
3) Risk of fire: This product must be installed in accordance with the applicable installation code by a person familiar with construction and operation of the product and the hazards involved.

Specification:

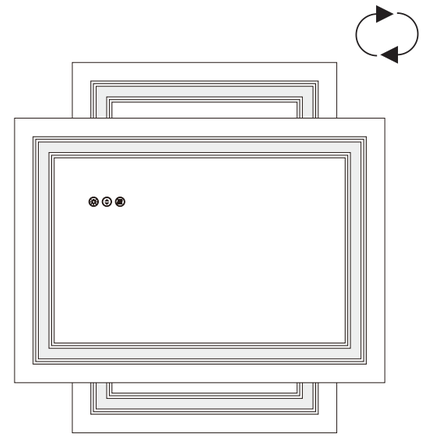
Model Number	Size	Thickness	Touch Button	Color Temperature	Lumen	CRI	Power(W)	Input(V) Voltage	Weight (KG)
KM001-S1R5070UL-V1	20"x28"	1.18"	3	3000/4000/6000	3601	90	48	100-120	5.45
KM001-S1R6080UL-V1	24"x32"	1.18"	3	3000/4000/6000	4370	90	48	100-120	7.15
KM001-S1R6090UL-V1	24"x36"	1.18"	3	3000/4000/6000	4754	90	60	100-120	7.85
KM001-S1R7090UL-V1	28"x36"	1.18"	3	3000/4000/6000	5138	90	60	100-120	8.90
KM001-S1R7691UL-V1	30"x36"	1.18"	3	3000/4000/6000	5406	90	60	100-120	8.75
KM001-S1R8090UL-V1	32"x36"	1.18"	3	3000/4000/6000	5522	90	60	100-120	9.75
KM001-S1R9090UL-V1	36"x36"	1.18"	3	3000/4000/6000	5906	90	80	100-120	10.80
KM001-S1R9696UL-V1	38"x38"	1.18"	3	3000/4000/6000	6366	90	80	100-120	12.28
KM001-S1R10060UL-V1	24"x40"	1.18"	3	3000/4000/6000	5138	90	60	100-120	8.90
KM001-S1R10076UL-V1	40"x30"	1.18"	3	3000/4000/6000	5752	90	80	100-120	10.16
KM001-S1R10080UL-V1	40"x32"	1.18"	3	3000/4000/6000	5906	90	80	100-120	10.90
KM001-S1R12080UL-V1	48"x32"	1.18"	3	3000/4000/6000	6674	90	80	100-120	15.10
KM001-S1R12191UL-V1	48"x36"	1.18"	3	3000/4000/6000	7169	90	80	100-120	17.10
KM001-S1R121100UL-V1	48"x40"	1.18"	3	3000/4000/6000	7480	90	80	100-120	20.95
KM001-S1R13975UL-V1	55"x30"	1.18"	3	3000/4000/6000	7211	90	80	100-120	16.45
KM001-S1R13991UL-V1	55"x36"	1.18"	3	3000/4000/6000	7826	90	80	100-120	18.63
KM001-S1R15070UL-V1	60"x28"	1.18"	3	3000/4000/6000	7442	90	80	100-120	16.60
KM001-S1R130100UL-V1	52"x40"	1.18"	3	3000/4000/6000	7573	90	80	100-120	19.53
KM001-S1R15076UL-V1	60"x30"	1.18"	3	3000/4000/6000	7672	90	80	100-120	17.48
KM001-S1R15090UL-V1	60"x36"	1.18"	3	3000/4000/6000	8210	90	100	100-120	20.05
KM001-S1R150100UL-V1	60"x40"	1.18"	3	3000/4000/6000	8594	90	100	100-120	22.40
KM001-S1R18191UL-V1	72"x36"	1.18"	3	3000/4000/6000	9473	90	100	100-120	24.62
KM001-S1R181100UL-V1	72"x40"	1.18"	3	3000/4000/6000	9811	90	100	100-120	27.11
KM001-S1R19591UL-V1	77"x36"	1.18"	3	3000/4000/6000	9976	90	150	100-120	26.42
KM001-S1R21380UL-V1	84"x32"	1.18"	3	3000/4000/6000	10245	90	150	100-120	25.80
KM001-S1R7080UL-V1	28"x32"	1.18"	3	3000/4000/6000	4604	90	60	100-120	7.85
KM001-S1R10090UL-V1	40"x36"	1.18"	3	3000/4000/6000	6098	90	80	100-120	13.25
KM001-S1R11076UL-V1	44"x30"	1.18"	3	3000/4000/6000	5936	90	80	100-120	12.16
KM001-S1R11090UL-V1	44"x36"	1.18"	3	3000/4000/6000	6464	90	80	100-120	12.55
KM001-S1R12090UL-V1	48"x36"	1.18"	3	3000/4000/6000	6829	90	80	100-120	16.33
KM001-S1R139100UL-V1	55"x40"	1.18"	3	3000/4000/6000	7632	90	100	100-120	19.71
KM001-S1R16890UL-V1	66"x36"	1.18"	3	3000/4000/6000	8316	90	100	100-120	18.90
KM001-S1R168100UL-V1	66"x40"	1.18"	3	3000/4000/6000	8676	90	100	100-120	20.67

Installation

















Horizontal or Vertical Installation

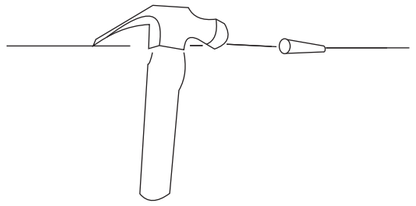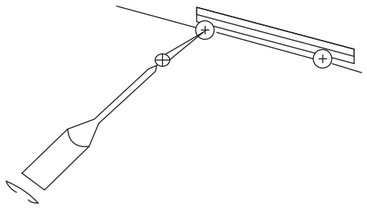Step 1	Step 2
 Turn off the power before installation.	 Measure the distance between the two ends, this mirror can be hung horizontal or vertical. Using a pencil and a level, mark the desired position on the wall.
Step 3	**Step 4**
 Drill the holes for nails and screws.	 Insert the nails.
Step 5	**Step 6**
 Mounted the brackets on the wall and then ight the screws to ensure the bracket stay sturdy. (Leave a 2-3 mm gap between the screwhead and wall)	Connect the wires properly to their corresponding color.  White(neutral) supply wire to the white(or ribbed) mirror wire Black (live) supply wire to the black(or smooth) mirror wire Green or bare copper supply wire to the green or bare copper mirror wire.
Step 7	**Step 8**
 Lift the mirror above the brackets.	 Turn on the power.

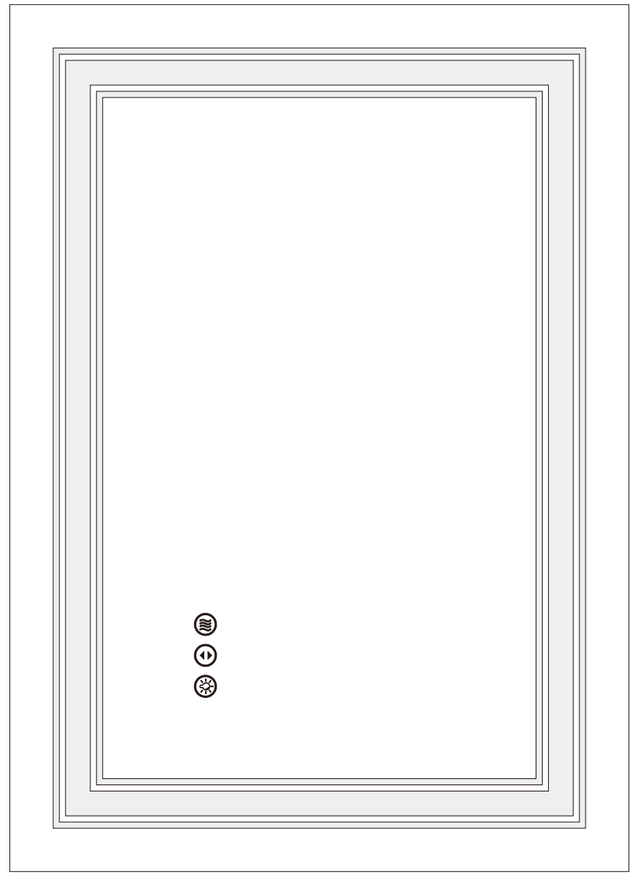
Maintenance

1. Do not touch the mirror with wet hands, and do not wipe the mirror with wet cloth to avoid increasing moisture intrusion.

2. It is recommended to wipe the mirror with a soft cloth or gauze.

3. Do not use any chemicals or misuse cleaning agents.

User Manual



Manufacturer:Guang Dong Kosmo Smart Home Devices Co., Ltd.
Factory Add:No.65,LinHai North Road, Sha Tian Town,Dong Guang Dong Province, China