# LIFT MASTER BOOM, ORBIT NON-TELESCOPING BOOM-LM-OBNT-8-30

APPROX WEIGHT: 520.20 lbs.

2 1/4'


38"

**30" FORK** 

**POCKET** 

**CENTERS** 

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

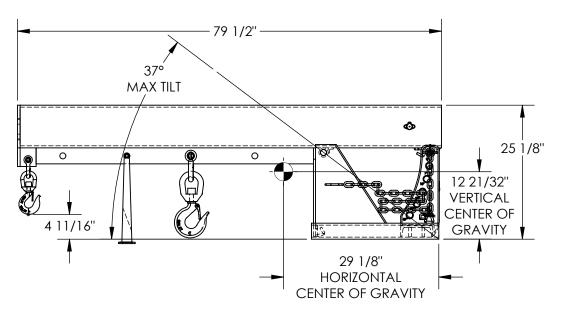

### \*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48''	60''	72"	78
CAPACITY	8000	6650	6000	5300	4850

#### STANDARD FEATURES

MODEL NUMBER IS LM-OBNT-8-30 CAPACITY IS 8,000 LBS MAXIMUM TILT ANGLE IS 37° OVERALL HEIGHT - 25 1/8" HEIGHT (MAX TILTED) - 57 3/16" OVERALL LENGTH - 79 1/2" **OVERALL WIDTH IS 38"** 36" MINIMUM HOOK POINT 78" MAXIMUM HOOK POINT HOOK HEIGHT (MAX TILTED) 40 3/8" HOOK HEIGHT - 4 11/16" USABLE FORK POCKET - 7 1/4"x 2 1/4" 30" FORK POCKET CENTERS

NEVER EXCEED LOAD CENTER RATING PER FORKTRUCK MANUFACTURERS GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

MINIMIM EFFECTIVE THICKNESS = LESS THAN 1"

APPROX. WEIGHT / LOST LOAD = 520.20

TOUGH BAKED IN POWDER COATED BLUE FINISH

## SPECIAL FEATURES NONE

FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB. POWER

Ρ

Ρ

R

0

V

Α

## DIMENSION TOLERANCE ± 1/4"

<del>---||</del> 7 1/4" <del>|---</del>

18 1/2"

**CENTER OF GRAVITY** 

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
REPRESENTED SATISFIES DESIGN AND DIMENSION
REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.
ANY MODIFIED UNITS ARE NON-RETURNABLE
[ ] As drawn  [ ] As marked

Signed: Date:

**Printed Name:** 

	LEAD TIME WILL START UP	ON RECEI	PT OF SIGNED	APPROVAL DRAWING
Ē	DISTRIBUTOR'S NAME:	P.O.# X		
	VESTIL MANUFAC	W.O.# X		
Ē	B.NOTHNAGEL	DATE: 7/6	/2015	SALES: X
R	reference: X		SCALE: 1:18	
C	QUOTED LEAD TIME: $\chi$	QUOTE #		08-007-311