

LUMARY SMART LED DECK LIGHT USER MANUAL



Lumary

Thank you for choosing Lumary! Are you excited to embark on a journey of smart living? Begin by downloading the Lumary App, your gateway to effortlessly managing your smart devices from anywhere using your smartphone or tablet. Our products seamlessly integrate with your home Wi-Fi, enabling you to command multiple devices with the mere touch of your fingertips.

At Lumary, we pride ourselves on being a leading producer of smart lighting solutions, dedicated to delivering unparalleled service. We are constantly refining our app and products to ensure that we meet and exceed your expectations. So, why wait? Illuminate your home with the sophistication and convenience of Lumary today. Let's make your space brighter and your life smarter.

Contents

Product & Notes	3
Installation Instructions	4-5
Application Connection	6-11
Group Control	12-14
Beacon Remote Controller	15-17
FAQ	18-19
Parameter Information	20-21
App-to-App Voice Control	22-28
After Sales & Social Media	29


Product&Notes

What's in the Box

Lumary Smart
User manual

- Lumary Smart LED Deck Light A

6 PACKAGE CONTENTS



PART	DESCRIPTION	QUANTITY
A	LED Deck Light (Power adapter not included)	6
B	Mounting Screws& Plastic Anchors	12
C	Waterproof Wire Nuts	13
D	Bluetooth Remote Controller(AAA battery not included)	1


Get Ready

- Know your Wi-Fi network and password.
- Make sure your mobile device is running iOS 13.3 or higher and Android 9.0 or higher.
- Make sure you're connecting to a 2.4GHz Wi-Fi network (Lumary can't connect to 5GHz networks).

WARNING


PLEASE READ ALL SAFETY PRECAUTIONS AND INSTALLATION INSTRUCTIONS CAREFULLY BEFORE INSTALLING THE FIXTURE.

1. Please check and make sure that there is no sign of physical damage to the product when unpacking. DO NOT use damaged products.
2. Turn off the power before installing or servicing.
3. Due to risk of fire or electric shock, installation of this product requires knowledge of the electrical systems. If you are not qualified, do not attempt installation. Contact a qualified electrician.
4. Please handle gently to ensure the lifespan and appearance of the product.
5. This LED deck light uses 12-24V low voltage. Please check that your supply voltage matches with the voltage marked on the label prior to connecting to supply leads.

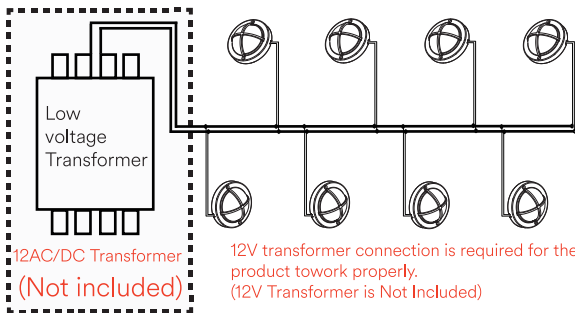


INSTALLATION INSTRUCTIONS

1. Drill two holes in the wall.
2. Tap the plastic anchors into the holes.
3. Align the holes on the fixture with two plastic anchors.
4. Tighten the fixture to the plastic anchors with the screws.

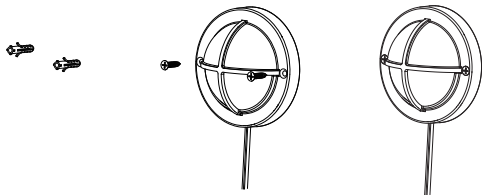



5. Use the waterproof wire nuts to connect the wires.

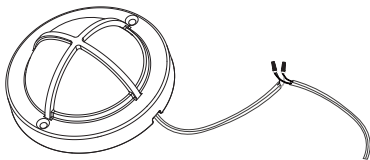


Input power cord:
12-24V AC/DC

Application Connection


1. Find and install the "Lumary" App on App Store, Google Play.

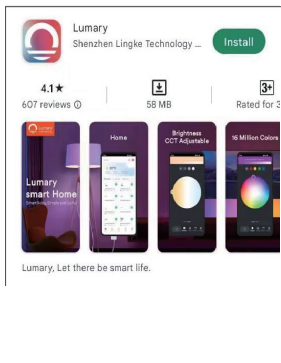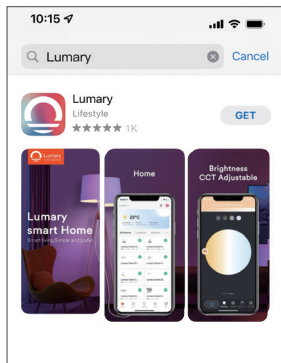

2. Register a Lumary account.

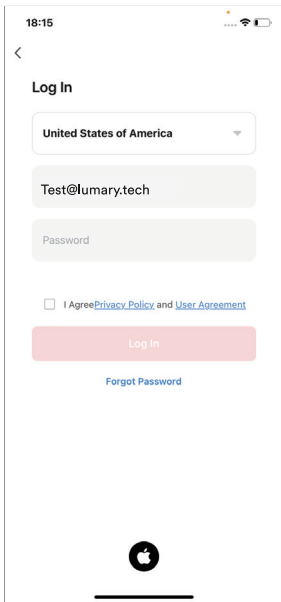

Enter your email address.

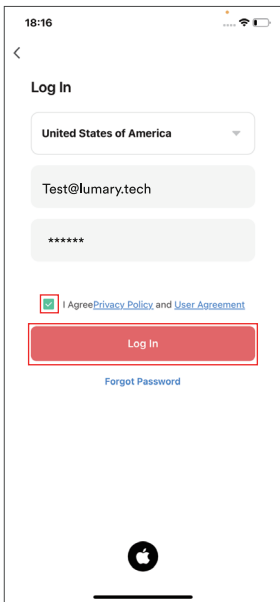

Log into the App.

Note: Please select your region and country.



3. Connect



Note:

Connect your Lumary smart device to the app using Bluetooth communication.

Steps:

1. Ensure that your phone is connected to a network and that Bluetooth is turned on.
2. Power on the Gateway, which red indicator light will start flashing or breathing.
3. Enter the Lumary App on your phone and click on the "+" icon to search for nearby devices on the network. Once the device is located, click "Add" to add it to the App.
4. If the red indicator light on the gateway does not flash, it may need to be reset. To do so, press and hold the reset button for 5s until the red indicator light flashes.
5. After completing the gateway configuration, power on all Bluetooth sub-devices, such as lamps, to ensure they enter distribution network mode. Once confirmed, you can proceed by clicking the distribution network button on the gateway. This action will automatically bind the Bluetooth lights that are in distribution network state.

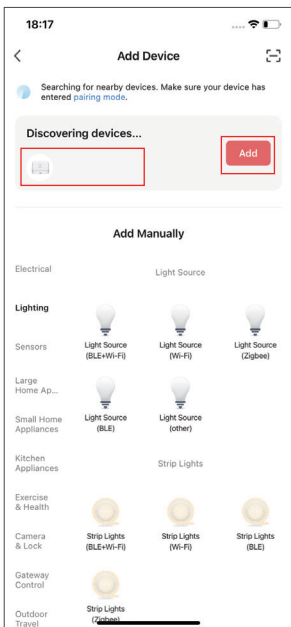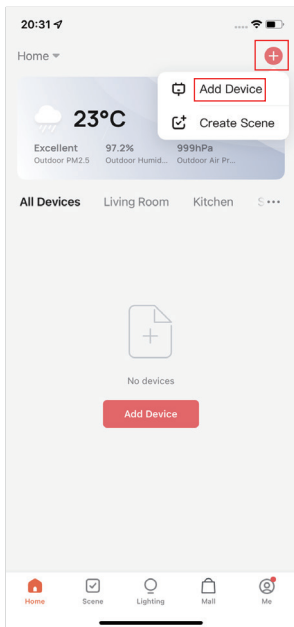

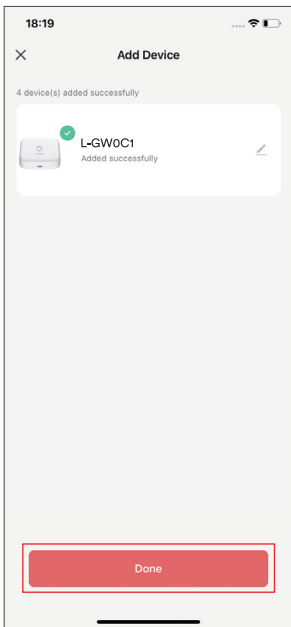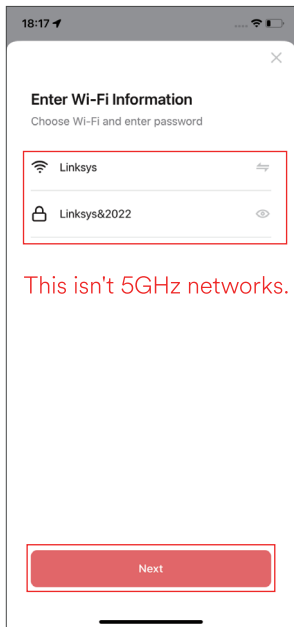


4. Troubleshooting

1. If your Gateway cannot connect to your Wi-Fi network, please ensure that you have entered the correct Wi-Fi password during the setup process. Check for any internet connection issues and try resetting your Wi-Fi router if the Wi-Fi signal is weak.

2. If you are unable to bind your device, you will need two phones. One to set up the hotspot and the other to connect the hotspot and add the device through the app. If the device is successfully added, it is normal. The issue may lie with your router, so please check your router settings for MAC and DHCP restrictions. **Please note that Lumary's products do not support 5GHz networks.**



3. If you have any questions, please contact us through our after-sales email: support@lumary.tech or leave a message on our official social media account.





Note: Long press the RESET button and the indicator light flashes quickly, which means the smart Hub will be restored to factory defaults. Do this only if you are going to reset your settings.

Group Control



1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.

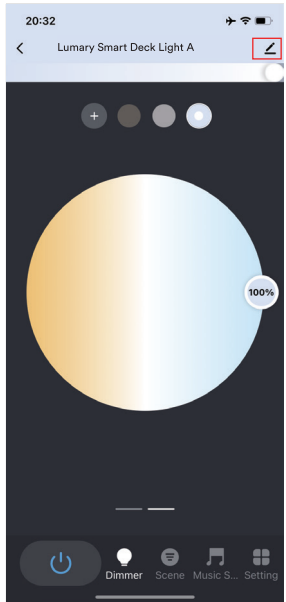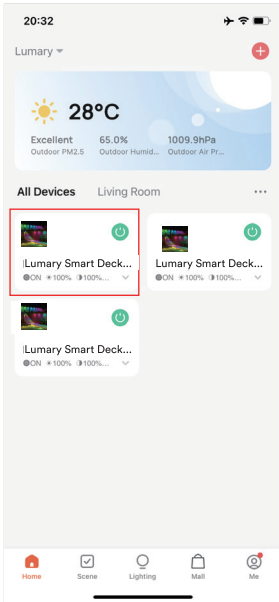


2. Click "Create Group", then select a device and save.

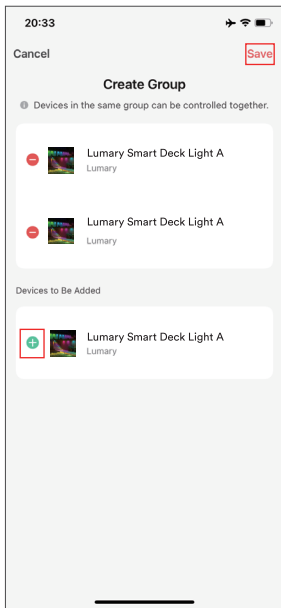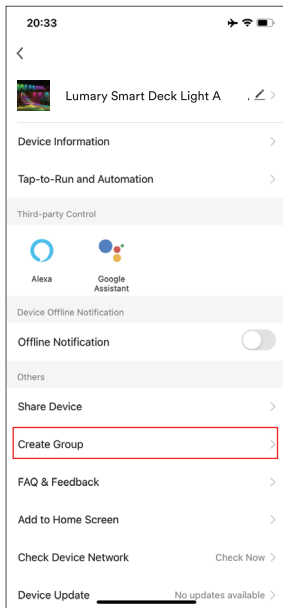

3. You can reset the group name and save it, and the group can control devices.

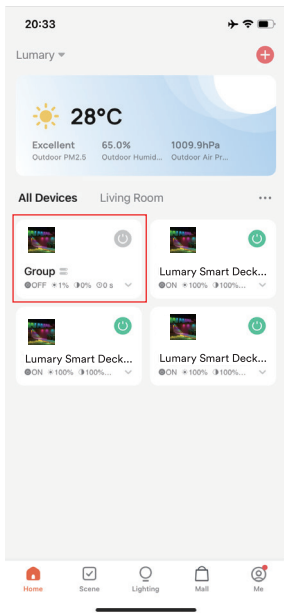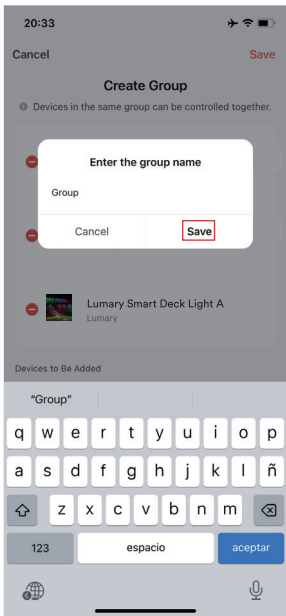


Beacon Remote Controller

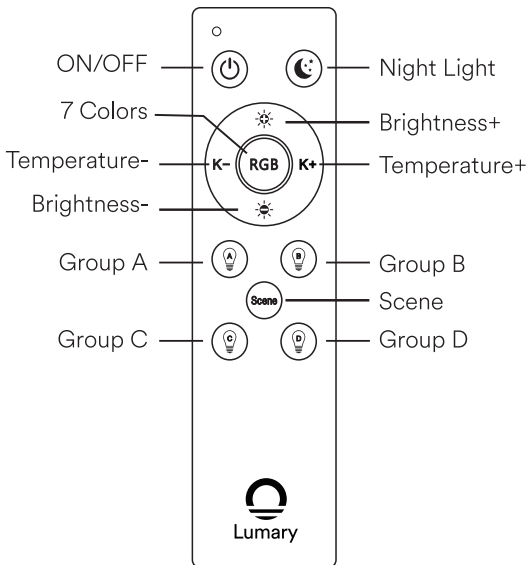

Remote controller paired device

Note: Not all devices are compatible with the remote controller. If you require more detailed information, please do not hesitate to contact us at our after-sales email address: support@lumary.tech.

1. The device is powered by 2xAAA dry batteries.
2. First, the light needs to be bound to the Lumary App.
3. Use the wall switch to disconnect the power for 5 seconds, then turn on the power, the light and the remote control are in pairing status.
4. Long press any key on the remote control A/B/C/D as needed until the light blinks to indicate successful pairing. If the desired devices are not fully paired during the configuration process, press and hold the group button again until all devices are paired successfully. If it takes more than 1 minute, repeat steps 3-4.

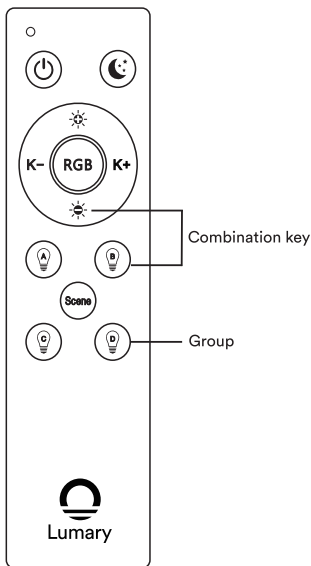

1. Short press: On/OFF for devices paired under grouping
2. Long press: Group key for device pairing
3. Long press "Grouping Key" and "Brightness-" combination key to unpair all devices under the grouping"
4. Bind: Group A/B/C/D key (long press until device blinks or breathes).
5. Unbind: "Brightness-" + any group A/B/C/D key (long press combination key for 3s).

FAQ

1. Why does the flickering occur with Lumary products?

Lumary's products are factory set to the default network configuration. If the device has not been connected to the network, it will flash for three minutes each time it is powered on. If the device has not been connected to the network, it will flash for three minutes every time it is powered on. If the device is connected to the network, it will stop flashing and will automatically connect to the network when it is switched off and on via the wall switch after 15 seconds.

2. What should I do if the device Appears offline or is unreachable?

Make sure your Wi-Fi router is online and in range, and check that you have the latest Lumary functionality by clicking "Check for firmware update" in your device settings. Try to turn off the device >> clear the application cache >> reboot the router >> turn on the device after one minute and check and confirm the device status after five minutes.

3. How do I reset the device?

To reconnect to Wi-Fi, Reset the device through the wall switch, on - off - on - off - on

- Reset once (press switch on - off - on - off - on) to reach Easy Mode, indicated by rapidly blinking white light. Refer to connect in Easy Mode.
- Reset again (press switch on - off - on - off - on) to reach AP Mode, indicated by slowly blinking white light. Refer to connect in AP Mode.

4. How many devices can I control?

- The maximum number of timers that can be added to a single device: 30
- Maximum number of devices that can be added in a single home: 120
- The maximum number of Tap-to-Run that a single home can create: 100
- Maximum number of Automation that can be created in a single home: 100
- The maximum number of tasks that can be added in a Tap-to-Run: 150
- The maximum number of tasks that can be added in an Automation: 150
- The maximum number of conditions that can be added in an Automation: 10
- The maximum number of mobile devices that can simultaneously log in to an account is: 200
- The maximum number of Homes that can be created by a single App account is: 20
- The maximum number of home members that can be added in a single home is: 20
- The maximum number of rooms that a single home can create is: 20
- The maximum number of devices that can be added in a single room is: 50
- The maximum number of devices that can be added in a single device group is: 100
- The maximum number of device groups that a single home can create is: 20
- The maximum number of each device group that can be shared with other users is: 20
- The maximum number of each device that can be shared with other users is: 20
- The maximum number of each App account that can be invited by other homes is: 20

5.What should I do,when I find a problem with the purchased product?

Please email us (support@lumary.tech) with your Amazon order ID. We are dedicated to ensuring your 100% satisfaction. Rest assured if the problem is with this product, we'll be more than happy to exchange it for a new one immediately.

Parameter information

Name	Lumary Smart Deck Light A
Model	L-LDL4A1/6
Input Voltage	12-24V AC/DC
Wattage	2.5W/Per
Color Temperature	RGB +Tunable White(2200K-6500K)
CRI	80+
Lumens	60lm
Beam Angle	120°
Rated Life	15000h



RoHS



Contains FCC ID:2ANDL-BT3L
Made in China

CAUTION:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



VOICE CONTROL GUIDE

Name and Control Each Device by Voice




Work With Amazon Alexa

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Alexa" in Third-party Control.
3. Tap "Sign In With Amazon".

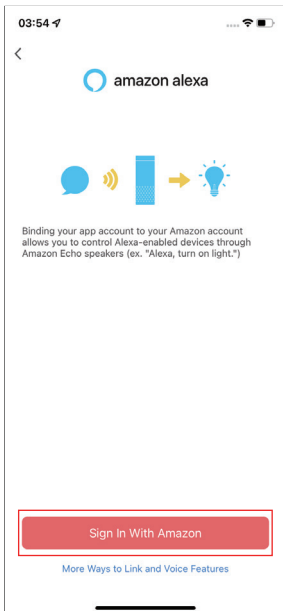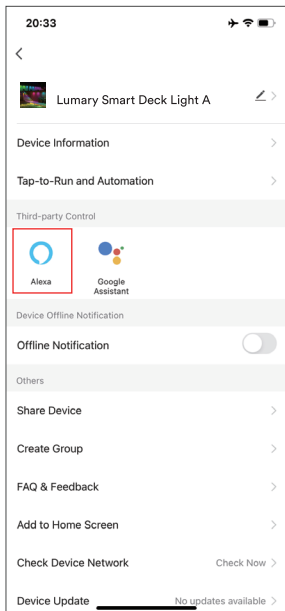

4. Tap "Allow";
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Alexa.

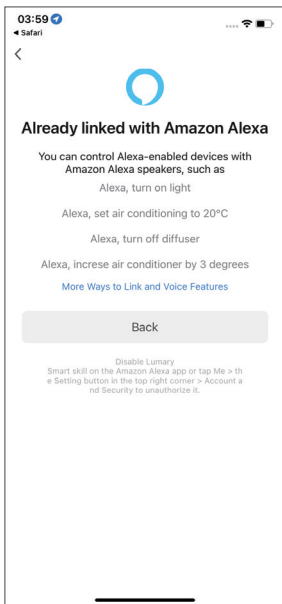



To control your Lumary smart device, just ask Alexa. Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Alexa, discover my devices."

"Alexa, turn on the bedroom light."

"Alexa, set the bedroom light to orange."

"Alexa, turn off the coffee machine."



"Alexa, set the living room to 50%."

"Alexa, dim porch light."



*Some commands require compatible devices.

Work With Google Assistant

1. Log in to Lumary App, tap the smart device and enter into, click "✎" in the top right corner.
2. Tap "Google Assistant" in Third-party Control.
3. Tap "Link with Google Assistant".

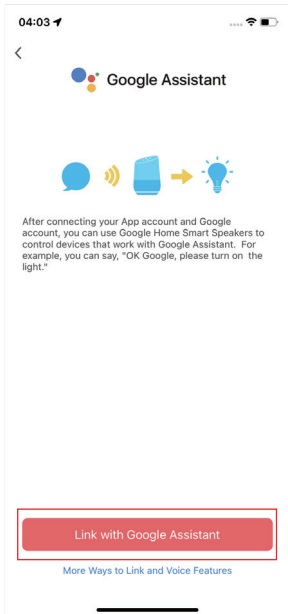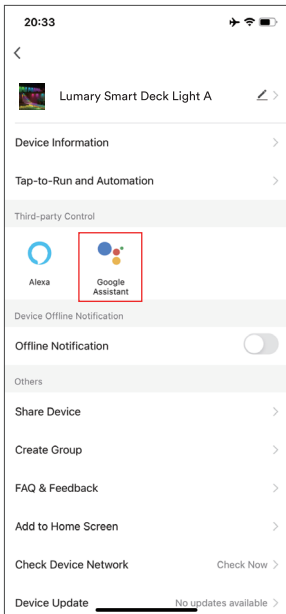

4. Click "Agree and link";
5. Linked successfully, when add new device, there is no need to link again, just discover new device in Google Home.

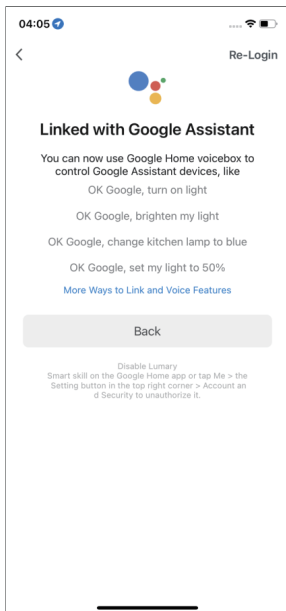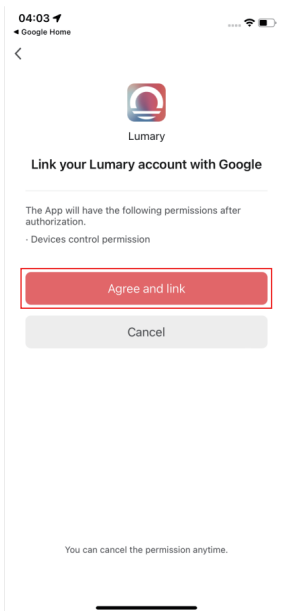



To control your Lumary smart device, just say "Hey Google", and ask.

Make sure your devices are already set up using the Lumary app.

Things you can say*:

"Hey Google, turn on all the lights in my bedroom."

"Hey Google, turn off the light."

"Hey Google, set the bedroom light to orange."

"Hey Google, turn off the coffee machine."

"Hey Google, set the living room to 50%."

"Hey Google, dim porch light."

*Some commands require compatible devices.

After Sales & Social Media

If you have any questions about product settings or operations, please feel free to reach out to us!

Customer Service Email:

support@lumary.tech

You can also find us on social media. Simply search for our username on your preferred platform, or scan the QR code for quick access.

- Facebook: @lumary.official
- X: @lumary_official
- Instagram: @lumary.official
- Pinterest: @lumary_official
- YouTube: @lumary.official
- Reddit: @Lumarysmartlight
- TikTok: @lumary.official



Facebook



Instagram



YouTube



TikTok



X



Pinterest



Reddit

Can't connect? Need help?



HAVING AN EASY TALK TO US BEFORE YOU RETURN
THE PRODUCT WILL FIX A PROBLEM MORE QUICKLY

Lumary support:

support@lumary.tech

Visit us at:

www.lumary.tech

www.lumarysmart.com