



INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.

Installation Guide

3-LIGHT DRUM PENDANT



Questions, problems, missing parts?

Contact the customer service department at info@getinlight.com

We commit to respond to emails within 24 hours - and sooner, if possible!

We are devoted to solving problems and offering the best service to our customers.

SKU #
IN-0335-3-WD

Model #
FSL01581



**PLEASE READ THESE INSTRUCTIONS BEFORE COMMENCING
INSTALLATION AND RETAIN FOR FUTURE REFERENCE.**



ATTACH YOUR RECEIPT HERE

Purchase Date _____

Safety Information

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For Residential installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL listed junction box.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purpose, this matter should be referred to Inlight Co. Ltd.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: RISK OF ELECTRICALSHOCK

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordancewith the National Electrical Code and any applicable local code requirements.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION: RISK OF INJURY

- Wear gloves and safety glasses at all times when removing luminaire from carton,installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

WARNING: RISK OF BURN

- Allow fixture to cool before handling. Do not touch enclosure or light source.
- Do not exceed maximum wattage marked on luminaire label.
- Follow all lamp manufacturer's warnings, recommendations and restrictions for: driver type, burning position, mounting locations/methods, replacement, and recycling.

CAUTION: RISK OF FIRE

- Keep combustible and other materials that can burn away from luminaire and lamp/lens.

Warranty

Inlight offers a 1 year warranty from the date of purchase which covers repairs or replacements of defective parts of the housing, optics, and electronics. Contact the Customer Service Team at info@getinlight.com or visit www.getinlight.com

Installation Instructions

BEFORE STARTING THE INSTALLATION, SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER. CONSULT A LOCAL LICENSED ELECTRICIAN OR ELECTRICAL CONTRACTOR IF YOU ARE NOT SURE ABOUT THE INSTALLATION.



TURN OFF ELECTRICITY

At main fuse box (or circuit breaker box)
Before removing the old fixture




REQUIRES 2 PEOPLE

Assistance will be required to support
the fixture during installation

- 1** Screw the **THREADED PIPE** onto the **FIXTURE**. Screw **FIXTURE CANOPY** onto **THREADED PIPE**. Attach the **BRACKET A** onto **FIXTURE CANOPY** using **BALL NUTS A** as shown.
- 2** Attach the **IRON RACK** onto **BRACKET B** using **CAP NUTS** and **SCREWS** as shown. Attach the **FIXTURE** onto **BRACKET B** using **BALL NUTS B** as shown.
- 3** Attach the **THREADED NIPPLE** to the **MOUNTING BRACKET**, then secure it with a **WASHER** and **HEX NUT**. Secure the **SCREW COLLAR LOOP** to the **THREADED NIPPLE**.
- 4** Attach the **MOUNTING BRACKET** to the **JUNCTION BOX** by using two **JUNCTION BOX MOUNTING SCREWS**.
- 5** Pass **CANOPY** over the **SCREW COLLAR LOOP**. Screw the **SCREW COLLAR RING** onto the **SCREW COLLAR LOOP** to secure **CANOPY**.
- 6** Determine the length of the **CHAIN** you need. To open chain links: Locate the split in the chain link you're removing. Put one pair of pliers (not included) on each side of the split and rotate the pliers in opposite directions to open the link's split. The open link should be shaped like the letter "C".
- 7** Using the **OPEN CHAIN LINKS** on chain, attach one end to **SCREW COLLAR LOOP** and the other end to **FIXTURE LOOP**. Weave the fixture electrical and ground wires through every other chain link and pass through **THREADED NIPPLE** into junction box. Then lower the **SCREW COLLAR RING** and **CANOPY** over the **CHAIN**.
- 8** Pull out the source wires from the junction box. Make wire connections using wire nuts as follows:
 - a. Connect the black wire from the fixture to the black wire from the junction box.
 - b. Connect the white wire from the fixture to the white wire from the junction box.
 - c. Attach the fixture grounding wire to the **MOUNTING BRACKET** with the green grounding screw, and then connect it to the house grounding wire with a wire nut.

Carefully put the wires back into the junction box.
- 9** Pass **CANOPY** over the **SCREW COLLAR LOOP**. Screw the **SCREW COLLAR RING** on the **SCREW COLLAR LOOP** to secure **CANOPY**.
- 10** Insert 60-watt max. medium-base **BULB** or **CFL/LED** equivalent (none included) into **SOCKET**.

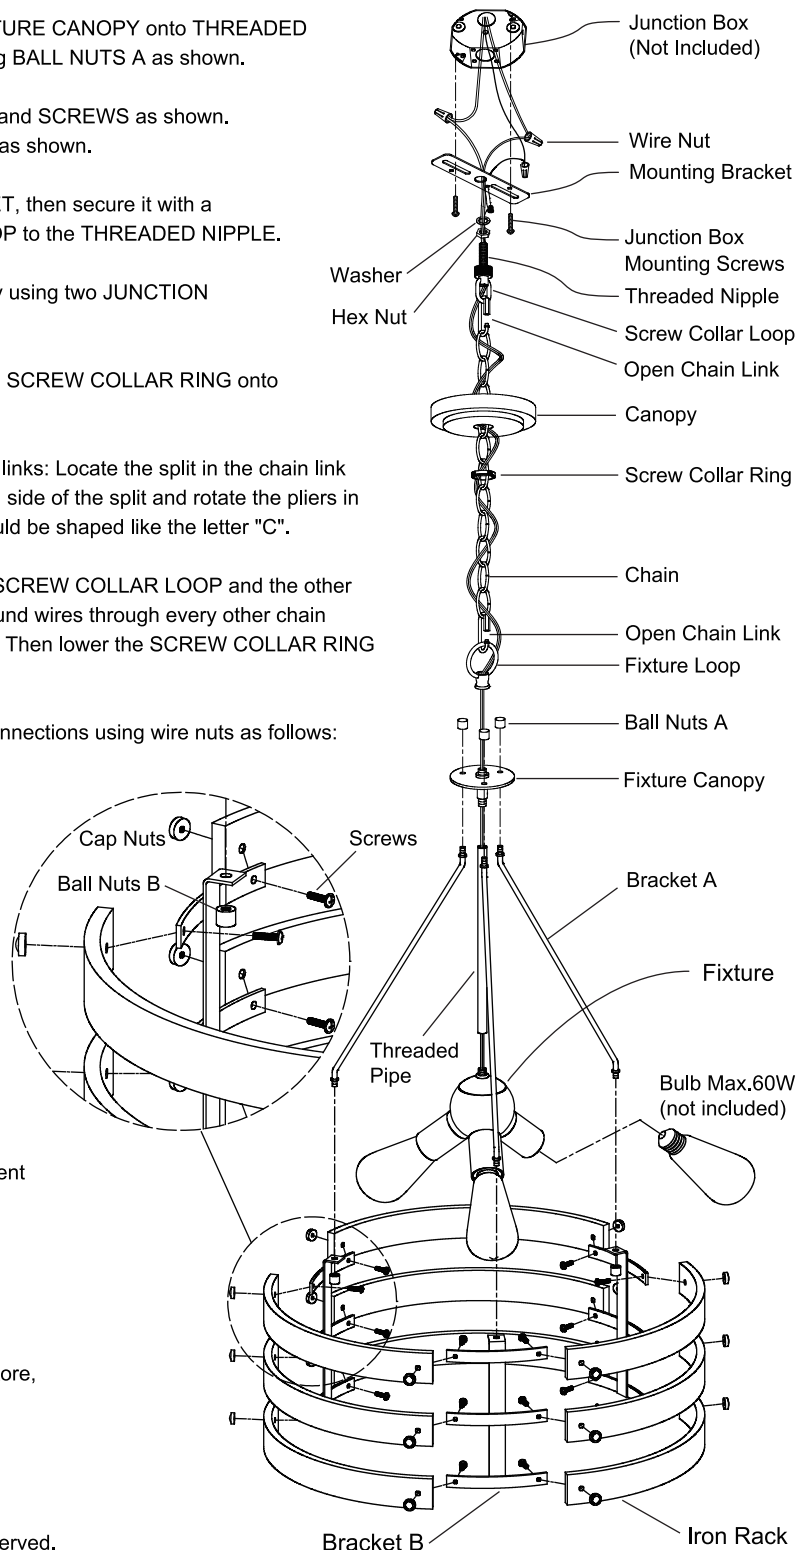

Questions, problems, missing parts? Before returning to the store,
contact Inlight Customer Service

info@getinlight.com

Retain this manual for future use.

INLIGHT is registered trademarks of Inlight Co. Ltd. All Rights Reserved.