

# LED Product Information and Warnings

## Important

- **Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**
- **Consult a qualified, licensed electrician to ensure correct branch circuit conductor.**
  
- Please read all included assembly instructions and warnings carefully before installation. Contact Customer Service if you have any questions or concerns. Before installation, please confirm that the fixture is compatible with your supply voltage and dimming system, if present.
- LEDs are highly sensitive electronic devices, and must be treated with care. Do not open any factory sealed compartments, and avoid touching the LEDs with your hands or any object.
- Although all our fixtures are equipped with protective devices, LED fixtures are vulnerable to power surges and supply variations. Do not install LED fixtures on the same circuit as any motors, appliances, or HVAC systems.
- Do not remove or bypass any LED Driver or Transformer that is provided with the fixture, and do not replace or substitute with another power supply.
- Remote LED Driver or Transformer installation must be done by a licensed electrician and in accordance with local codes. Remote installations should be in an accessible location, as close to the fixture as possible.
- Fixtures must be wired in parallel on independent leads; do not "daisy chain" multiple fixtures together or wire them in series.
- All factory-made splices and connections must remain intact. LED circuits are carefully designed and built, and improper connections may damage the fixture.
- The ends of coaxial pendant cords have been precisely stripped and split at the factory and must not be field cut. Excess cord or cable should be neatly coiled and reserved in the fixture canopy.
- Any mounting hardware is provided for your convenience and should be used with discretion. Always use the appropriate hardware for the mounting surface.

February 06, 2015

# Assembly Instructions


2330, 2332, 2334, 2338

## INSTRUCTIONS D'INSTALLATION

Stiletto Lungo Series - 48" LED Wall Bar, 60" LED Wall Bar, 72" LED Wall Bar, 96" LED Wall Bar

### Important

- Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.
- Consult a qualified, licensed electrician to ensure correct branch circuit conductor.  
*Consulter un électricien qualifié pour vous assurer que les conducteurs de la dérivation sont adéquats.*

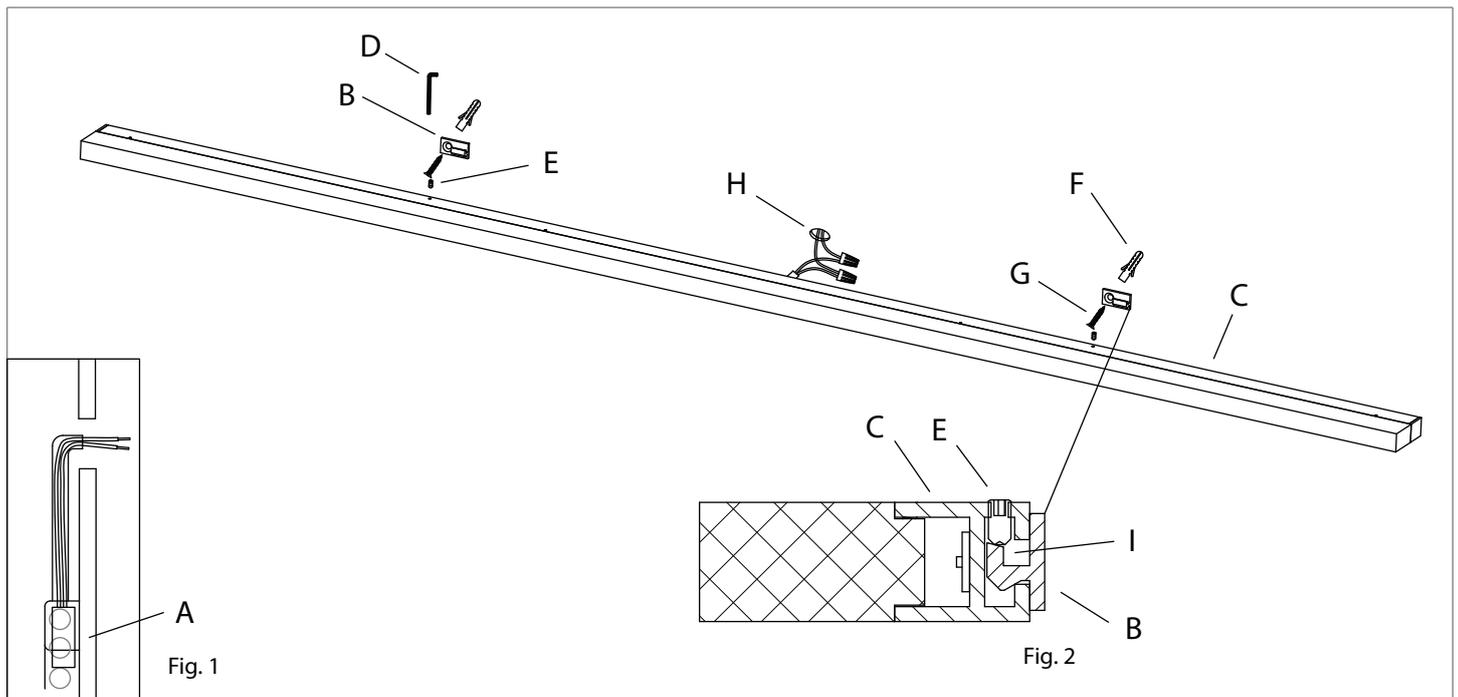

1. Shut off power to the outlet box.
2. The LED driver (A) must be installed in a remote and accessible location near the fixture in accordance with local electrical code. (Fig. 1)
  - a. Connect the LED driver's live wire (black) to the live supply wire.
  - b. Connect the LED driver's neutral wire (white) to the neutral supply wire.
  - c. Connect the LED driver's positive (+) output wire (red) to the necessary length of red wire (not included) to reach the fixture location.
  - d. Connect the LED driver's negative (-) output wire (black) to the necessary length of black wire (not included) to reach the fixture location.
  - e. (2334, 2338 only) If not using the 0-10V dimming function, cap off the purple and grey dimming wires.
3. Before removing the brackets (B) from the fixture (C), place the fixture against the wall and mark the location of the brackets on the wall.
4. Use the Allen key (D) to loosen the set screws (E) and remove the brackets (B).
5. Attach the brackets (B) to the wall with anchors (F) and screws (G) in the locations marked in Step 2.
6. Drill a small hole (H) in the wall behind the fixture and pull the low voltage wires through the wall.
7. Make appropriate electrical connections using wire nuts:
  - a. Connect the positive (red) low voltage wire to the inner conductor of the fixture cord.
  - b. Connect the negative (black) low voltage wire to the braided outer conductor of the fixture cord.
  - c. Carefully push the connections and extra wires back through the hole (H) in the wall.
8. Lay the fixture cord into the hooks (I) on the brackets (B), and attach the fixture (C) to the brackets (B) by using the Allen key (D) to tighten the set screws (E) against the hooks. (Fig. 2)
7. Restore power to the fixture.

### Note

- 2330, 2332: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) and Incandescent (Leading-Edge) type dimmers only. For best performance, use an Electronic Low Voltage dimmer.
- 2334, 2338: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge), Incandescent (Leading-Edge), and 0-10V type dimmers only.

### Care Instructions

- **Dusting:** Use a clean, dry cloth.
- **Cleaning:** To protect the finish, avoid any harsh abrasives or chemicals.