

Instruction Manual

SQUARE GLASS FLUSHMOUNT

Questions?

E-mail our customer service department

IMPORTANT SAFETY INSTRUCTIONS:

This fixture must be installed by a qualified electrician!
Disconnect the power at the main electrical panel before installation.


This fixture is for indoor use only. The fixture should not be used near water. Never cover the lamp with any object, including cloth or paper as this is a fire hazard. Do not handle the bulb immediately after the light is turned off as it will be hot. This is not a toy. It is recommended that you wear gloves during assembly.

ASSEMBLY INSTRUCTIONS:

- Step 1. Fasten the four clips (3) with washer-screws (1) and nuts (2) onto the ceiling plate (4).
- Step 2. Turn the main power supply off. Strip $\frac{3}{4}$ in. of insulation from the wire ends of the fixture and of the supply circuit wires. Holding fixture unit, attach ground supply circuit wire and ground fixture wire together with wire nut (5). (Never connect ground wire to black or white power supply wires.) Twist stripped wire ends of fixture and supply circuit wires together black to black (hot) white to white (neutral). Twist on wire nuts (5). Tape wire nuts and wires together. Carefully tuck connected wires and wire nuts into outlet box.
- Step 3. Fasten ceiling plate (4) with screws (6) to outlet box.
- Step 4. Install bulb. Only use bulb of recommended type and maximum rated wattage or less.
- Step 5. Install the glass shade (7) by gently pulling the four metal clips (3) outward, sit the glass on the clips (3) one at a time, until all four clips are in place. Do not let go of the glass until it is secured by all four clips (3).
- Step 6. Turn on the power.

HARDWARE CONTENTS:

8-WASHERS
8- CLIP SCREWS
4-CLIPS
2-OUTLET BOX SCREWS
3-WIRE NUTS
1-CEILING PLATE
1-GLASS SHADE

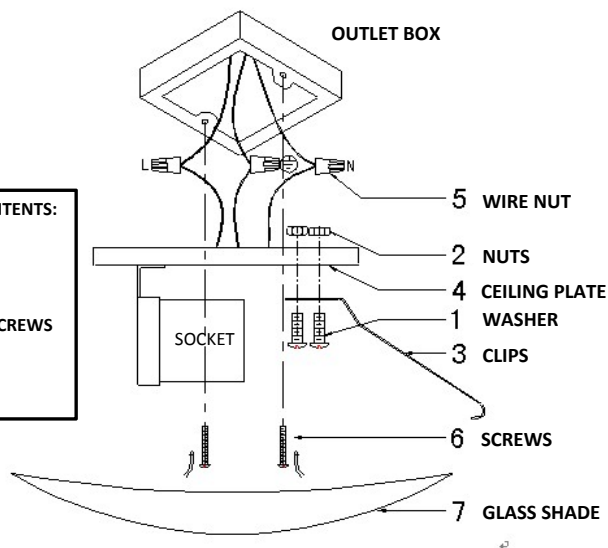

REQUIRES (1) X MAX 60W TYPE "A"

CLEANING & MAINTENANCE:

BULB REPLACEMENT

Turn off the fixture before replacing bulb.

TROUBLESHOOTING

1. If fixture does not light, check the bulb for a broken filament. Replace bulb if necessary.
2. If any wires of this fixture are damaged, it must be replaced by a qualified electrician in order to avoid a hazard.

MAINTENANCE

1. To clean, use a soft cloth only.
2. Do not use any chemical or abrasive cleaners.

LIMITED WARRANTY