


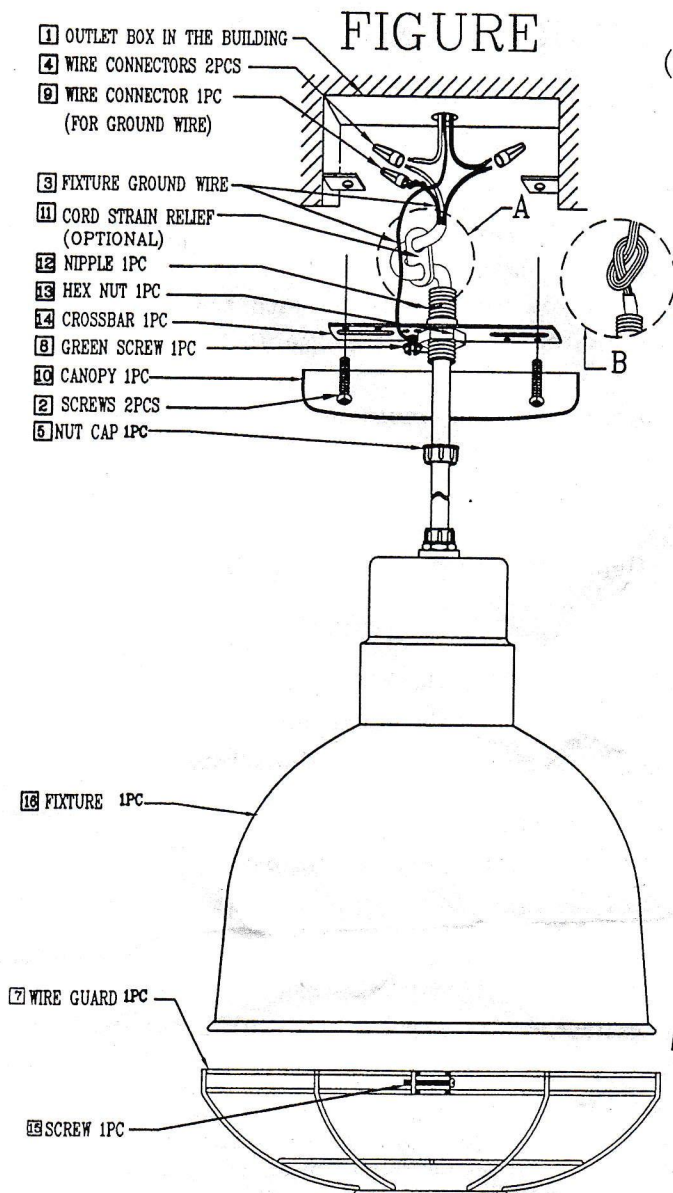


(1) ASSEMBLING INSTRUCTION

1. INSERT (12 NIPPLE) INTO CENTRAL HOLE OF (14 CROSSBAR) AND ADJUST TO SUITABLE LENGTH. FASTEN (12 NIPPLE) IN SUITABLE LENGTH BY (13 HEX NUT) MAKE SURE THE NIPPLE WILL NOT ROLL AGAIN.
2. FEED THE FIXTURE WIRES THROUGH (5 NUT CAP), (10 CANOPY), (12 NIPPLE) AND COME OUT FROM (11 CORD STRAIN RELIEF). CUT AND TRIM ANY EXCESS WIRE, LEAVING ENOUGH WIRE FOR ELECTRICAL CONNECTIONS. IF YOU NEED TO ADJUST THE LENGTH OF THE CABLE, RELEASE (11 CORD STRAIN RELIEF) FIRST, THEN ADJUST THE CABLE TO THE DESIRED LENGTH. REINSTATE (11 CORD STRAIN RELIEF).
3. KNOT THE CORD AS FIGURE B WITHOUT (11 CORD STRAIN RELIEF)

(2) INSTALLING WAY

- 1 OUTLET BOX IN THE BUILDING.
- 2 SCREWS 2PCS : SECURE (14 CROSSBAR) TO (1 OUTLET BOX) WITH THE SUPPLIED (2 SCREWS).
- 3 FIXTURE GROUND WIRE: TWIST (3 FIXTURE GROUND WIRE) AND GROUND WIRE FROM OUTLET BOX, FIX THEM WITH (9 WIRE CONNECTOR) (PROVIDED).
- 4 WIRE CONNECTORS 2PCS : CONNECT FIXTURE WIRES AND WIRES FROM OUTLET BOX WITH (4 WIRE CONNECTORS). CAREFULLY TUCK ALL WIRE CONNECTORS INTO OUTLET BOX AND ENSURE THAT NO WIRE CONNECTORS ARE LOOSE AND NO BARE PARTS OF WIRES ARE EXPOSED.
- 5 NUT CAP 1PC : SCREW ON (12 NIPPLE) TO SECURE (10 CANOPY) AGAINST THE CEILING.
- 6 TURN ON ELECTRICITY AFTER ASSEMBLING THE BULBS TO TEST IF THE ELECTRICITY CAN WORK NORMALLY. (MAKE SURE THE BULBS CAN WORK)
- 7 WIRE GUARD 1PC: DRAW APART THE CUT OF (7 WIRE GUARD) AT OPPOSITE DIRECTION BY HAND SO AS TO MAKE IT LARGE ENOUGH TO LET SHADE ON (16 FIXTURE) SNAP IN, THEN FIX (7 WIRE GUARD) WITH (15 SCREW) TO PREVENT IT FALLING OFF.

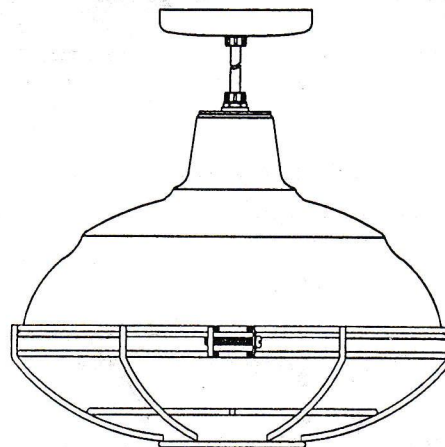

NOTE: THE APPEARANCE OF FIXTURE AND QUANTITY OF SOCKET(S) IS SUBJECT TO THE ACTUAL FIXTURE YOU RECEIVED, WHICH IS DIFFERENT FROM THE FIGURE IN THIS INSTRUCTION SHEET, BUT IN SAME INSTALLING WAY AS ABOVE.