

# ASSEMBLY INSTRUCTIONS


## TWIN BED

### (Box 1)


#### BOX OF HEADBOARD & FOOTBOARD

No	ITEM	Qty
A	Headboard	1 pc
B	Footboard	1 pc
C	Headboard Leg (L/R)	2 pcs
D	Bed Slats	4 pcs

**STEP 1 :** Attach Head Board Leg ( C ) to Head Board ( A ) as shown using JCBC BOLT ( 1 ) with Spring Washer (2), Flat washer (3) and securing with ALLEN KEY ( 4 ).

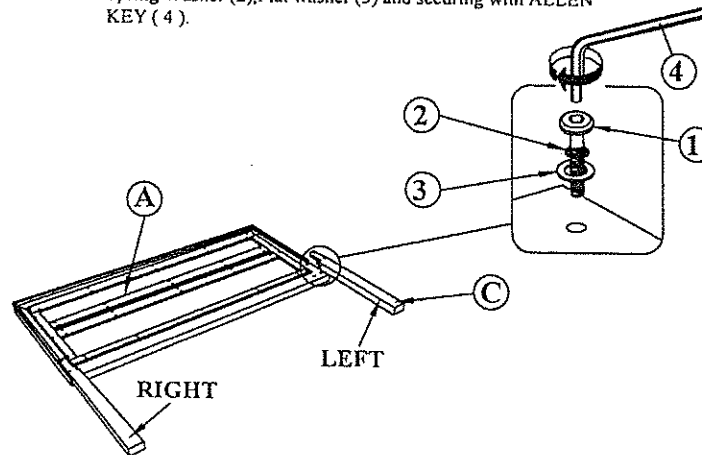

**STEP 2 :** Hook SIDE RAIL ( E ) TO HEAD BOARD closely and push down to fit. repeat step 2 with other end of rail to hook onto FOOTBOARD.

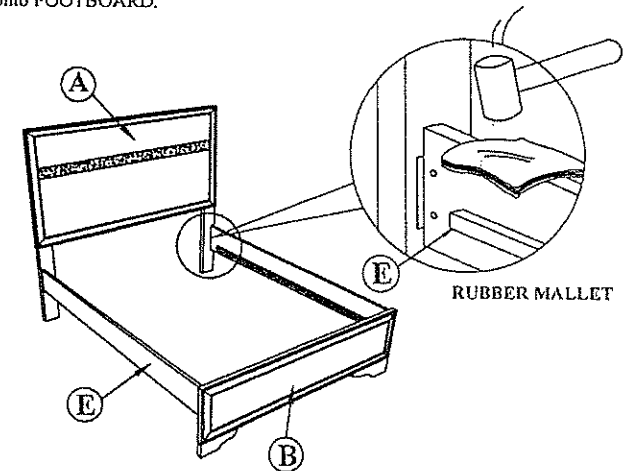

### (Box 2)

#### BOX OF SIDE RAIL

No	ITEM	Qty
E	Side Rail	2 pcs


**STEP 2 :** Install the bed slat ( D ) to side rail ( E ) and tighten with Csk Screw ( 5 ) as per diagram shown. (NOTE: THE SETUP MUST DONE AT THE DECIDED LOCATION FOR THE BED TO OBTAIN PERFECT STABILITY)

### (Box 1)

#### HARDWARE LIST (HEADBOARD)

No	ITEM	Qty
1	JCBC M6 x 30mm	6 pcs
2	SPRING WASHER 1/4" Rbw	6 pcs
3	Flat Washer 1/4" ID x 13mm OD Blk	6 pcs
4	ALLEN KEY m4x65mm Blk	1 pc
5	CSK M4 x 32mm	8 pcs

### STEP 3.1 :

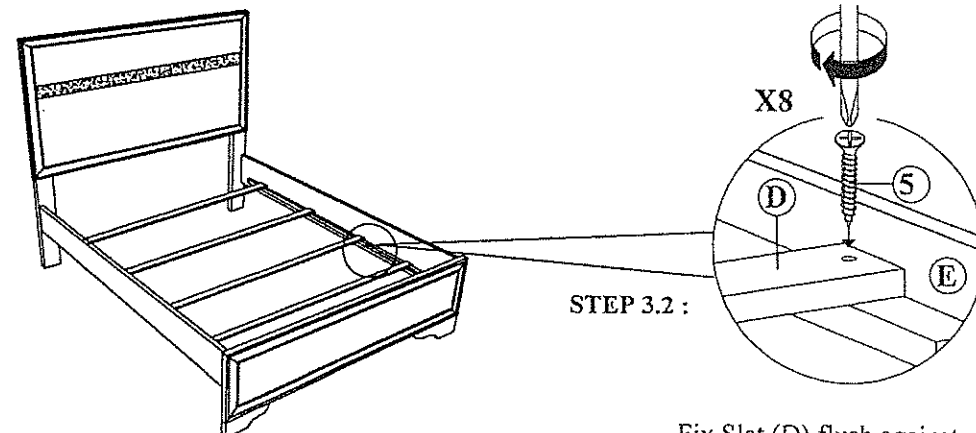

### STEP 3.2 :

Fix Slat ( D ) flush against Side Rail ( E ) using screw driver & CSK screw ( 5 ).

NOTE : MUST TIGHTEN SCREWS PERIODCALLY. SCREW NATURALLY LOOSEN WITH USE. CHECK TIGHTNESS OF ALL SCREW EVERY 6-8 WEEKS.