

SJ4323  
MOUNTING PLATE

**HARDWARE**

**A**



Mounting Screw  
Qty: 1 Extra

**B**



Wire Connector  
Qty: 3pcs+1 Extra

**C**



Sleeve  
Qty: 6pcs+1 Extra

**D**



3-Wire Terminal  
Qty: 1 Extra

**E**



2-Wire Terminal  
Qty: 1 Extra  
(Not needed  
for SJ4323)

**F**




Anchor Screw  
Qty: 4pcs+1 Extra

**G**



Plastic Anchor  
Qty: 4pcs+1 Extra

**SEDUCTION  
SJ4323**

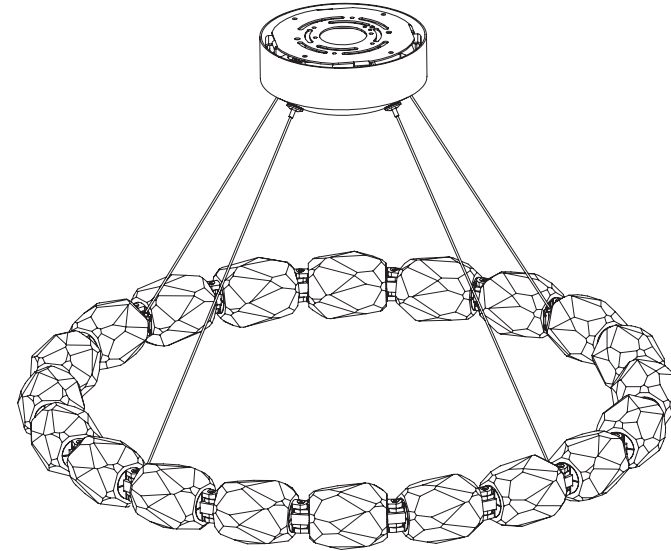

THIS DESIGN IS THE PROPRIETARY  
TRADE DRESS/TRADEMARK OF  
W SCHONBEK LLC.

FOREVER  
SCHONBEK



WWW.SCHONBEK.COM/INSTALLATIONMANUAL

Fig. 2 Wiring



| Fixture Wires      | House Wires                   |
|--------------------|-------------------------------|
| Black or Smooth    | Black (Live)                  |
| White or Ribbed    | White (Neutral)               |
| Bare wire (Ground) | Green or Bare Copper (Ground) |

Fig. 3 Switch



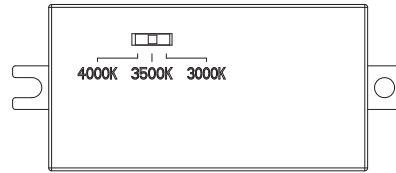


Fig. 1

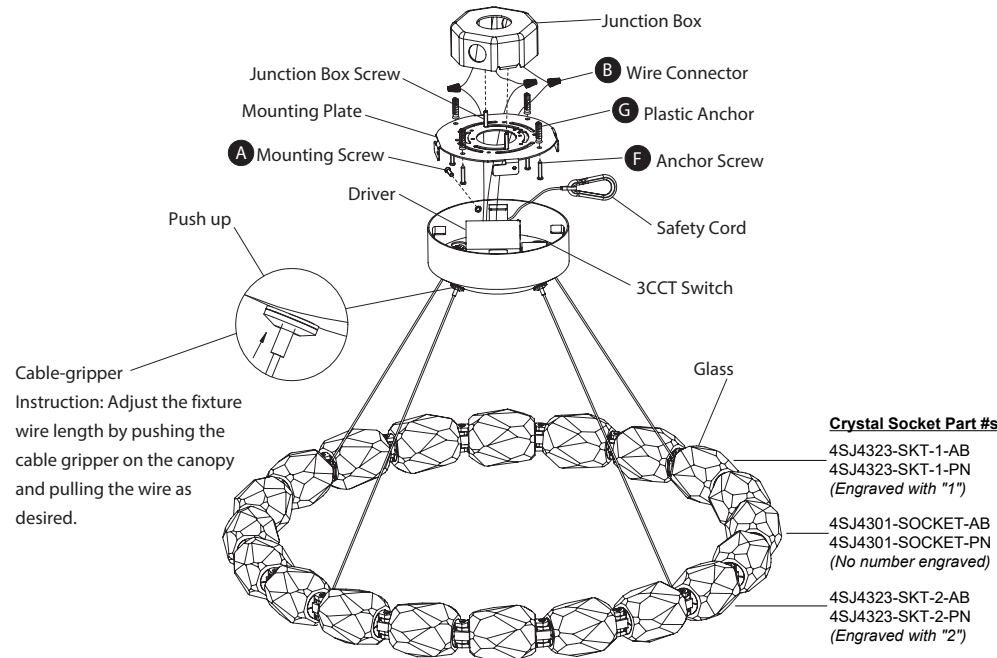

Note: Minimum hanging height is 30"

Fig. 4

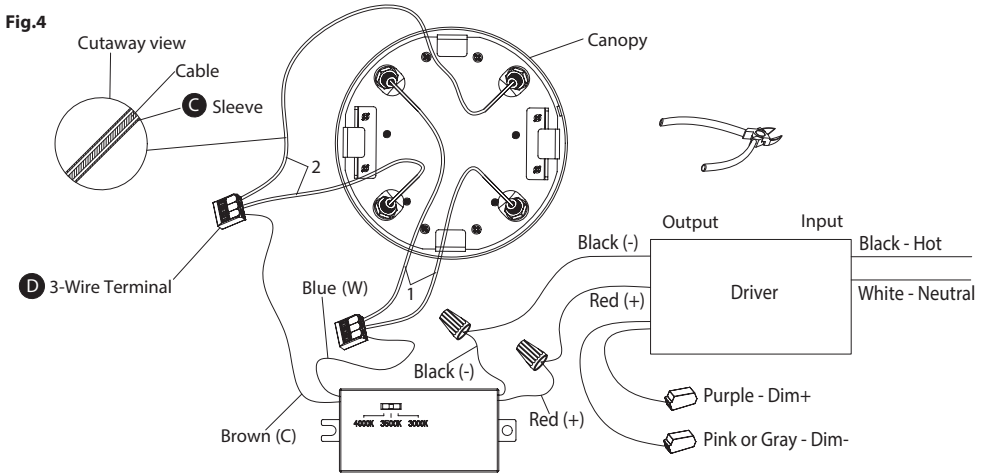

**PREPARATION**

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Be careful not to lose any small parts necessary for installation.
3. Use gloves when handling trim, crystals, and glass components during installation.

**MOUNTING THE FIXTURE (Fig. 1, Fig. 3)**

4. Remove mounting screw (A) from mounting plate.
5. Drill holes in the wall aligned with the outer set of 3 holes located in the wall plate. Insert the plastic anchors (G) into the wall plate.
6. Secure the mounting plate to the junction box using the original junction box screws. Fasten the wall plate to the wall using anchor screws (F).
7. Set color temperature at this stage. The fixture can switch between three color temperatures (3000k, 3500k, 4000k), which can be adjusted to your preference using the 3CCT switch (Fig. 3) mounted in the mounting plate.
 

**Note:** Fixture must be powered off to adjust the CCT setting, after each CCT adjustment cycle power on, off then on to show new CCT setting.
8. Secure mounting plate to junction box using original junction box screws.
  - (i) It is recommended to use only original junction box screws or replacements provided by junction box manufacturer.
  - (ii) The side of the mounting plate marked "GND" must face out, towards the installer.

**CONNECTING THE WIRES (Fig. 1, Fig. 2, Fig. 4)**

9. Hang the fixture to the mounting plate using the safety cable. This secures the fixture and aids in wiring.
10. Adjust the steel cable to the appropriate length and cut off excess. Making sure that the 4 steel cables are sleeved (C) within the canopy, connect the 3-wire terminals (D) (Fig 4). Avoid contact between the steel cable and other hardware.
11. Connect the driver's input wires to the junction box wires (Fig. 2), using wire connectors (B) provided. Ensure all wire connectors are secure. Connect the fixture's ground wire to the ground in the junction box; this will be either a green wire or a bare copper wire. After fixture is wired to house wires, tuck wires carefully inside the junction box.

**COMPLETING THE INSTALLATION (Fig. 1)**

12. Secure the fixture to mounting plate using mounting screw (A).

**ATTENTION:**

Please make sure the powered suspension cables do NOT come in contact with other metal parts, this will cause the lights to NOT work.

