


ASSEMBLY GUIDE

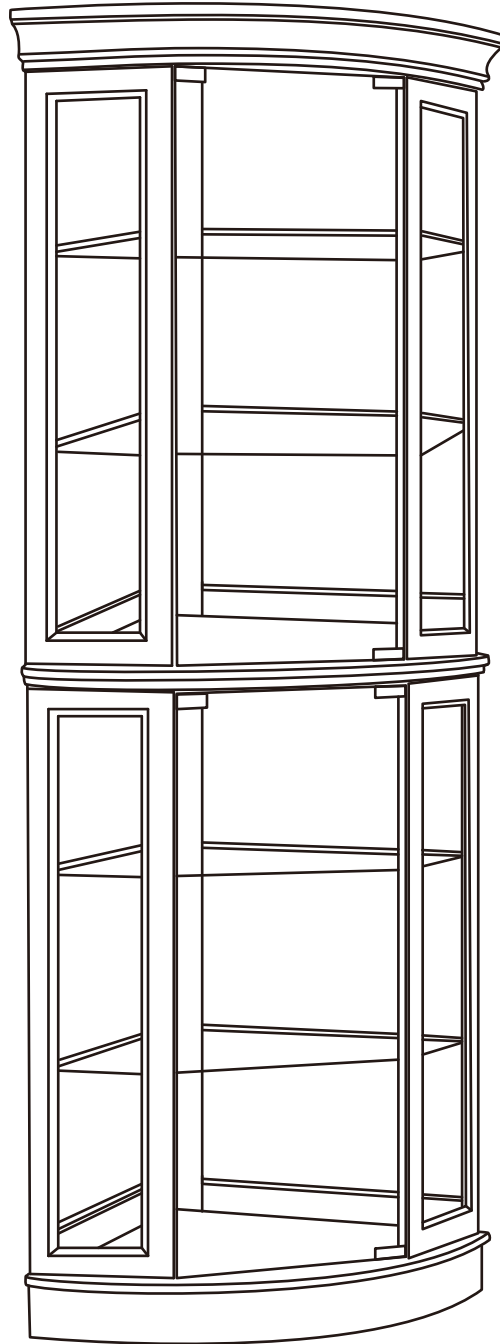

Note: This instruction booklet contains important safety information, please read and keep for future reference.

Hardware List

(R1)FLAT HEAD SCREW ST2.9X12 4pcs 


(R2)CAM BOLT 16pcs




(R3)CAM LOCK 16pcs



(R4)MAGNETIC LATCH 2pcs



(R5)LIGHT 1pc

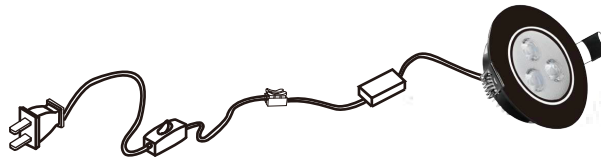


(R6)ADJUSTABLE FOOT 5pcs



(R7)FLAT HEAD SCREW ST2.9X15 10pcs



(R8)FLAT HEAD SCREW ST3X25 44pcs




(R9)SHELF SUPPORT STUD 20pcs



(R10)LATCH PLATE 2pcs



(R11)GLASS HINGE 2pcs



(R12)GLASS HINGE 2pcs




(R13)PLASTIC SCREW ANCHOR 1pc




Parts List


(AL1)LEFT PANEL-1PC




(AL2)TOP LEFT PANEL-1PC




(AR1)RIGHT PANEL-1PC




(AR2)TOP RIGHT PANEL-1PC




(B)BASE UNIT-1PC




(C)SHELF BOARD-1PC




(D1)LEFT BACK PANEL-1PC




(D2)TOP LEFT BACK PANEL-1PC




(E1)RIGHT BACK PANEL-1PC



(E2)TOP RIGHT BACK PANEL-1PC




(F)COVER BOARD-1PC




(G)SHELF-4PCS




(H)SHELF-1PC



(I)DOOR-2PCS



CAM LOCK SYSTEM



(1)







CORRECT



(2)

WRONG


Ensure starting position is correct, adjust cam bolt by pushing or pulling during assembly. Turn clockwise until secure.

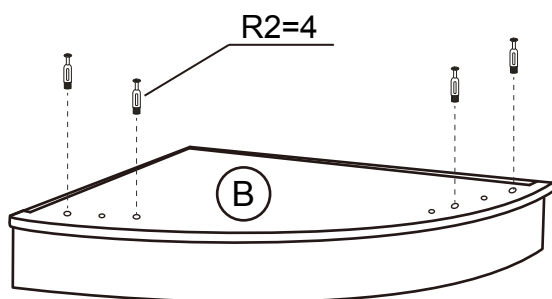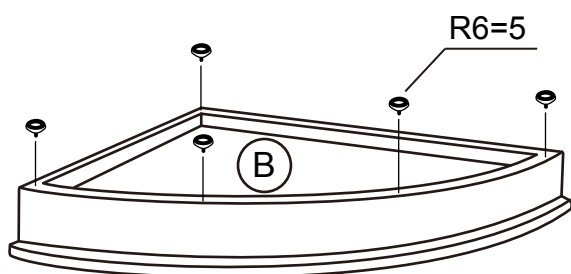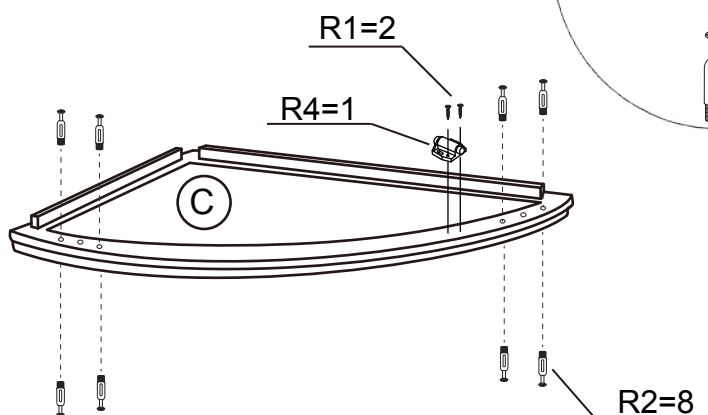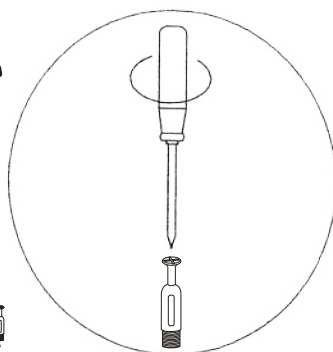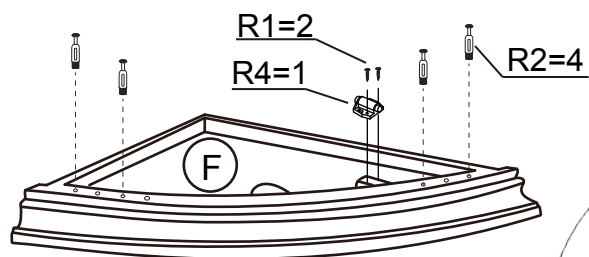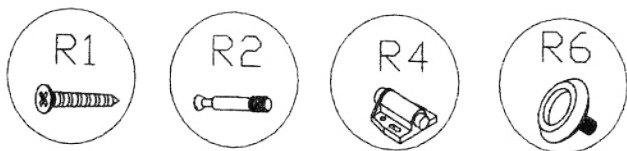



- (R1)ST2.9X12:4PCS
- (R2)CAM BOLT:16PCS
- (R4)MAGNETIC LATCH:2PCS
- (R6)ADJUSTABLE FOOT: 5PCS

- 1.a) Fasten 1 magnetic latch R4 to cover board F, using 2 screw R1(ST2.9X12).
- b) Fasten 4 cam bolt R2 to cover board F.
- c) Fasten 1 magnetic latch R4 to shelf board C, using 2 screw R1(ST2.9X12).
- d) Fasten 5 adjustable foot R6 to base unit B.
- e) Fasten 4 cam bolt R2 to base unit B
- f) Fasten 8 cam bolt R2 to shelf board C.

Note: The magnetic latches are adjustable, please make sure they are in the right place to attach the door closely.




Note: This side faces the glass door.

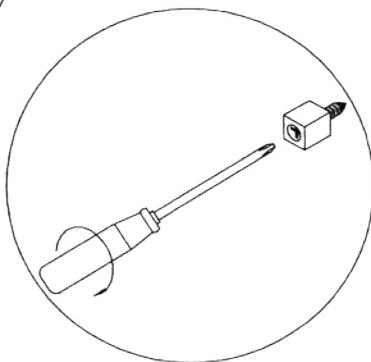

(R9)SHELF SUPPORT
STUD:4PCS




(R3)CAM LOCK:4PCS

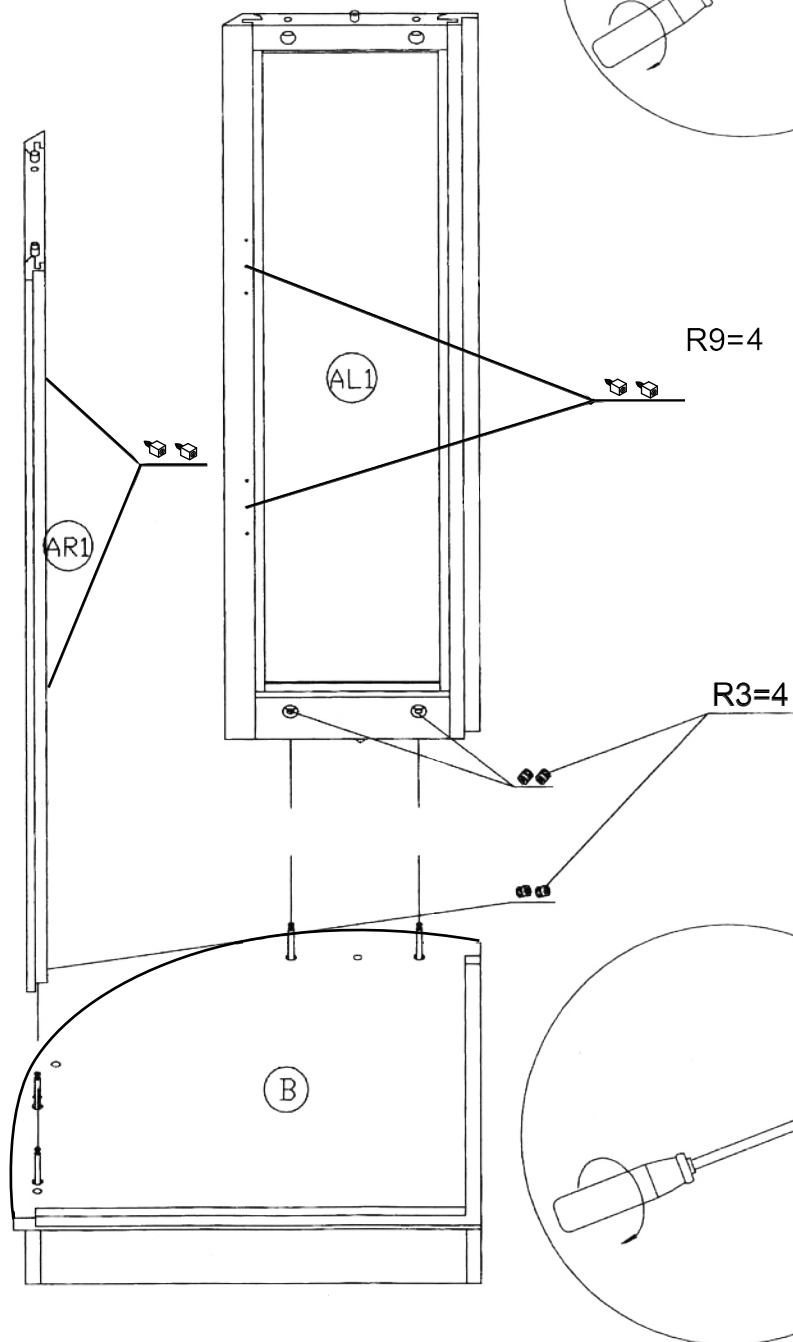


2.a)Fasten 4 shelf support R9 to
left panel and right panel AL1
& AR1.

b)Attach left and right panel AL1
& AR1 to base unit B.

c)Fasten AL1&AR1 to B, using 4
cam lock R3.



(R3) CAM LOCK:4PCS

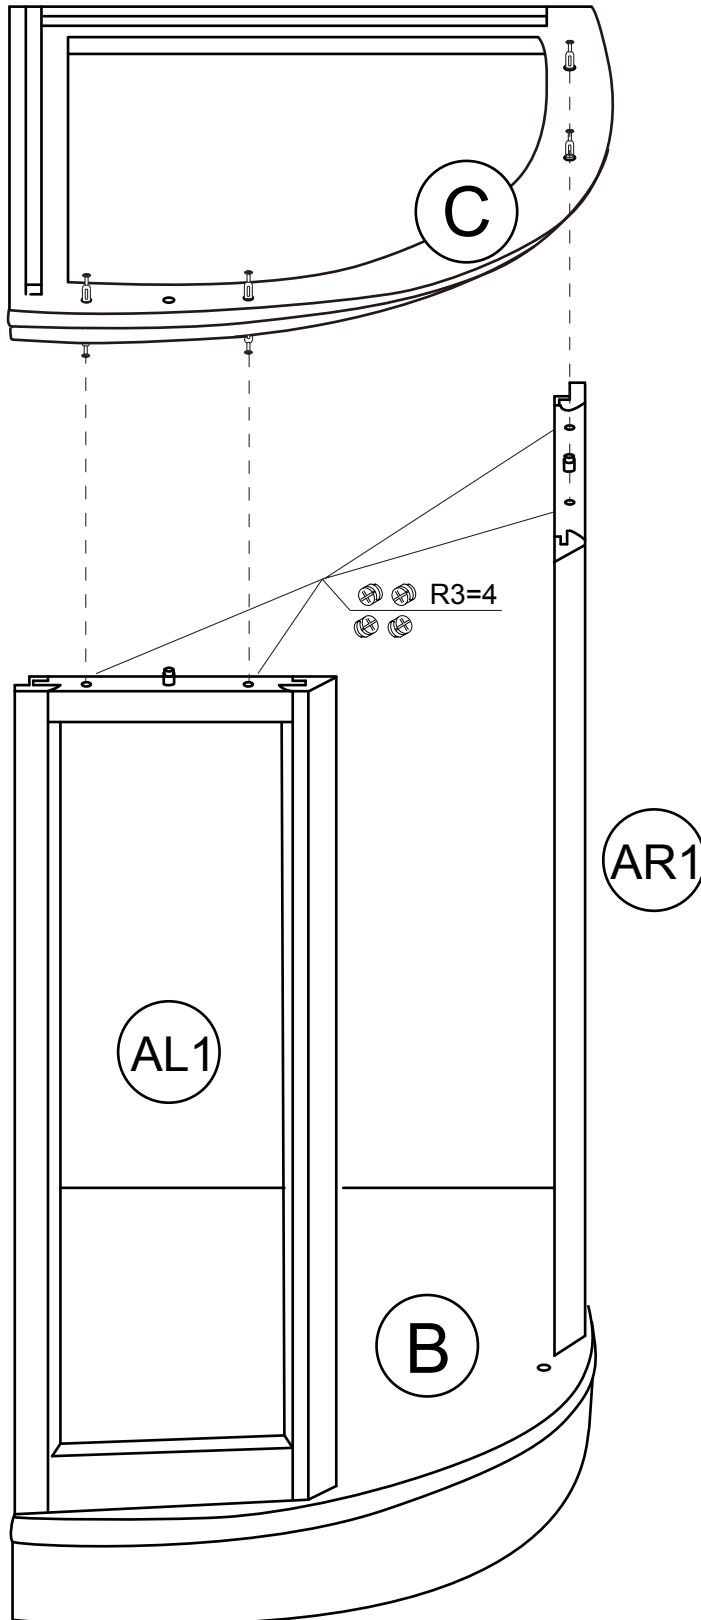

3. Attach shelf board C to left and right panel AL1 & AR1 using 4 cam lock R3.



(R7)ST2.9X15:5PCS





(R8)ST3X25:22PCS



(R9)SHELF SUPPORT

STUD: 6PCS

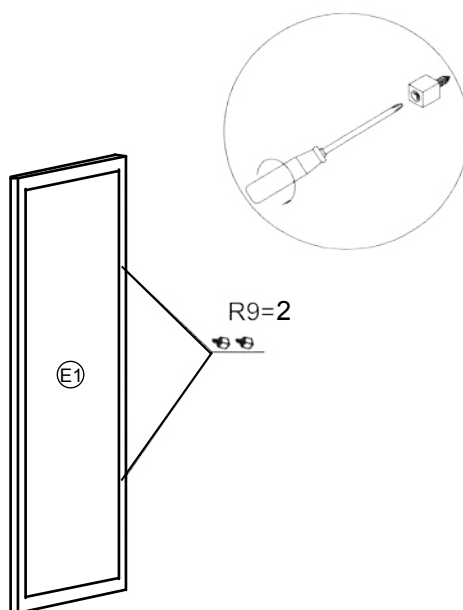
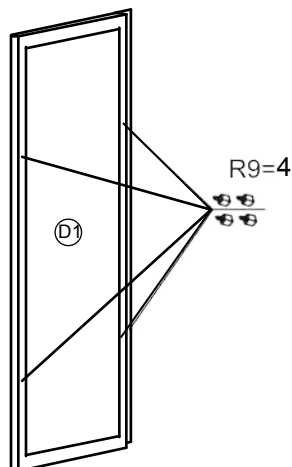




4.a)Fasten 6 shelf support stud R9 to left back panel D1 and right back panel E1.

b)Fasten left back panel D1 to shelf board C, left panel AL1 and base unit B, using 11 screw R8(3.5X25).

c)Fasten right back panel E1 to right panel AR1, shelf board C and base unit B, using 11 screw R8(ST3X25).

d)Fasten left edge of left back panel D1 to right back panel E1,using 5 screw R7(ST2.9X15).

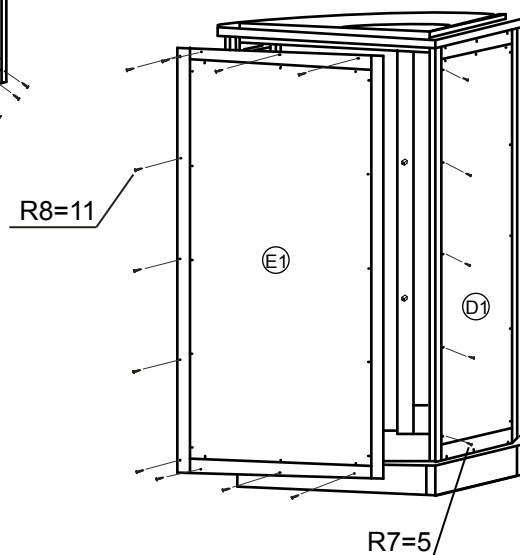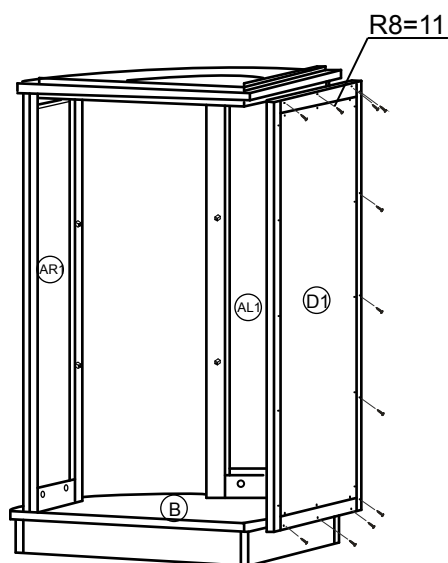




(R9)SHELF SUPPORT
STUD: 4PCS





(R3)CAM LOCK:4PCS




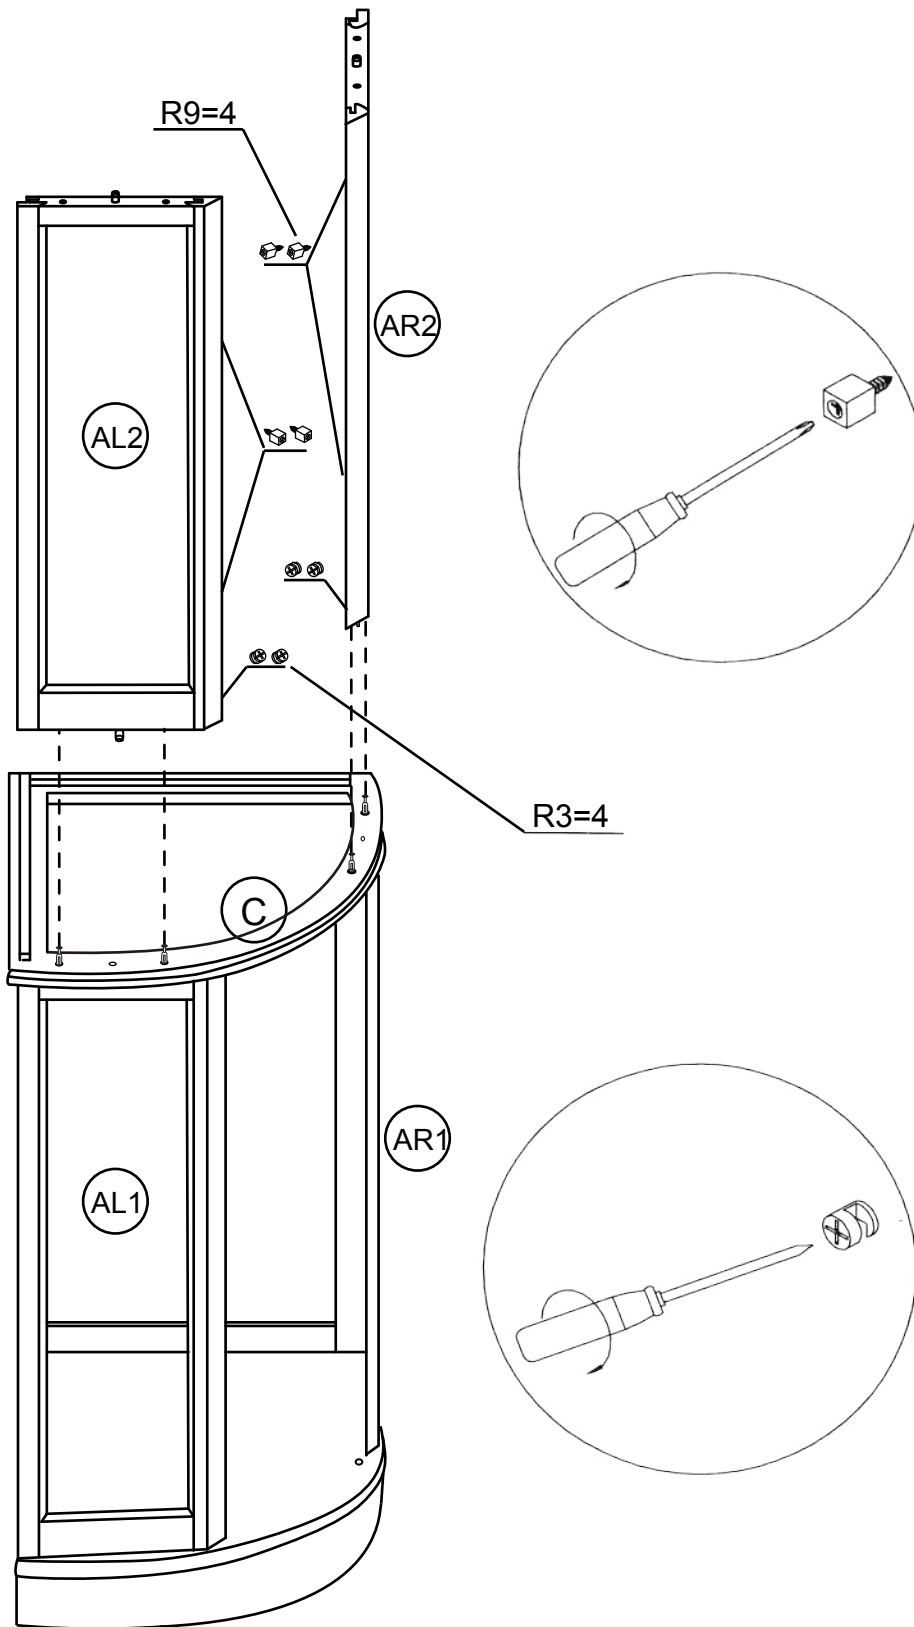


- 5.a) Fasten 4 shelf support stud R9 to top left panel and top right panel AL2 & AR2.
b) Fasten top left panel AL2 and top right panel AR2 to shelf board C with 4 cam lock R3.


(R3)CAM LOCK:4PCS

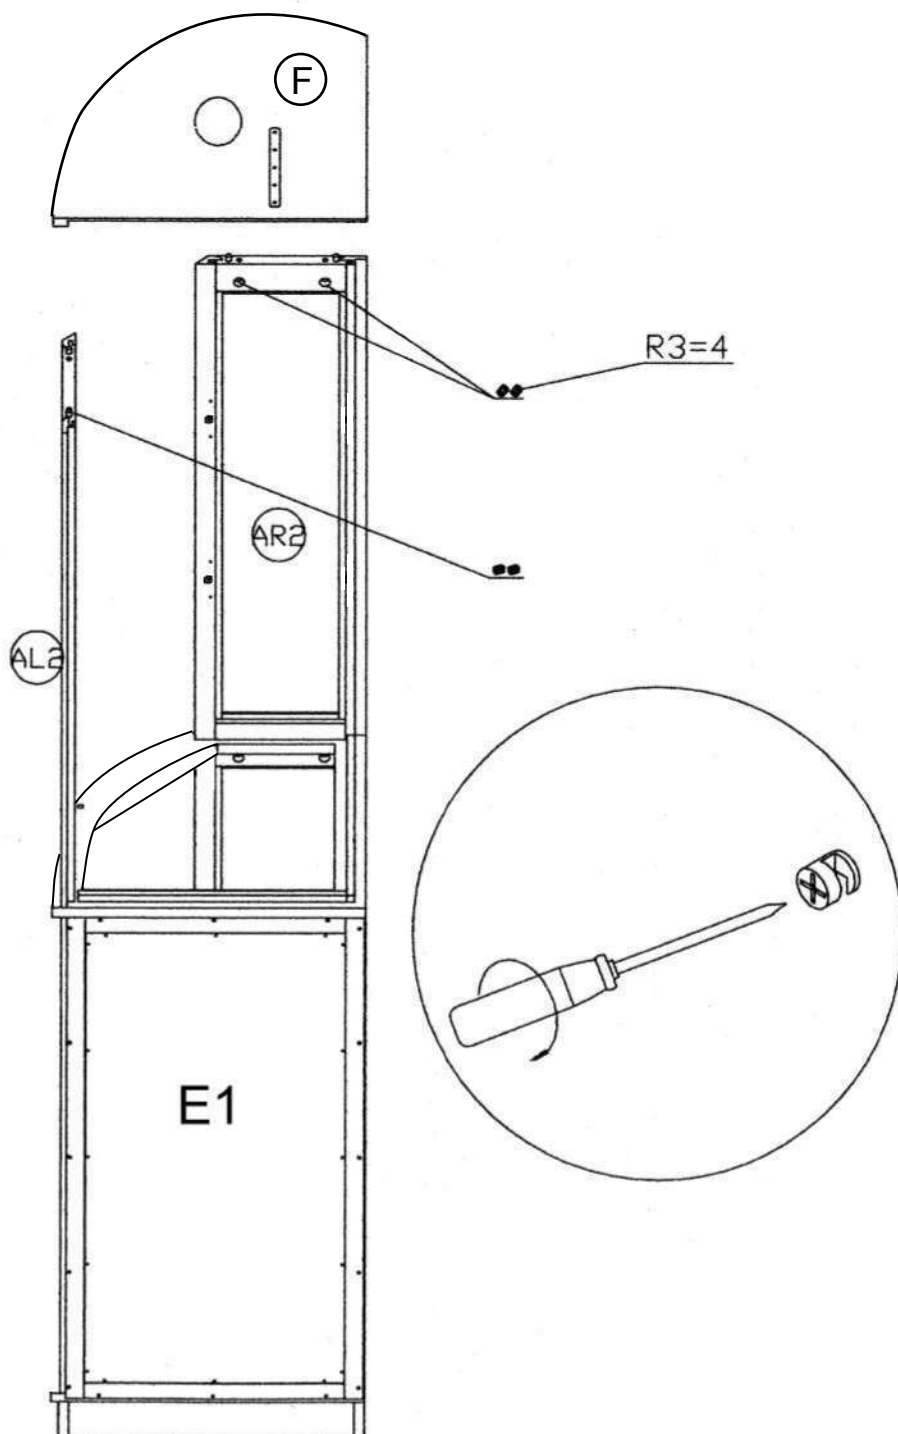


- 6.a) Attach cover board F to top left and top right panel AL2&AR2.
b) Fasten F to AL2&AR2, using 4 cam lock R3.

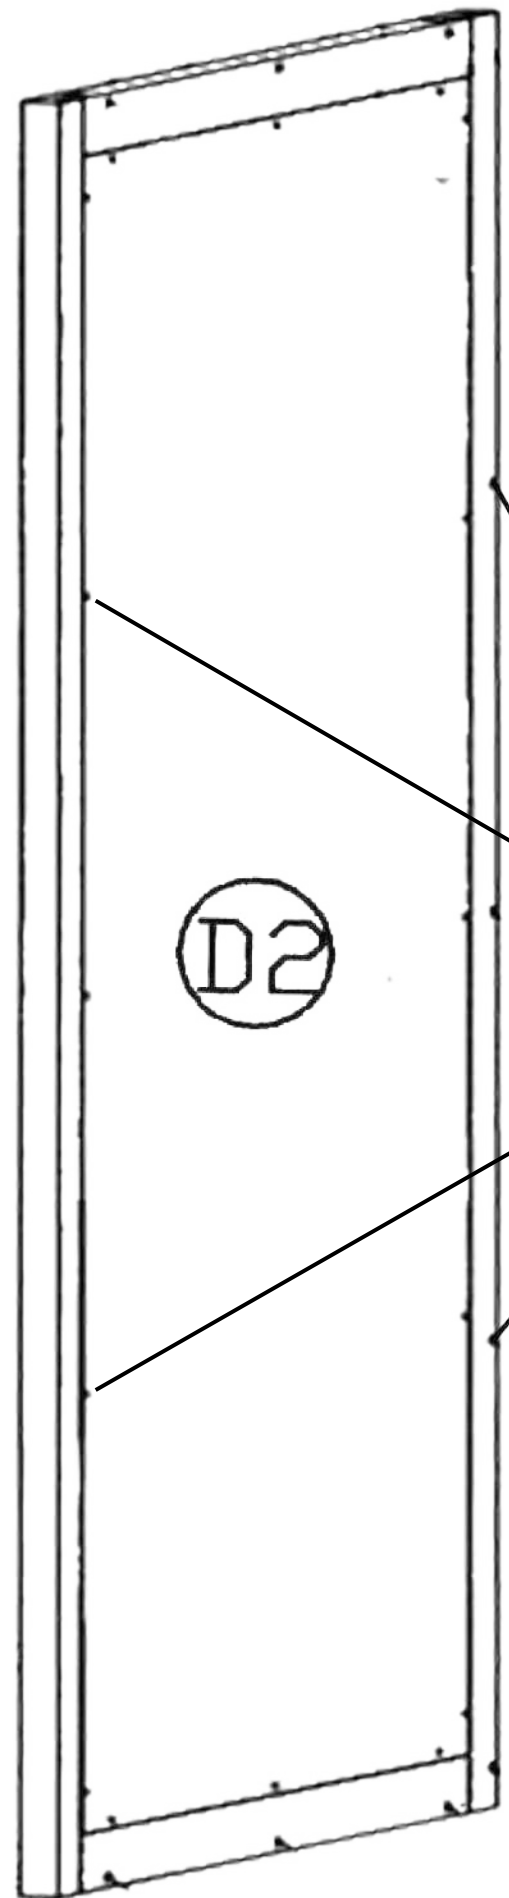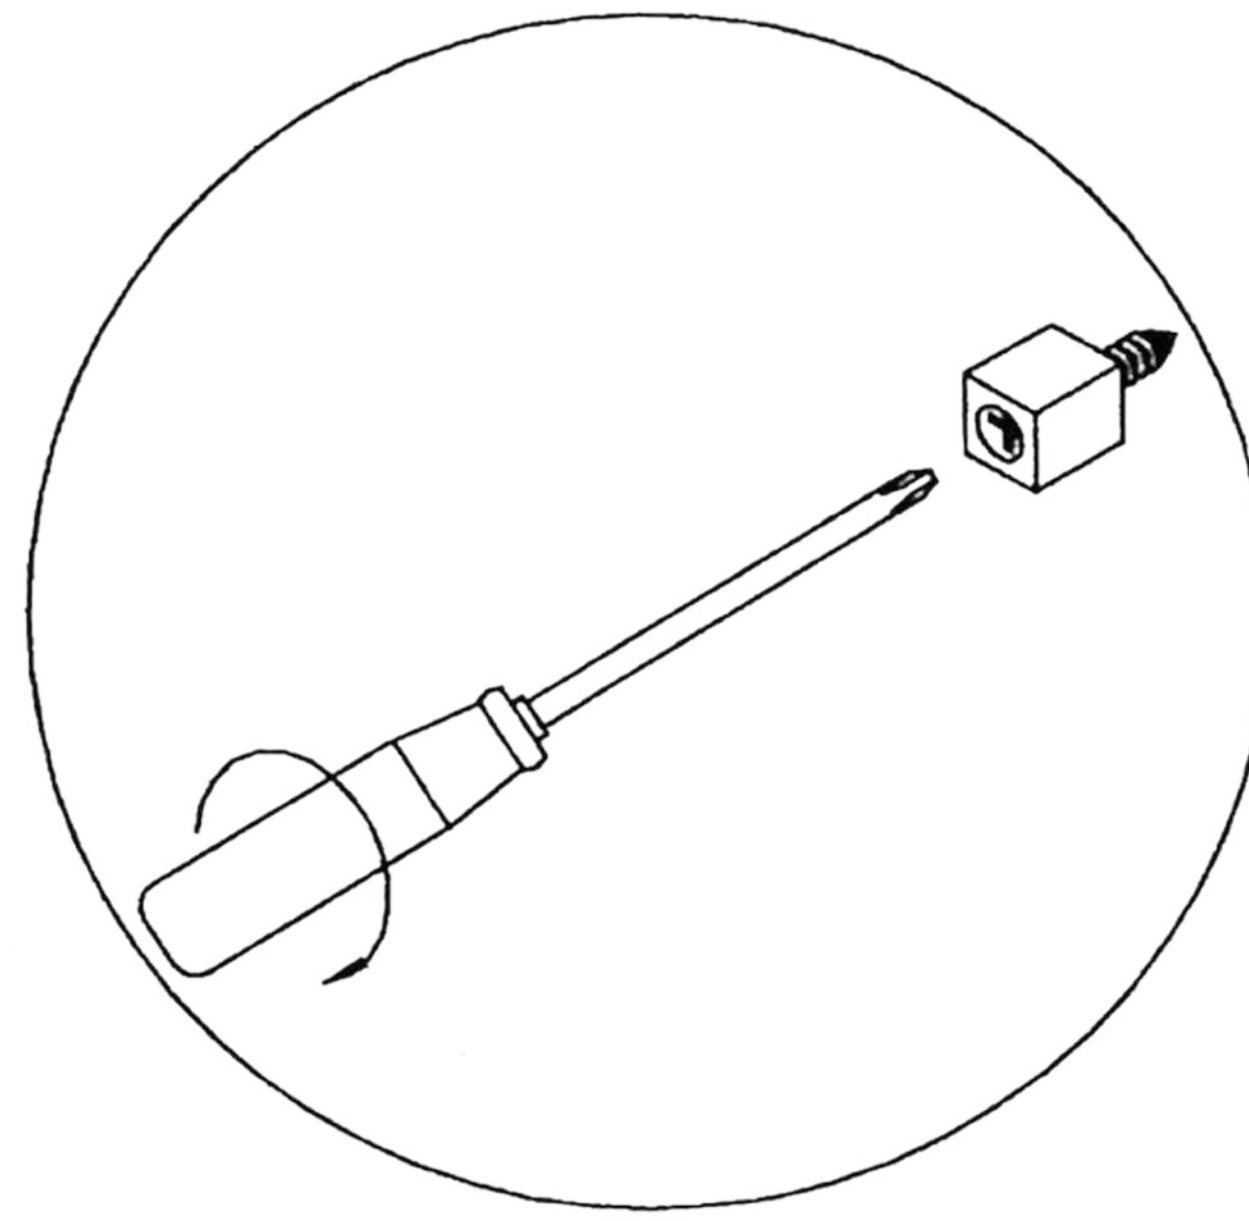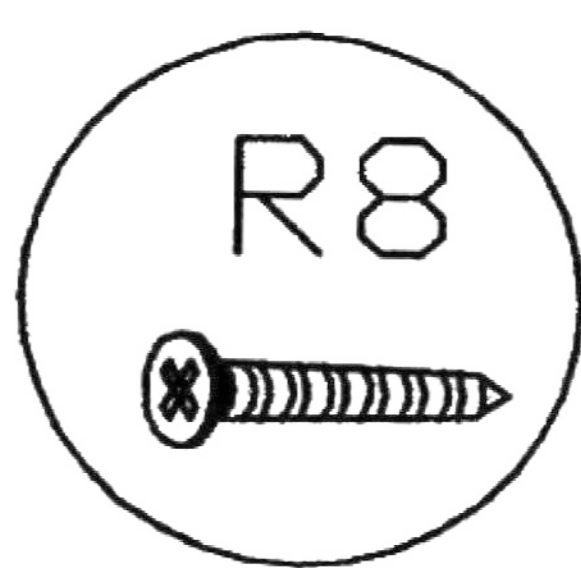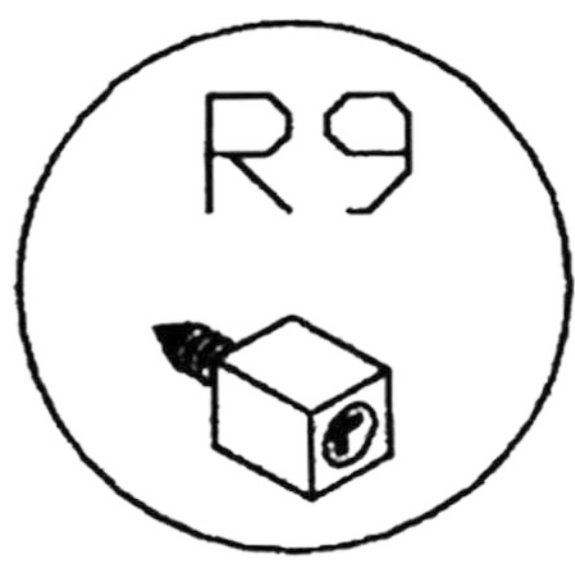


R9=4

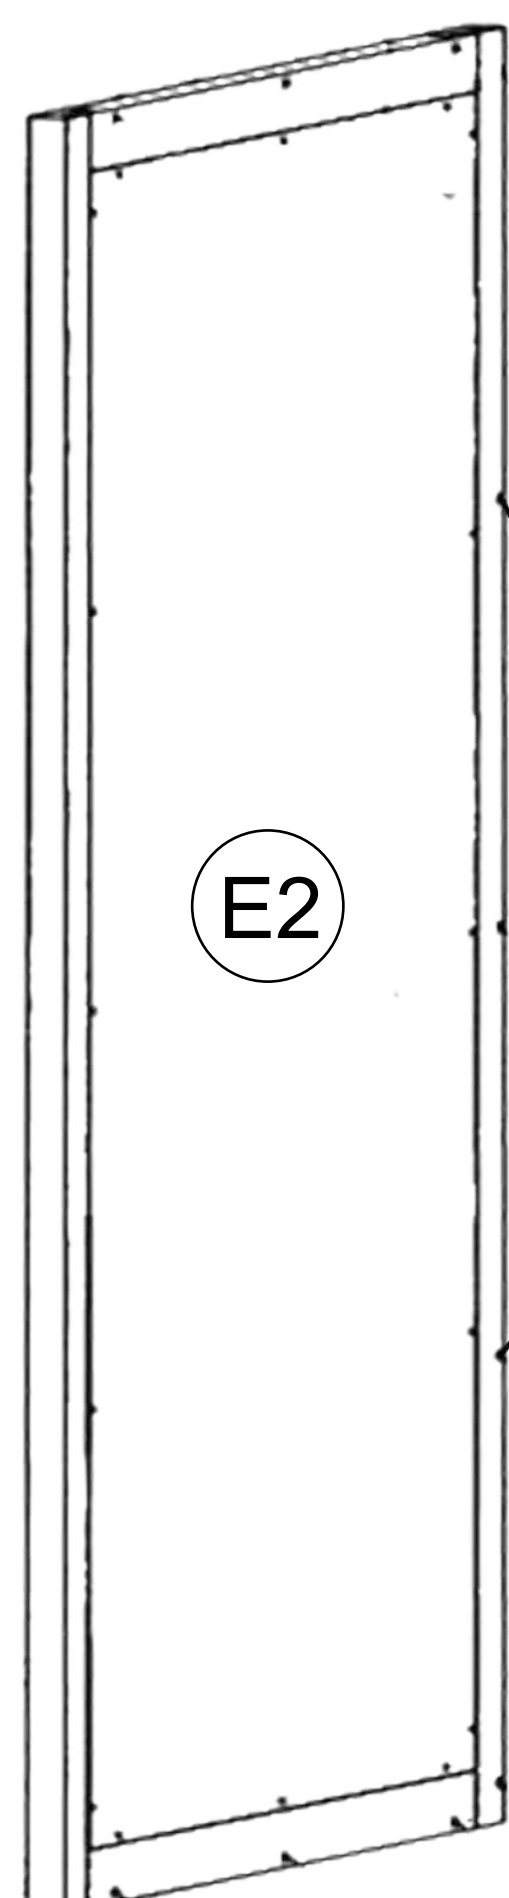


R9=2

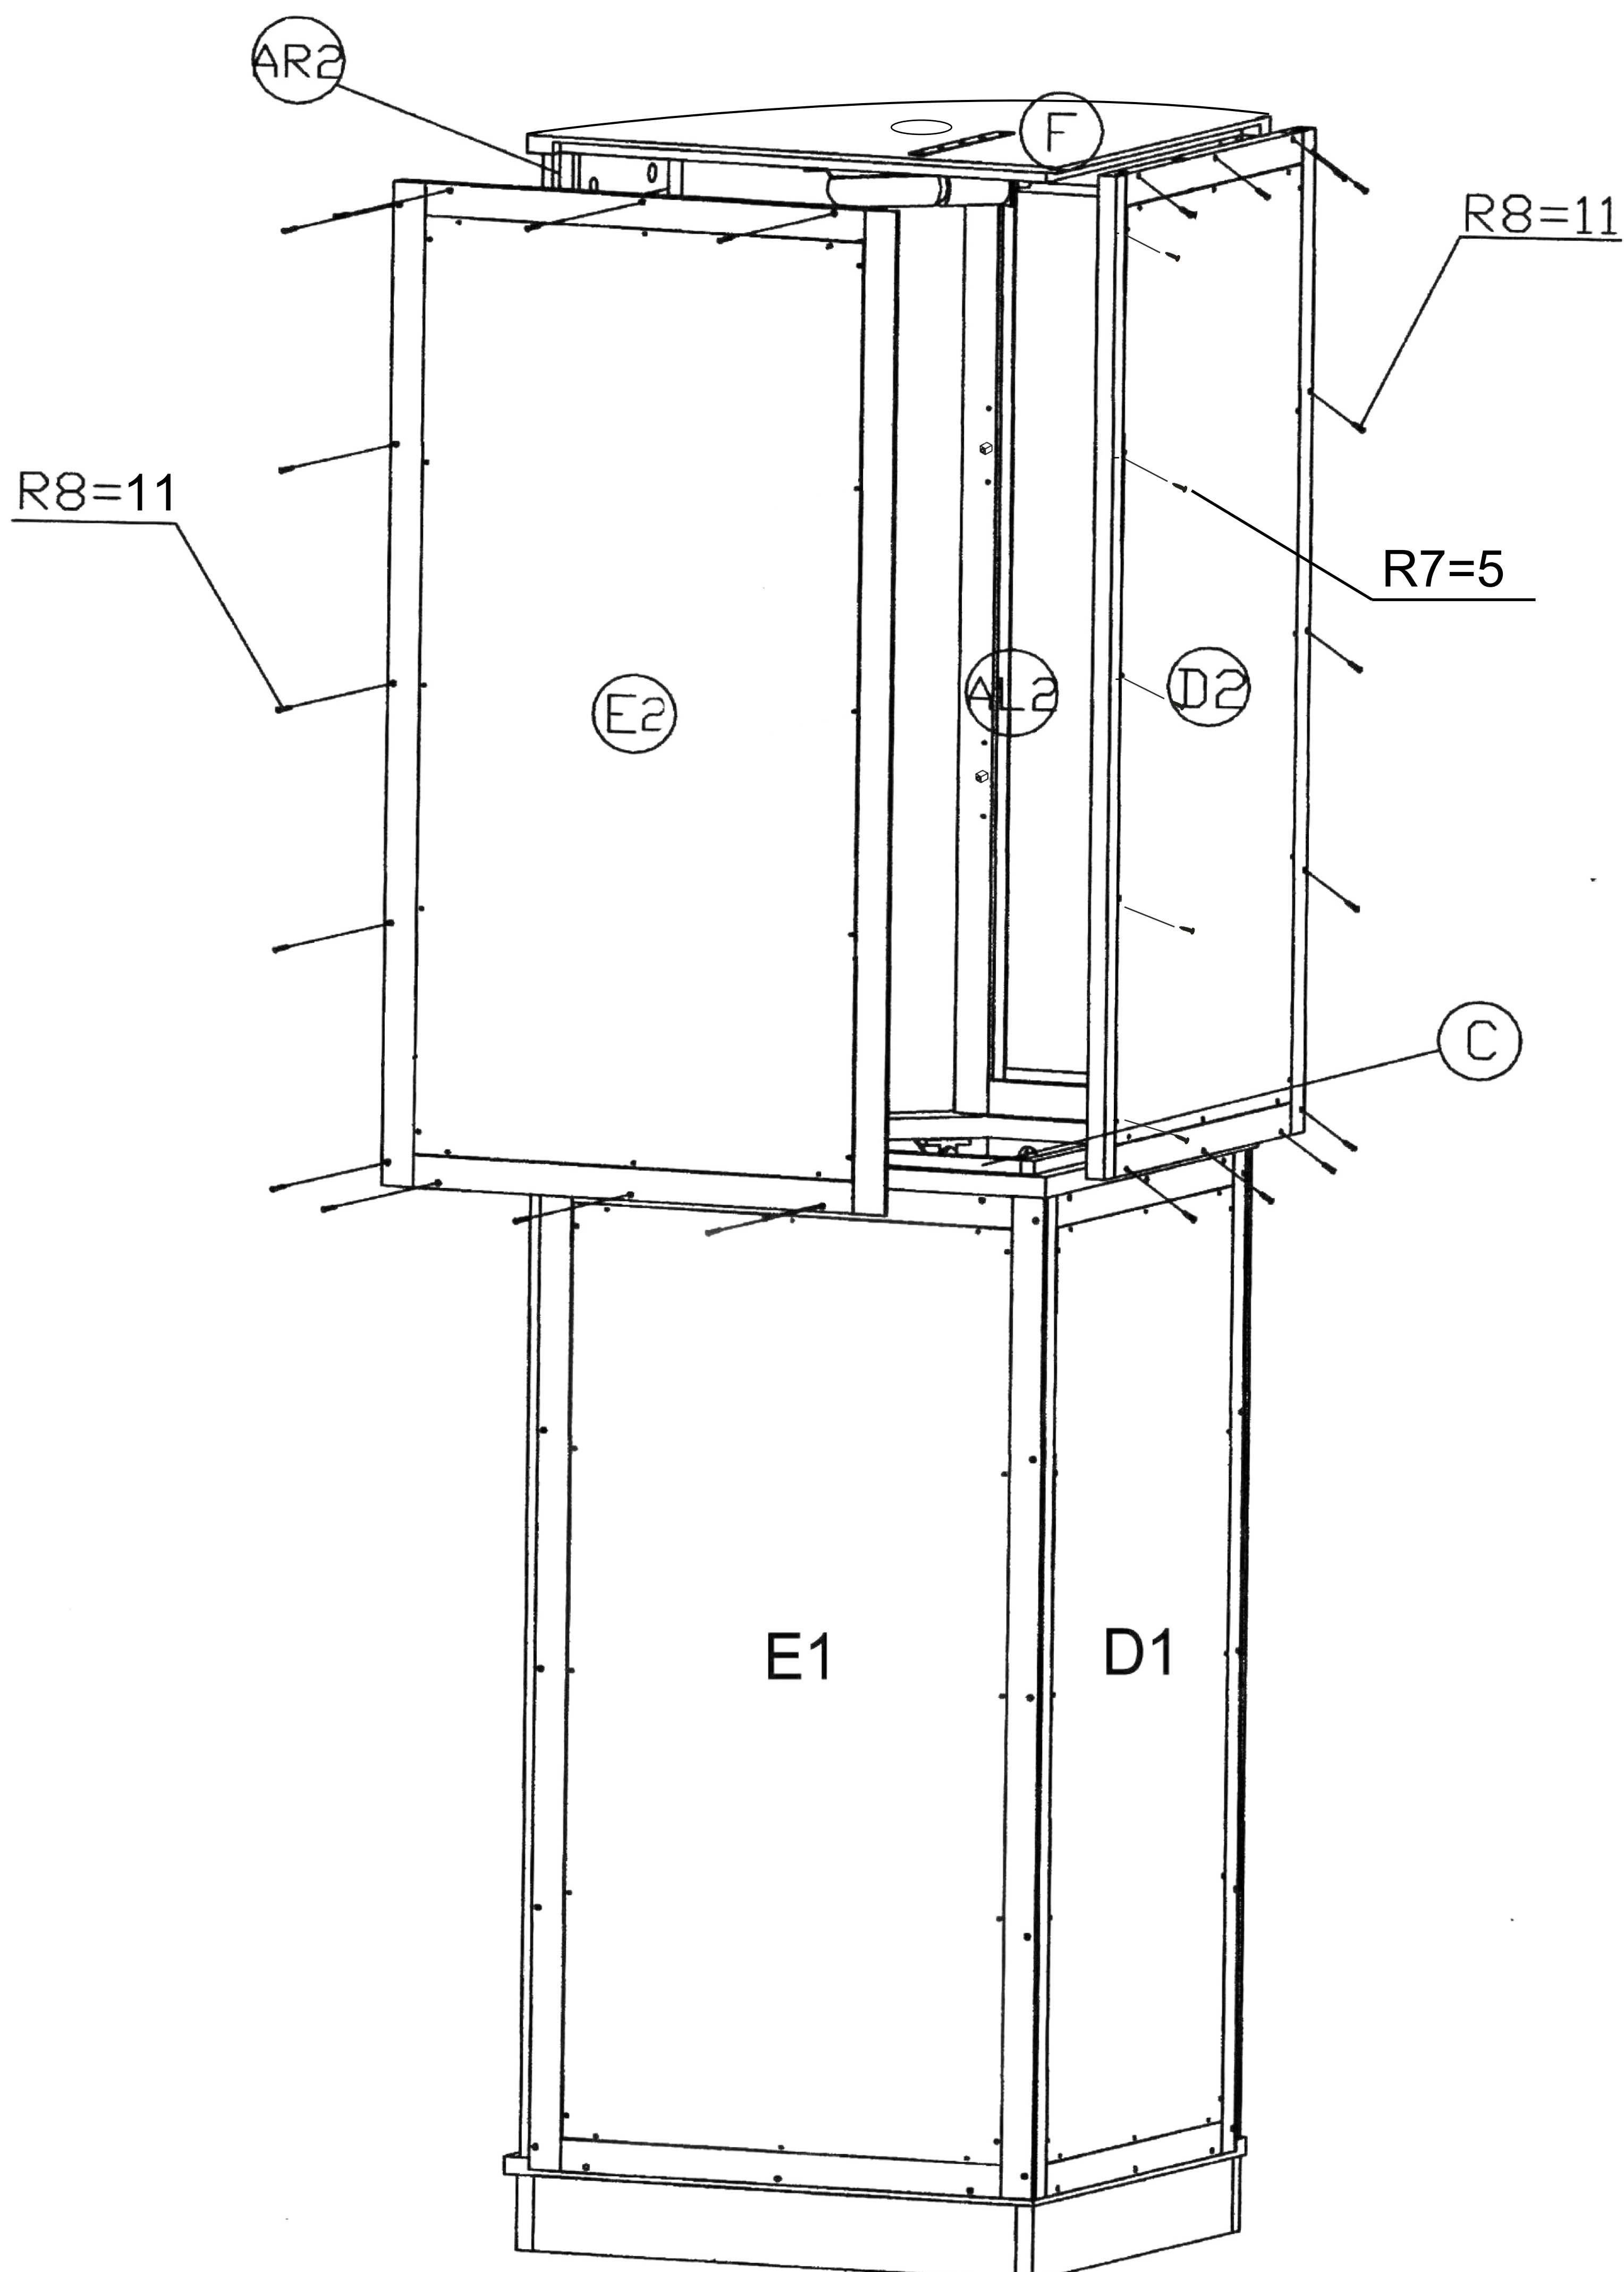


(R9)SHELF SUPPORT
STUD:6 PCS








(R7)ST2.9X15:5PCS




(R8)ST3X25:22PCS

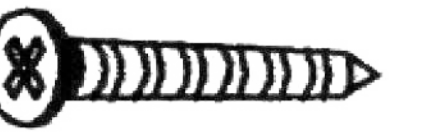

- 7.a)Fasten 6 shelf support stud R9 to top left back panel D2 and right back panel E2.
- b)Fasten top left back panel D2 to cover board F, top left panel AL2 and shelf board C, using 11 screw R8(ST3.5X25).
- c)Fasten top right back panel E2 to cover board F, top right panel AR2 and shelf board C, using 11 screw R8(ST3X25).
- d)Fasten left edge of top left back panel D2 to top right panel E2, using 5 screw R7(ST2.9X15).

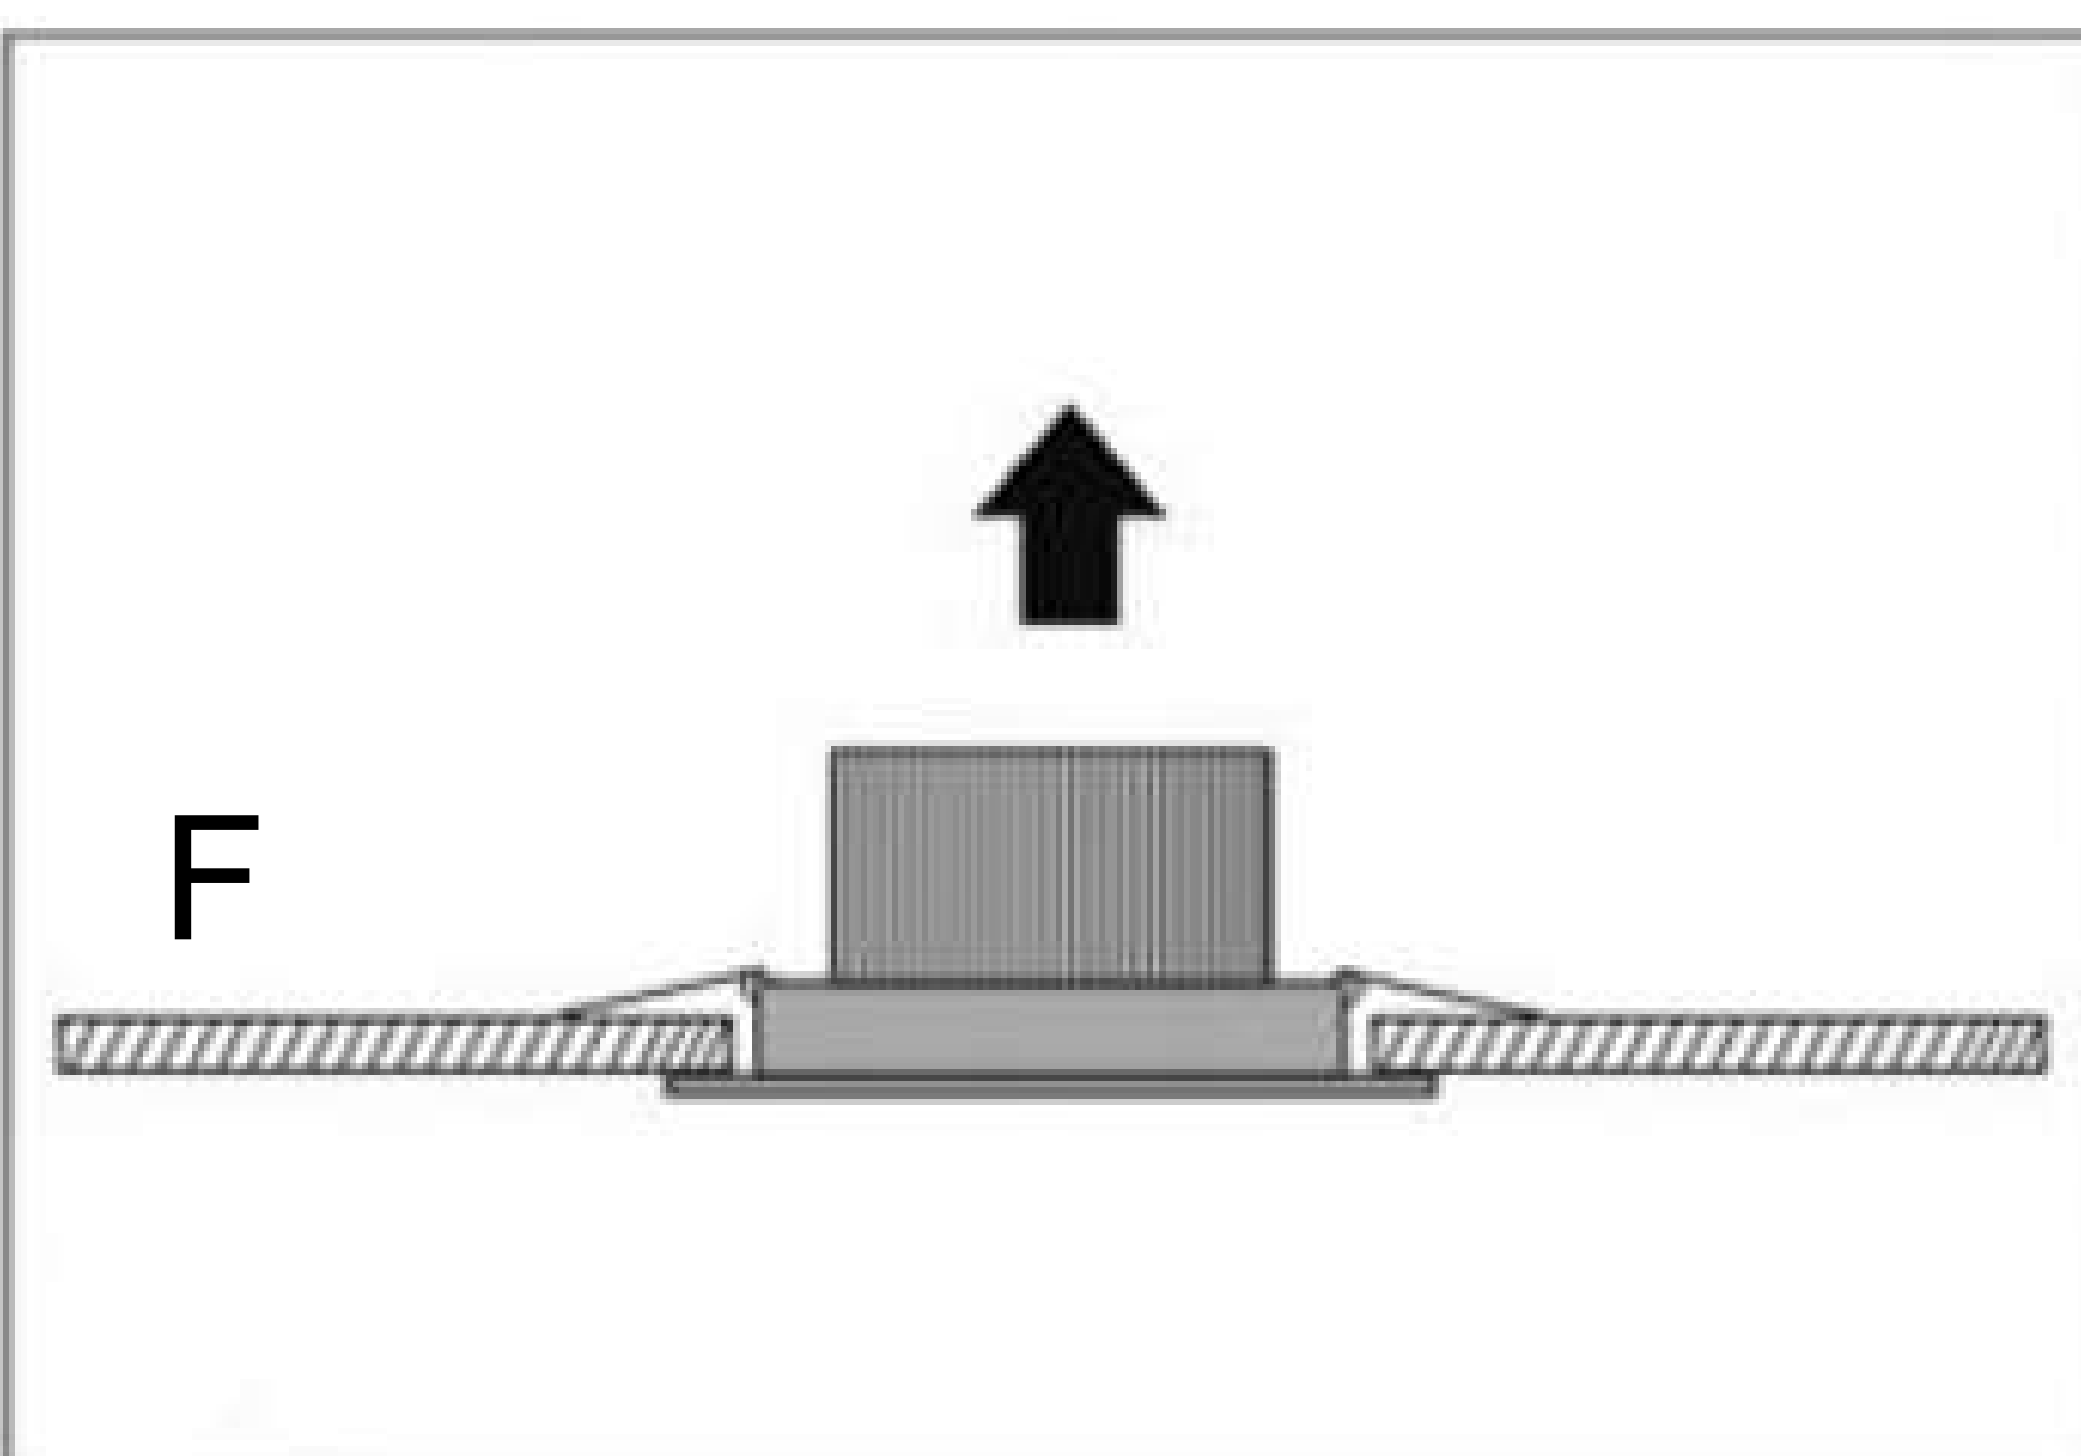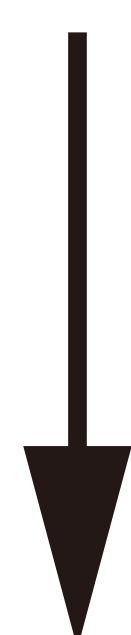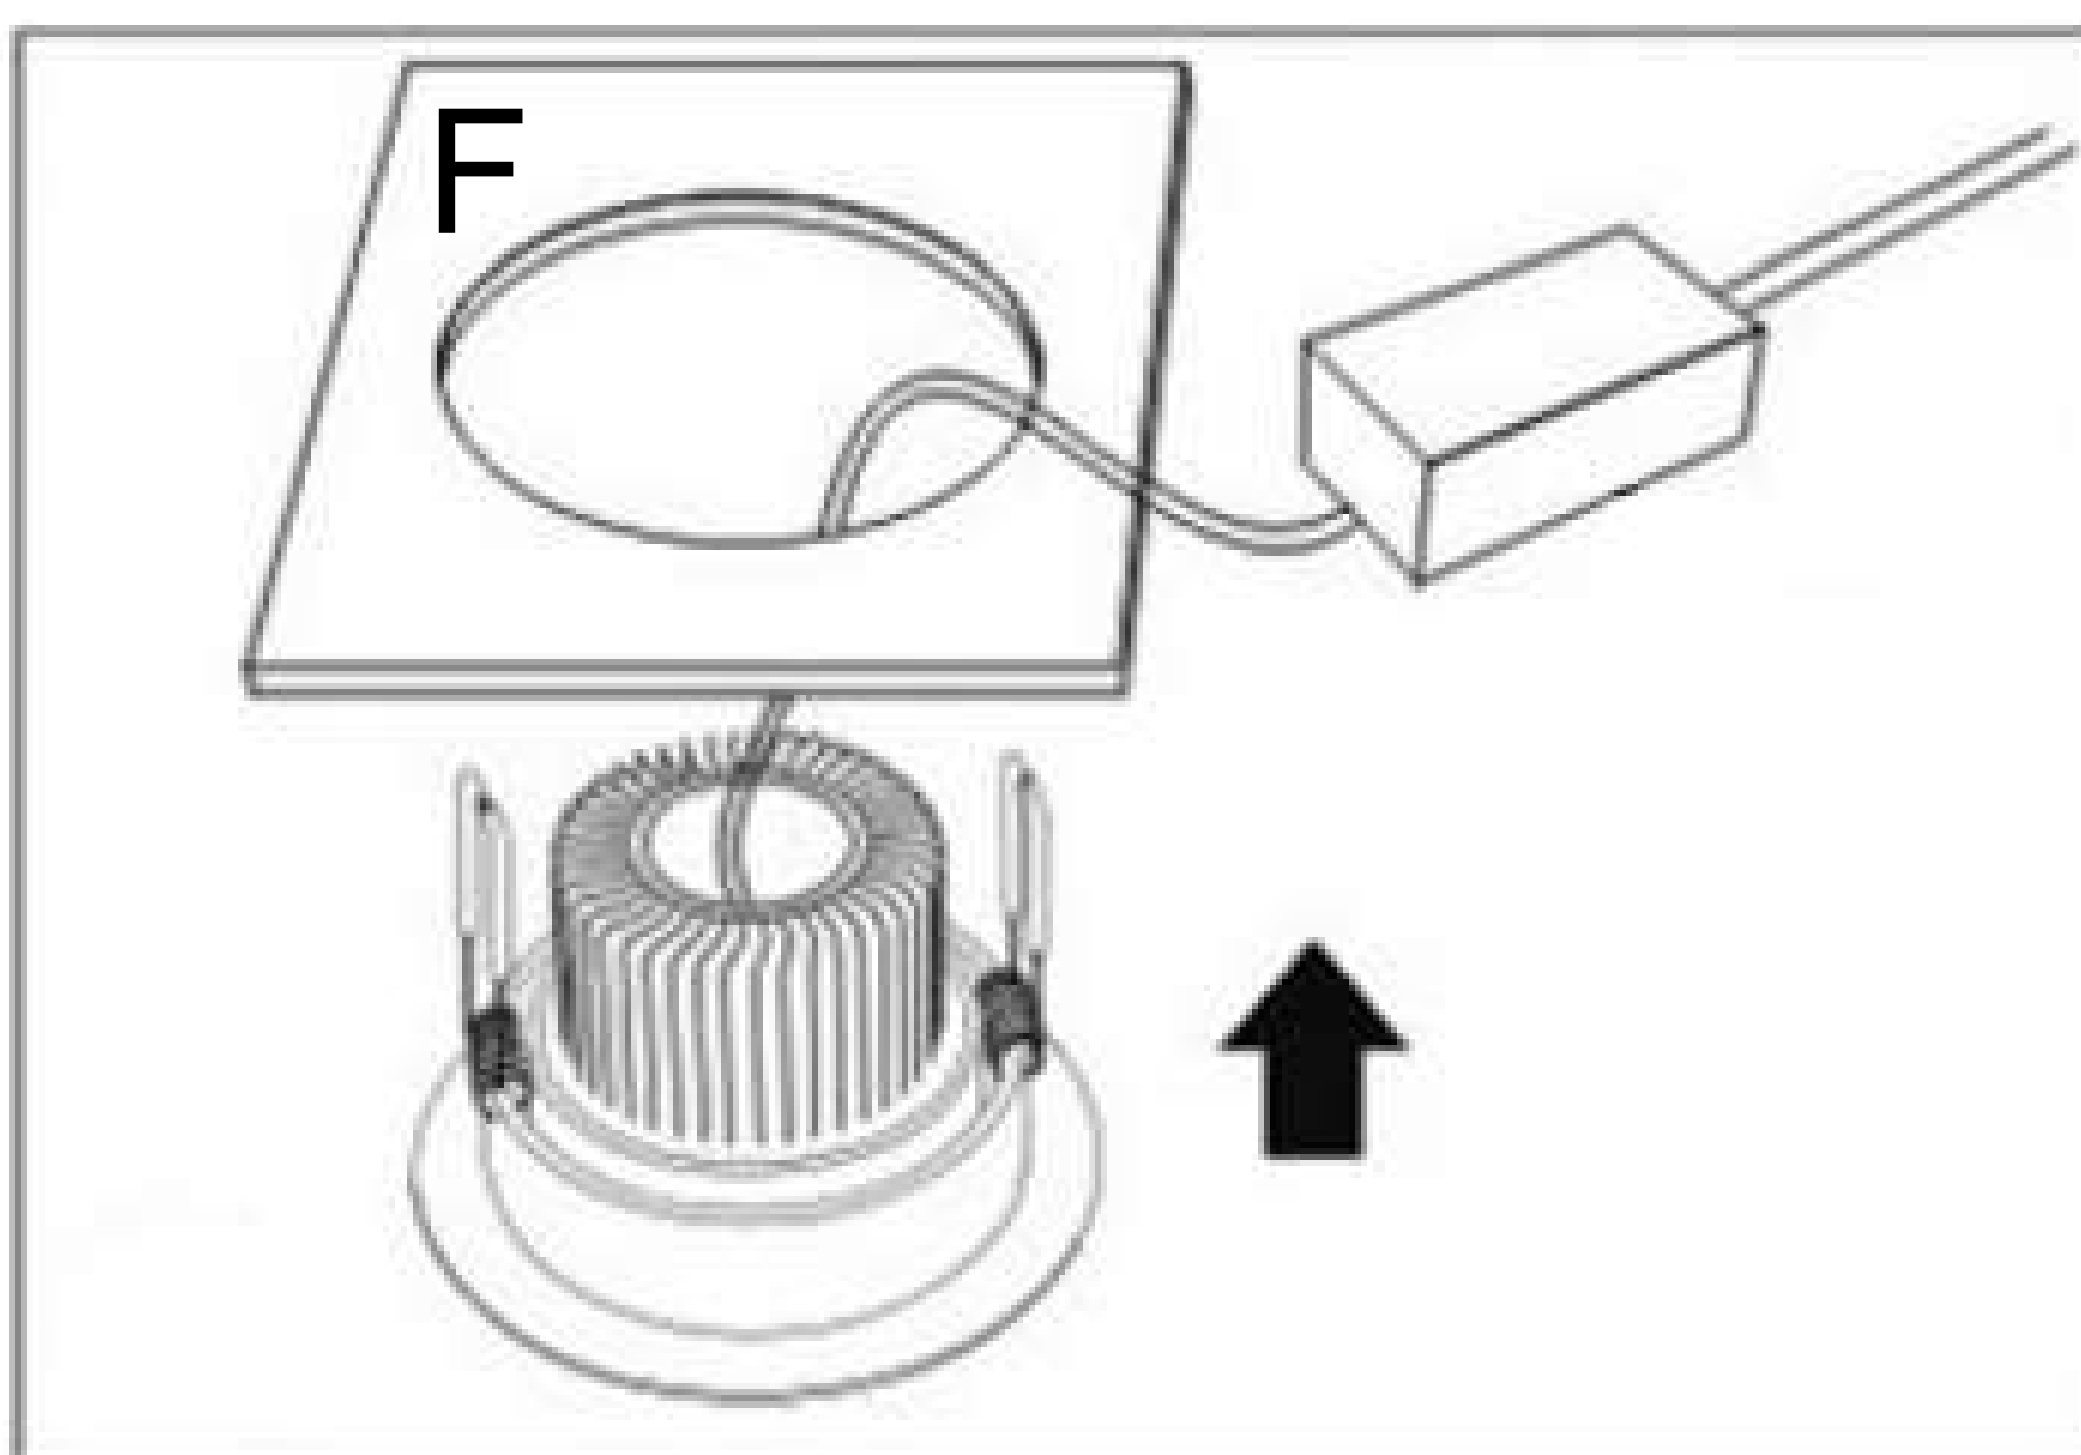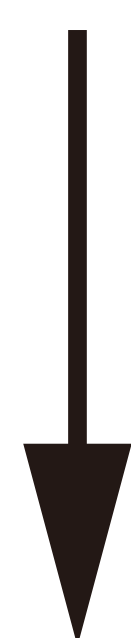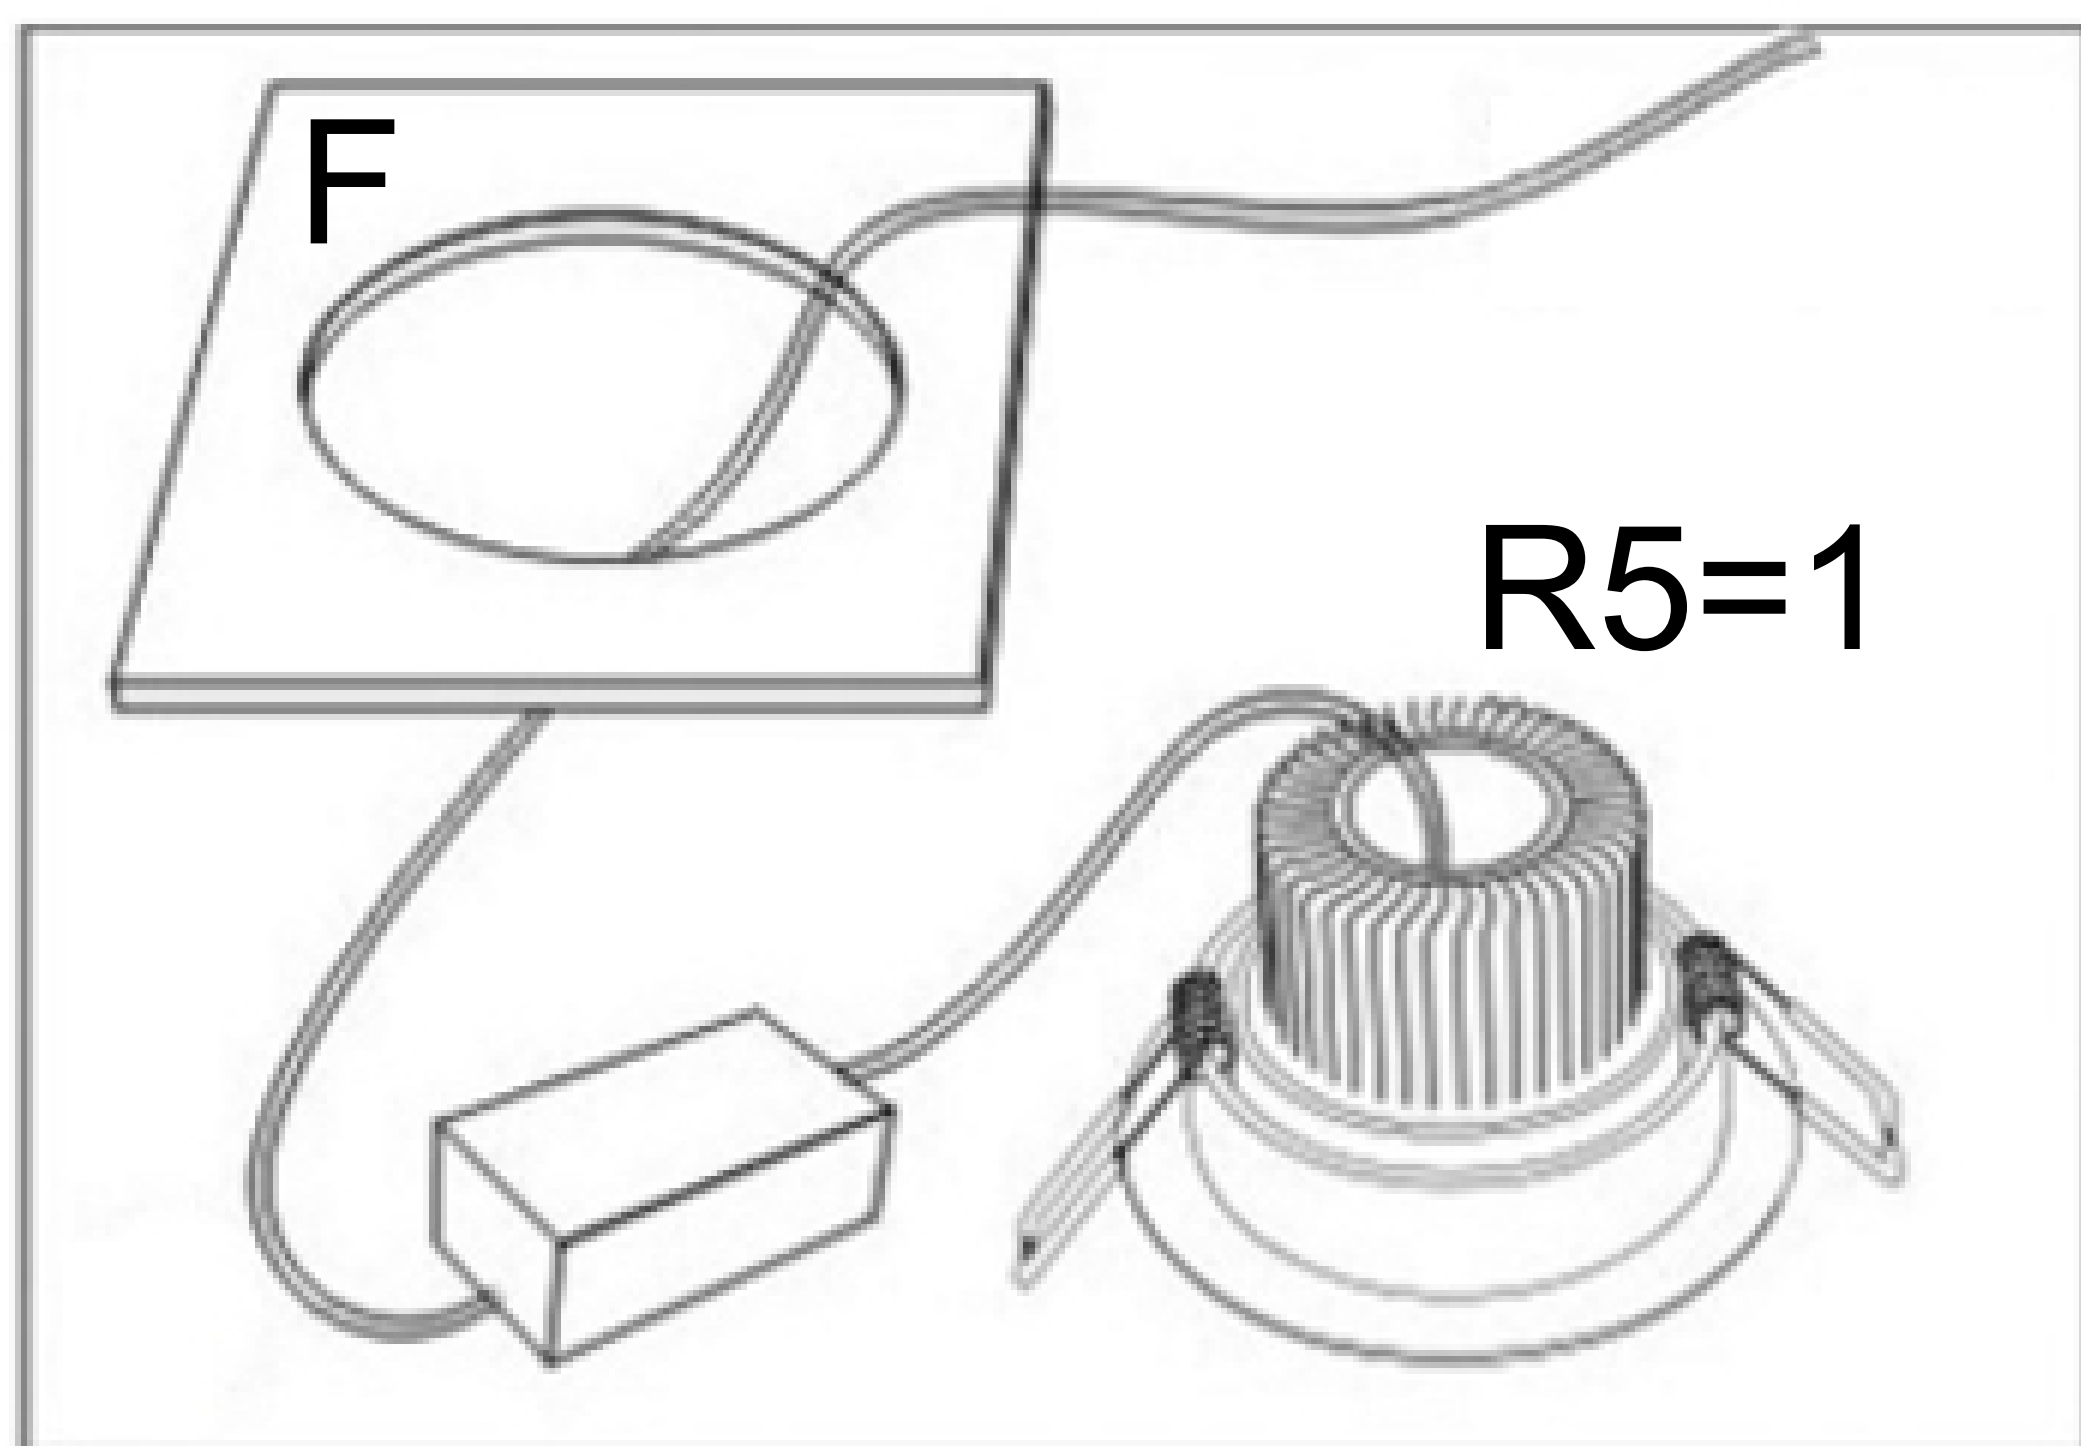


(R5) LIGHT:1PCS

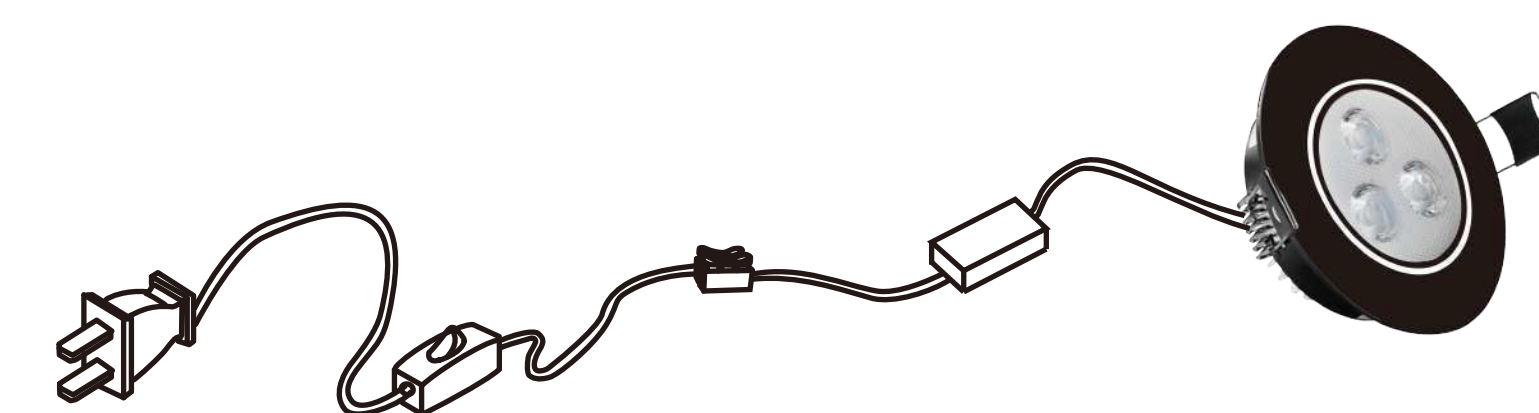


8.Light R5 installation:

Put the power cord of R5 through the round hole in the middle of cover board F. Stand up the spring buckles on both sides of the lamp and put them through the round hole, then lay them down.

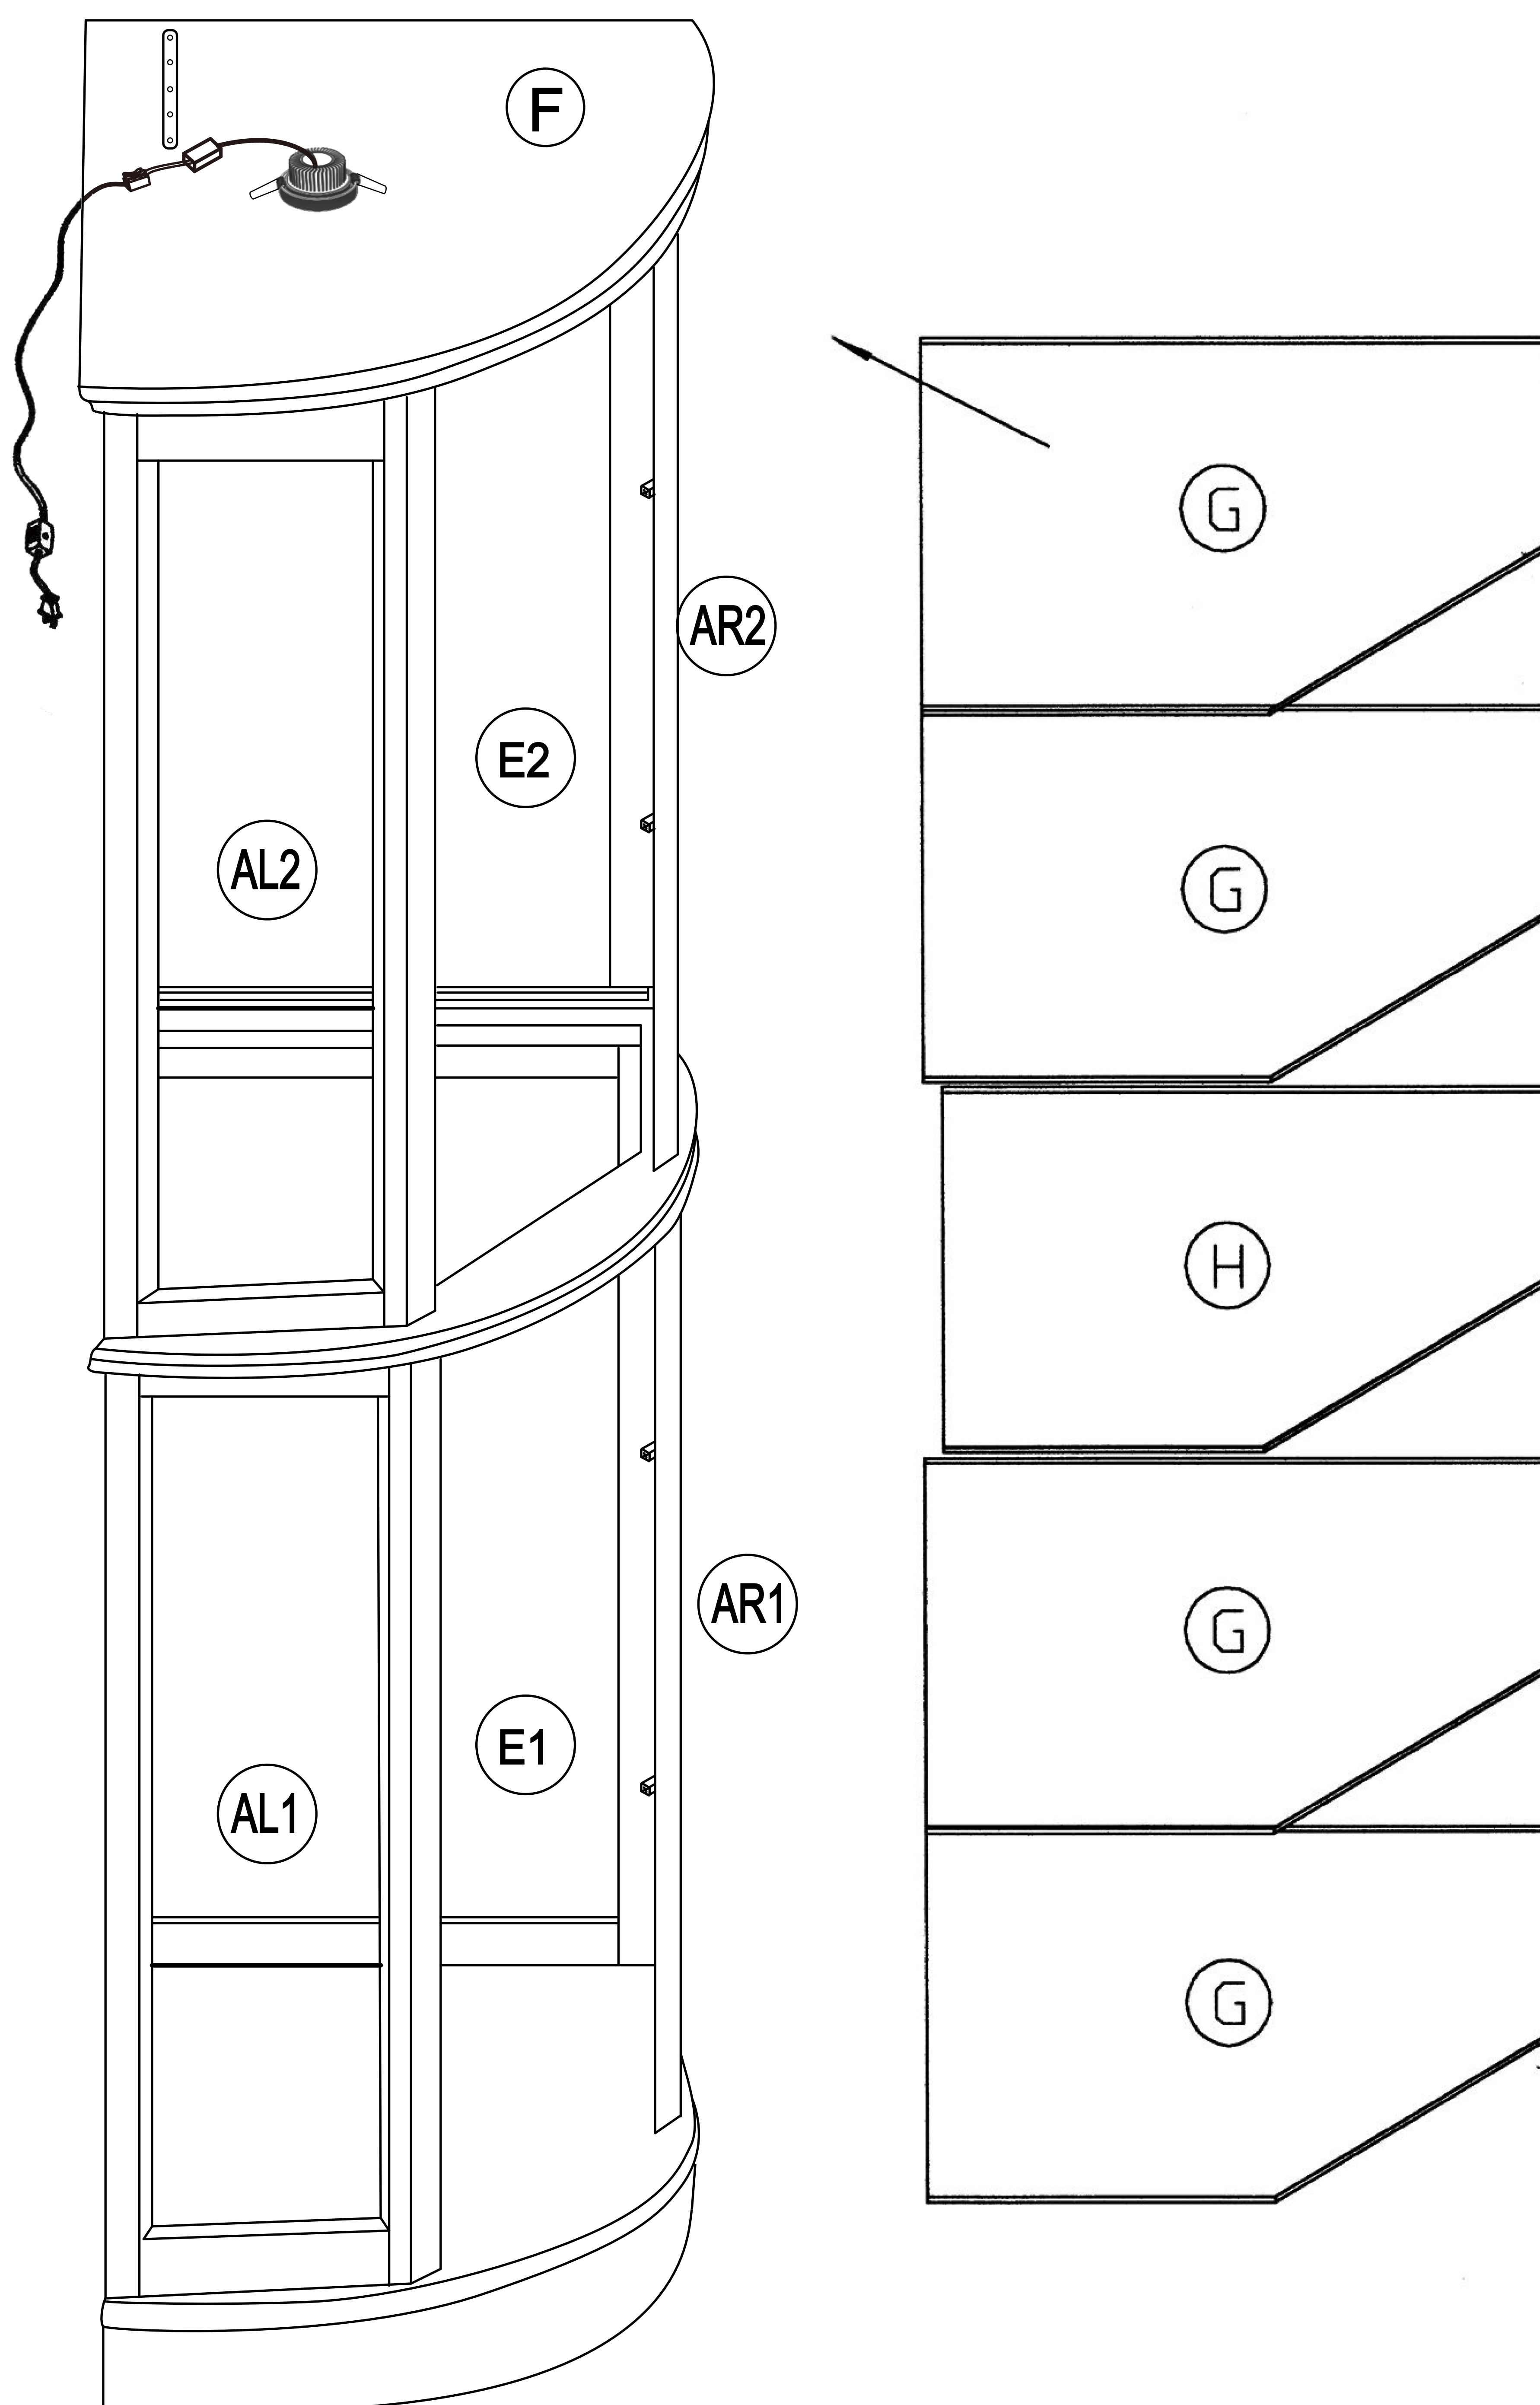

- 9.a) Attach 4 shelf G onto shelf support stud.
b) Attach 1 shelf H onto shelf board C.


Note: weight on glass shelves should not exceed 4kgs.

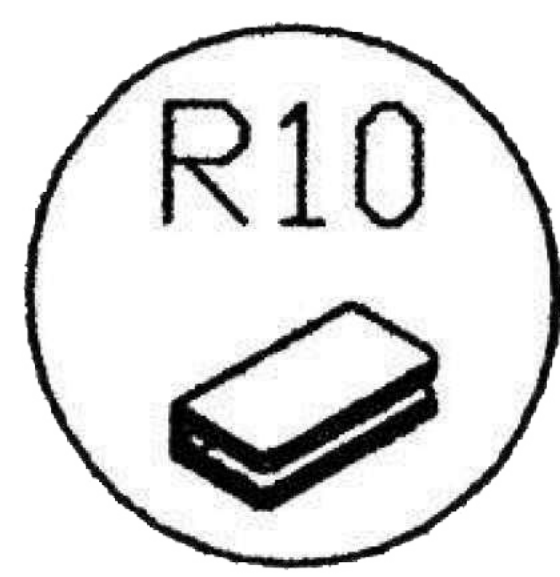

(R10)LATCH PLATE:2PCS 


(R11)GLASS HINGE:2PCS 


(R12)GLASS HINGE:2PCS 

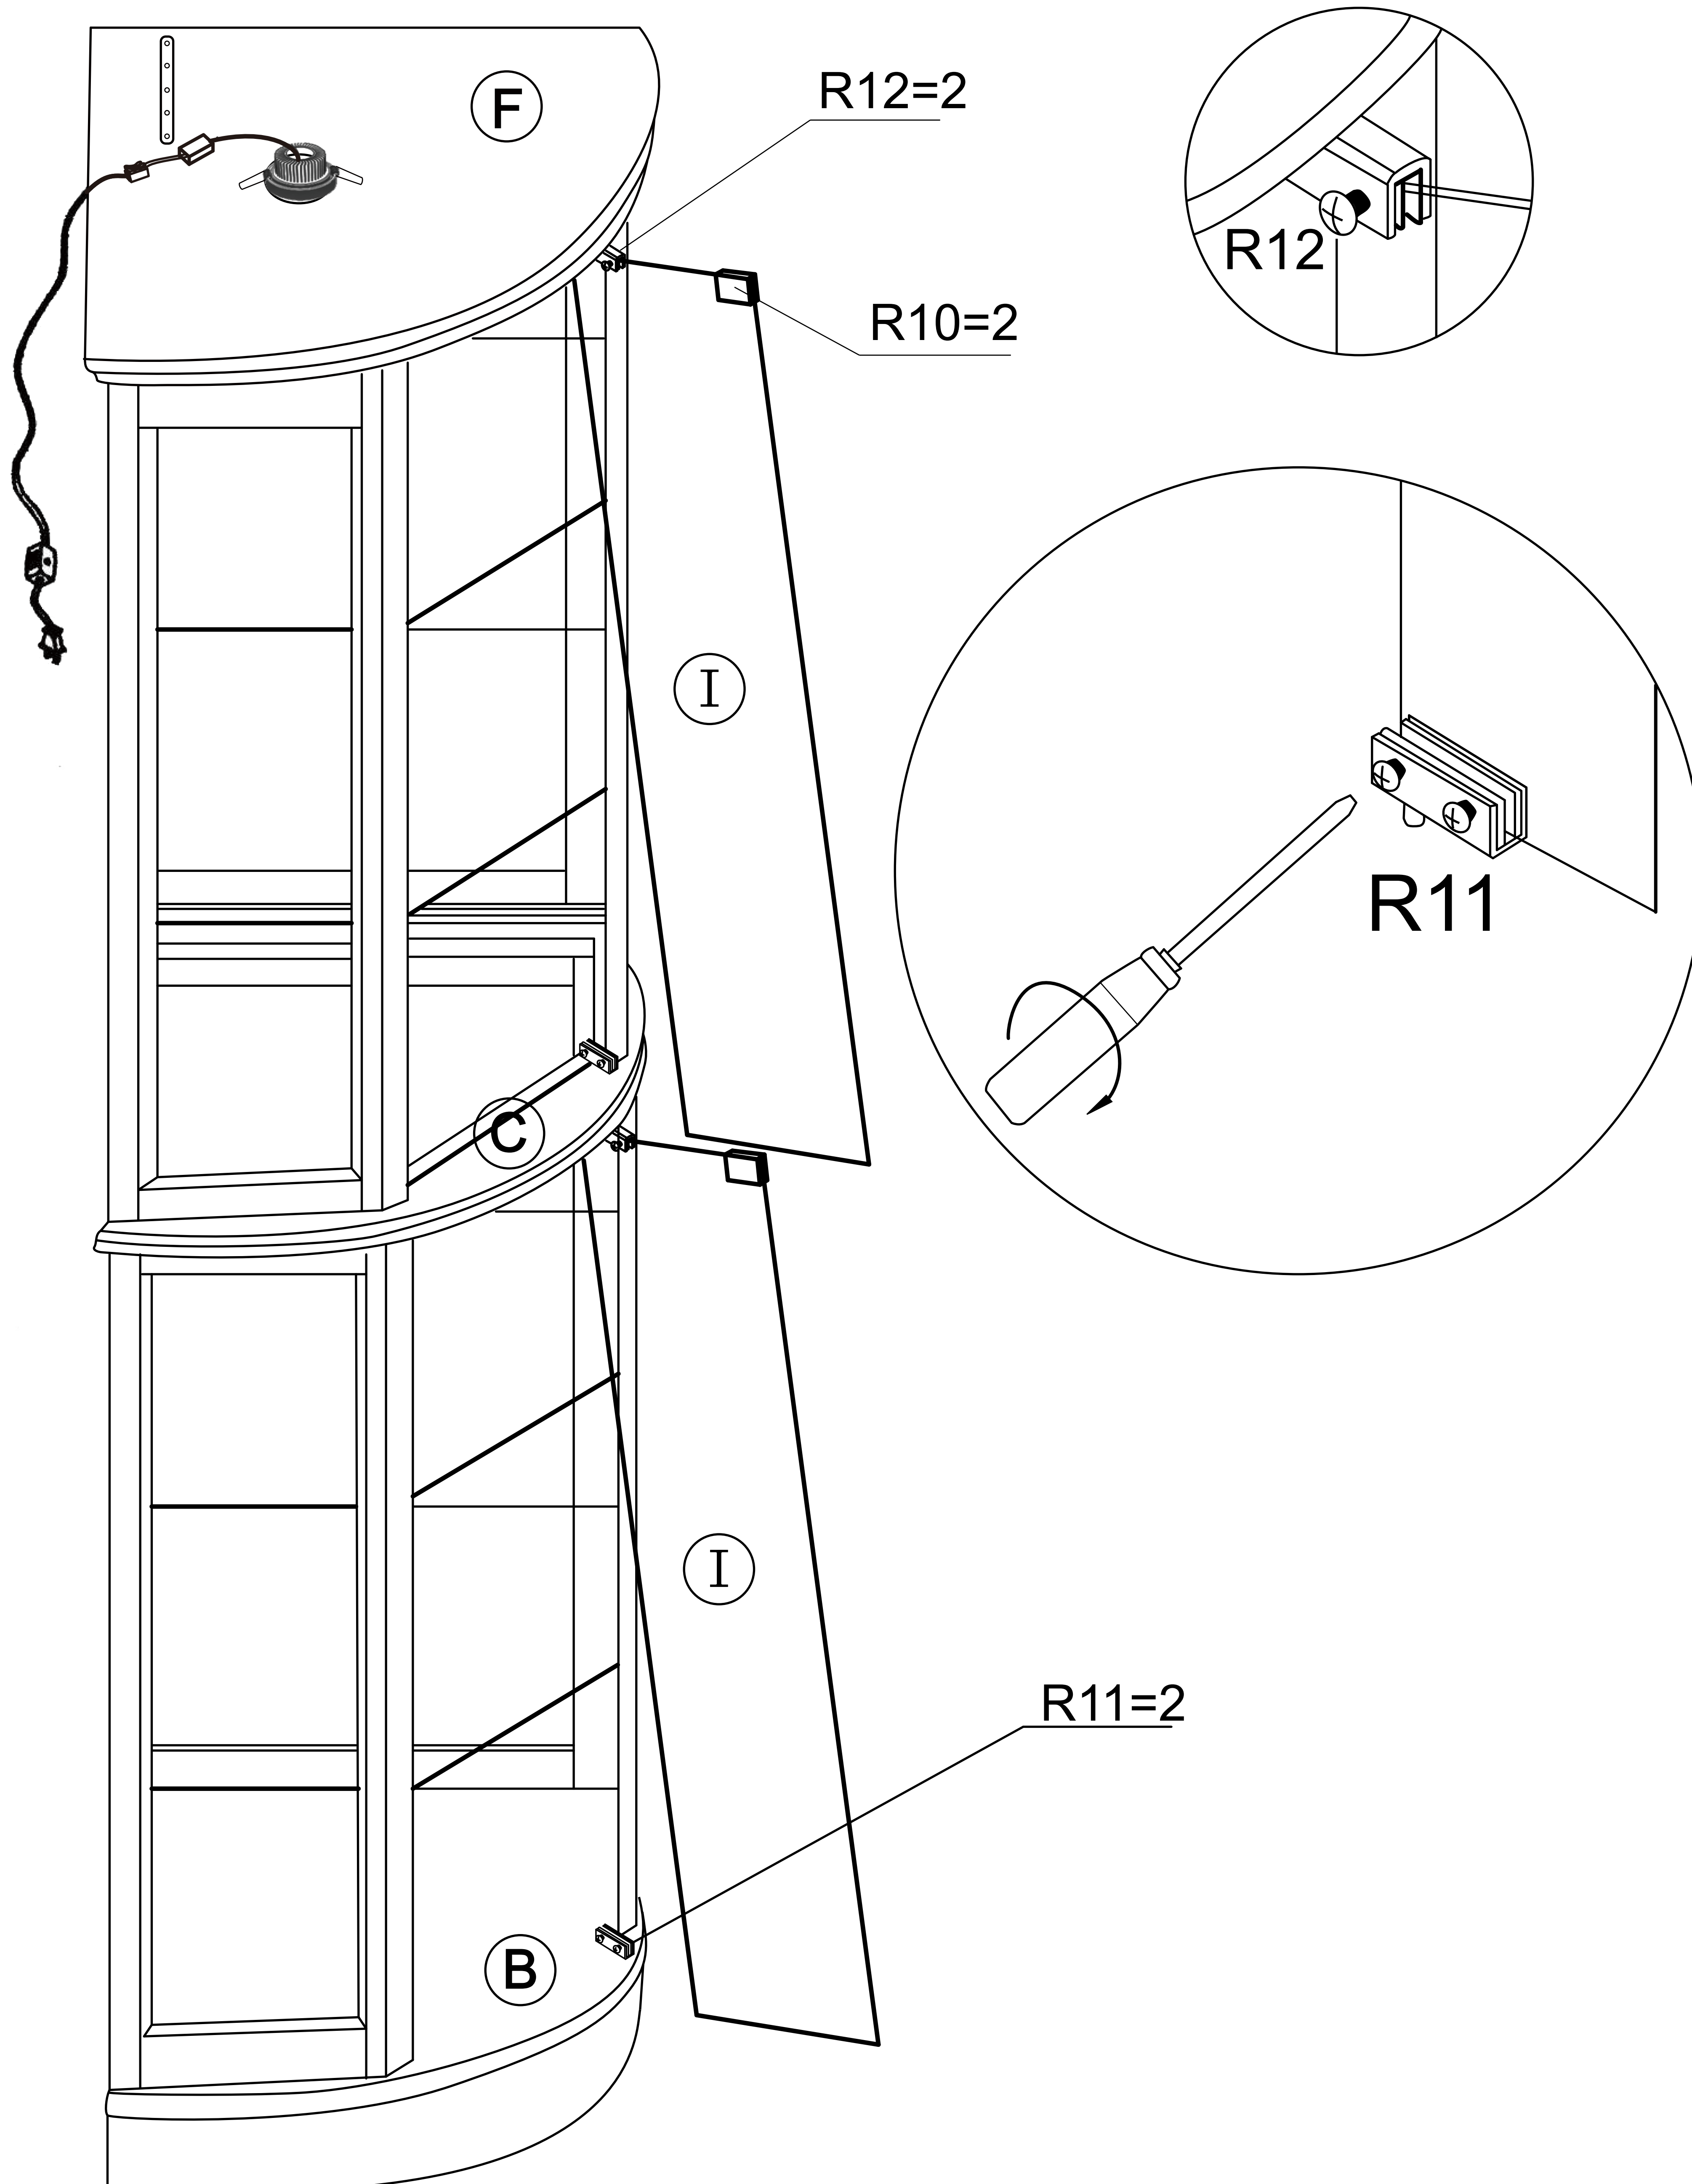

- 10.a) First fasten 1 latch plate R10 and 1 glass hinge R12 on the position of door I, then insert glass hinge R12 into the top hole on cover board F.
- b) Insert glass hinge R11 into the bottom hole on shelf board C, slide the glass into place, then fasten the screw.
- c) Repeat the process for another door I.

Note: The black washer on glass hinge R11&R12 should be attached under the screw. Glass hinge R11&R12 should be attached close to the edge of the glass.

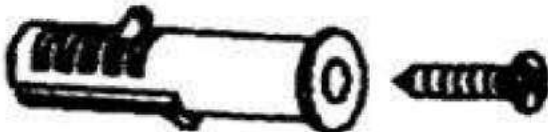(R13)PLASTIC SCREW 
ANCHOR:1PC

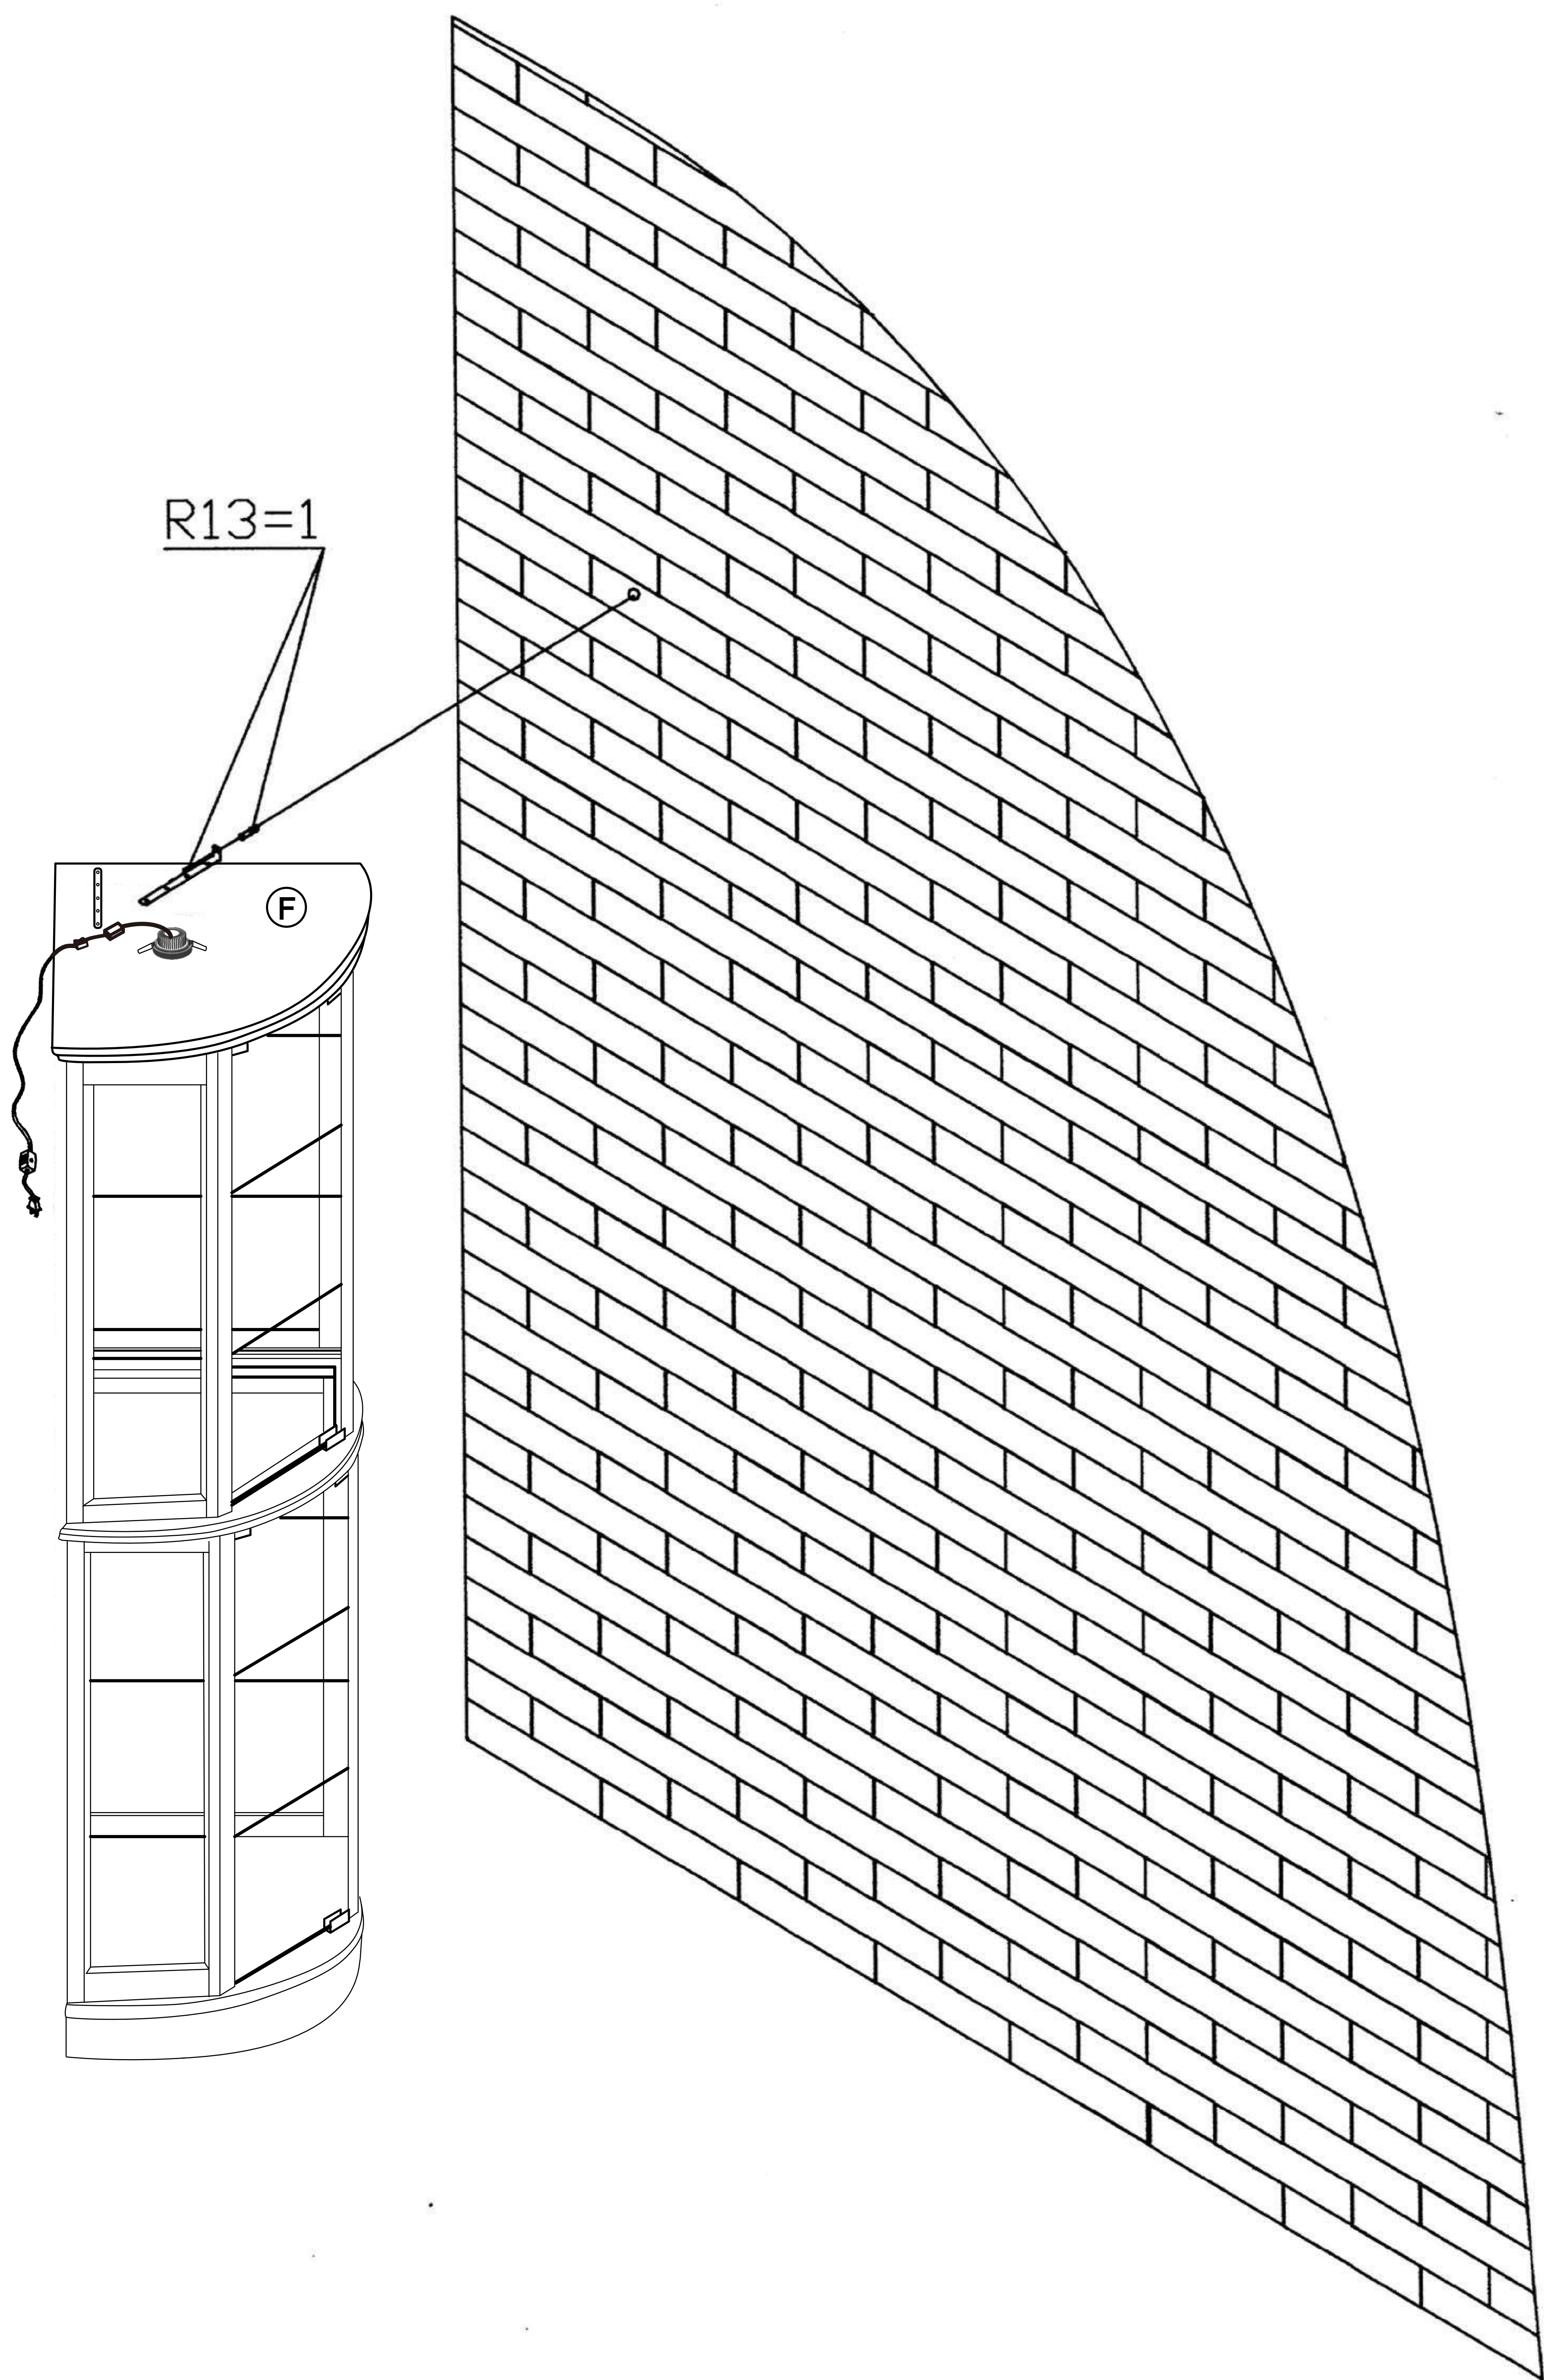

11 .In order to ensure that the cabinet is stable, adjust the adjustable foot R6 under the cabinet. As an added safety feature, a support strap on cover board F has been provided, it must be attached to the wall, using 1 plastic screw anchor R13.