



INSTALLATION INSTRUCTIONS

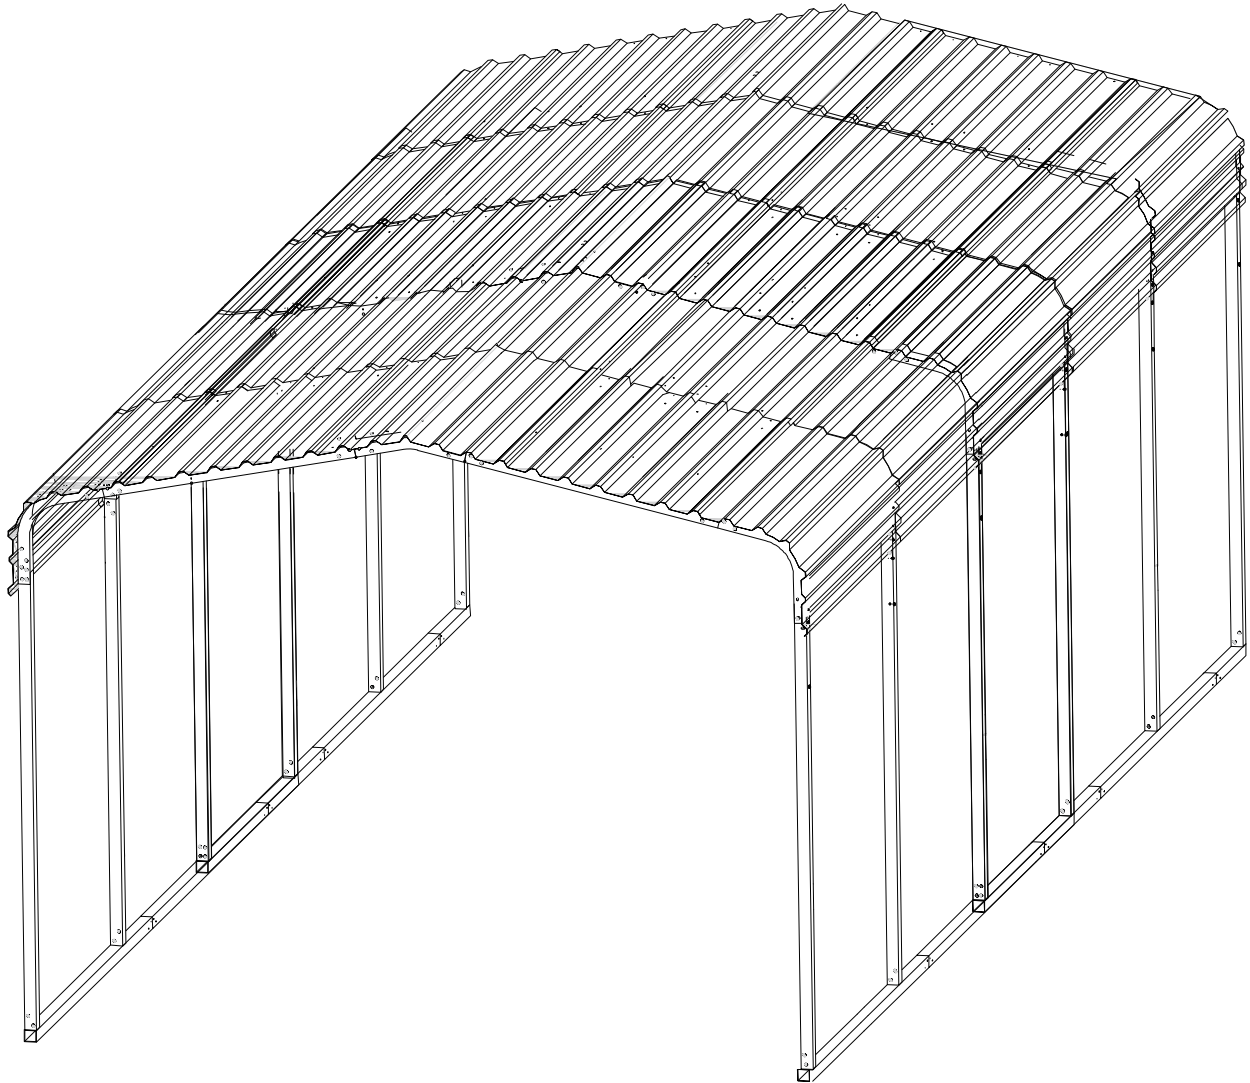

OFC006

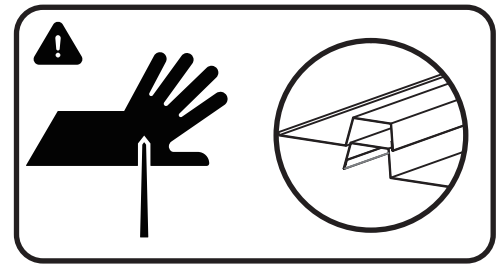


Any questions please contact us
service@replycenter.net

Read this instruction carefully. Refer hardware and furniture parts list for guidance. Be sure all parts are complete before assembling. Place all wooden furniture part on a clean and flat soft surface to prevent scratches. Refer steps provided as assembling guide.

SAFETY PRECAUTIONS


Safety precautions *MUST* be followed at all times throughout the construction of your building!

sharp edges

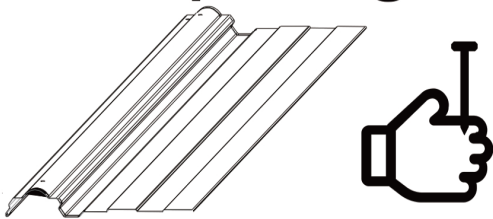

When working with your building's parts, which may have sharp edges, always wear work gloves and eye protection, and put on long sleeves. This helps prevent cuts and injuries during assembly or maintenance.

always practice proper tool safety

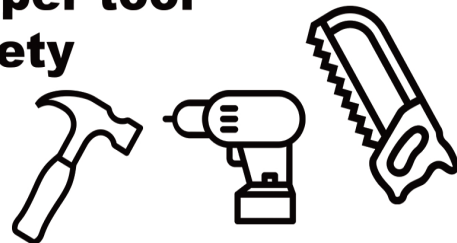


Exercise caution when using tools during assembly. It's particularly important to be well-versed in the use of any power tools involved in the process.

no children or pets at worksite



Ensure that children and pets are kept at a safe distance from the construction area until the building is fully assembled. This precaution minimizes distractions and reduces the risk of accidents.

don't focus weight on roof



Roof Safety Warning:
Never put your full weight on the building's roof. Always ensure that a step ladder is fully extended and placed on level ground before climbing it.

wind advisory



Wind Advisory:
Avoid assembling your building on a windy day. Large panels can act like sails in the wind, making them hard to control and posing safety risks during construction.

Complete Check:
Before starting assembly, verify that you have all the parts and hardware listed. A partially assembled building can be vulnerable to damage, even from mild winds.

ASSEMBLY TIPS & TOOLS

Weather Awareness:

Choose a clear and calm day for your installation. Avoid building assembly on windy days, and be cautious if the ground is wet or muddy.


Team Effort Required:

Assembling your building is a three-person job at minimum. One can hold parts or panels in place, while the other secures them and manages the tools, ensuring a quicker and safer assembly process.

Gathering Your Tools and Supplies:


Prepare by listing the basic tools and materials necessary for assembly. Your choice of anchoring method and base type will determine the complete list of materials required.

WHAT YOU NEED

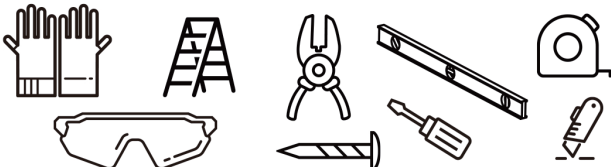

- Work Gloves
- Safety Glasses
- Step Ladder
- No. 2 Phillips Screwdriver (Magnetic Tip Preferred)
- Utility Knife or Scissors
- Pliers
- Carpenter's Level
- Tape Measure

RECOMMENDED TIME SAVERS



- Power Drill (Cordless, Variable Speed)
- Nut Driver or Wrench
- Square
- String (for squaring the frame)
- Awl (to align holes)

BASE PREPARATION TOOLS



- Lumber and/or Concrete
- Hammer and Nails
- Spade or Shovel
- Hand Saw or Power Saw



Choosing and Preparing Your Site:

Select an ideal spot for your building before assembly begins. Opt for a level area with effective drainage.








Ensure ample space around the construction area for easy movement and assembly of parts. Check that there's sufficient clearance at the entrance for doors to open fully. Additionally, you'll need enough external space around the building for attaching panel screws from the outside.

Prior to starting the assembly of any parts, make sure your base is in place and the anchoring system is set up and ready for action.

EXPLODED DRAWING

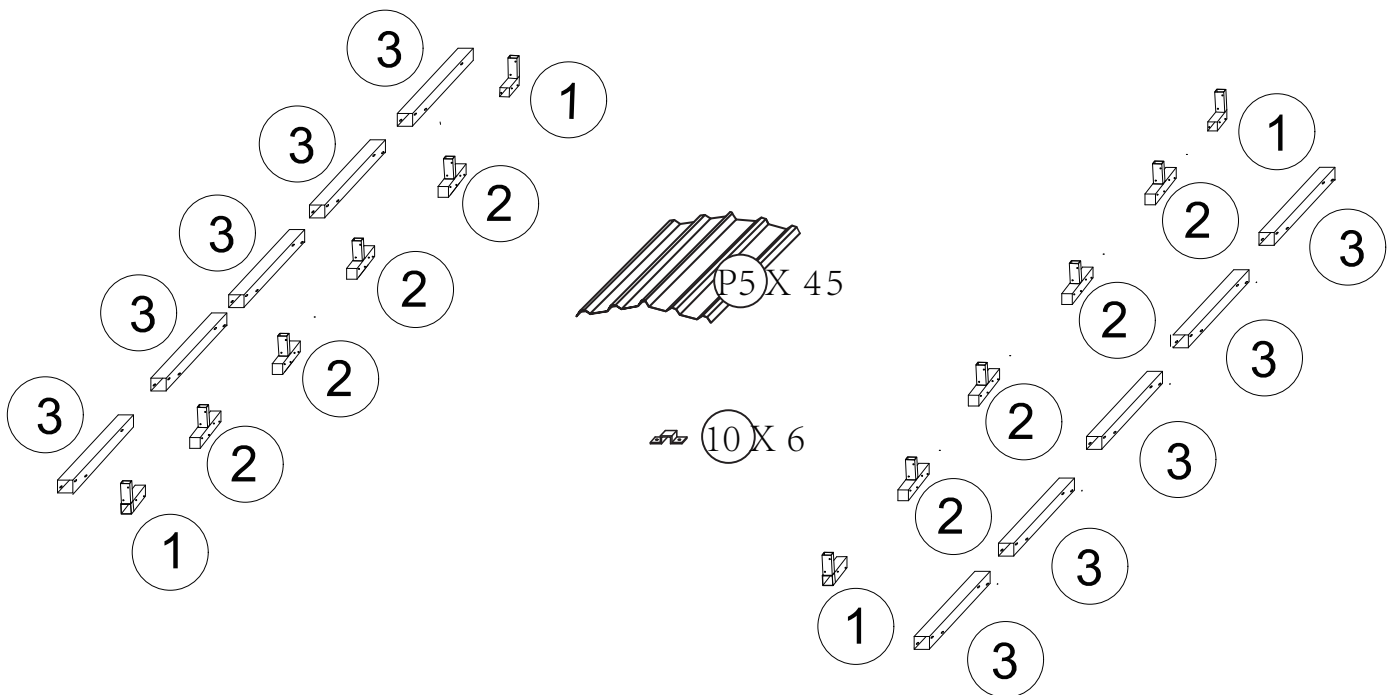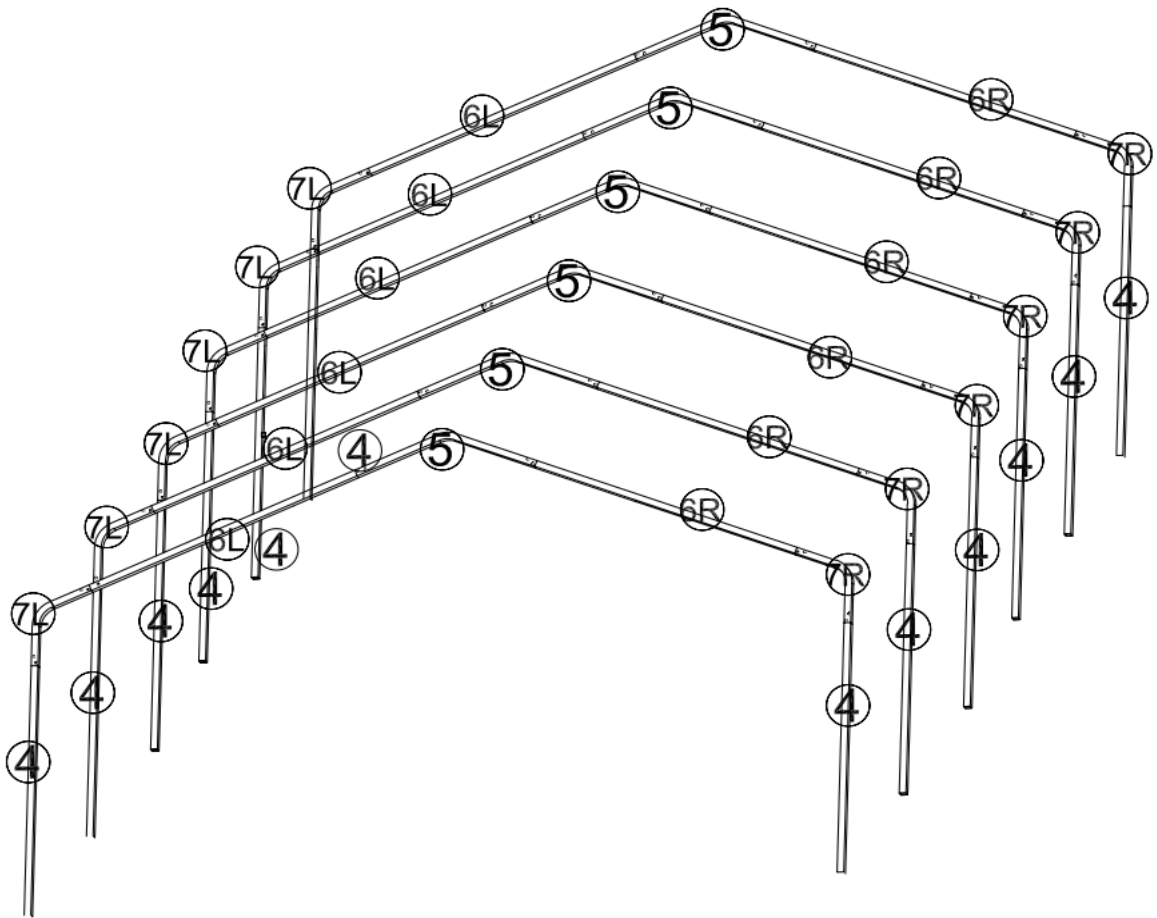

PART LIST



IMAGE	NO.	QTY	IMAGE	NO.	QTY
	1	X4		10	X6
	2	X8		adhesive tape	X2
	3	X10		P5	X45
	4	X12		F3	X490
	5	X6		F4	X1
	6L	X6		9	X10
	6R	X6		F8	X12
	7L	X6		F9	X2
	7R	X6		F5	X2
	F11	X4		glass glue	X4

X6


Note: There is a hole position on both 6L and 6R for connecting Part 8. Do not install the pipe in the reverse direction.



Note: There are two hole positions on the bottom of both 7L and 7R for connecting Part 9. Do not install them in the reverse direction.

Schematic diagram of the installation of the middle three-gear carport

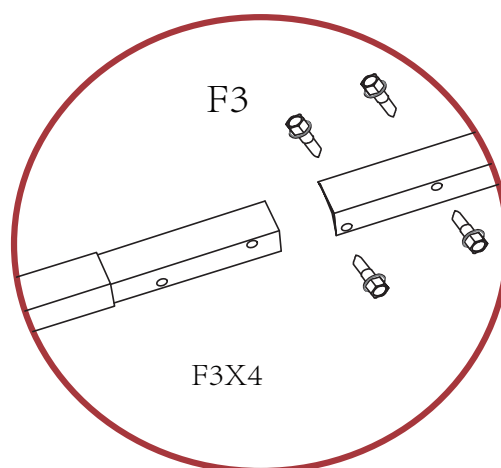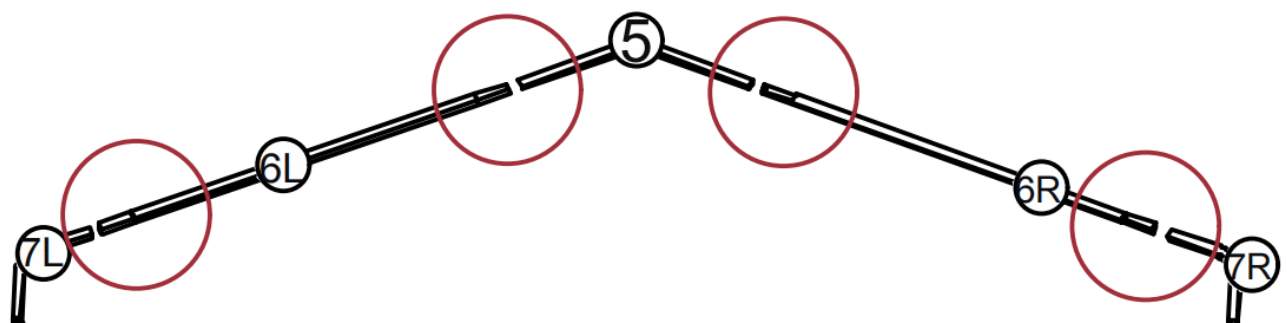




X4


F 3		X96
-----	---	-----

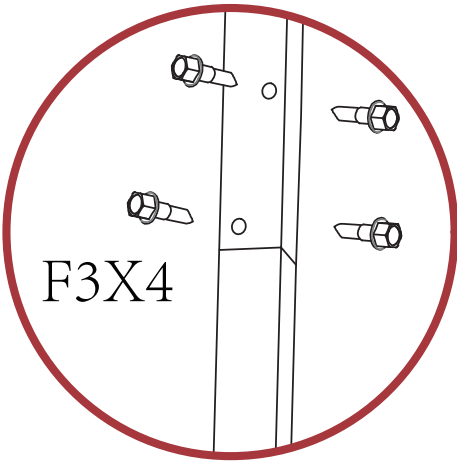
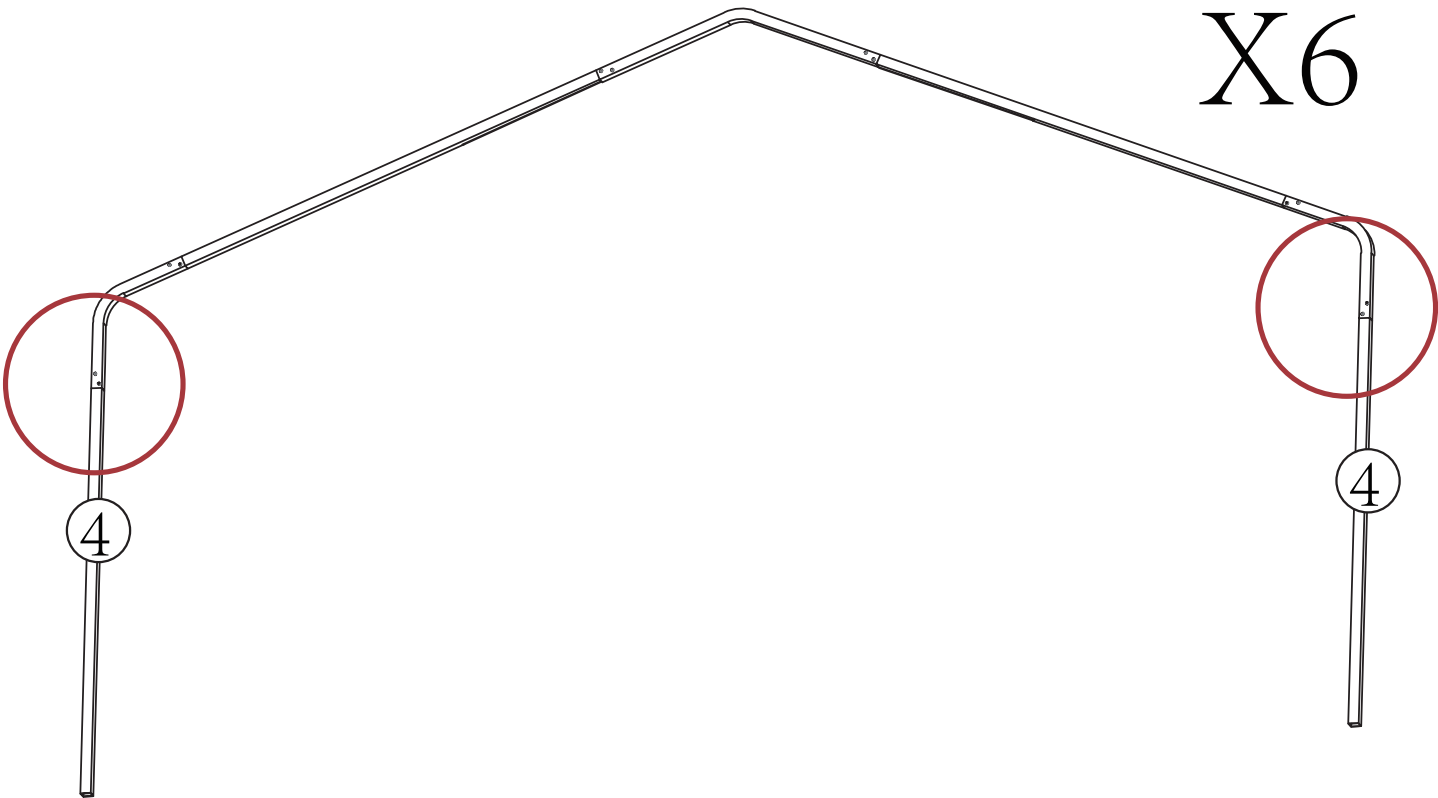


X12


F3		X48
----	---	-----

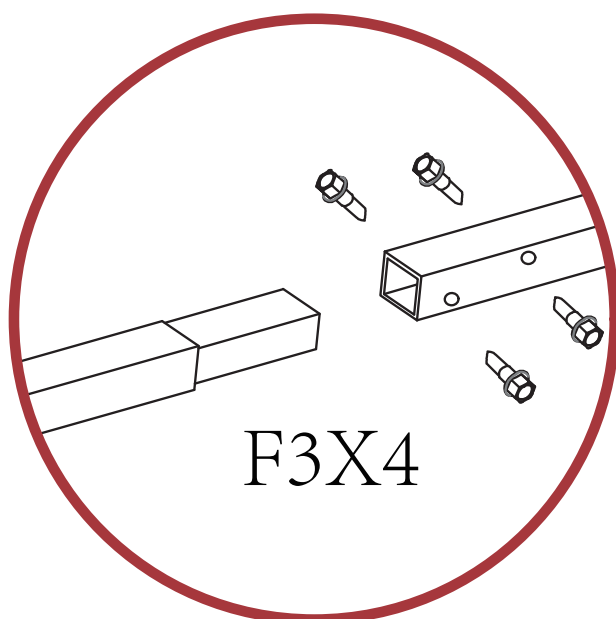
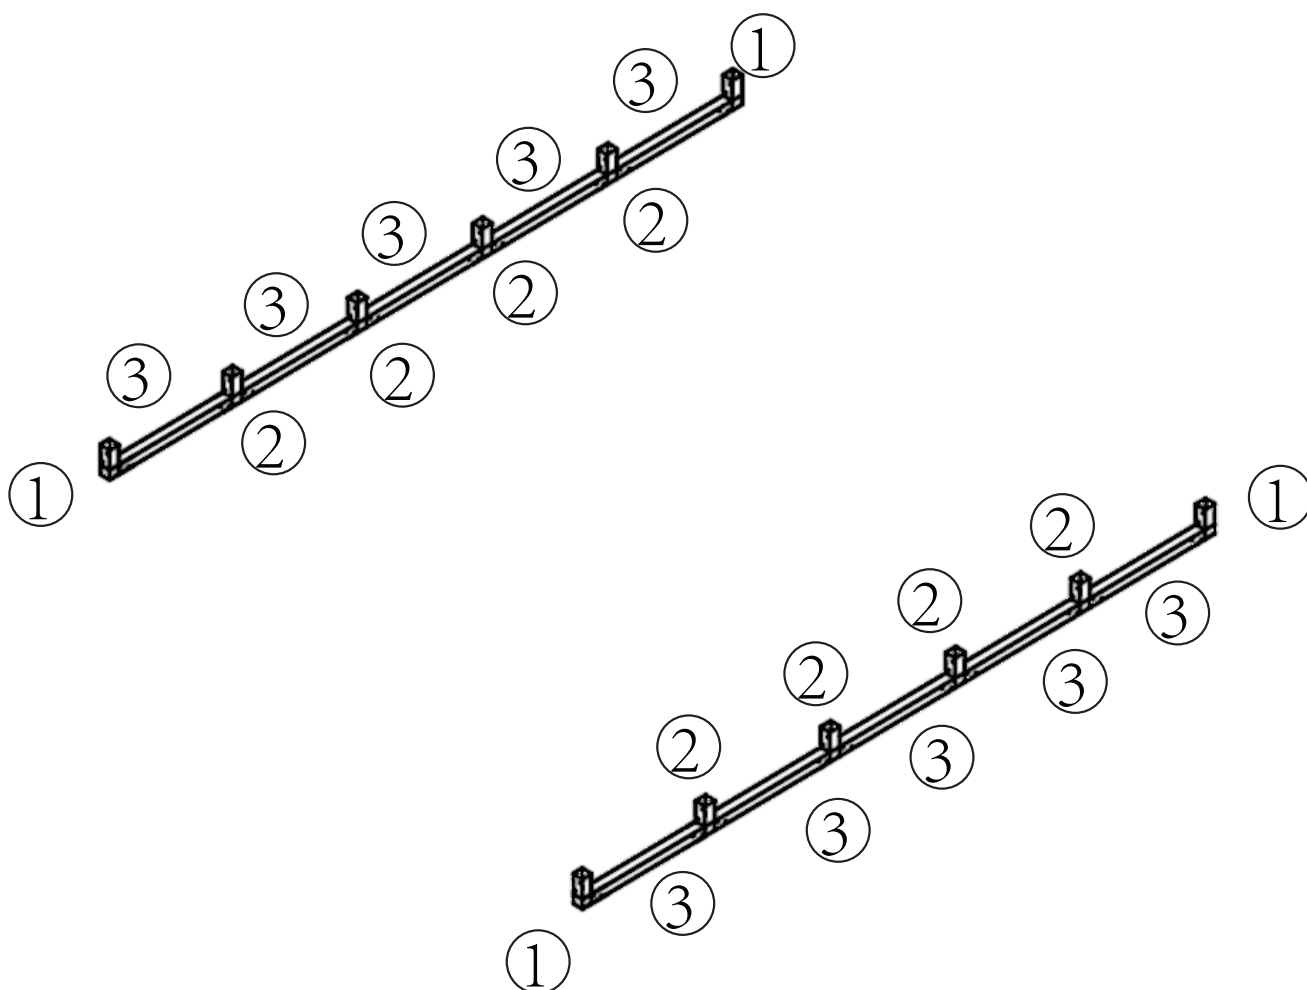


F 3		X80
-----	---	-----

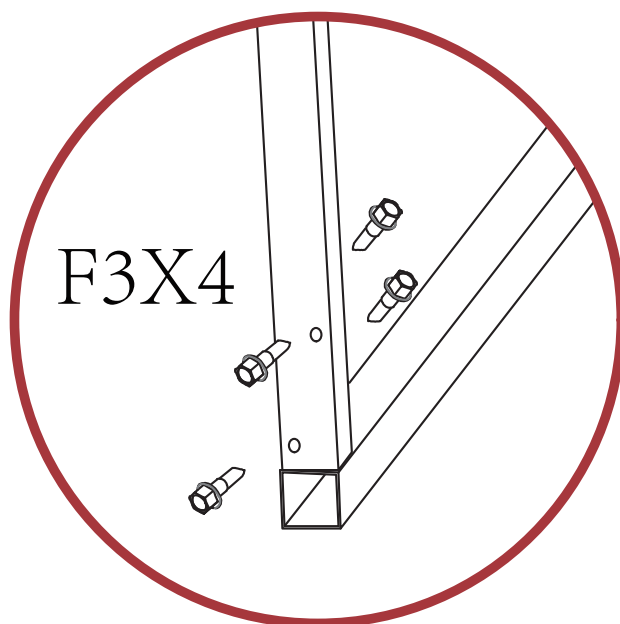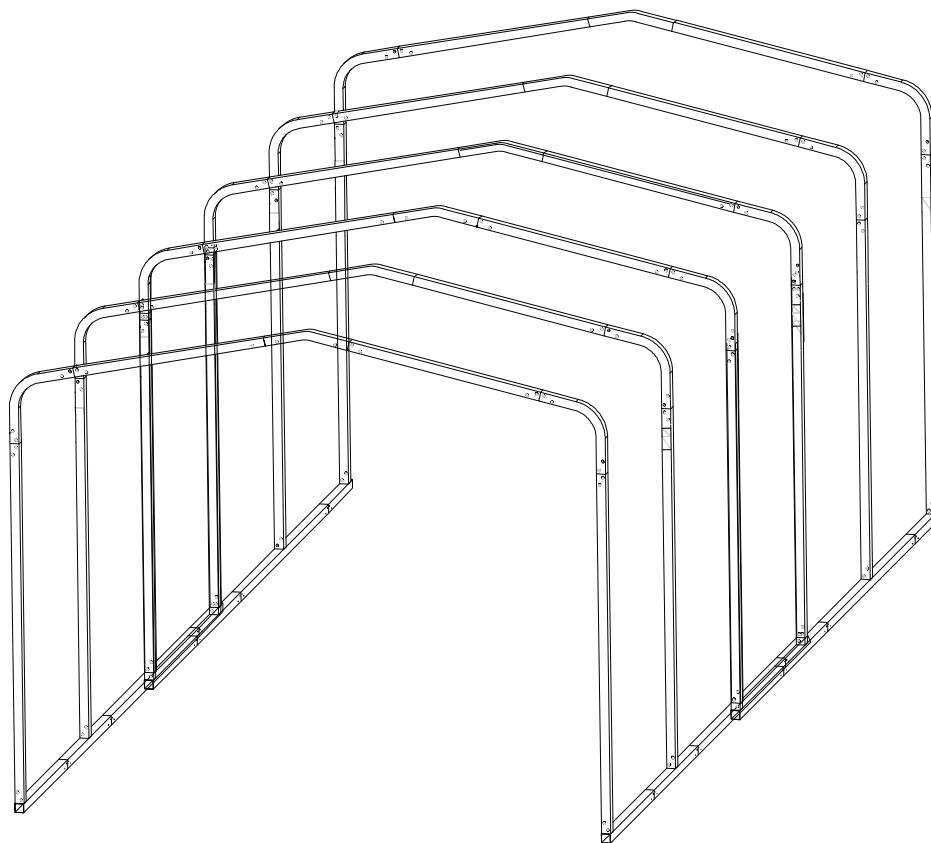




X12


F3		X48
----	---	-----

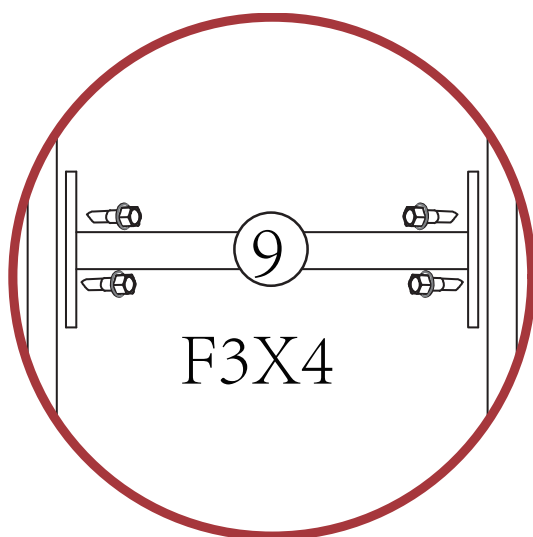
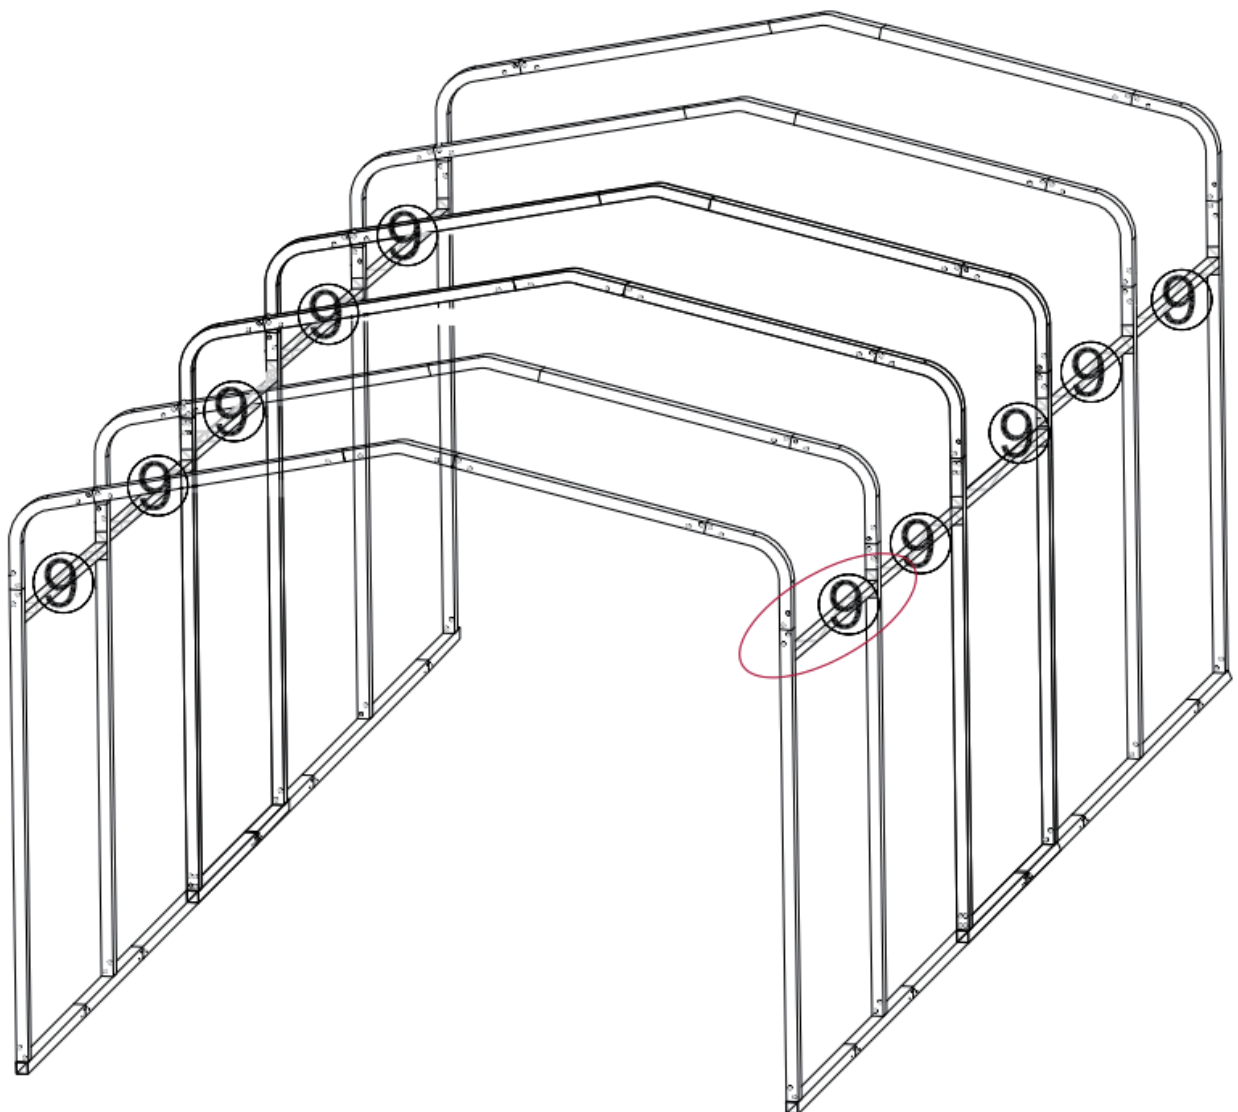


X10


F3		X40
----	---	-----

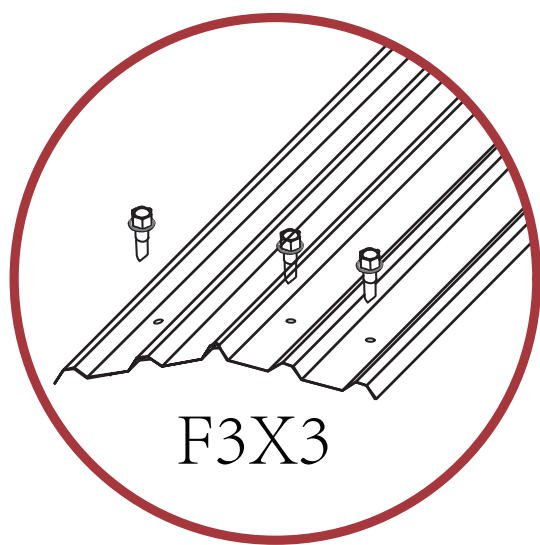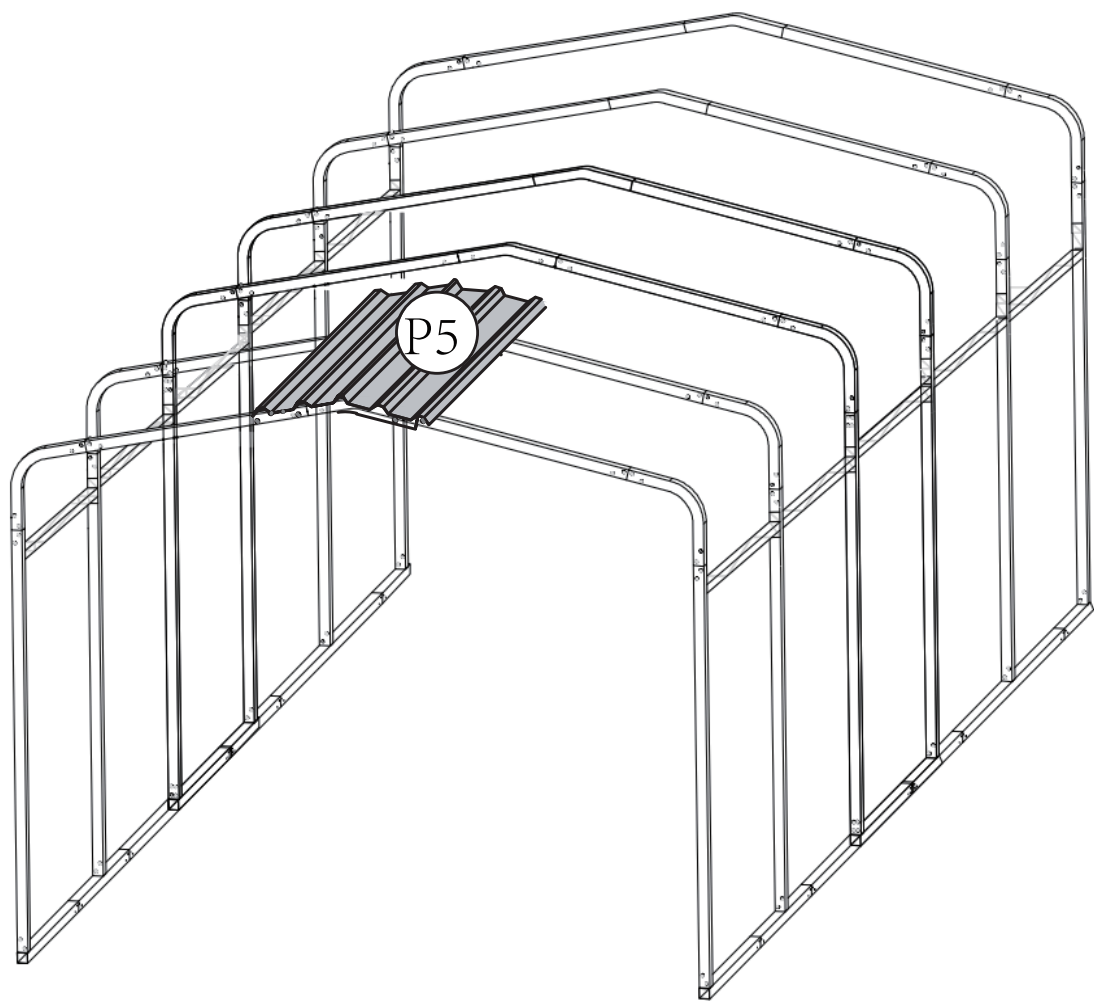

F3		X3
----	---	----


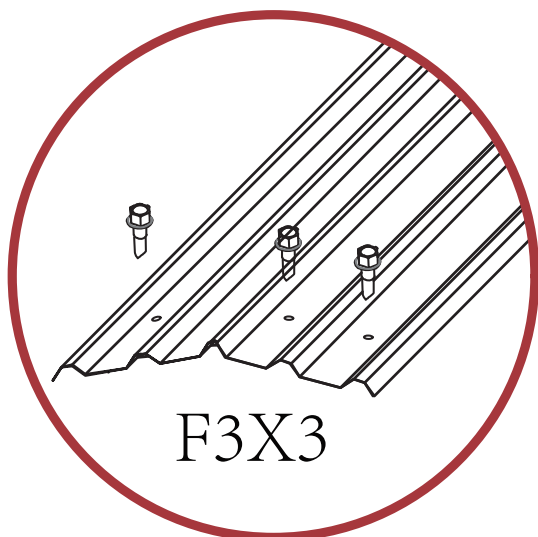
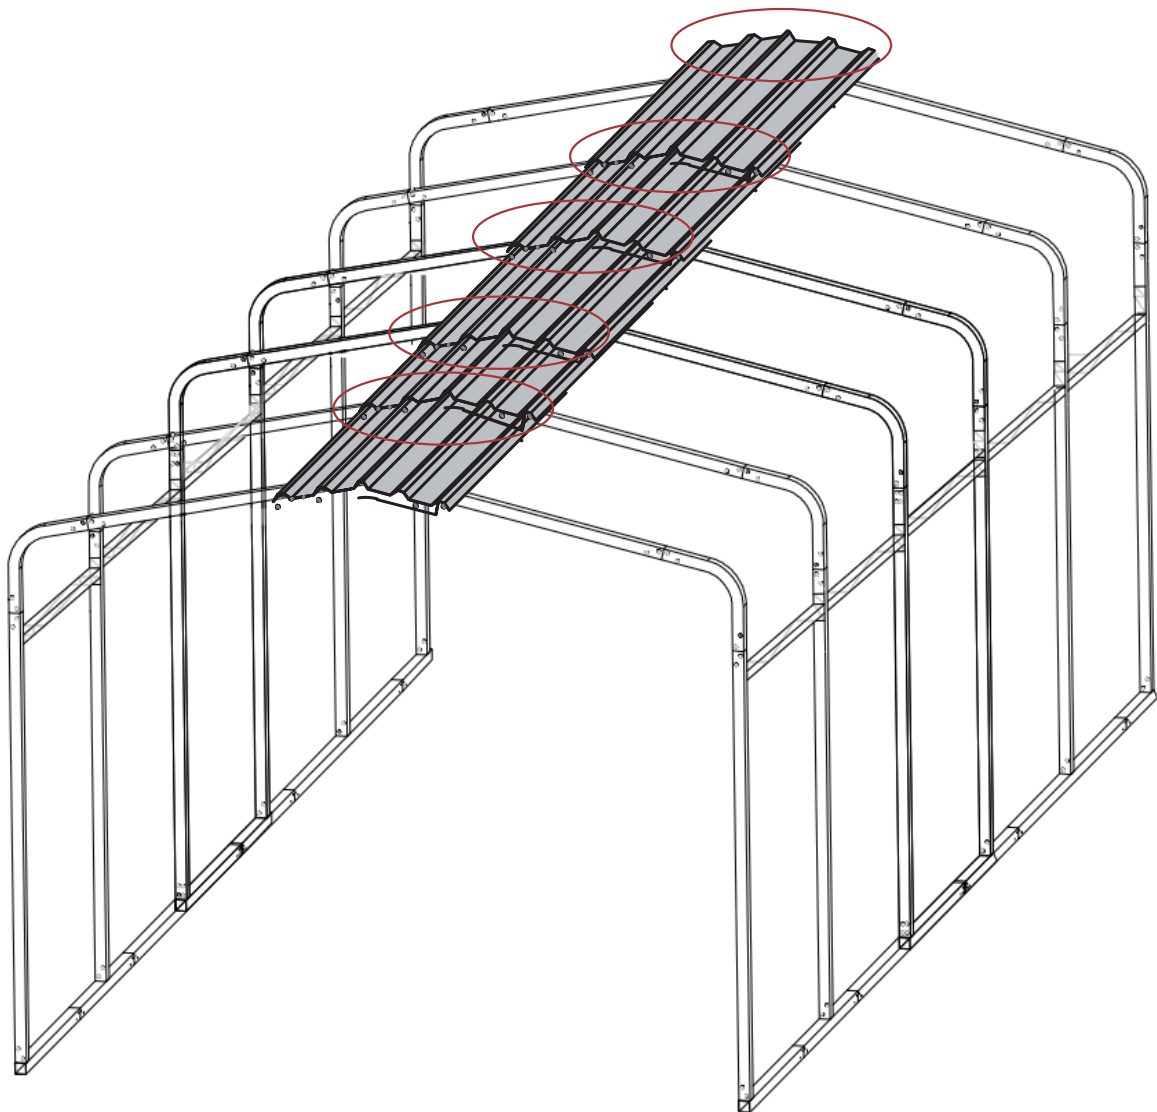



F3X3



F3		X15
----	---	-----

Note: You need to drill holes on the frame when installing the P5. Make sure the edges of the boards are aligned to avoid skewing during the assembly process.



Important: In the gaps where the tiles overlap, apply glass glue to prevent water leakage

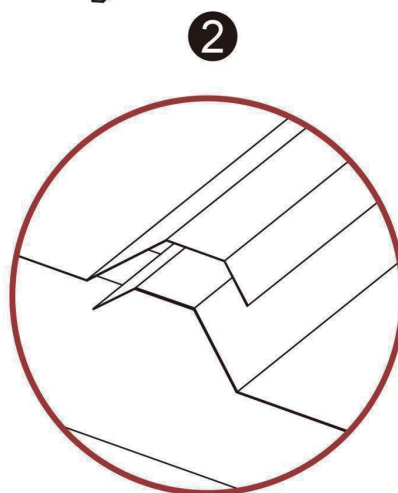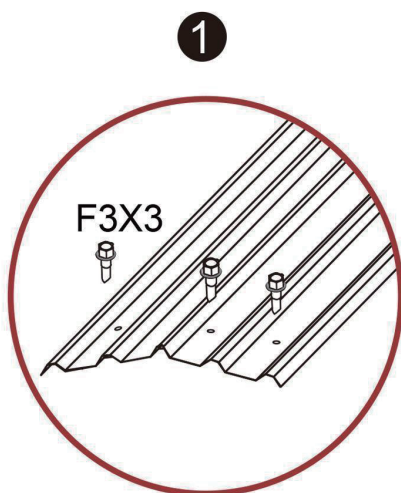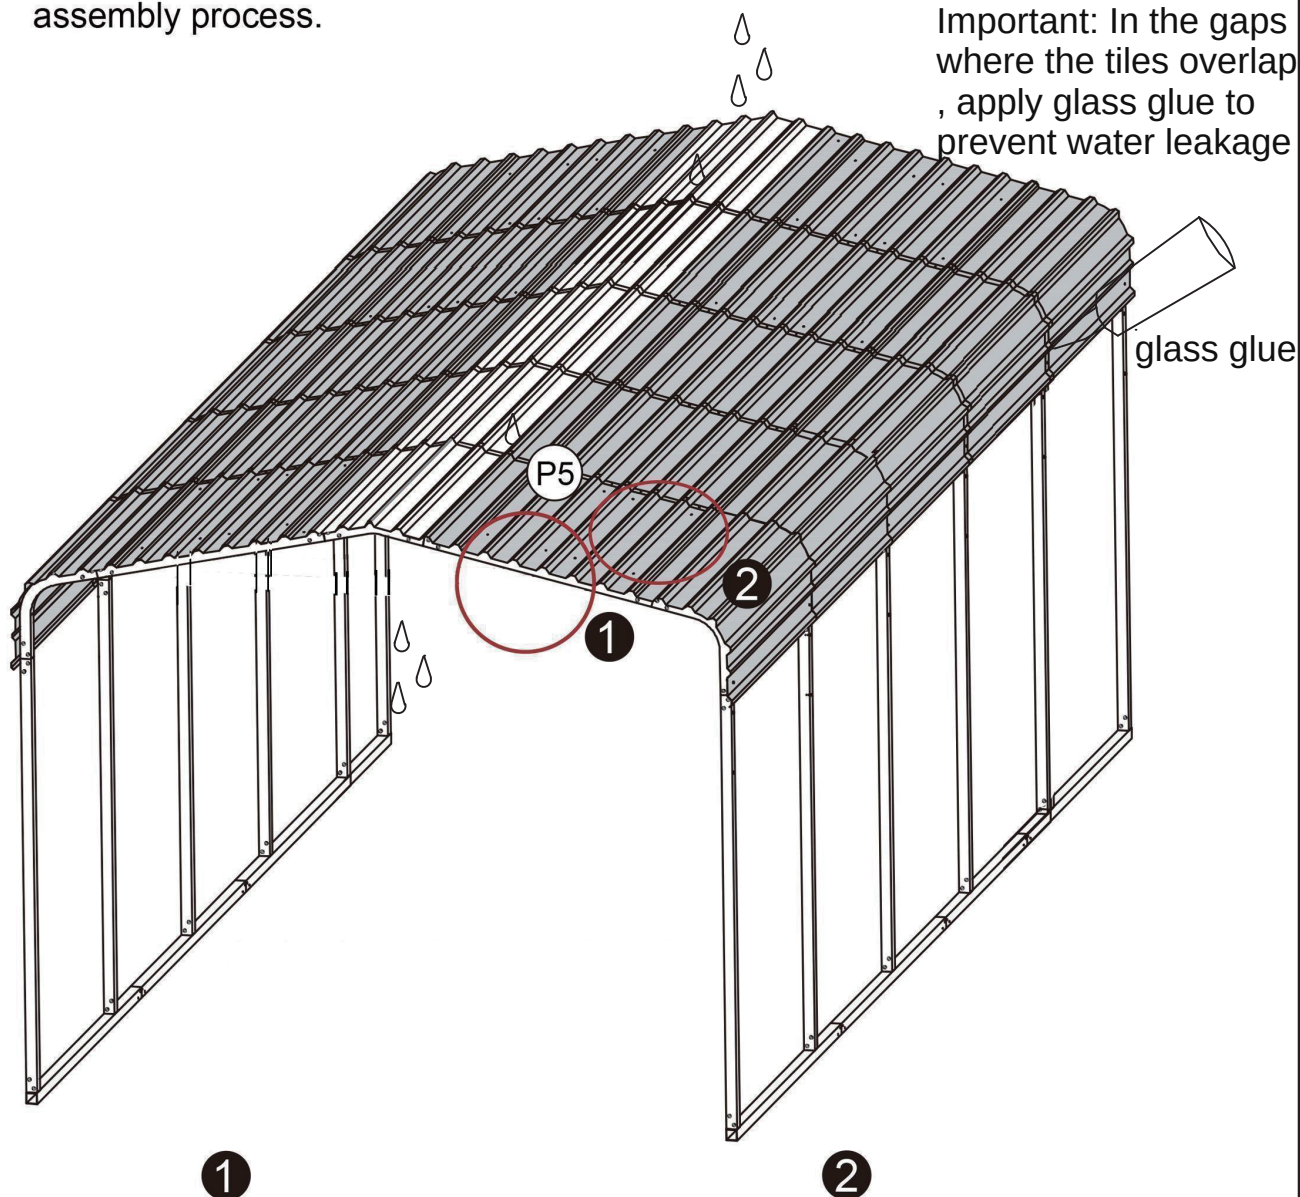


F3		X144
----	---	------

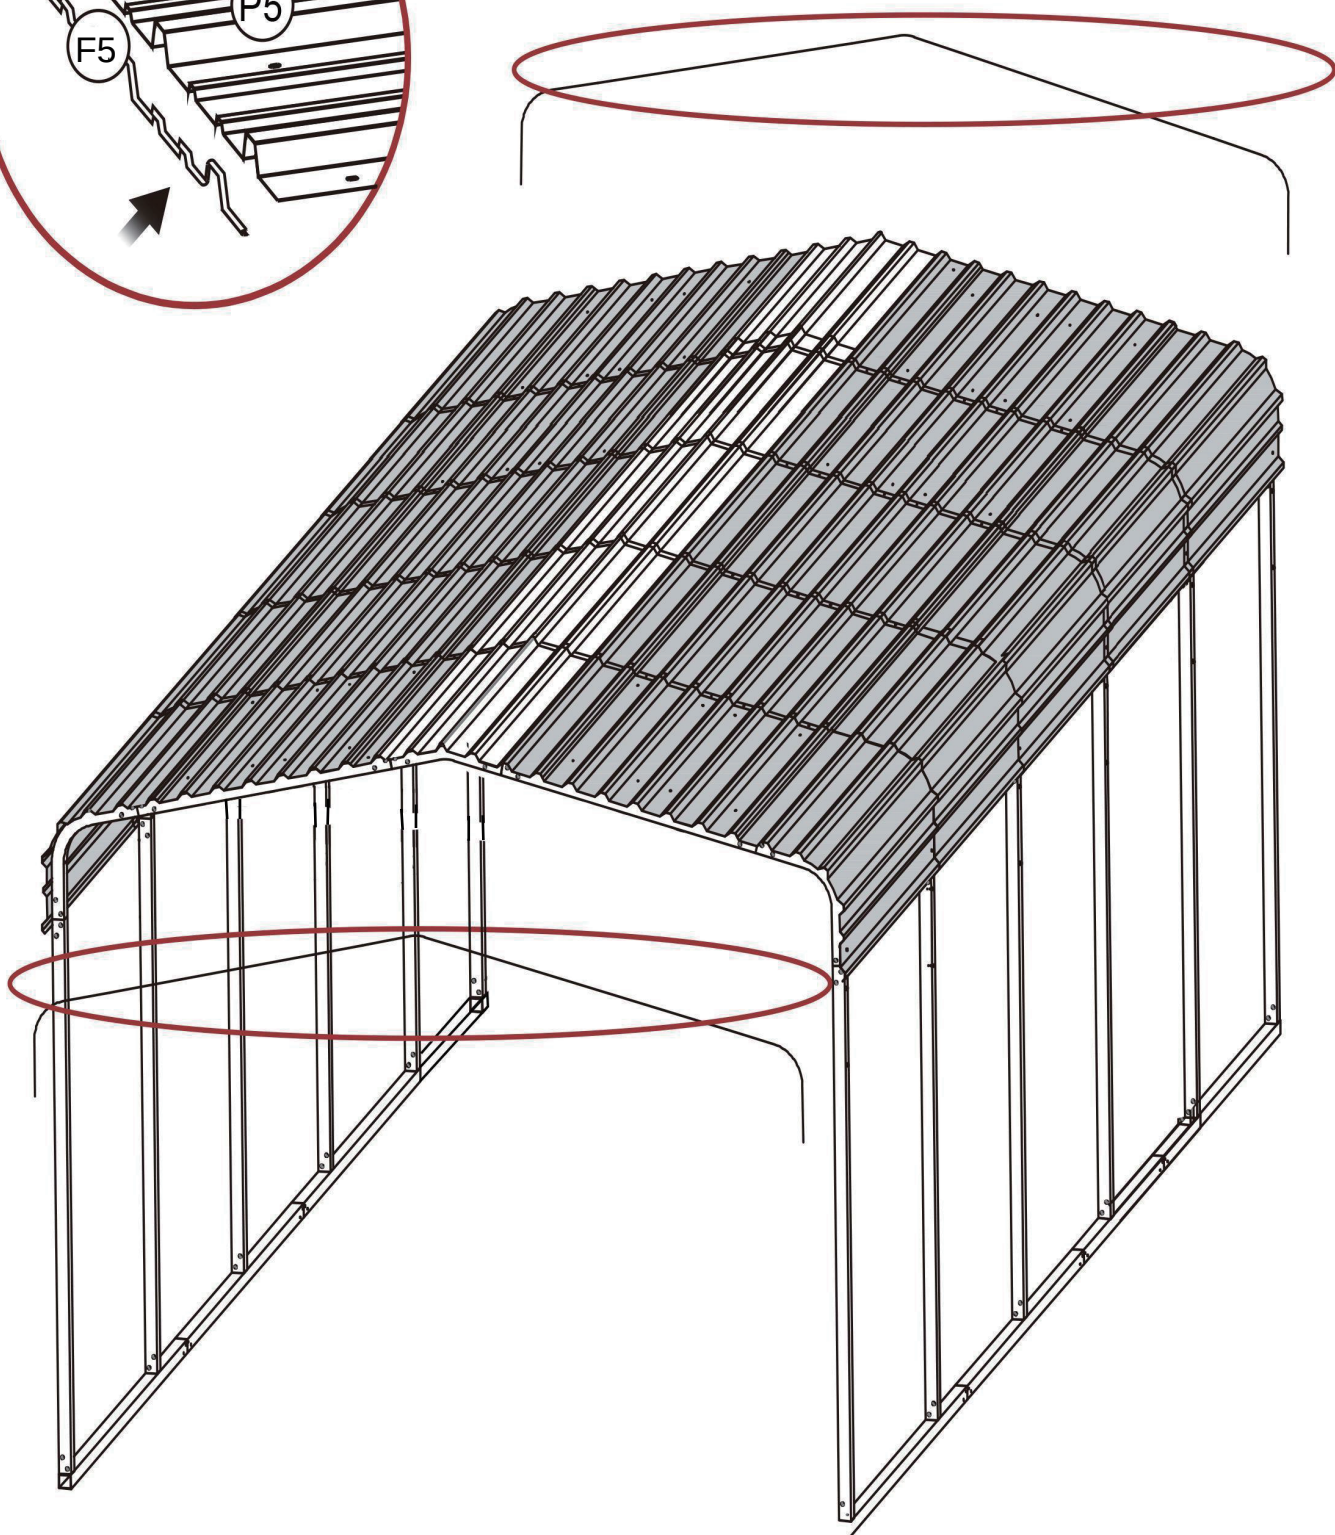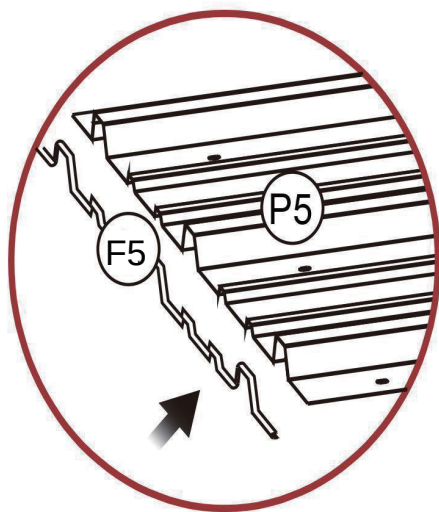

Note: Before installing the F8, make sure the overall product size is consistent. If not, adjust it to prevent the product from shaking

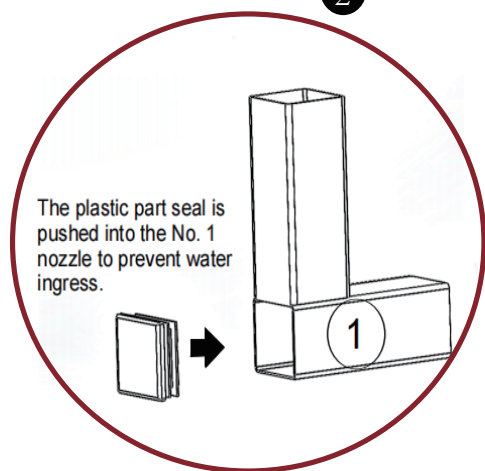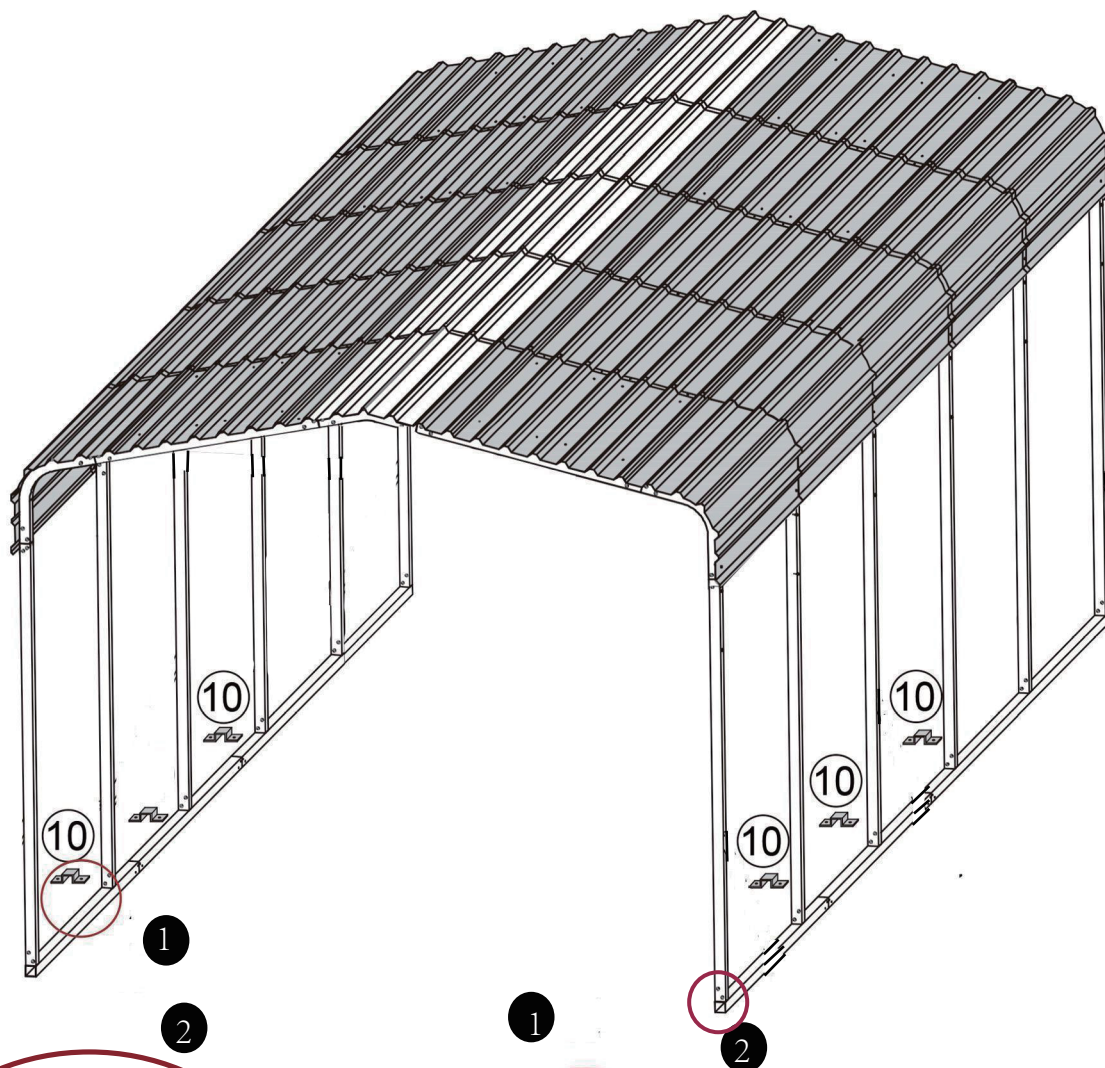

X4

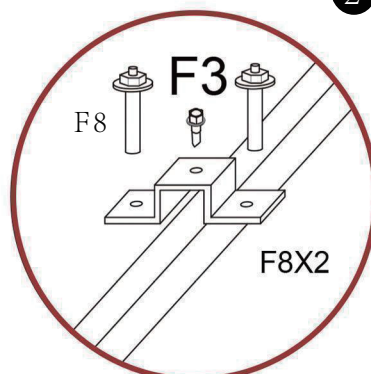

X6

F3		X6
----	--	----

AFTER-SALE SERVICE

If you have any suggestions for our products or find that the products have quality problems, please contact us first, our after-sales team will reply you within 24 hours, and we will do our best to give you solutions until you are satisfied.

Guaranteed Customer Service

Your shopping experience is very important to us!
Feel unsatisfied? **Contact us!**
Have any questions? **Contact us!**

Wanna share your experience with our products?
Share your pictures with us.

Any suggestions? **Contact us!**
We gotcha back!



E-mail: service@replycenter.net