


2275.500 Shown

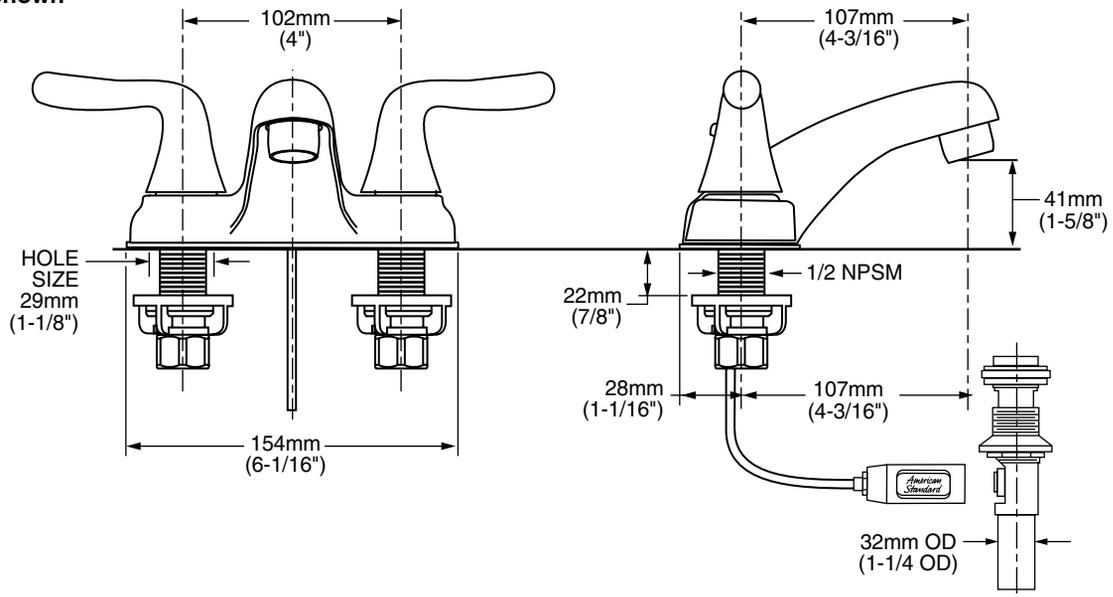

MODEL NUMBER:

- 2275.503 Colony Soft 2 Handle Centerset**
Lever Handles. Non-metallic Speed Connect®
Pop-up drain.
- 2275.509 Colony Soft 2 Handle Centerset**
Lever Handles. Metal Speed Connect® Pop-up drain.

GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterways with one-half inch male inlet shanks. Metal body. Color matched underbody. Lever handles. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4 inch (32mm) tail piece, (2275.509). Non-Metallic Speed Connect drain body with 1-1/4 inch (32mm) tail piece, (2275.503). 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Longer Spout: Provides extended reach into lavatory.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required - seals the first time, every time.
- Flexible stainless steel cable - installs effortlessly in tight spaces.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.


SUGGESTED SPECIFICATION:

Two-handle 4" centerset lavatory faucet shall feature a cast brass waterway. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2275.____.____.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125**
- NSF 61/Section 9**

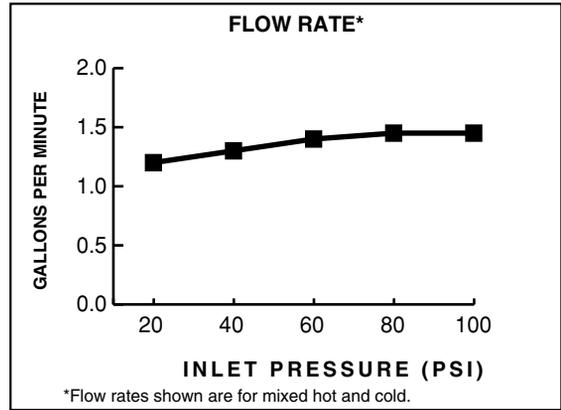

Product Number	Description	Finish Options	
		Polished Chrome	PVD Satin Nickel
		002	295
2275.503	Colony Soft 2 Handle Centerset. Lever Handles. Non-metallic Speed Connect® Pop-up drain..		
2275.509	Colony Soft 2 Handle Centerset. Lever Handles. Metal Speed Connect Pop-up drain.		

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.