


Sidetable


CTG075 | 3 Drawers

Assembly Instructions

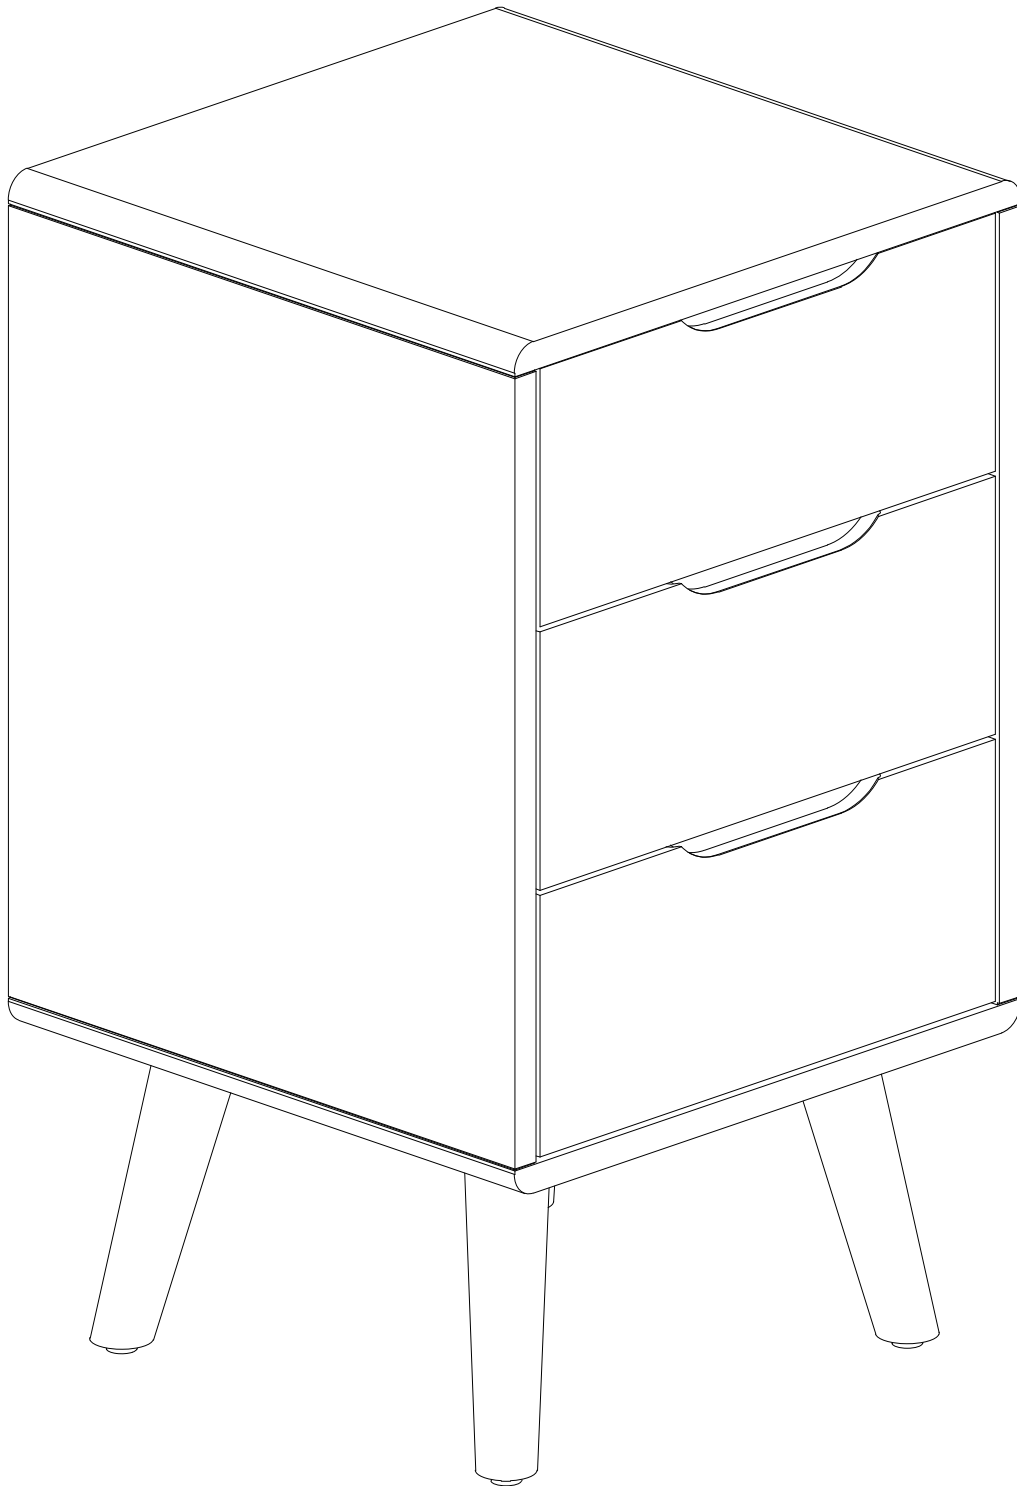


Assembly Diagram

CTG075 | 3 Drawers

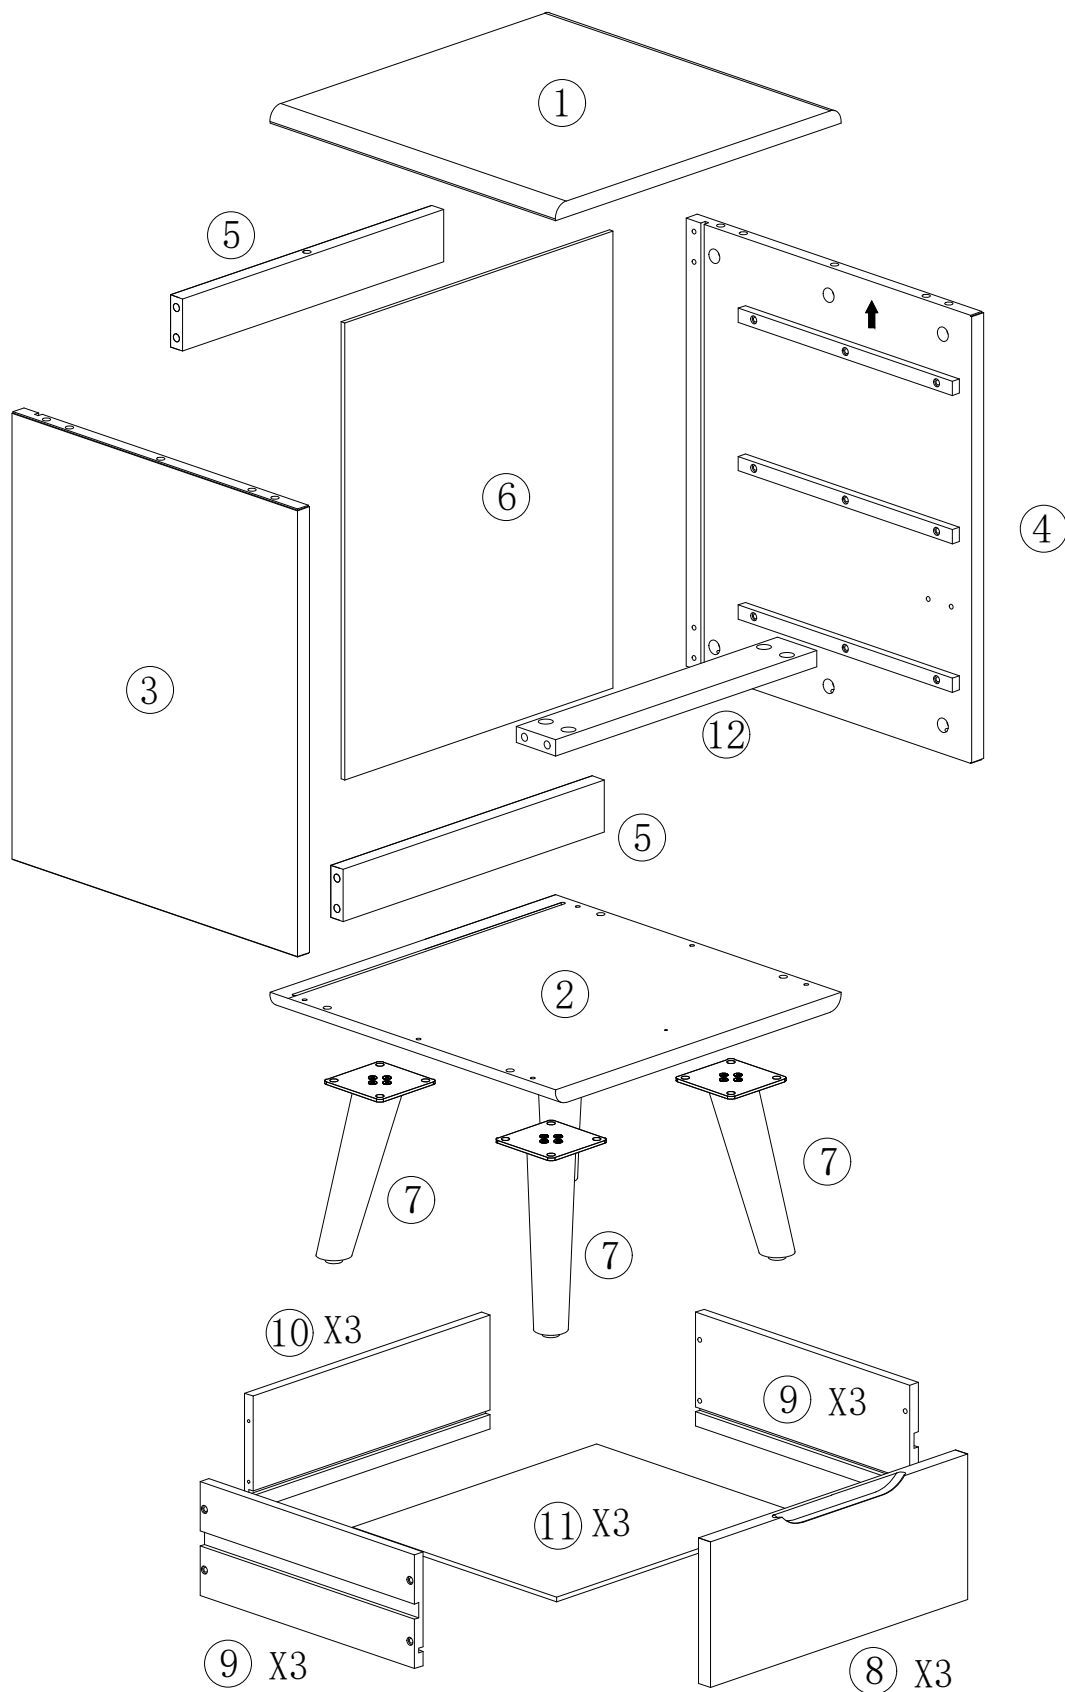

Parts List


CTG075 | 3 Drawers



1 Top panel

400 × 400 × 17MM


Quantity: 1



2 Base panel

400 × 400 × 17MM

Quantity: 1




3 Left side panel

472.5 × 400 × 27MM

Quantity: 1

Slides preinstalled



4 Right side panel


472.5 × 400 × 27MM

Quantity: 1

Slides preinstalled

Parts List


CTG075 | 3 Drawers



5 Upper / lower rear crossbar

366 × 55 × 17MM


Quantity: 2



6 Back panel

482 × 376 × 5MM


Quantity: 1



7 Leg with mounting plate

158 × Ø40MM

Quantity: 4




8 Drawer front assembly

360 × 153.5 × 29MM

Quantity: 3

Parts List

CTG075 | 3 Drawers



9 Drawer side

300 × 120 × 12MM

Quantity: 6


Slides preinstalled



10 Drawer back

332 × 120 × 12MM


Quantity: 3



11 Drawer bottom

342 × 286 × 5MM

Quantity: 3




12 Middle drawer crossbar

366 × 55 × 17MM

Quantity: 1

Hardware & Tools


CTG075 | 3 Drawers



A Cam bolts

L=40MM


Quantity: 26 + 2



B Cam locks

Ø15 × 9MM


Quantity: 26 + 2



C Wood dowels

Ø8 × 30MM

Quantity: 8 + 1



D Flat-head screws


#8 × 30MM

Quantity: 24 + 2

Coarse thread

Hardware & Tools


CTG075 | 3 Drawers



E Drawer retaining clips

L=50MM


Quantity: 3



F Wood screws

#3.5 × 15MM

Quantity: 3




G Ratchet screwdriver

M6 × 136MM

Quantity: 1

Reusable tool



H Hex key


M4 × 100MM

Quantity: 1

Reusable tool

Hardware & Tools


CTG075 | 3 Drawers



I Cover stickers

20MM


Quantity: 10 + 1



J Adhesive pads

Ø25 × 3MM


Quantity: 4



K Hex socket bolts

M6 × 12MM

Quantity: 16 + 1



L Washers


M6 × 13MM

Quantity: 16 + 1

Ratchet Screwdriver

CTG075 | 3 Drawers

1. Manual operation setting
2. Ratchet right setting
3. Ratchet right setting
4. Press down for bit removal and retraction.

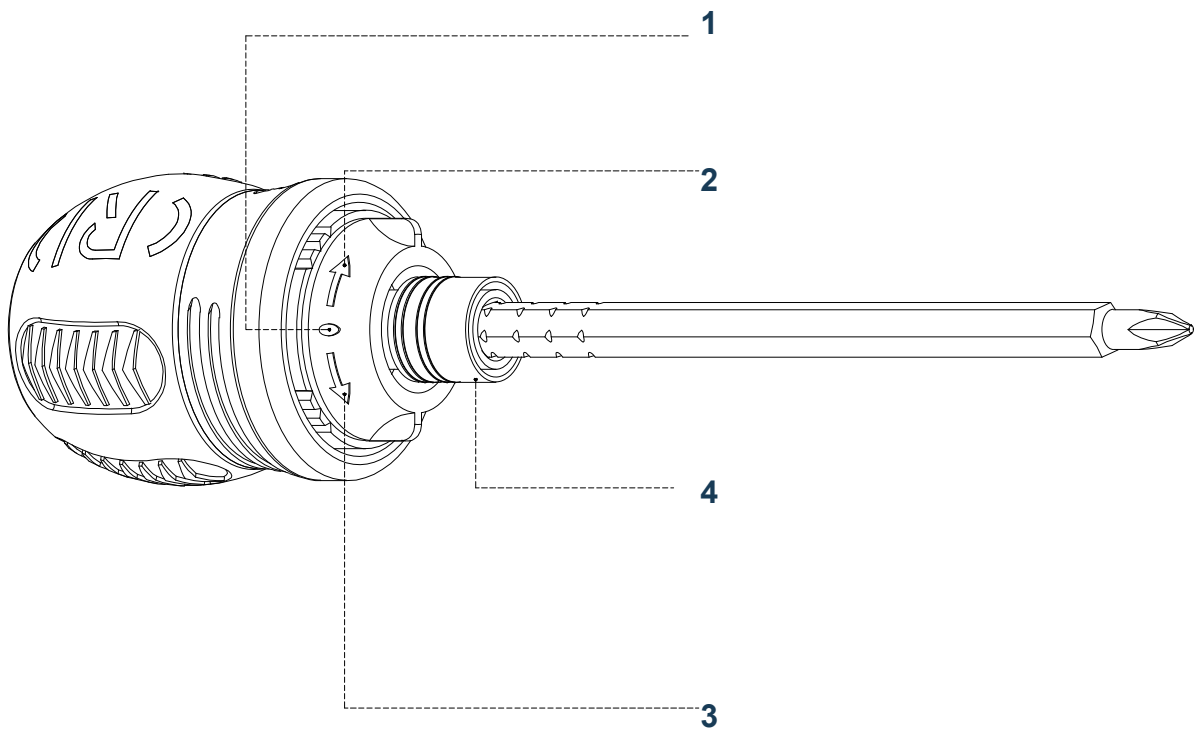

Safety Warnings

CTG075 | 3 Drawers

Place the unit on a level surface, or level it with the included hardware when applicable.

Do not sit or stand on the product. Do not allow children to climb, sit or stand on it.

For safety, the unit must be secured to the wall.

Do not use the unit without installing the tip restraint.

The unit can tip over and cause severe injury or death.

Do not exceed the recommended weight limits.


Distribute weight evenly on each level. Keep heavier loads at the bottom.

Before cutting, drilling or hammering into a wall or floor, check for electrical wiring, plumbing and gas lines. Cutting into them can cause serious injury.


Cam Lock Assembly

CTG075 | 3 Drawers


Illustration key: A = cam bolt; B = cam lock.




1. Screw the cam bolt into the panel.




2. Insert the cam lock with its arrow pointing toward the panel edge.



3. Align the cam bolt and cam lock.
Insert fully into the cross-bored hole.



4. Turn the cam lock clockwise
190°–230° to lock the panels.



5. Check that the panels fit tightly
and the connection is rigid.

Generic Fitting Reference

CTG075 | 3 Drawers





Follow the insertion depths shown for the connector types illustrated.

Illustration labels A and C are generic reference labels.

Use the model-specific parts and hardware lists for assembly.

For a wood dowel, insert it at least halfway.

If necessary, tap gently with a rubber mallet.

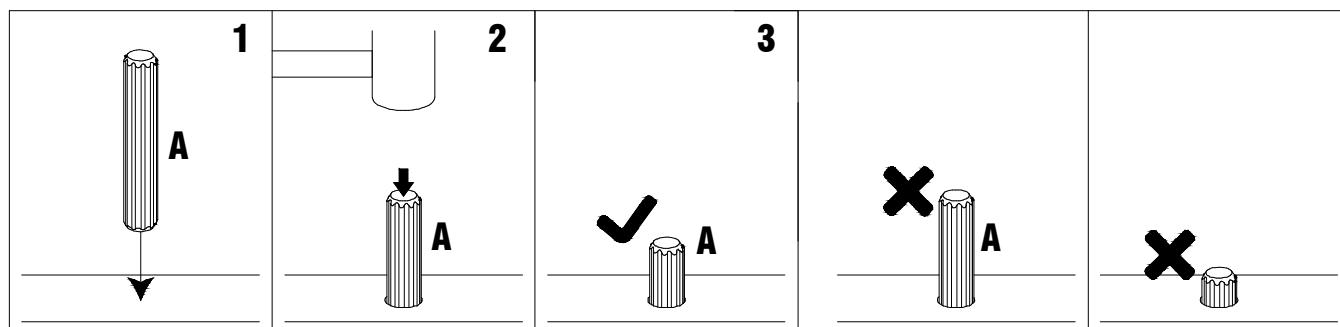

Before Assembly


CTG075 | 3 Drawers

Check all parts against the parts and hardware lists before assembly.


Use the correct screws to avoid splitting or damaging the panels.

The cabinet and drawer slides shown are preinstalled.


Tools G and H are reused throughout assembly.

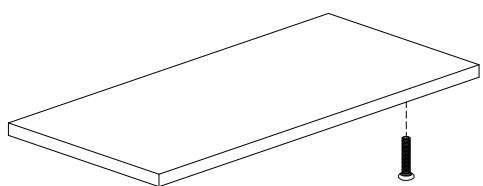

Example



Incorrect: oversized screw






Correct: matching screw

Step 1

CTG075 | 3 Drawers

Install Cam Bolts A in Side Panels 3 and 4 using Tool G.

Hardware: A × 12 Tool: G (reuse)

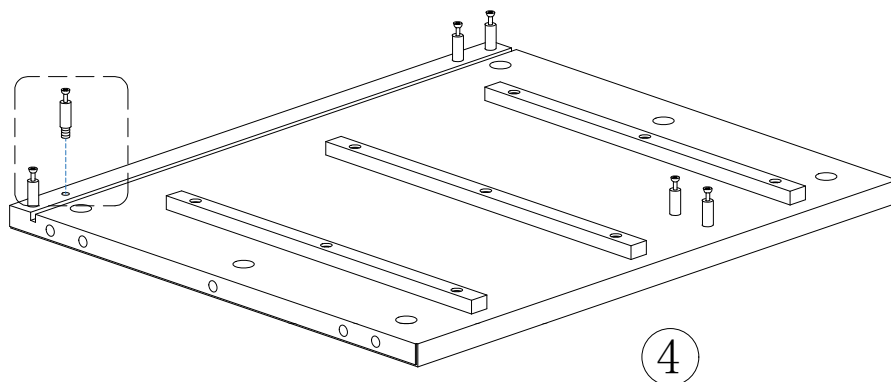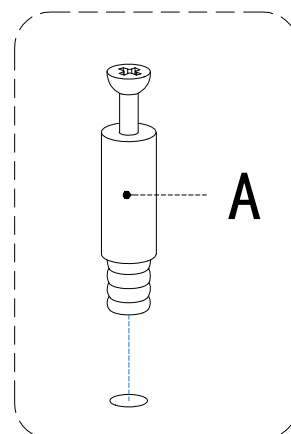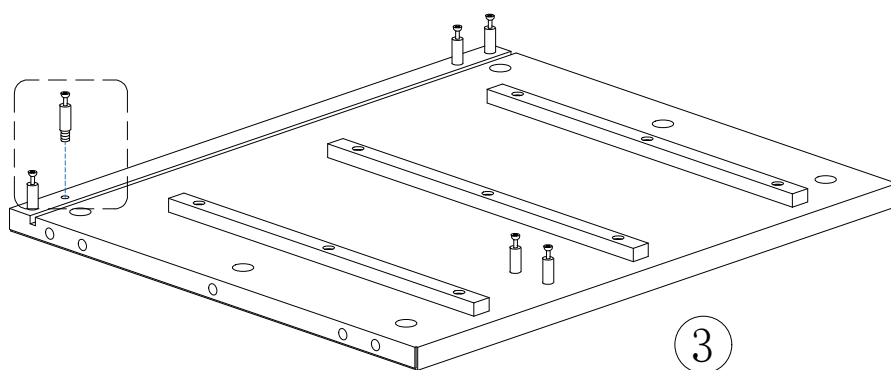






Step 2

CTG075 | 3 Drawers

Install Cam Bolts A in Top Panel 1 and Base Panel 2.

Attach one Retaining Clip E to each of Parts 1, 2 and 12 using Screw F.

Hardware: A × 14 E × 3 F × 3 Tool: G (reuse)

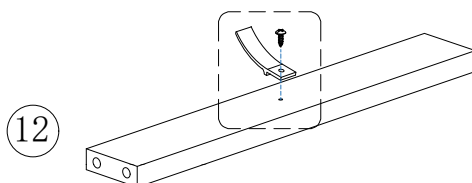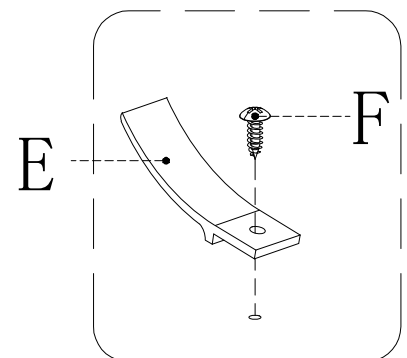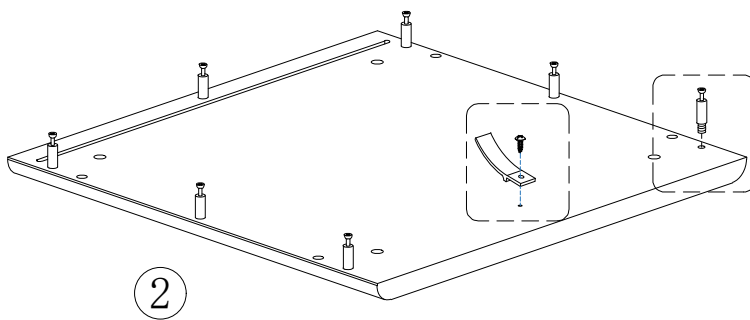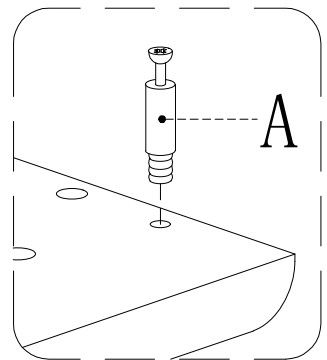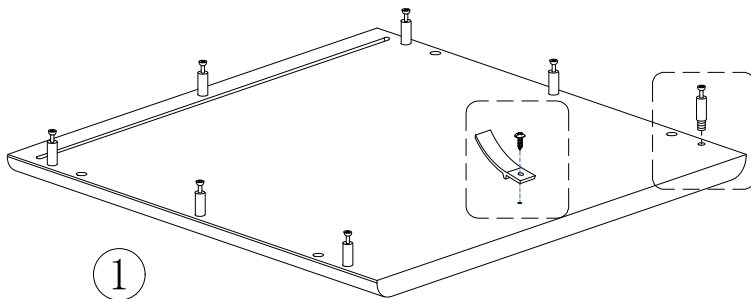


Step 3

CTG075 | 3 Drawers

Join Side Panels 3 and 4 with both Crossbars 5 and Crossbar 12 using Cam Locks B.

Keep the arrows and center holes oriented as shown; apply Stickers I.

Hardware: B × 12 I × 8 Tool: G (reuse)


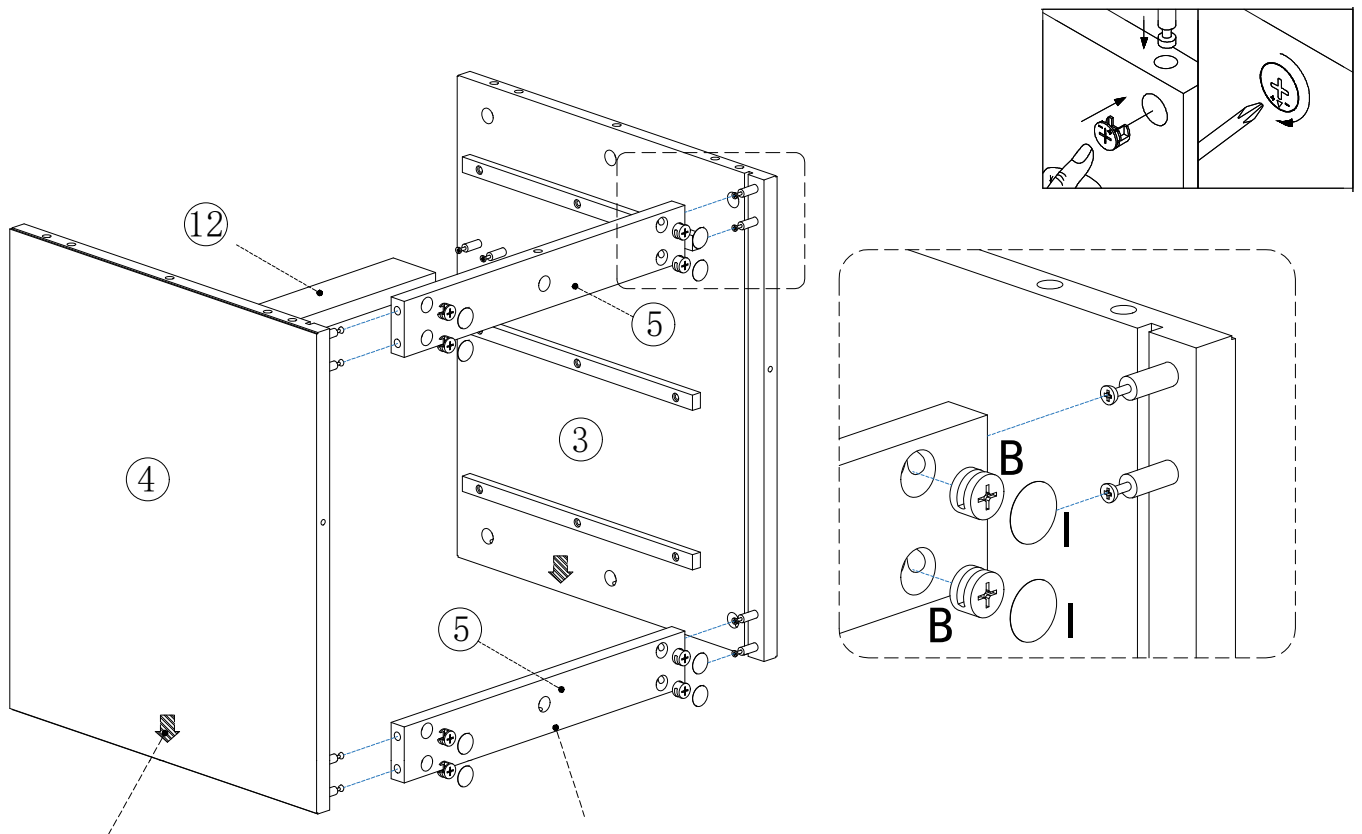


Step 4

CTG075 | 3 Drawers

Attach Top Panel 1 to the assembly from Step 3 using Cam Locks B, Wood Dowels C and Tool G.


Hardware: B × 6 C × 4 Tool: G (reuse)

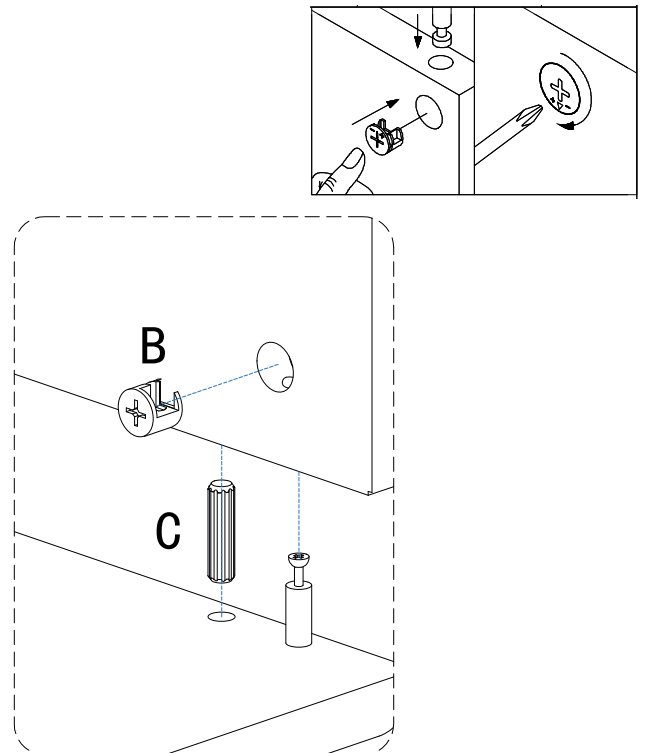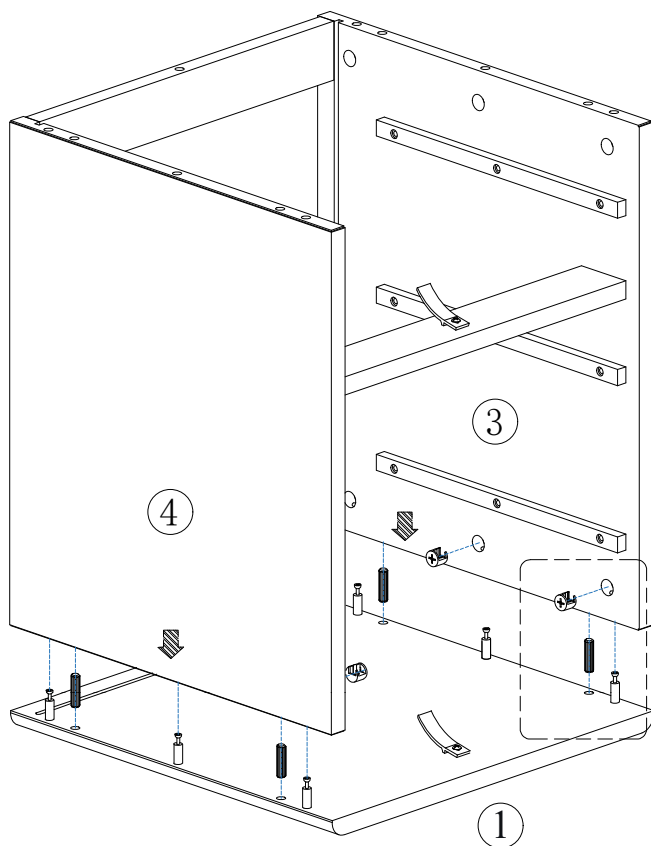

Step 5

CTG075 | 3 Drawers

Slide Back Panel 6 into the grooves of the assembly from Step 4.



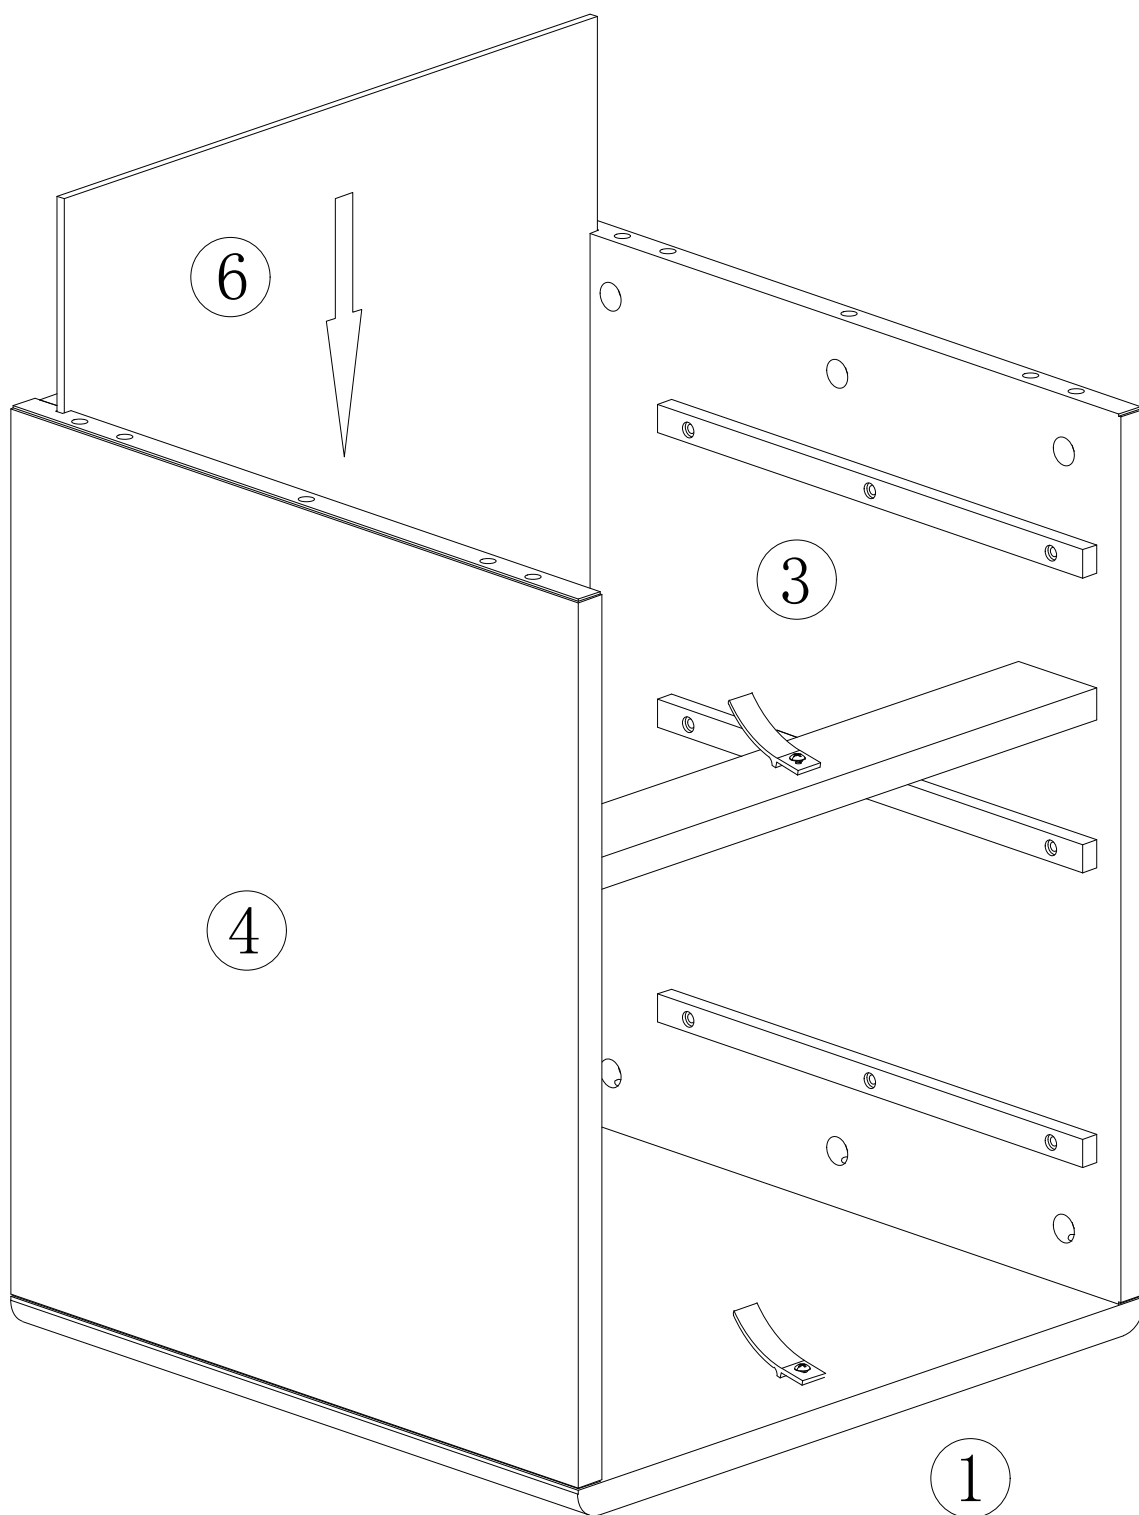


Step 6

CTG075 | 3 Drawers

Attach Base Panel 2 to the assembly from Step 5 using Cam Locks B, Wood Dowels C and Tool G.

Hardware: B × 6 C × 4 Tool: G (reuse)

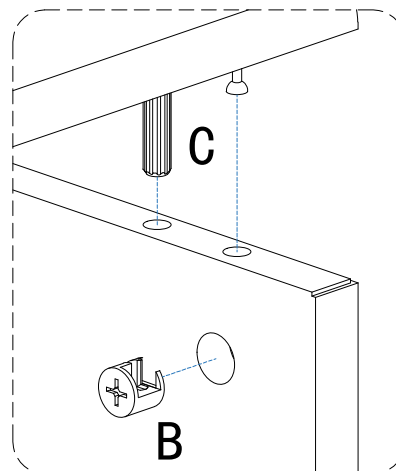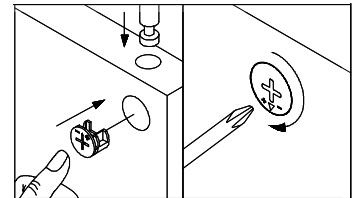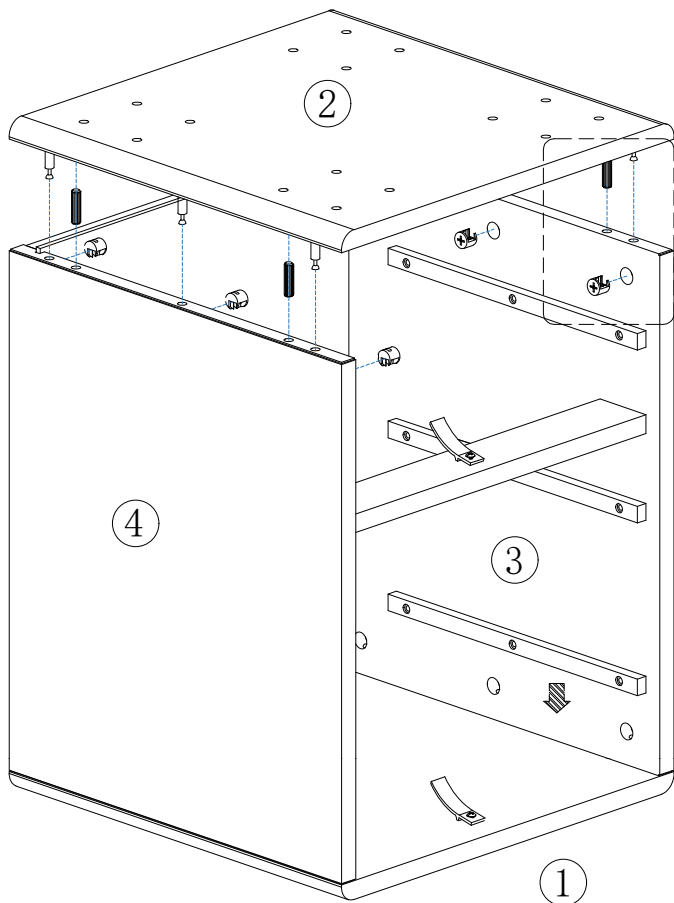




Step 7

CTG075 | 3 Drawers

Fasten Parts 1, 2 and 5 as shown using Cam Locks B.

Cover the indicated holes with Stickers I.

Hardware: B × 2 I × 2 Tool: G (reuse)

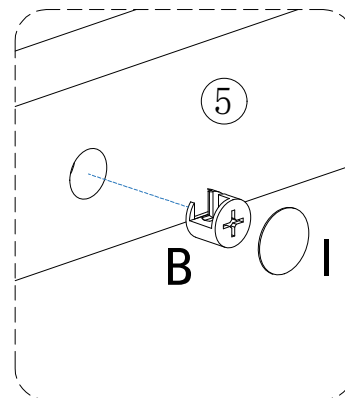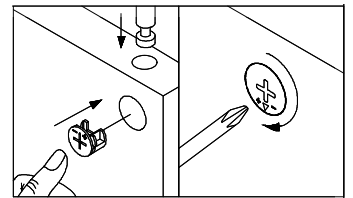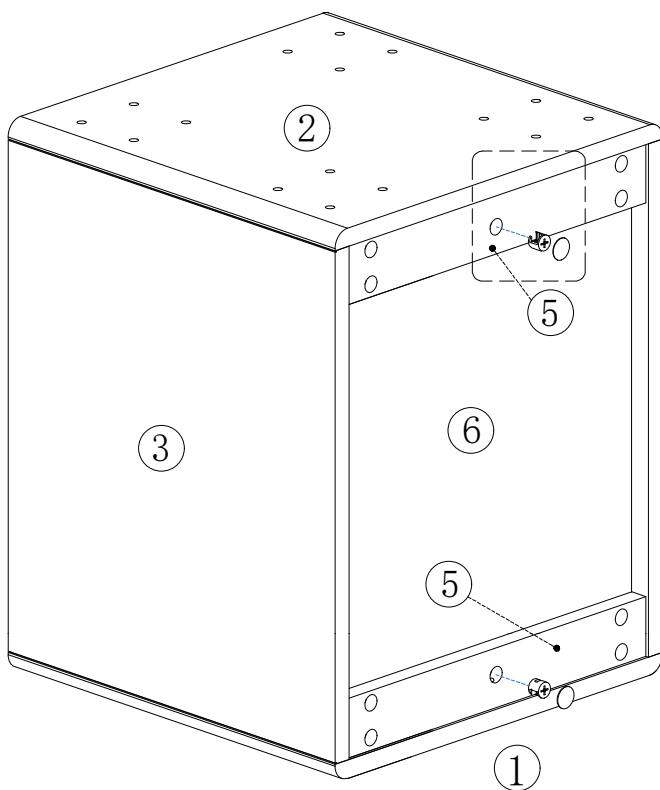




Step 8

CTG075 | 3 Drawers

Attach all four Legs 7 to Base Panel 2 with Bolts K and Washers L.

Follow the mounting-plate orientation in the top view.

Hardware: K × 16 L × 16 Tool: Hex Key H (reuse)

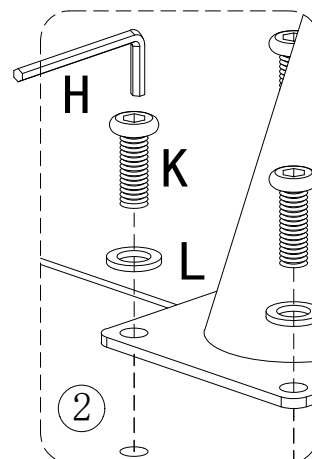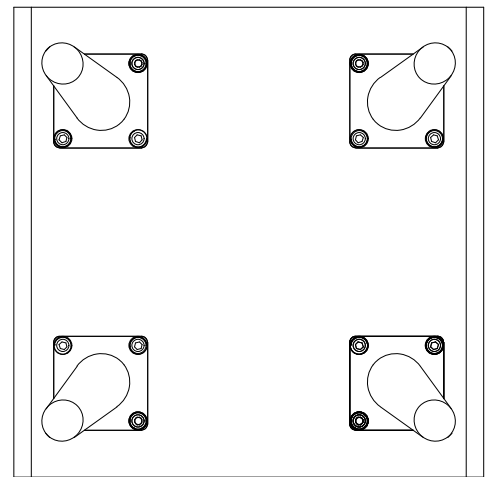
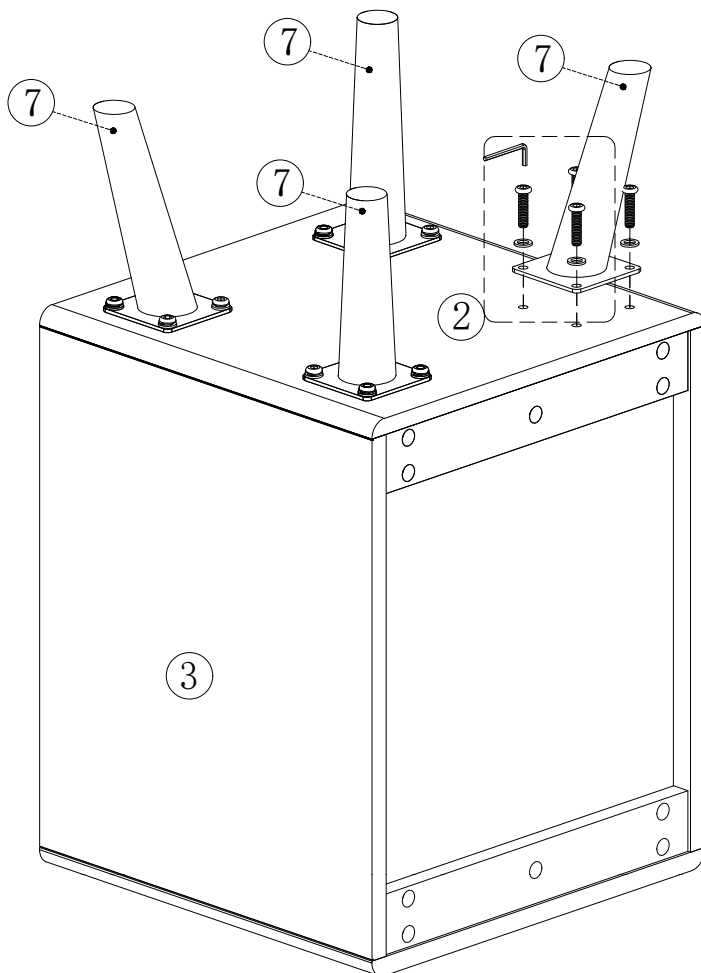


Step 9

CTG075 | 3 Drawers

Apply one Adhesive Pad J to the bottom of each Leg 7.

Hardware: J × 4

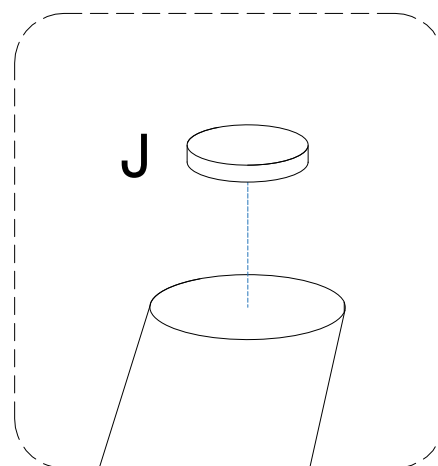
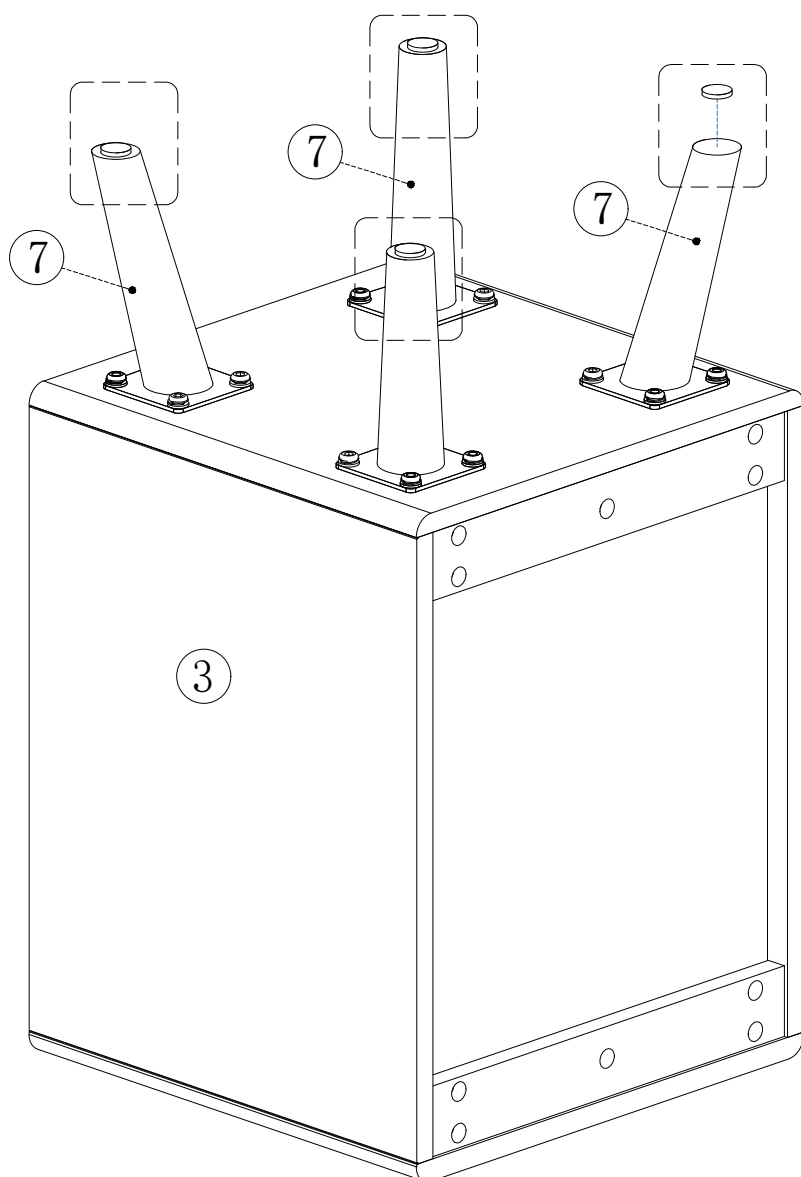


Step 10

CTG075 | 3 Drawers

Attach two Drawer Sides 9 to each Drawer Front Assembly 8 using Screws D and Tool G. Make three identical drawers.


Hardware for all three drawers: D × 12 Tool: G (reuse)

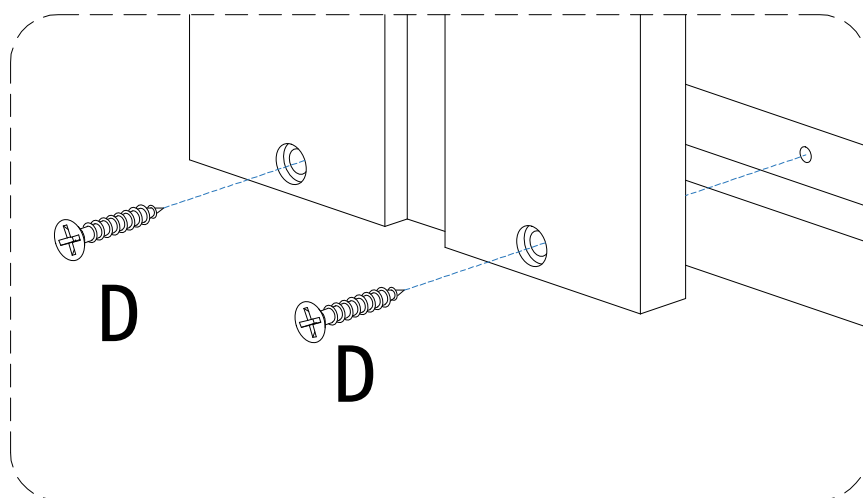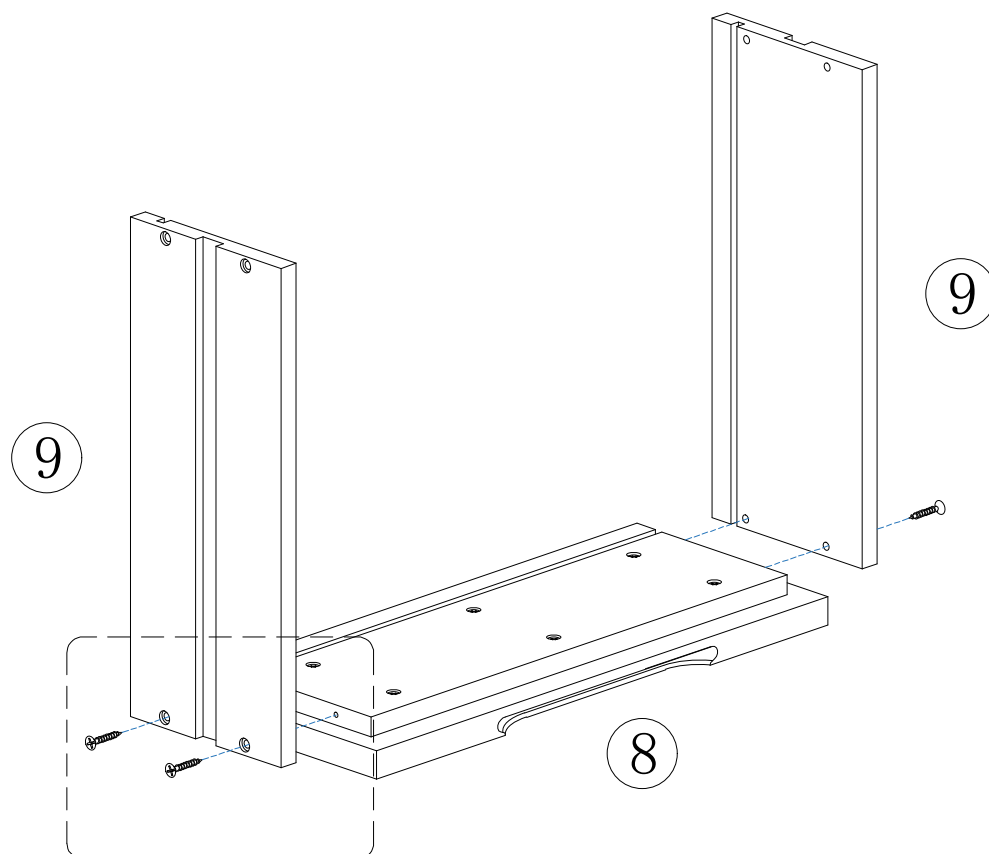

Step 11

CTG075 | 3 Drawers

Slide one Bottom Panel 11 into each drawer assembled in Step 10.
Repeat for all three drawers.

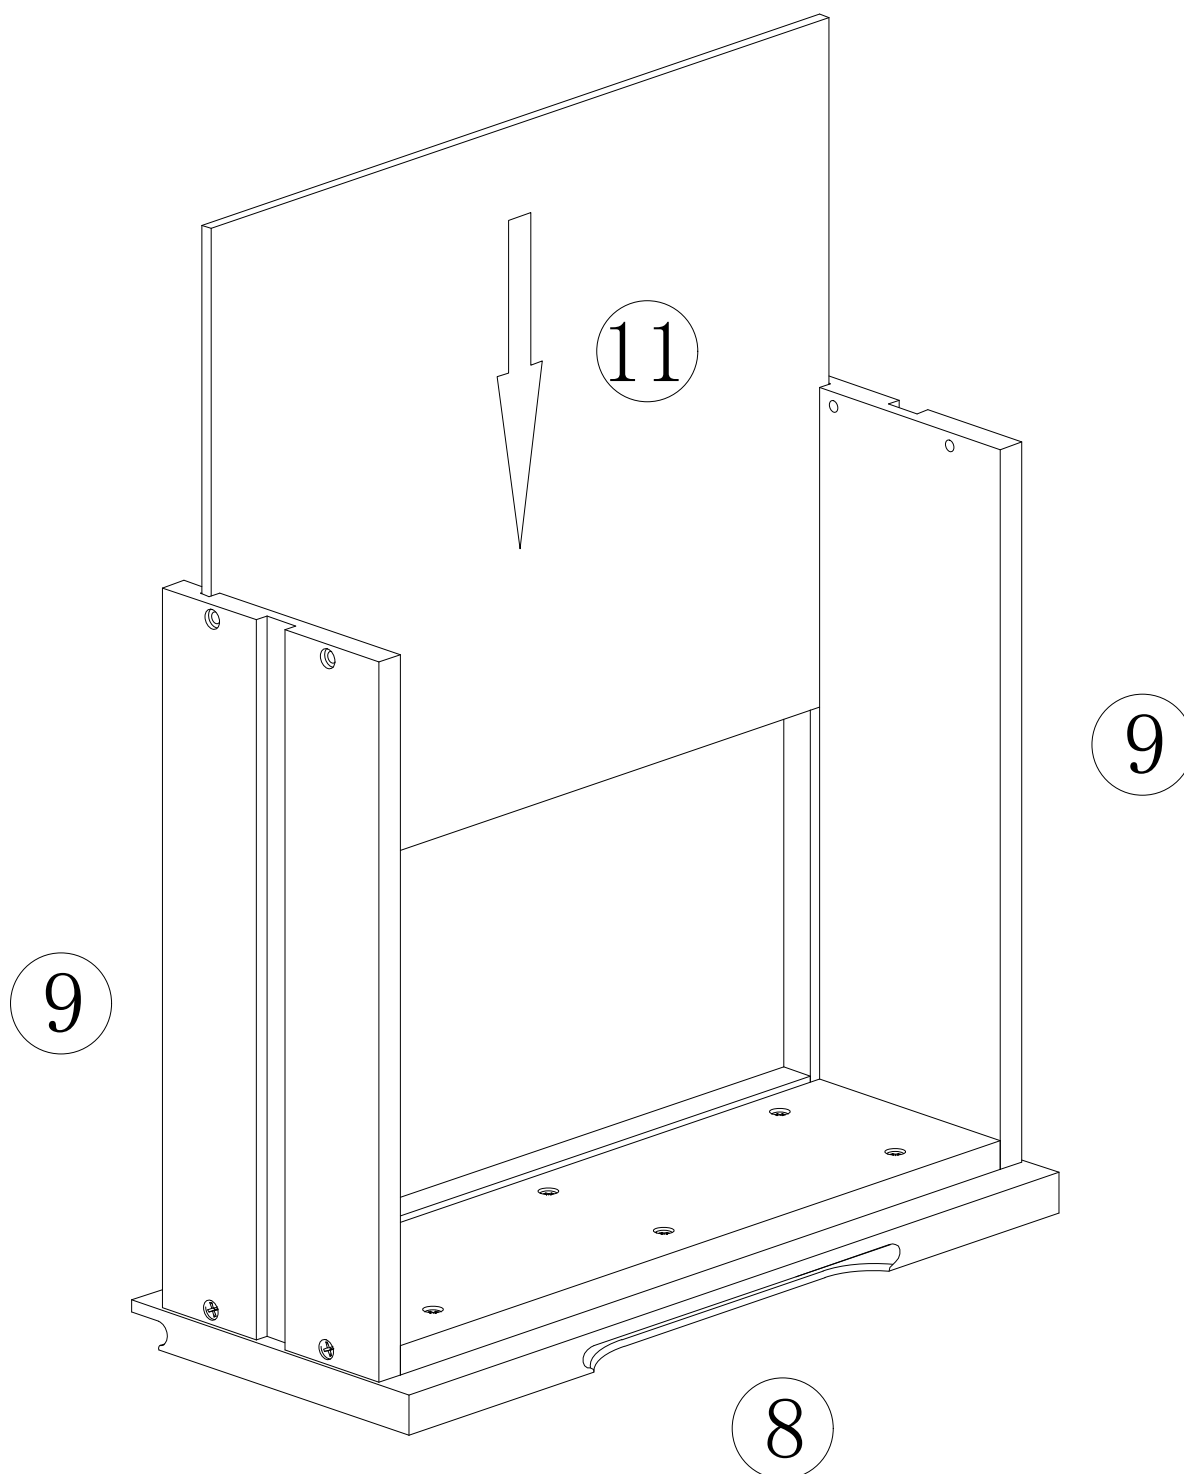




Step 12

CTG075 | 3 Drawers

Attach Back Panel 10 to both Drawer Sides 9 using Screws D.

Repeat for all three drawers.

Hardware for all three drawers: D × 12 Tool: G (reuse)

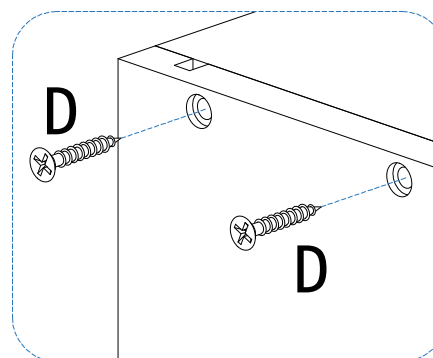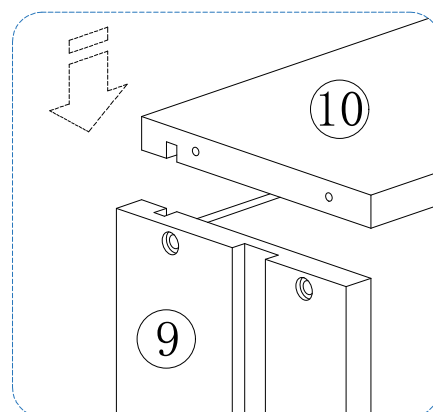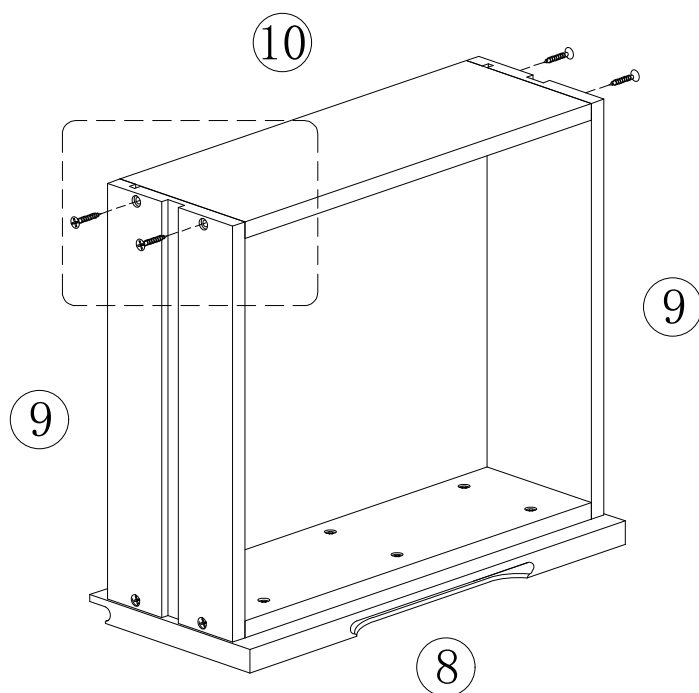

Step 13

CTG075 | 3 Drawers

Align the preinstalled slides and slide all three assembled drawers into the leveled cabinet from Step 9.

