



Bancroft®
5' Bath Whirlpool with Heater
K-1151-HR

Features

- 8 color-matched Kohler hydro-massage jets.
- Single-speed pump with air switch.
- In-line heater.
- Textured bottom surface.
- Right-hand drain.
- Integral apron with removable access panel.
- 60" (1524 mm) x 32" (813 mm) x 21-1/4" (540 mm) with flange.

Material

- Acrylic

Installation

- Integral tile flange on three sides for alcove installation.



Codes/Standards

ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795

KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

No change in measurements if connected with drain illustrated. (K-11677)

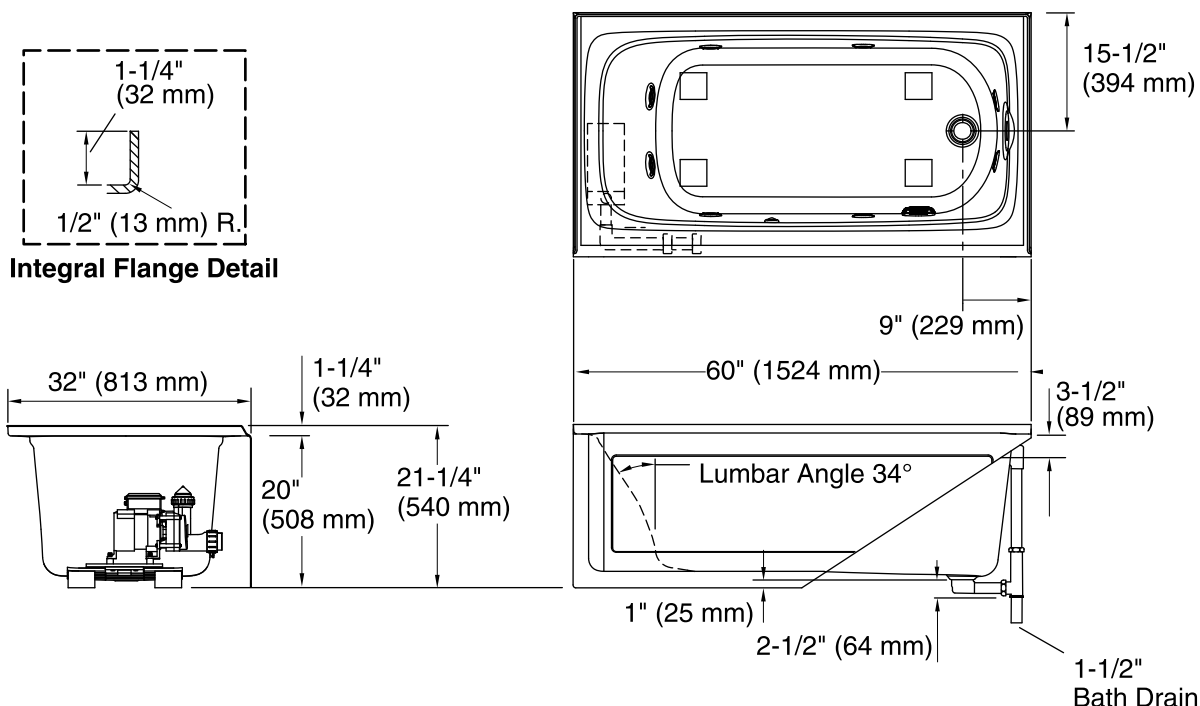

Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Right

Basin area, bottom: 45" x 22" (1143 mm x 559 mm)

Basin area, top: 54" x 25" (1372 mm x 635 mm)

Weight: 140 lbs (63.5 kg)

Minimum floor load: 50 lbs/ft² (244.1 kg/m²)

Water depth: 14" (356 mm)

Water capacity: 60 gal (227.1 L)

Electrical rating: Pump: 120 V, 7 A, 60 Hz

Heater: 120 V, 12.5 A, 60 Hz, 1500 W

Notes

Install this product according to the installation guide.

Measure your actual product for roughing-in details.