





SANCHI X-LARGE SEMI FLUSH

SLFM33327

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



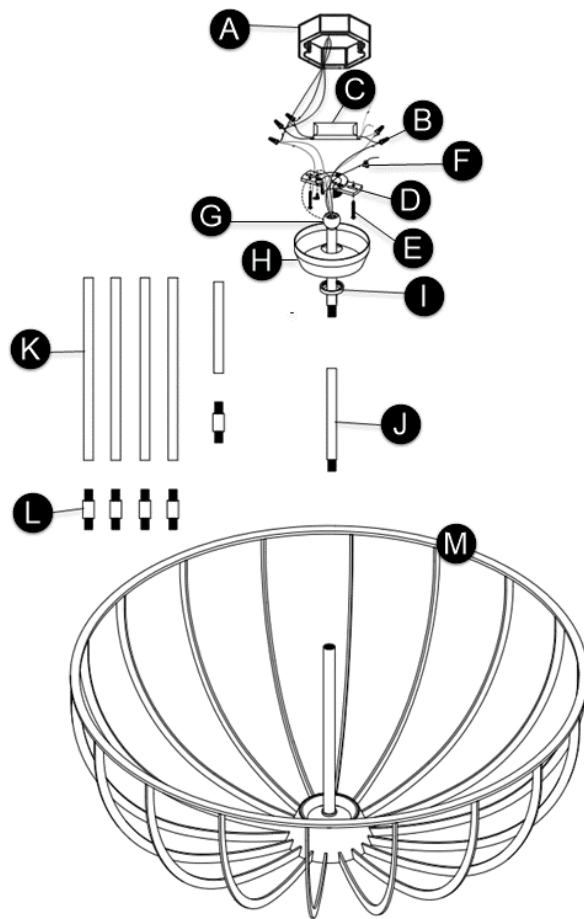

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Bar with Screw Collar
- E. Mounting Screws
- F. Safety Cable with Cable Grip
- G. Half Ball
- H. Canopy
- I. Collar Nut & Top Stem
- J. Short Stems
- K. Stem Assembly
- L. Stem Couplers
- M. Fixture

INSTRUCTIONS

I. Preparing for Installation

1. Separate the mounting bar from the canopy.
2. Determine the desired height of the fixture and complete the stem assembly by screwing the stems together using the stem couplers.
3. Feed the fixture wires and safety cable through the stem assembly, collar nut, canopy, and half ball.
4. Next, screw the stem assembly on top of the fixture. Then screw the half ball onto the stem assembly.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires (120V). Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
4. Place the driver in the junction box, ensuring the output driver wires are accessible.
5. Secure the mounting bar to the junction box using the mounting screws.
6. Slide the half ball of the assembled fixture into the bracket of the mounting bar.
7. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting bar, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
8. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-/solid blue) fixture wire to negative (-/blue) output driver wire
 - b) Positive (+/solid red) fixture wire to positive (+/red) output driver wire
9. Pull the safety cable up and down through the mounting bar, feed it through the cable grips, and secure it to the bar by tightening the set screws.
10. Carefully tuck all the wires into the canopy.
11. Place the canopy onto the mounting bar and secure it in place by screwing the collar nut onto it.