

SPECIFICATIONS:

DESCRIPTION

2-4 light vanity luminaires featuring handcrafted glass.

LAMPING

Standard: 40W Low-pressure G9 Halogen, 120V, lamp included. Suitable for use in an open fixture. Dimmable with standard incandescent dimmer (not included).

LED: 5W Replaceable source, 120V, dimmable, 80+ CRI, 3000° K CCT, 450 lumens, 25,000 hours, lamp included.

DIFFUSER

Shade shall be handcrafted double glass of various decors.

Outer diameter of 4.0" and height of 7.0", spaced 7.875" apart on center.

CONSTRUCTION

Fixture utilizes metal arm assembly and stamped steel body, with plated finish. Decorative finials can be removed for downlighting applications. Decorative outlet box cover optional when not required.

METAL FINISH

Fixture shall be finished in Bronze, Chrome or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal outlet box, with 1.75" left or right offset. Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



LIGHT VANITY SHOWN IN CLEAR/OPAL WITH SQUARE CANOPY

TRANS. ARMAGNAC/OPAL

TRANS. AMETHYST/OPAL

TRANS. SMOKE/OPAL

TRANS. OLI/OPAL





For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

ORDERING:

FIXTURE	-	GLASS OPTIONS	-	METAL FINISH	-	METAL FINISH	-	OPTIONS
2 Light Vanity		Trans. Amethyst/Opal		40W G9 Hal		Bronze		Square
3 Light Vanity		Clear/Opal		5W LED 120V,		Chrome		Canopy
4 Light Vanity		Trans. Armagnac/Opal		dimmbale		Satin Nickel		
		Trans. Olive/Opal						
		Trans. Smoke/Opal						

Light Vanity w/ Trans. Armagnac/Opal Glass, Satin Nickel Finish

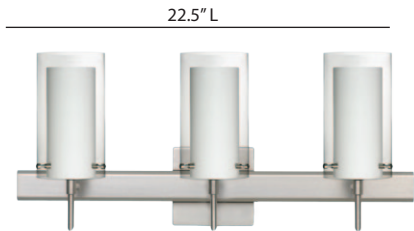

Canopy allows direct wiring without outlet box, where armored cable or non-metallic sheathed cable is employed, and the decorative outlet box cover is not required. Orient upward or downward, wall-mount only.

Project Information: