

---

around the Ground Screw (D). Tighten the Ground Screw (D) to clamp the ground fixture wire between the head of the Ground Screw (D) and the Mounting Bracket (B).

**It is imperative that the ceiling outlet junction box in your home be properly grounded!**

9. Connect the neutral fixture wire to the neutral junction box wire. It usually has white insulation around it. Fasten these together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
10. Connect the hot fixture wire to hot junction box wire. It usually has black insulation around it. Fasten these together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
11. Gently tuck the wire connections neatly into ceiling outlet junction box.
12. Secure the Canopy (H) onto Mounting Bracket (B) by fastening the Ball Nut (J) onto Nipple (E).
13. Connect the neutral fixture wire to the neutral junction box wire. It usually has white insulation around it. Fasten these together with a plastic Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed.
14. Insert THREE (3) 25-Watt maximum Type B Candelabra base incandescent light bulbs (not included) or THREE (3) 6-Watt compact fluorescent light bulbs (not included) or THREE (3) 4-Watt LED light bulbs (not included) into the sockets. Do not exceed specified wattage.
15. Restore power to junction box and test the fixture.
16. Installation is now completed.

---

## CARE INSTRUCTIONS


- ✓ Wipe clean with a soft, dry cloth or static duster.
  - ✓ Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the chandelier's finish.
-

## PARTS ENCLOSED

		QTY
A	Wire Connector	3
B	Mounting Bracket	1
C	Mounting Screw	2
D	Ground Screw	1
E	Nipple	1
F	Hex Nut	2
G	Lock Washer	1
H	Canopy	1
I	Quick Links	3
J	Ball Nut	1
K	Chain	3
L	Iron Rods	144

## WARNINGS

- ✓ Before installing the chandelier, make sure the power to the circuit is turned off at the main fuse box/circuit breaker utility box.
- ✓ To reduce the risk of fire, electrical shock or personal injury, always turn off the chandelier and allow it to cool prior to replacing light bulbs.
- ✓ Do not touch the bulbs when the chandelier is turned on. Do not look directly at lit bulb.
- ✓ Keep flammable materials away from lit bulb.

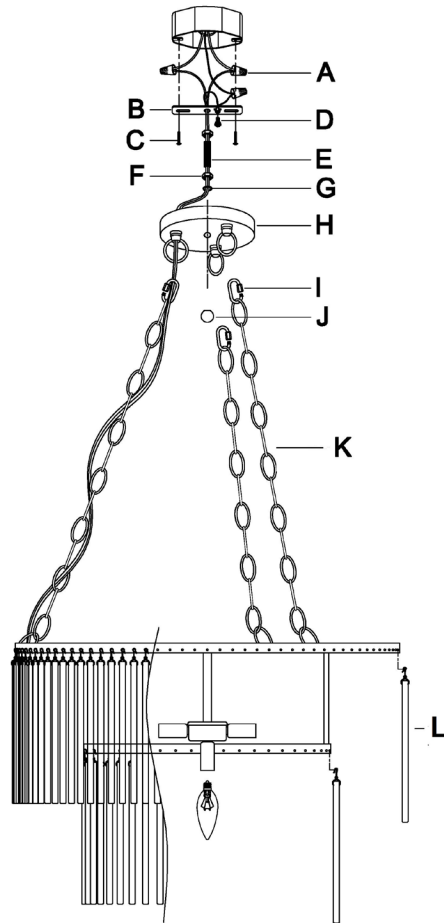

## SAFETY FIRST

- ✓ This chandelier is meant for indoor use, **dry locations only**.
- ✓ Do not use the electric cord to support the weight of the chandelier.
- ✓ These instructions are provided for your safety. It is important that they are read carefully and completely before beginning the installation of this lighting fixture.
- ✓ For your safety, it is strongly recommended that **two** people install the lighting fixture.
- ✓ **This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved.**
- ✓ Save these instructions.

## ASSEMBLY INSTRUCTIONS

Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

- 1. Shut off the main electrical supply from the main fuse box/circuit breaker.**
2. Attach the Mounting Bracket (B) onto the ceiling outlet box using the Mounting Screw (C). Tighten screws with a screwdriver until secure.
3. Attach one Hex Nut (F) to the bottom of Nipple (E). Secure the top of Nipple (E) to the Mounting Bracket (B) with the Hex Nut (F), exposing approximately 2" of its thread.
4. Pull the power cord and ground wire through the hole on the canopy. Connect all the Chains (K) to Canopy (H). Close the opening of the Quick Links (I) by screwing the nut clockwise.

5. Raise the fixture close to the junction box and so it is securely supported before making the wire connections.
6. Gently pull existing ground, hot, and neutral junction box wires down from the junction box and allow these to hang.
7. Carefully inspect the chandelier wires. The neutral fixture wire is ribbed. The hot fixture wire is smooth, and the ground fixture wire is copper.
8. Attach the ground wire from the fixture to the ground junction box wire. It usually has green insulation around it or is bare wire. Fasten these together with a Wire Connector (A) and wrap the connection with electrical tape. Make sure that no wire strands are exposed. If the ceiling outlet junction box does not have a ground junction box wire, insert the Ground Screw (D) into the Mounting Bracket (B) where it is marked "Ground" facing downward, and wrap the ground wire from the fixture