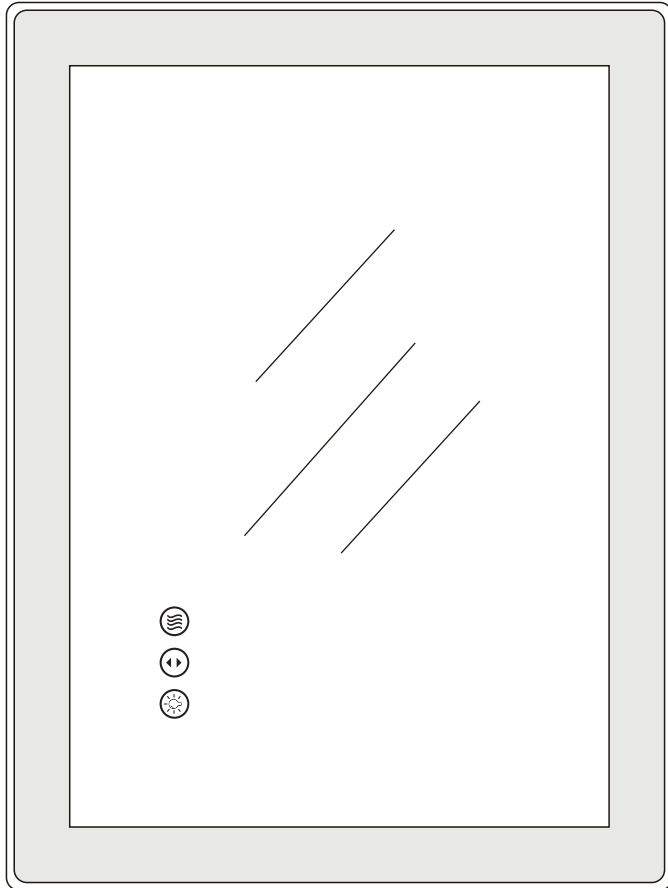


FRAMED LED MIRROR

With Front and Backlit



User Manual

Before Installation

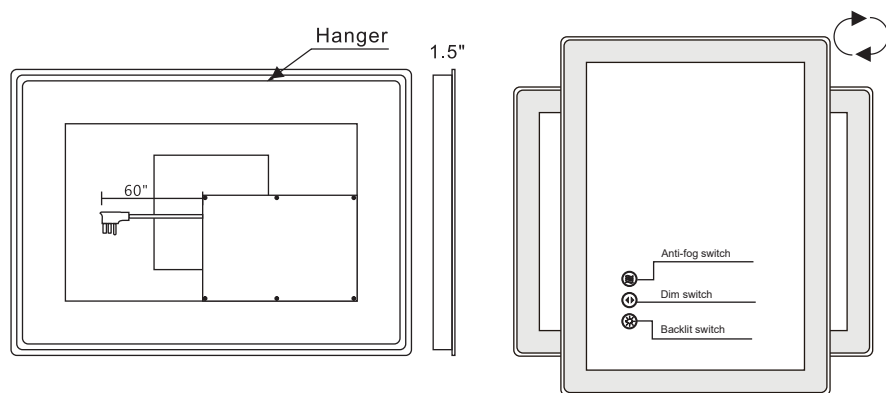
Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.

Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.
3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended.
5. Disconnect power before installing, adding or changing any components.
6. Ensure that the fixing location is able to take the weight of the complete fitting.
7. Keep the voltages 110V-120V. If the voltage exceeds 120V, please use transformer.
8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

Please check and make sure below functions work properly before installation ⬇️

Product Functions



Horizontal/ Vertical Installation



Anti-fog switch: After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



Dim switch: The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.




Color temperature switch: The front and back lights all have three color temperatures that can be switch(3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.



Button Lighting Mode

| State of Button Light | Meaning |
|-----------------------|---------------------|
| White Light ON | Function is Working |
| Blue Light ON | Function Standby |
| Light OFF | Power OFF |

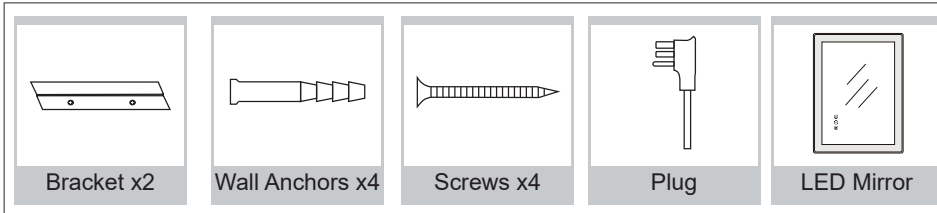Package Contents



Installation tools you may need

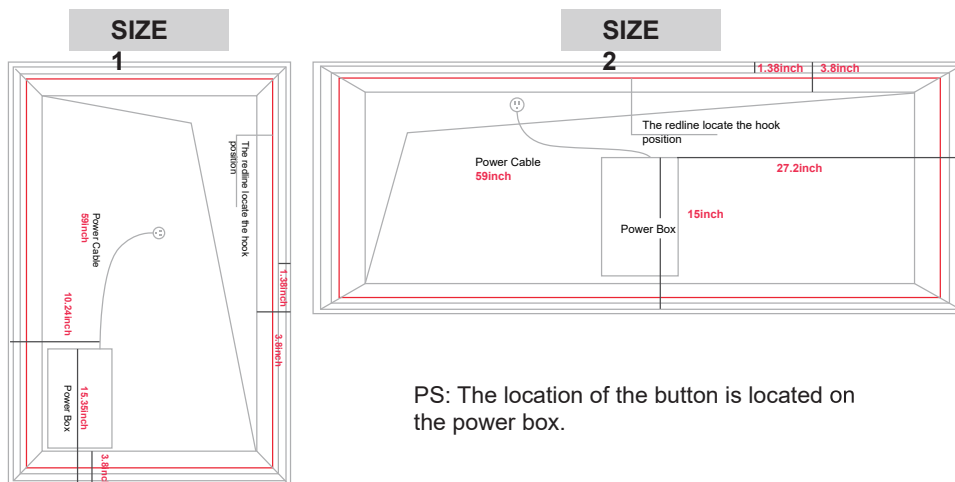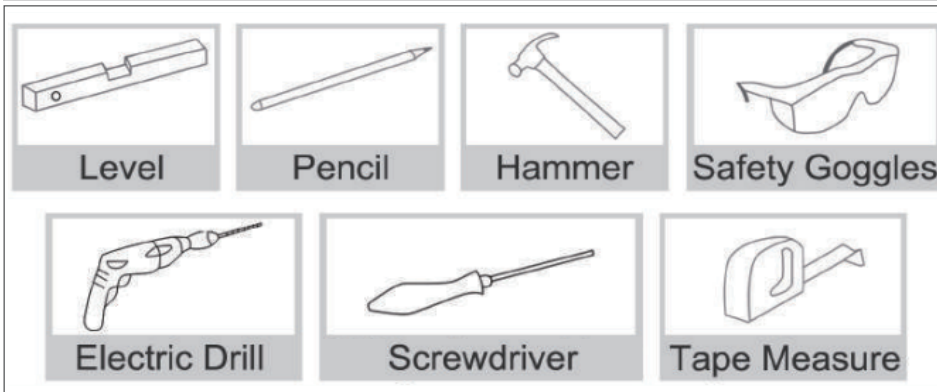

PS: The location of the button is located on the power box.









Product Specifications

| Size | Thickness | Touch Button | LED Stripe Model | Color Temperature | Lumen | CRI | Power (W) | Input Voltage (V) | Weight (kg) |
|------------|-----------|--------------|-------------------------|-------------------|-------|-----|-----------|-------------------|-------------|
| 20" X 28" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 6780 | 90 | 48 | 110V~, 50/60Hz | 6.9 |
| 24" X 32" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 8220 | 90 | 60 | 110V~, 50/60Hz | 8.8 |
| 24" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 8943 | 90 | 60 | 110V~, 50/60Hz | 9.68 |
| 28" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 9376 | 90 | 60 | 110V~, 50/60Hz | 11 |
| 28" X 60" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 14250 | 90 | 100 | 110V~, 50/60Hz | 16.8 |
| 32" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 12216 | 90 | 75 | 110V~, 50/60Hz | 15.48 |
| 32" X 48" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 13611 | 90 | 100 | 110V~, 50/60Hz | 15.4 |
| 32" X 72" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 12210 | 90 | 150 | 110V~, 50/60Hz | 22.5 |
| 36" X 32" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 11304 | 90 | 75 | 110V~, 50/60Hz | 12.09 |
| 36" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 12216 | 90 | 75 | 110V~, 50/60Hz | 15.48 |
| 36" X 48" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 14490 | 90 | 100 | 110V~, 50/60Hz | 17.2 |
| 38" X 38" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 13093 | 90 | 75 | 110V~, 50/60Hz | 14.88 |
| 40" X 30" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 11771 | 90 | 75 | 110V~, 50/60Hz | 12.63 |
| 40" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 12860 | 90 | 75 | 110V~, 50/60Hz | 14.55 |
| 48" X 30" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 13326 | 90 | 75 | 110V~, 50/60Hz | 16.84 |
| 48" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 15192 | 90 | 100 | 110V~, 50/60Hz | 21.24 |
| 55" X 30" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 14250 | 90 | 100 | 110V~, 50/60Hz | 19 |
| 55" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 15986 | 90 | 150 | 110V~, 50/60Hz | 22.74 |
| 60" X 30" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 16102 | 90 | 150 | 110V~, 50/60Hz | 19.84 |
| 60" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 16250 | 90 | 150 | 110V~, 50/60Hz | 26.55 |
| 60" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 17525 | 90 | 150 | 110V~, 50/60Hz | 28.97 |
| 72" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 18000 | 90 | 150 | 110V~, 50/60Hz | 31.32 |
| 72" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 19990 | 90 | 150 | 110V~, 50/60Hz | 34.32 |
| 84" X 32" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 22380 | 90 | 150 | 110V~, 50/60Hz | 32.9 |
| 84" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 22424 | 90 | 150 | 110V~, 50/60Hz | 41.13 |
| 96" X 36" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 18620 | 90 | 150 | 110V~, 50/60Hz | 43 |
| 110" X 40" | 1.5" | 3 | 2835 3 colors 192LED | 3000/4000/6000 | 27634 | 90 | 150 | 110V~, 50/60Hz | 55.12 |

Product Specifications

| Parameter | Specification |
|-------------------|-----------------------|
| Switch | Touch Sensor Switch |
| LED Color Change | Yes |
| LED Dimming | Yes |
| Memory | Yes |
| Anti-fog | Yes |
| Waterproof | IP54 |
| Safety Compliance | ETL |
| Glass Thickness | 5 MM |
| Glass Material | Tempered Glass |
| Cable Length | 1.5 M |
| Power Source | Hardwired / Plug in |
| Mounting Type | Wall Mounted |
| Mounting Method | French Cleat Mounting |
| Orientation | Horizontal / Vertical |
| Warranty | 3-Year Manufacturer |

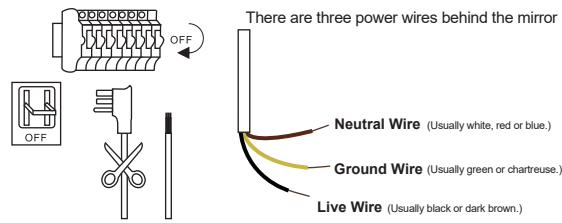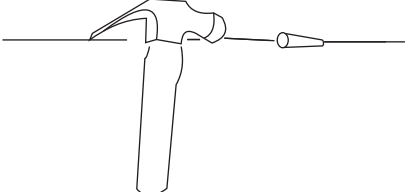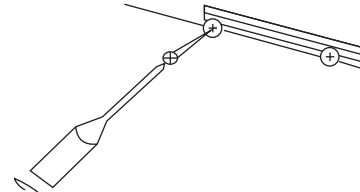Installation Instruction

| Method 1: Plug in | Method 2: Hardwire |
|---|---|
|  <p>Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.</p> |  <p>There are three power wires behind the mirror</p> <p>Neutral Wire (Usually white, red or blue.)</p> <p>Ground Wire (Usually green or chartreuse.)</p> <p>Live Wire (Usually black or dark brown.)</p> <p>Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).</p> |
| Step 1 | Step 2 |
|  <p>Draw a straight line with a ruler to keep the mirror horizontal</p> |  <p>Use a electric drill to punch four holes at the marked spots.</p> |
| Step 3 | Step 4 |
|  <p>Apply wall anchors with hammer.</p> |  <p>Use a screwdriver to screw the screws into the wall anchors.</p> |
| Step 5 | Step 6 |
|  <p>Hang the mirror on the wall</p> |  <p>Turn on the power.</p> |

Troubleshooting

| | |
|--|---|
| LED doesn't turn on / Defogging doesn't work | Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables). |
| Part of light strip is fault | Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light. |
| After using for a few month, the light doesn't work. | Please contact us to replace the power supply. |