



Instruction Manual


Column Head Light

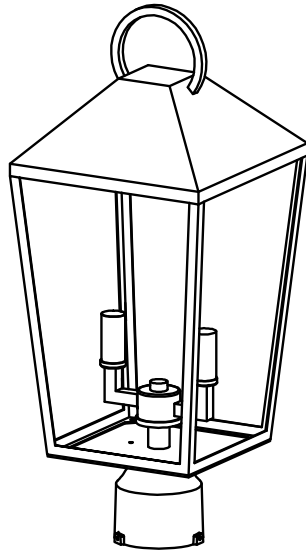

PACKAGE CONTENTS



A



B



C

PART	DESCRIPTION	QUANTITY
A	Fixture	1
B	Lamp holder	1
C	Screw	4

HARDWARE CONTENTS(shown actual size)



mounting x 3 Wire nut x 3
screw

! WARNING

- TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- MINIMUM 90°C SUPPLY CONDUCTORS.

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.

Estimated Assembly Times: 25 minnutes

Tools Required for Assembly (not included): Flathead screwdriver , Phillips screwdriver, Pliers, Electrical tape, Wire cutters, Safety glasses.

Helpful Tools (not included): Wire strippers, Step ladder.



CAUTION: To avoid any waterproofing problems, please make sure the light fixture fits the mounting surface perfectly installation and use waterproof glue around the canopy for better sealing after installation.

Customer Service: service@24h-reply.com

ASSEMBLY INSTRUCTIONS


1. Unscrew the screw (C) and remove the lamp holder (B) from the bottom of the lamp body (A)

Hardware Used

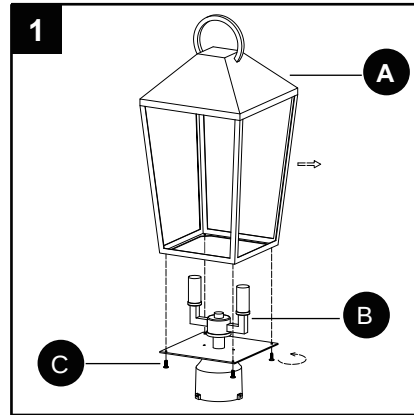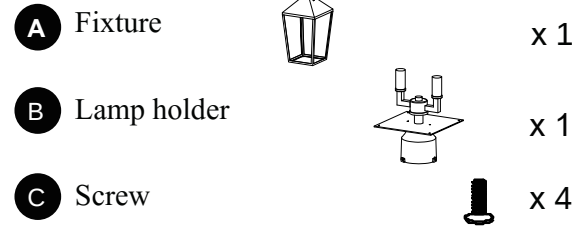



2. Install light bulb (not included). Use four E12 bulbs.

Hardware Used

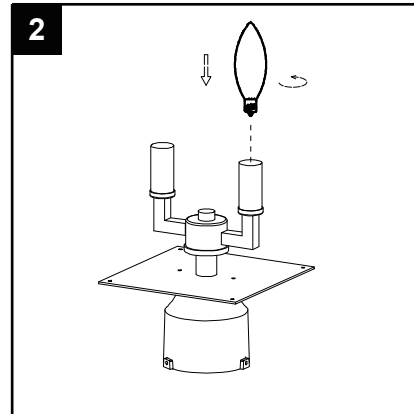


3. Install the lamp body (A) back onto the lamp holder (B) and lock it with screws (C)

Hardware Used

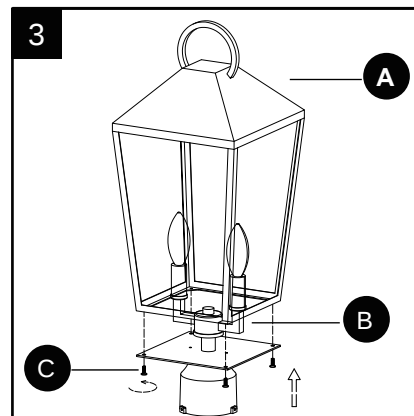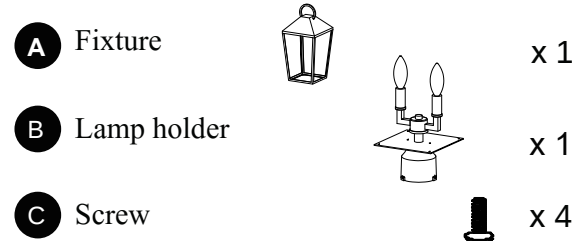


ASSEMBLY INSTRUCTIONS

4. Strip 3/4 in. of insulation from wire ends. Twist stripped ends together with pliers (not included), black to black (power) and white to white (neutral). Attach copper wire to ground wire. Helpful hint: If necessary, attach copper ground wire to grounded outlet box.

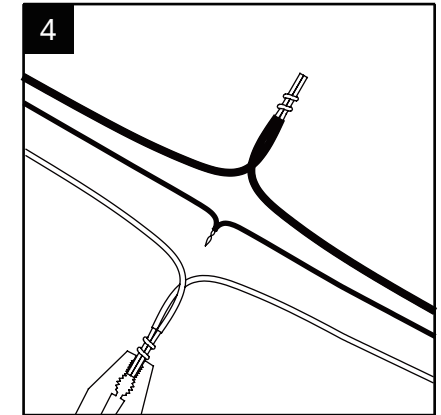

5. Attach wire nuts (BB). Tape wire nuts (BB) and wires together.

Hardware Used

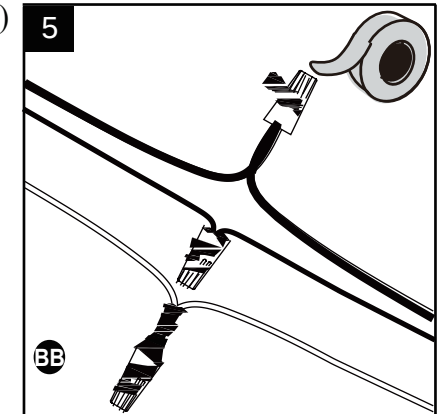

5. Put the wires and connectors into the lamp holder (B), then place the lamp holder (B) onto the mounting post (not equipped) and lock it with screws (AA)

Hardware Used

