robern®


M SERIES FLAT DOOR CABINET

Features

- *Recess or surface mount*
- *Mirrored doors and interior, matte silver interior*
- *3-way adjustable concealed hinge system*
- *SAFESEAL® gasket frame*
- *Patented swing-out magnifying mirror*
- *Rust-free aluminum construction*
- *Can be installed as a left- or right-hand door swing*
- *Four adjustable glass shelves*
- *19-1/4" (48.9 cm) W x 39-3/8" (100 cm) H x 4-5/8" (11.7 cm) D*

MP20D4FBN

ALSO MP20D4FPN

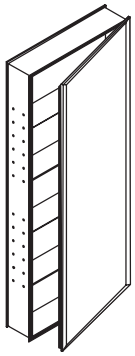

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *None applicable*

Specified Model

Model	Description	
MP20D4FBN	Beveled edge	❑
MP20D4FPN	Plain edge	❑
NOTE: Additional hardware is required for installing cabinets side-by-side.		

Required Accessories - For Surface Mount Installations Only		
MPSK40D4	Beveled mirror side kit	❑
MPSK40D4P	Plain mirror side kit	❑
M40SKD4A	Aluminum side kit	❑
Refer to the Price Guide for additional side kit colors and finishes.		

Required Accessories - For Multiple Cabinets Installed or Stacked Vertically Only		
MSF___S	Stack filler for surface mounted cabinet installations	❑
MSF___R	Stack filler for recessed cabinet installations	❑
MSF___D2	Stack filler for partially recessed cabinet installations	❑
Follow MSF with width of full cabinet array plus any installed lights when ordering. For example, MSF **49.5** S is stack filler for two surface mounted 24″ (61 cm) cabinets and one kit of 1-1/2″ (3.8 cm) lights [23-1/4″ (59.1 cm) + 23-1/4″ (59.1 cm) + 1-1/2″ (3.8 cm) + 1-1/2″ (3.8 cm)].		

Optional Accessories		
SLB20D4	Safety-lock box	❑
MGKIT	M ganging kit - hardware required for installing 2 or 3 cabinets side-by-side	❑
Frames, light options, and additional accessories are available. Refer to the Price Guide for more information.		

USA: 1-800-877-2376
www.robern.com

M SERIES FLAT DOOR CABINET

Technical Information

Roughing-in opening	18-1/2″ (47 cm) W x 38-5/8″ (98.1 cm) H x 4″ (10.2 cm) D
Door opening angle	170°

Installation Notes

Install this product according to the installation guide.


When determining the height of the mirrored cabinet, ensure the mirrored door will clear all obstacles, such as a faucet. A minimum distance of 1″ (2.5 cm) is required.

Secure the screws (provided) to a stud to avoid possible property and product damage. If this is not possible, anchors (provided) must be inserted before installing the screws.

Modular components can be joined horizontally and vertically. When ganging cabinets: rough opening width/height = total width/height of all cabinets and lights minus 3/4″ (1.9 cm).

Stack filler is required for vertical stacking.

Recessed cabinets project 7/8″ (2.2 cm) from wall.

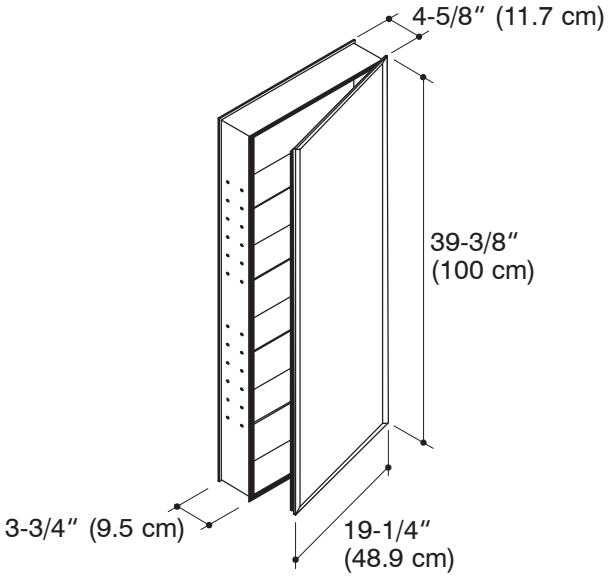

Product Diagram