VD-023-NEW

Product Manual


If you have any questions about the installation, please contact

haewonservice@163.com

We will help you within 24 hours.


haewonservice@163.com


The same number represents the same size board.

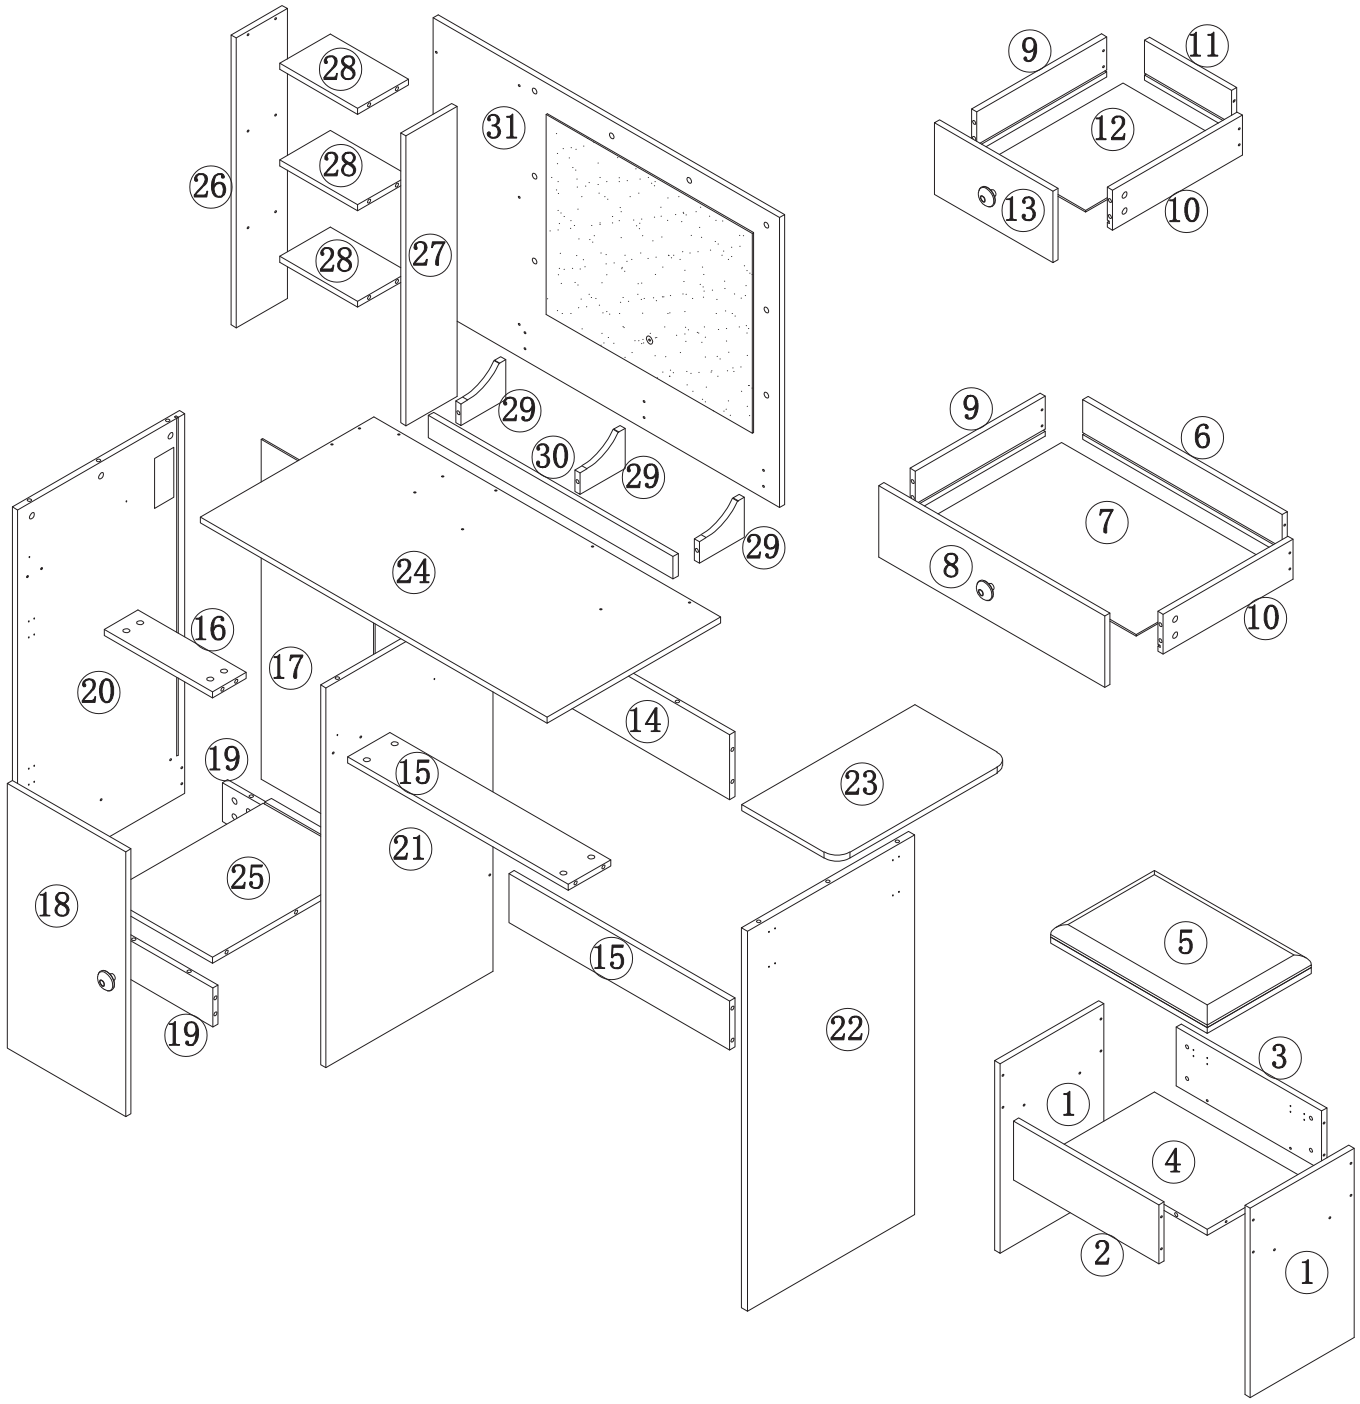






Parts List




haewonservice@163.com

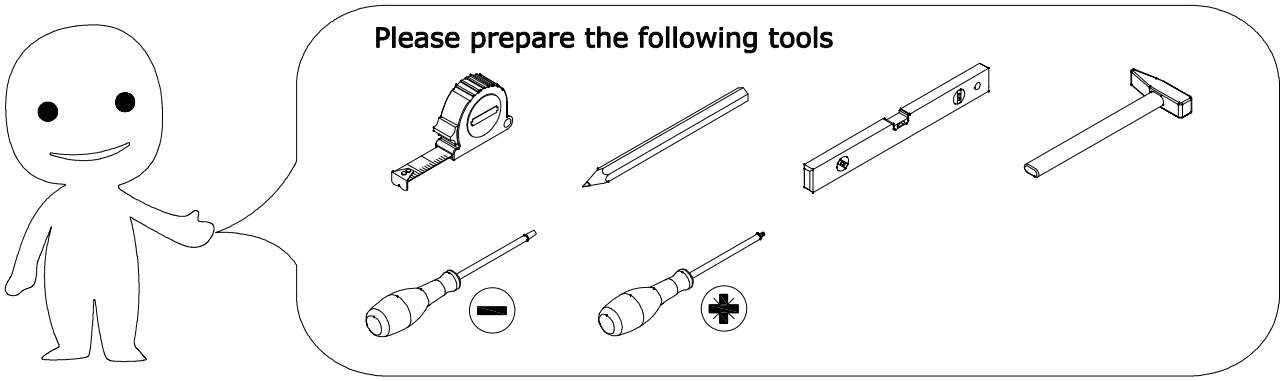

A x 83	B x 83	C x 32	D x 32
			
∅6 x 35 mm	∅12 x 10 mm	∅4 x 40 mm	∅10 x 9 mm


E x 3	F x 3	G x 54	H x 1
			
Drawer handle	∅4 x 20 mm	∅3.5 x 12mm	Charging Station

I x 2	J x 4	K x 1	L x 1
			
	Cabinet Hinge	Screwdriver	USB Line


M x 2	N x 8	P x 8
		
	∅35 mm	14*14*5


haewonservice@163.com

Before installing the drawer rail, you need to separate the CR and DR first.

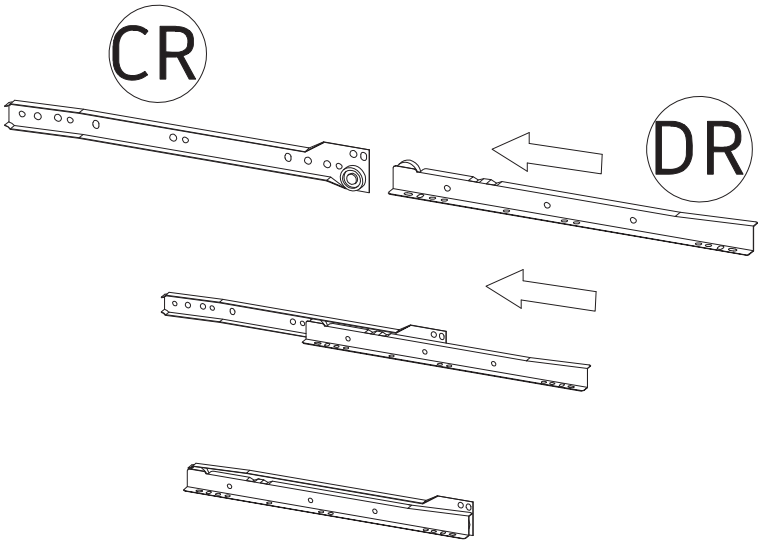

This Cam Lock Fastening Systemwill be used throughout the assembly process

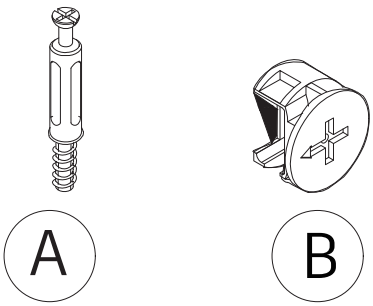


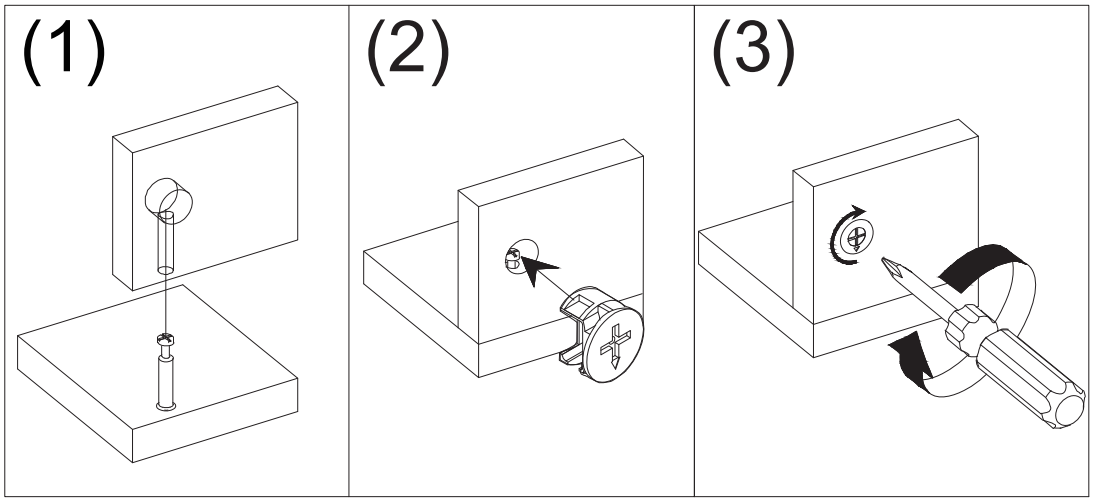

haewonservice@163.com

1


A x 24




∅6 x 35 mm


20 x 1 21 x 1






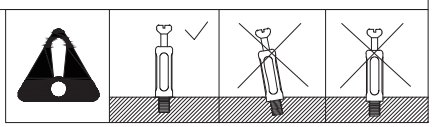

Screw the cam bolt (A) into the panel (20).

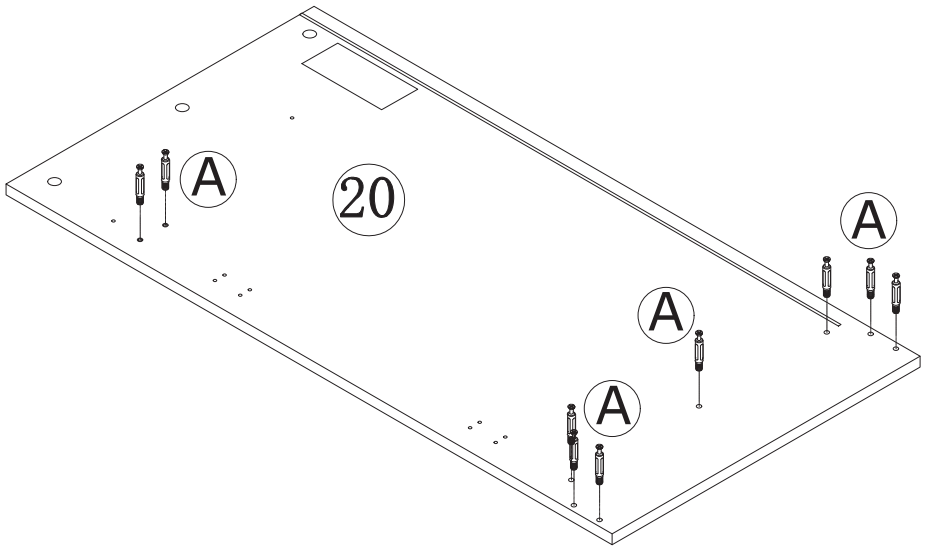


Screw the cam bolt (A) into the panel (21). Then,flip the panel 180° and screw the cam bolt (A) into the other side of panel (21).

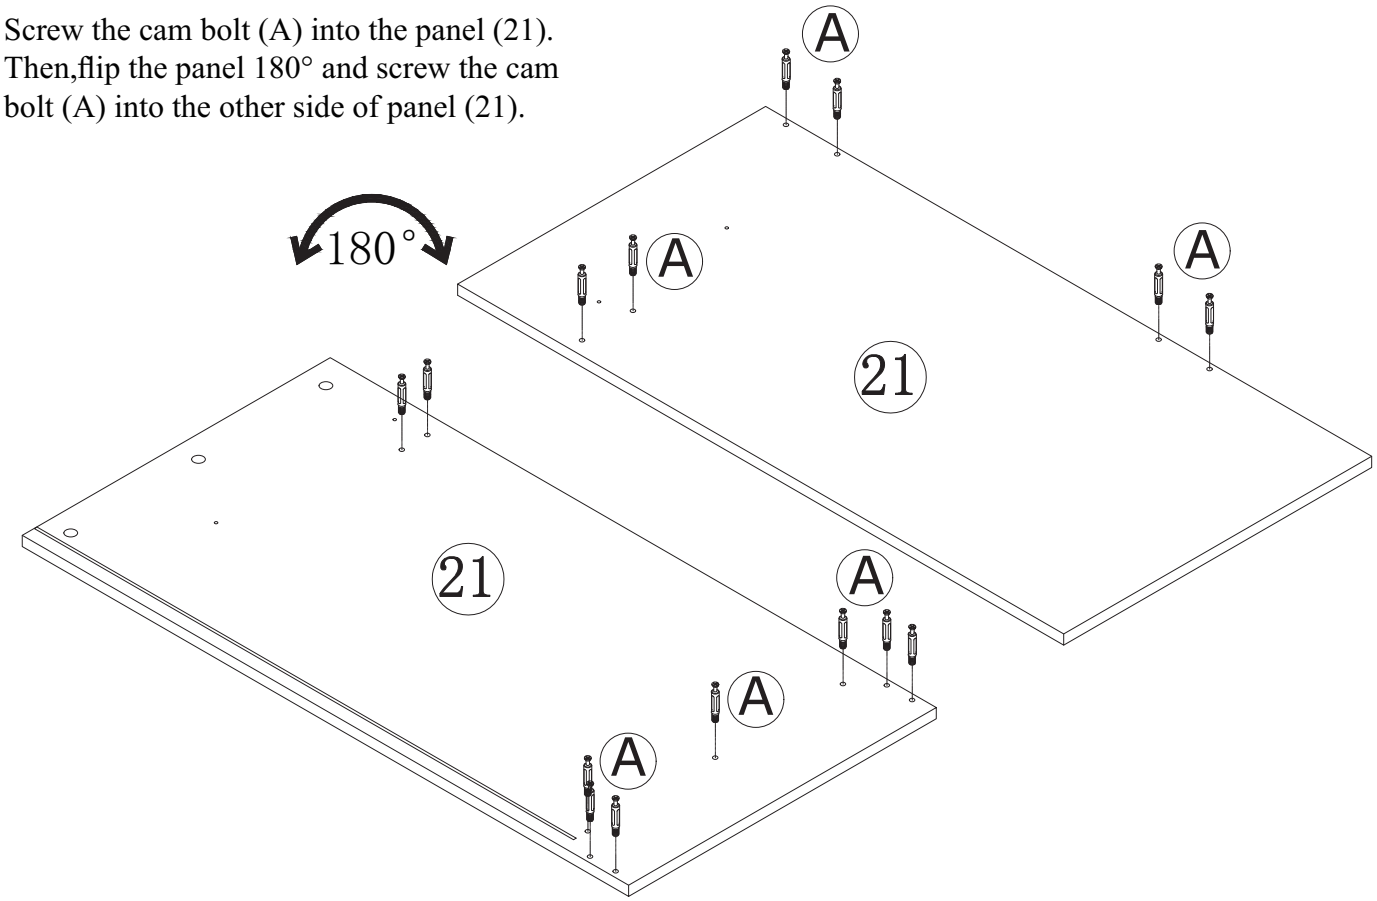

haewonservice@163.com


2


A x 10




∅6 x 35 mm


22 x 1 25 x 1

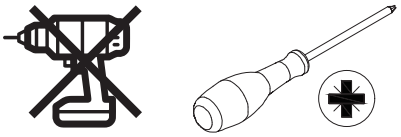

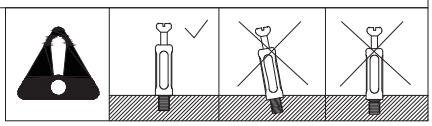


Screw the cam bolt (A) into the panel (22) and (25).

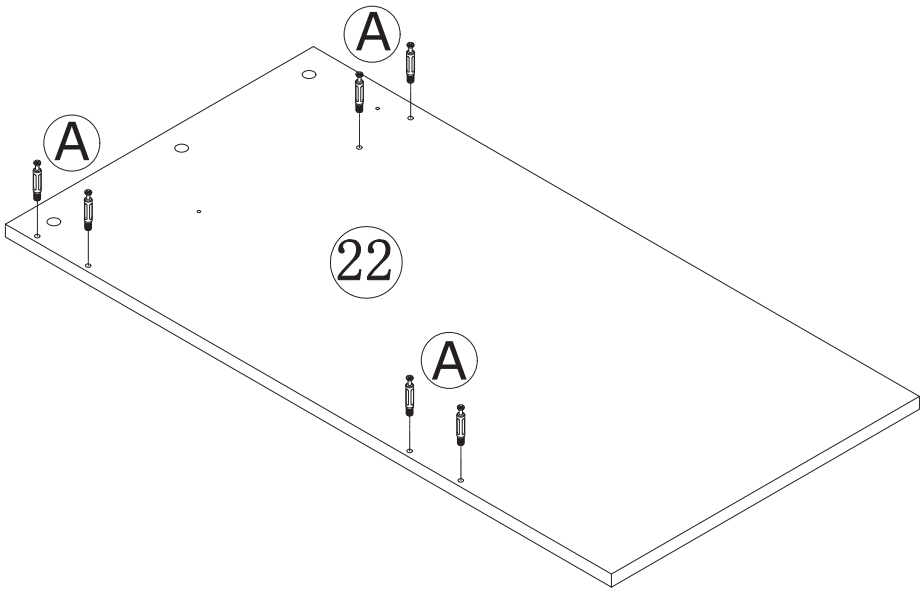

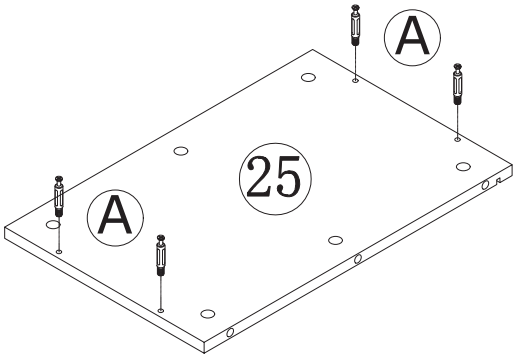

3

A x 29





∅6 x 35 mm

8 x 1 13 x 1


24 x 1






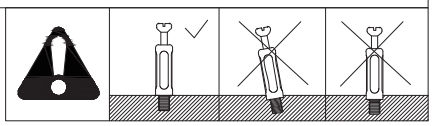


Screw the cam bolt (A) into the panel (8) and (13).



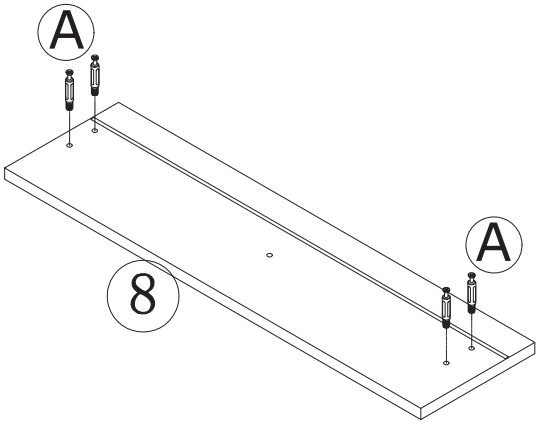


Screw the cam bolt (A) into the panel (24).
Then,flip the panel 180° and screw the cam bolt (A) into the other side of panel (24).

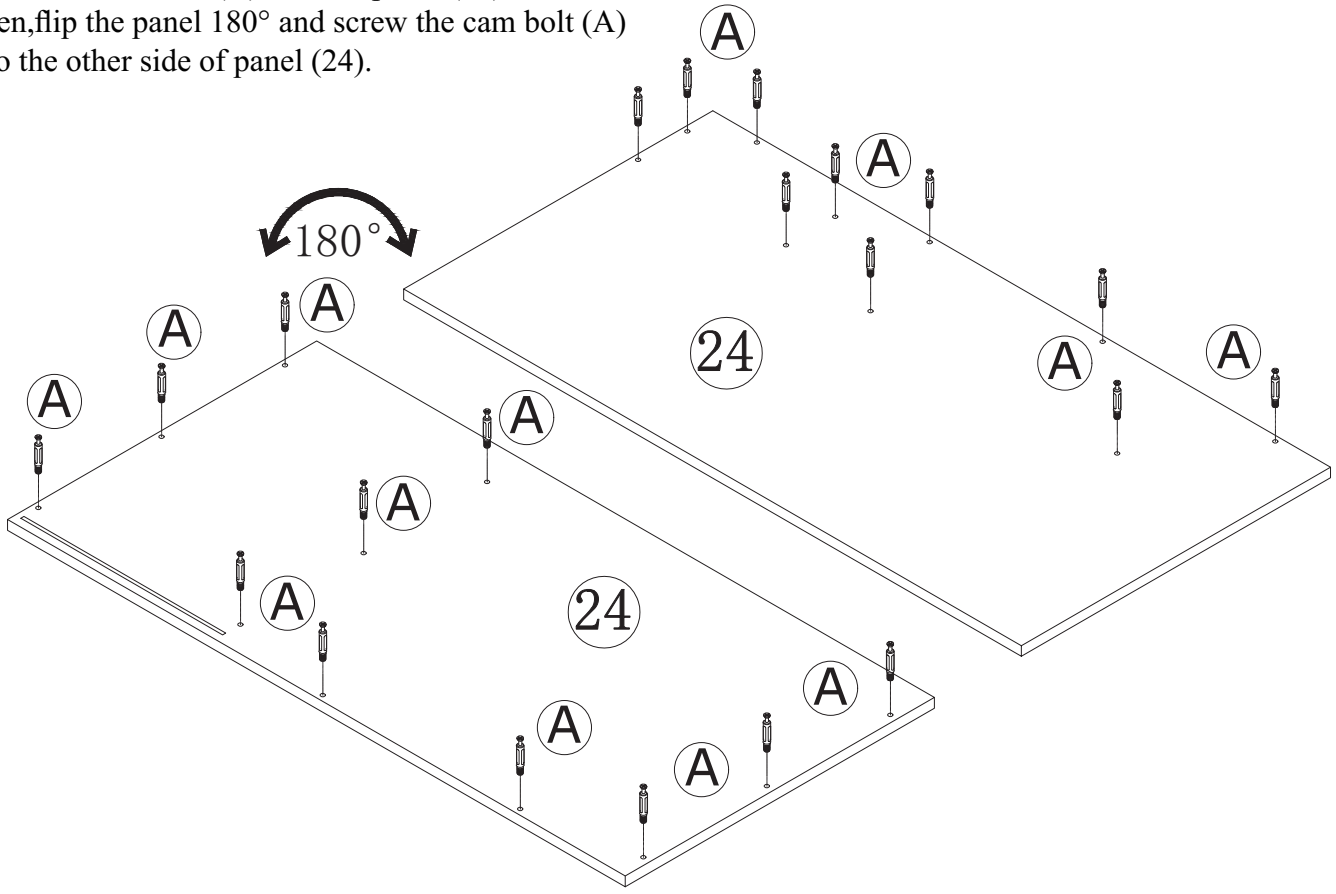

haewonservice@163.com

4


A x 12




∅6 x 35 mm


26 x 1 27 x 1





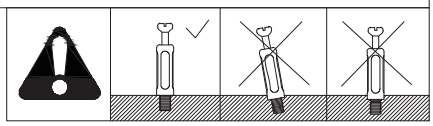

Screw the cam bolt (A) into the panel (26) and (27).

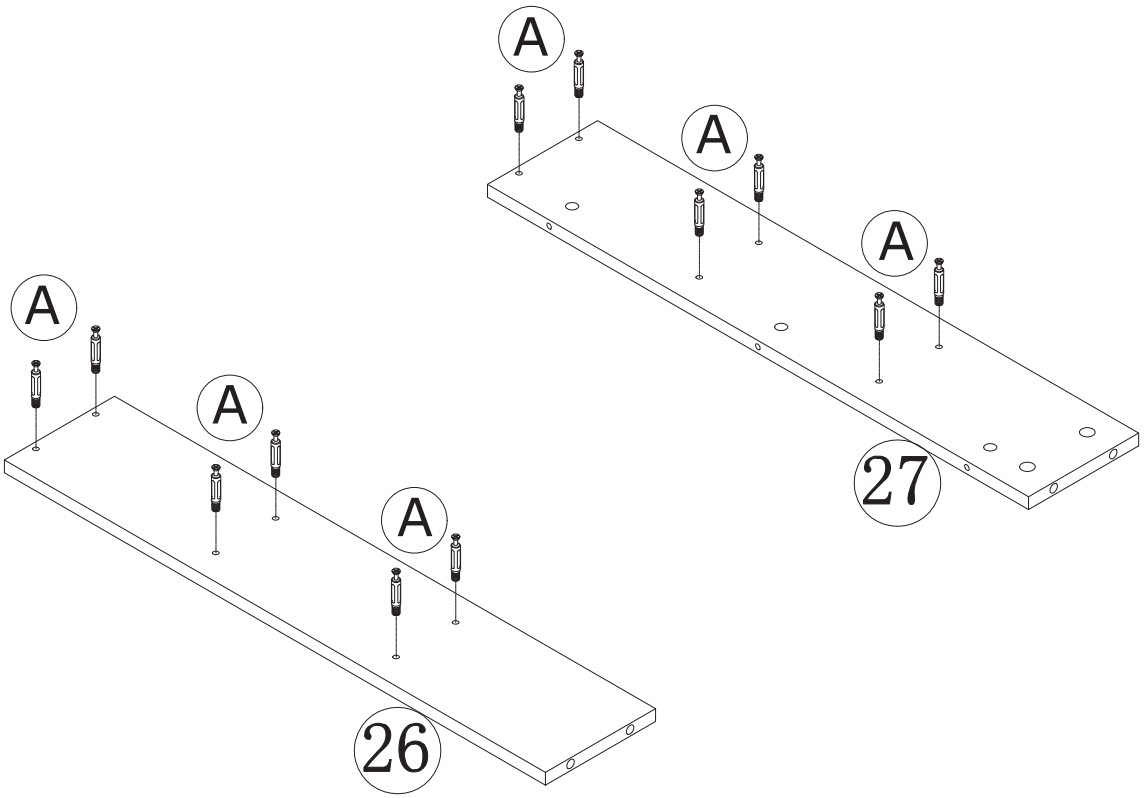



haewonservice@163.com


5



Screw the cam bolt (A) into the panel (2) (3) and (30).

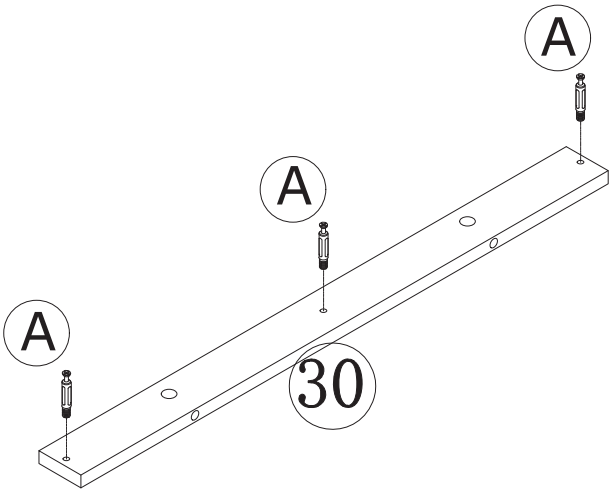

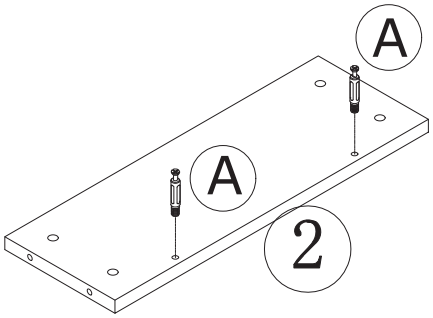

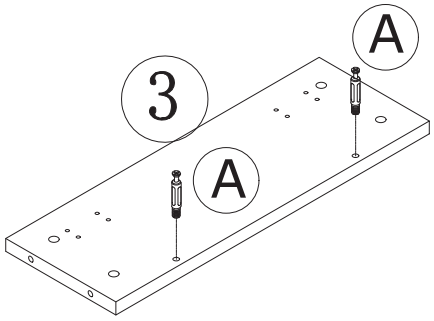



haewonservice@163.com

6


C x 4	D x 4	9 x 1 10 x 1 11 x 1 12 x 1
 ∅4 x 40 mm	 ∅10 x 9 mm	






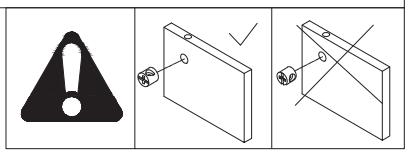


Screw part (D) into panel (11).
Attach panels (9) and (10) to panel (11) using screws (C).
Slide bottom panel (12) into the assembled drawer unit.

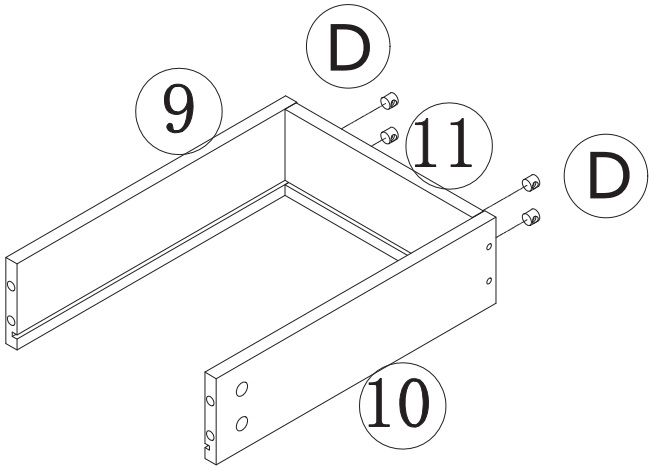


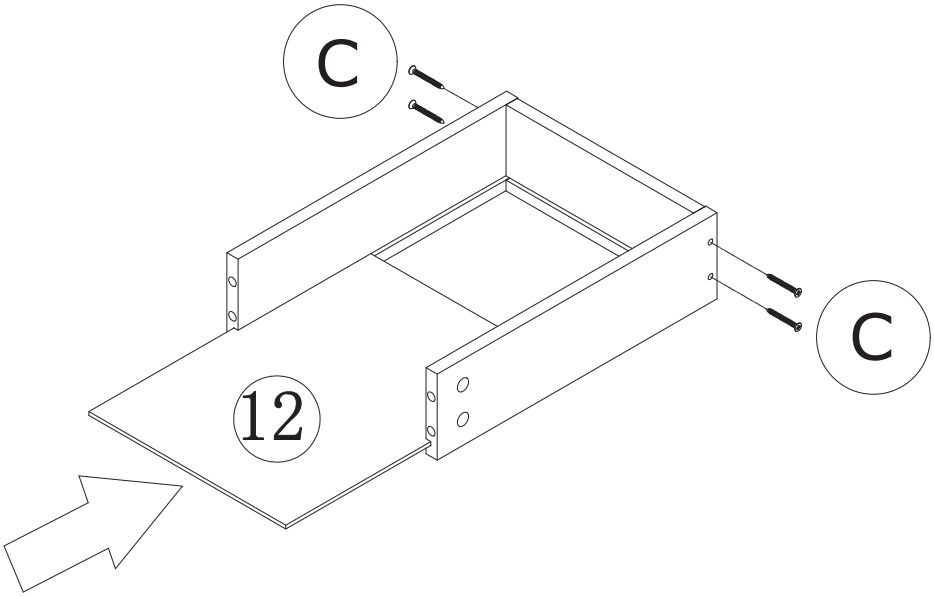

haewonservice@163.com

7

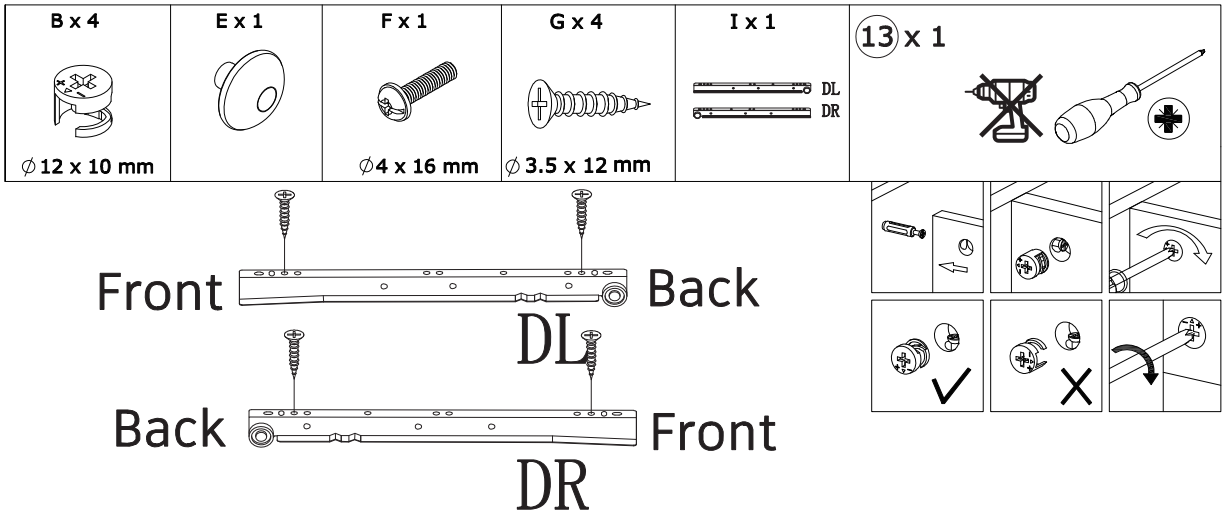


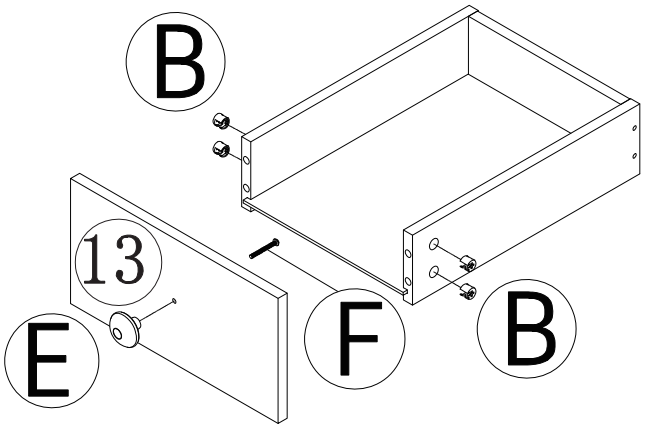

Pass screw (F) through the center of panel (13) to attach with the drawer handle (E).
Align the screws (A) on panel (13) with the holes in panels (9) and (10), then secure them using cam locks (B).

Install the drawer tracks (DR and DL) on the bottom of the drawer, and secure them using screws (G).


Note: Refer to the diagram to ensure that the alignment holes on panels (9) and (10) are properly aligned with the holes on tracks (DL and DR).

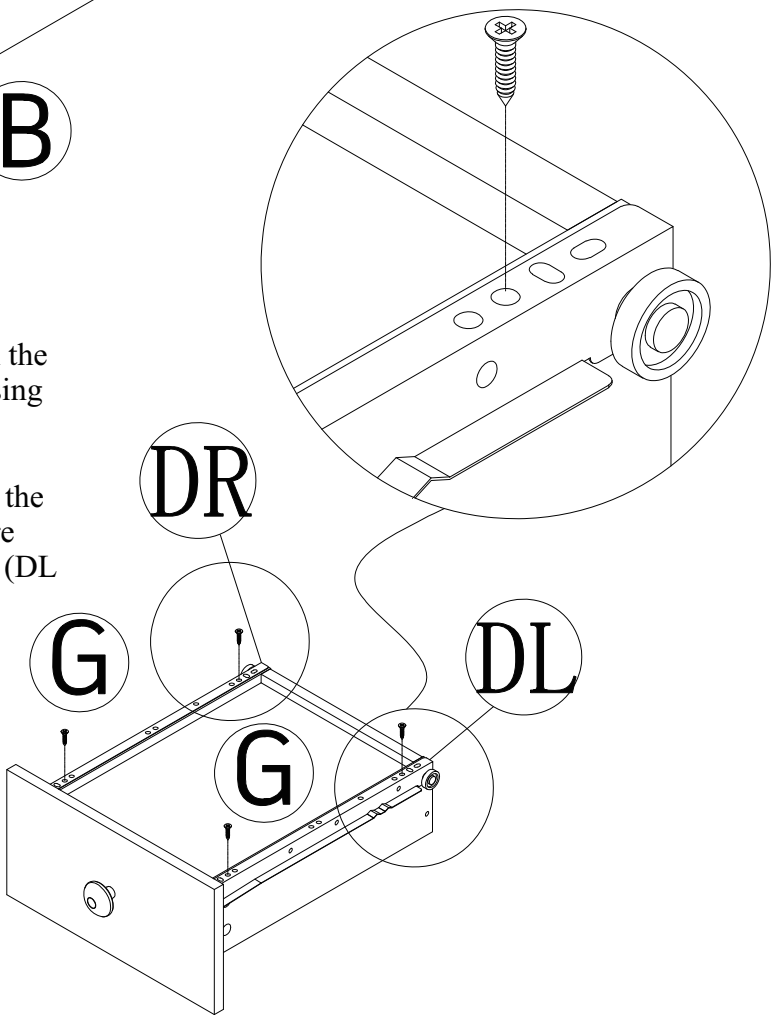


haewonservice@163.com


8


C x 4	D x 4	6 x 1 7 x 1 9 x 1 10 x 1
∅4 x 40 mm	∅10 x 9 mm	

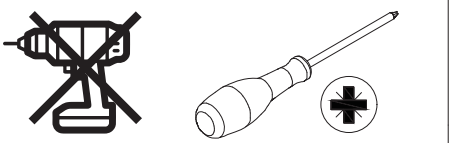

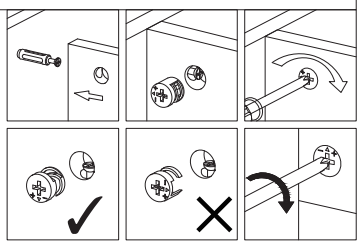



Screw part (D) into panel (6).
Attach panels (9) and (10) to panel (6) using screws (C).
Slide bottom panel (7) into the assembled drawer unit.

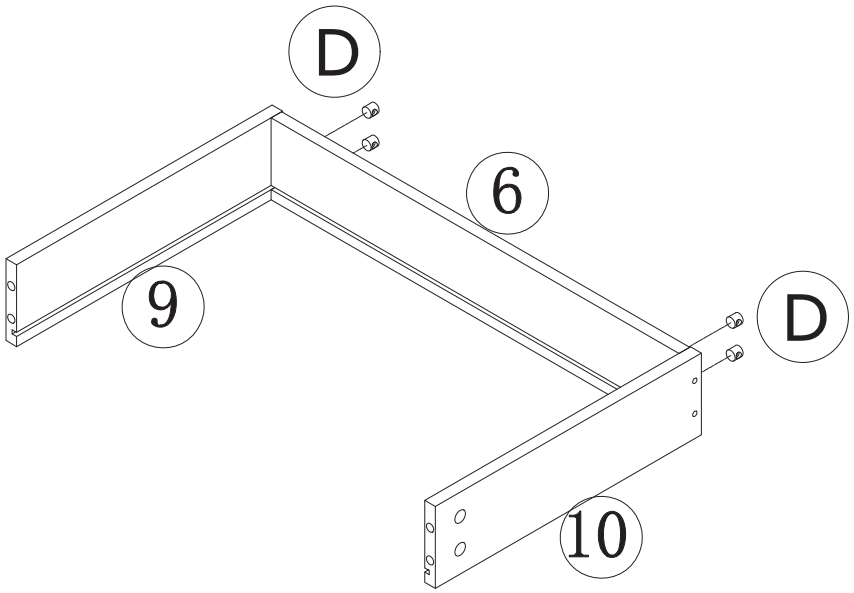


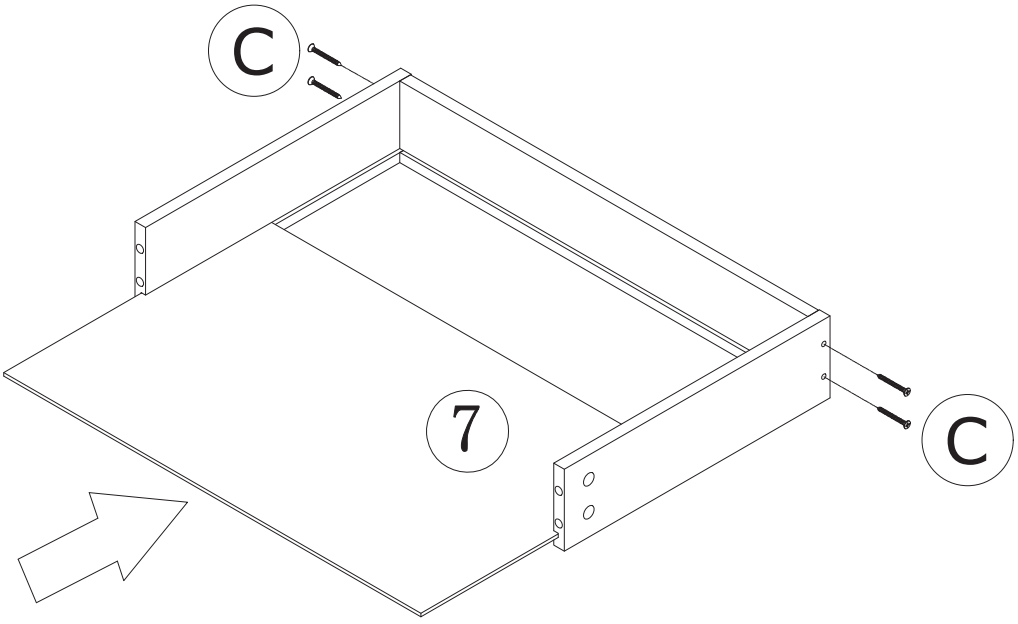



haewonservice@163.com

9


B x 4	E x 1	F x 1	G x 4	I x 1	8 x 1
					
∅12 x 10 mm		∅4 x 20 mm	∅3 .5x 12mm	DL DR	

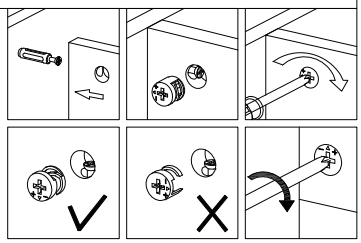


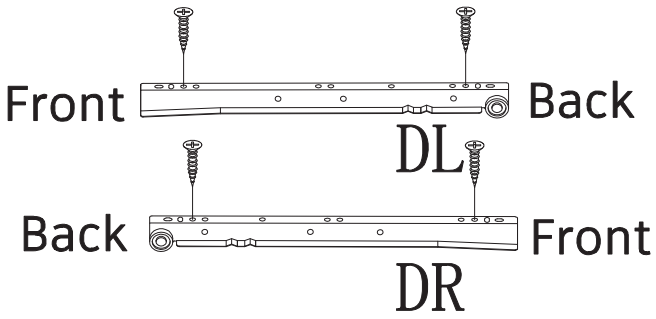

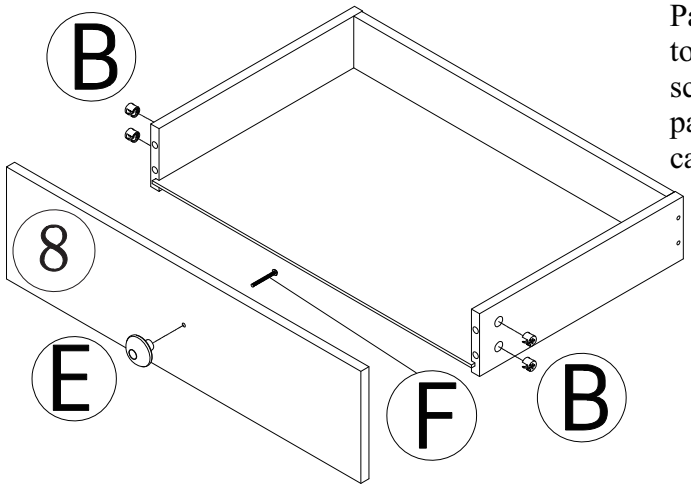

Pass screw (F) through the center of panel (8) to attach with the drawer handle (E).Align the screws (A) on panel (8) with the holes in panels (9) and (10), then secure them using cam locks (B).

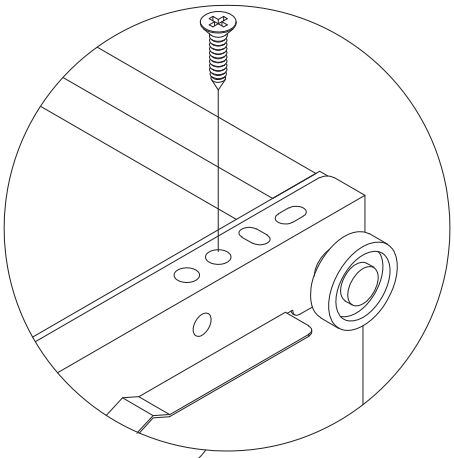


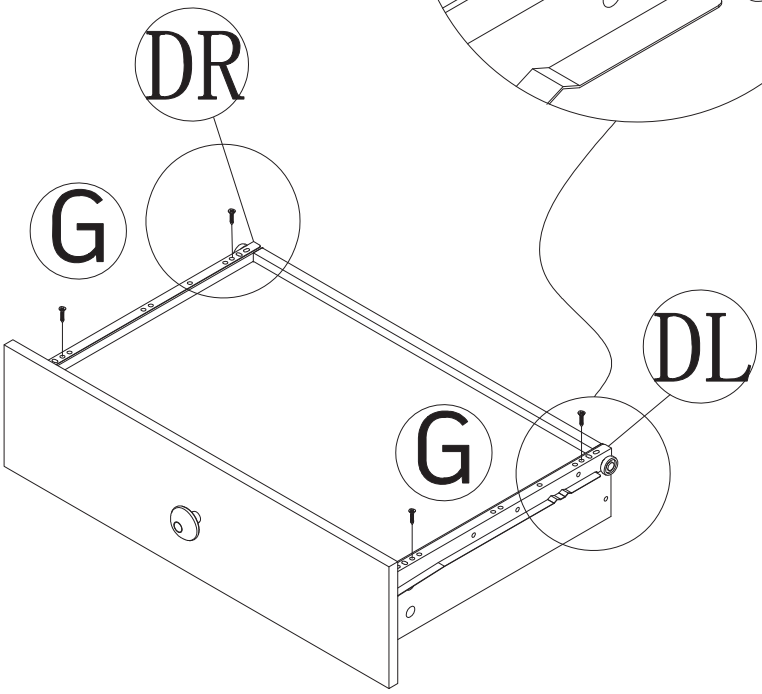


Install the drawer tracks (DR and DL) on the bottom of the drawer, and secure them using screws (G).
Note: Refer to the diagram to ensure that the alignment holes on panels (9) and (10) are properly aligned with the holes on tracks (DLand DR).


haewonservice@163.com

10

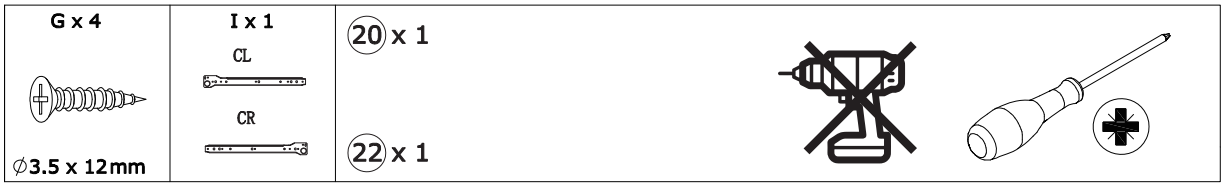

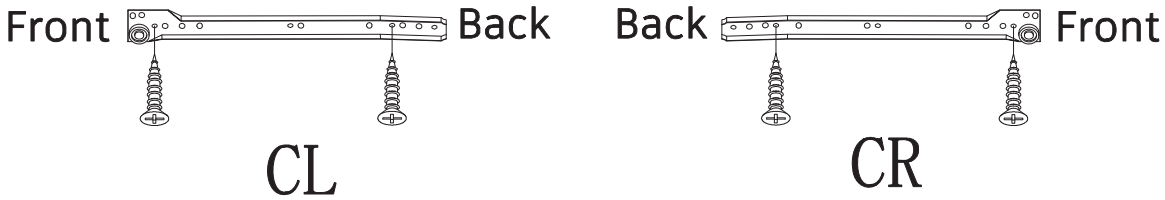


CL CR

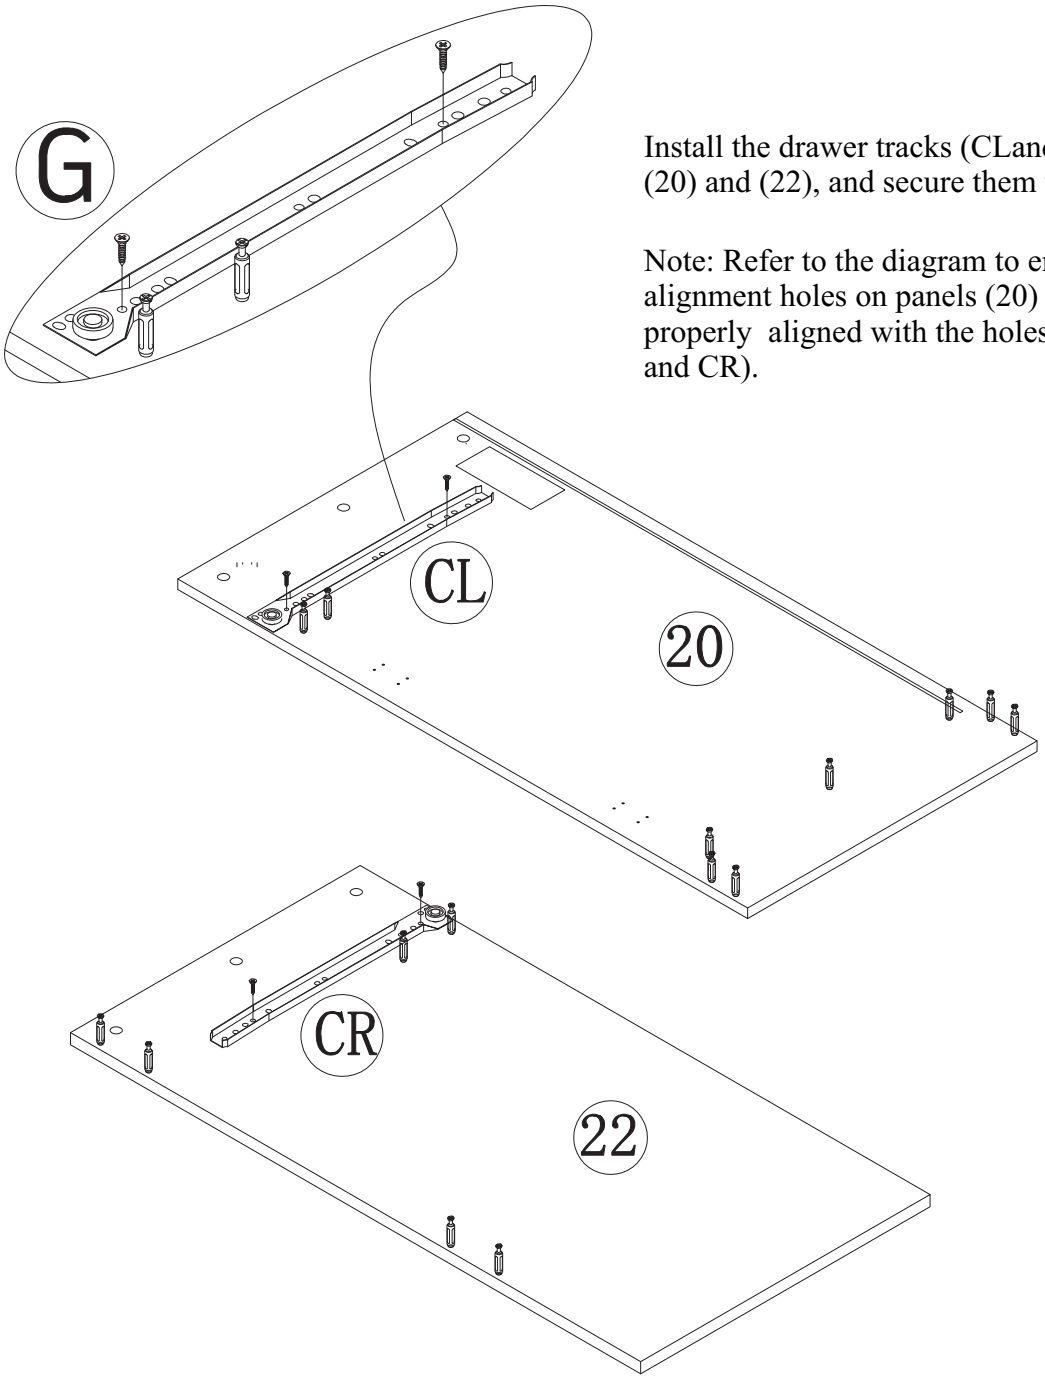


Install the drawer tracks (CLand CR) onto panels (20) and (22), and secure them with screws (G).

Note: Refer to the diagram to ensure that the alignment holes on panels (20) and (22) are properly aligned with the holes on the tracks (CL and CR).

11

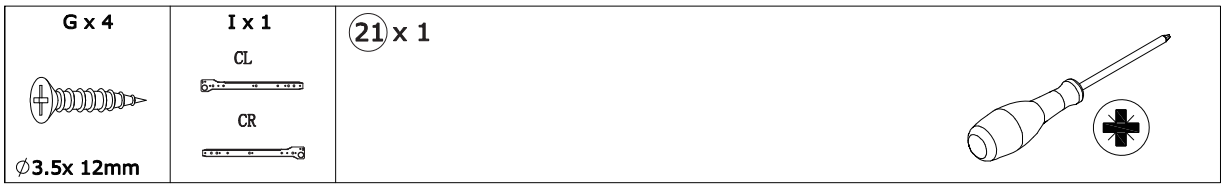


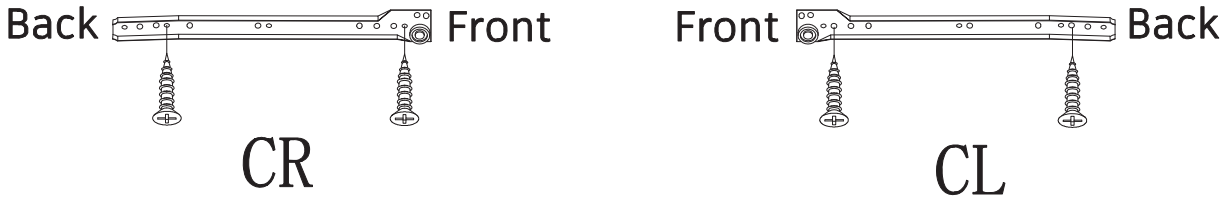


CR CL


Install the drawer track (CR) onto panel (21), and secure it with screw (G).Then,flip the panel 180° and install the drawer track (CL) onto the other side of panel (21), secure it with screw (G).

Note: Refer to the diagram to ensure that the alignment holes on panel (21) are properly aligned with the holes on the tracks (CLand CR).

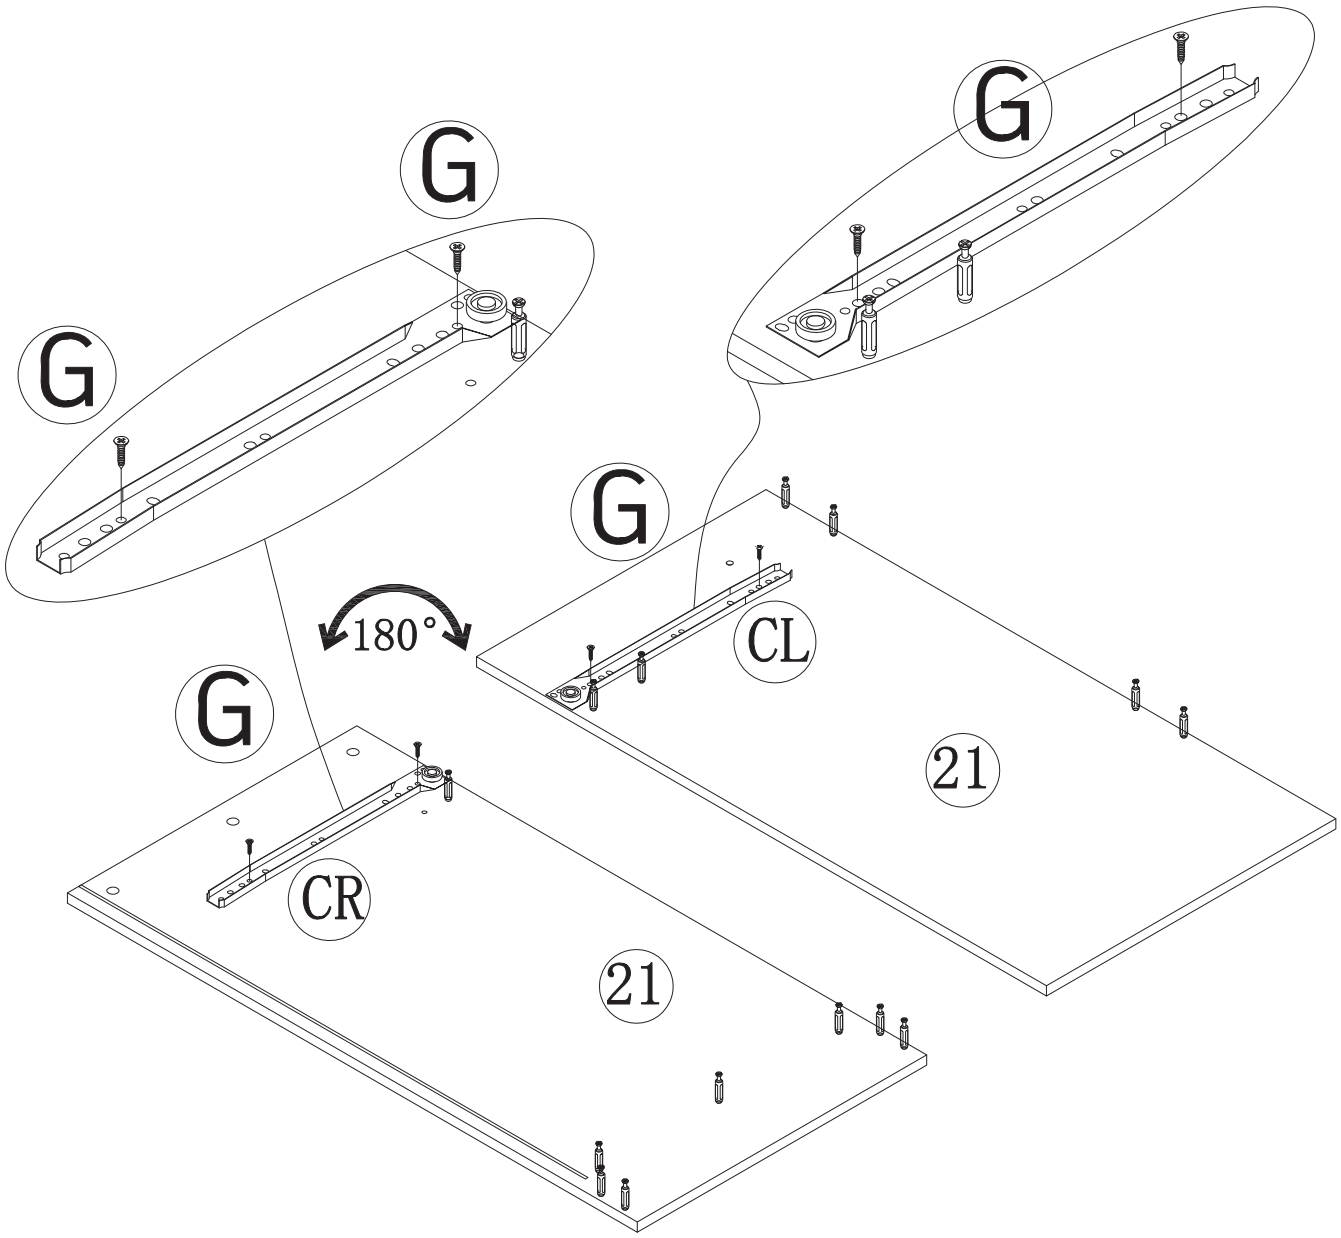


12

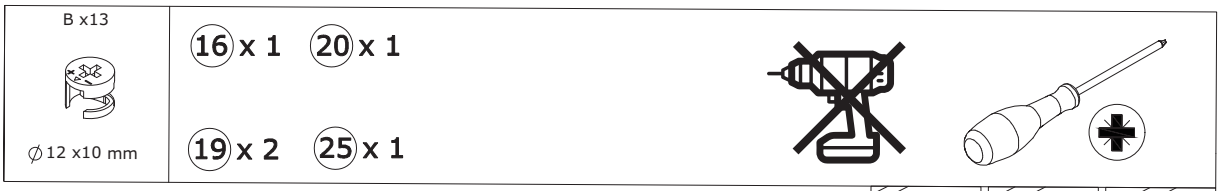

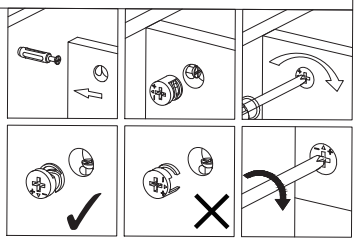

Align screw (A) on panel (25) with the holes in panel (19) and secure it in place using cam lock (B).

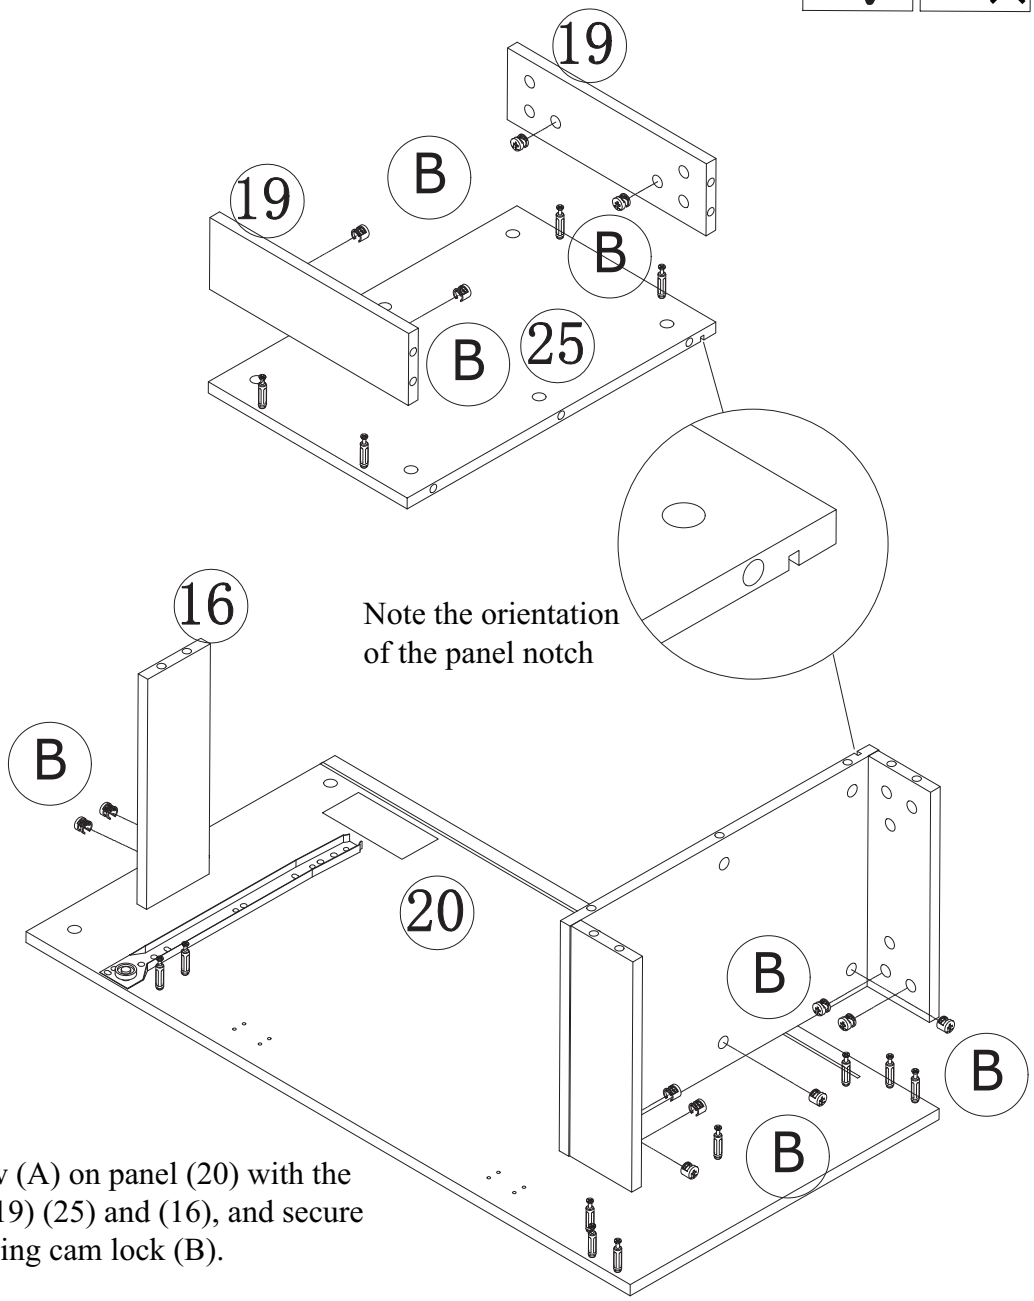

Next, align screw (A) on panel (20) with the holes in panels (19) (25) and (16), and secure them in place using cam lock (B).

haewonservice@163.com

13


B x 9




∅12 x 10 mm

21 x 1



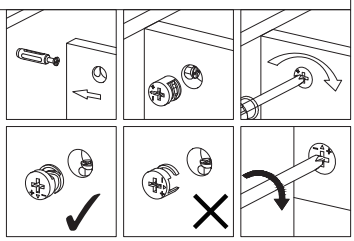

Align screw (A) on panel (21) with the holes shown in the illustration.
Cover the panel and secure the screws in place using cam lock (B).

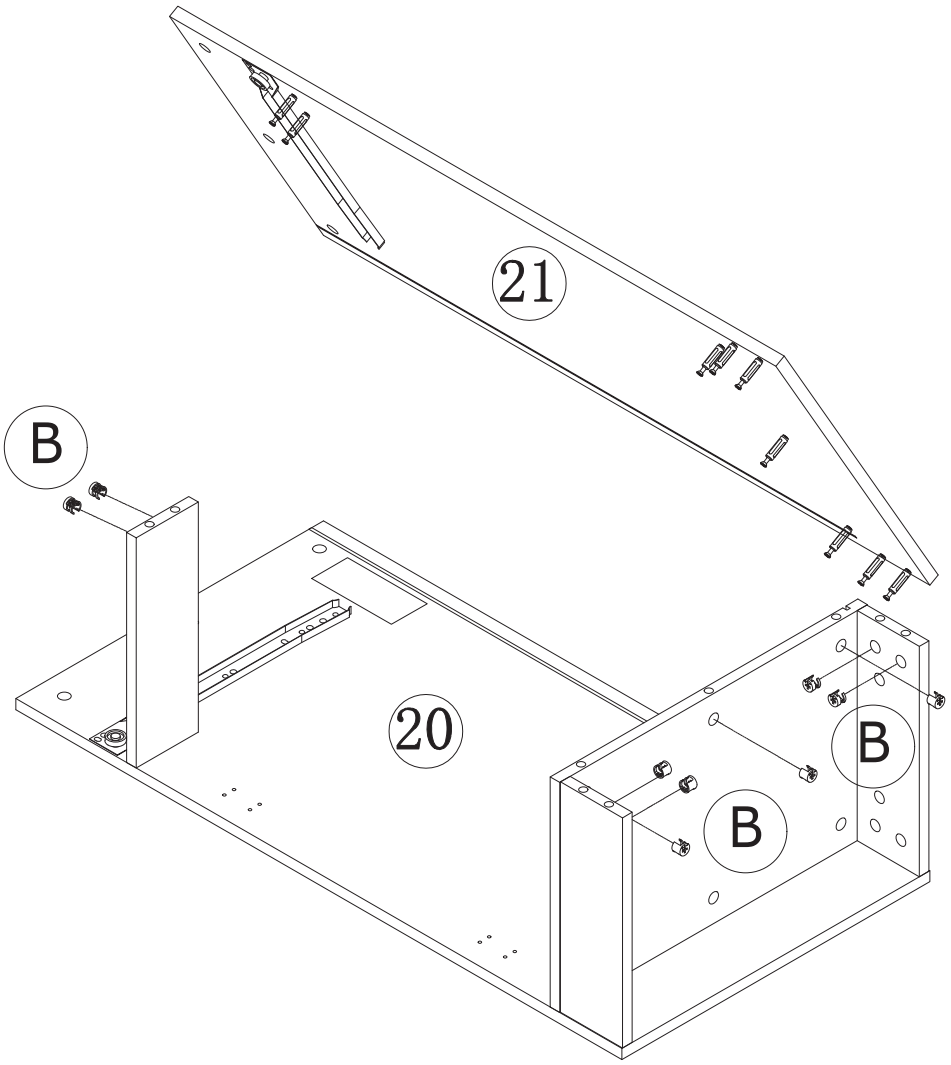

haewonservice@163.com

14

B x 12





∅12 x 10 mm

14 x 1 22 x 1


15 x 2





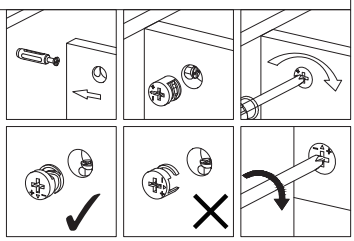


Align screw (A) on panel (21) with the holes in panel (14) and (15), secure them in place using cam lock (B).
Then, align screw (A) on panel (22) with the holes in panel (14) and (15), secure them in place using cam lock (B).

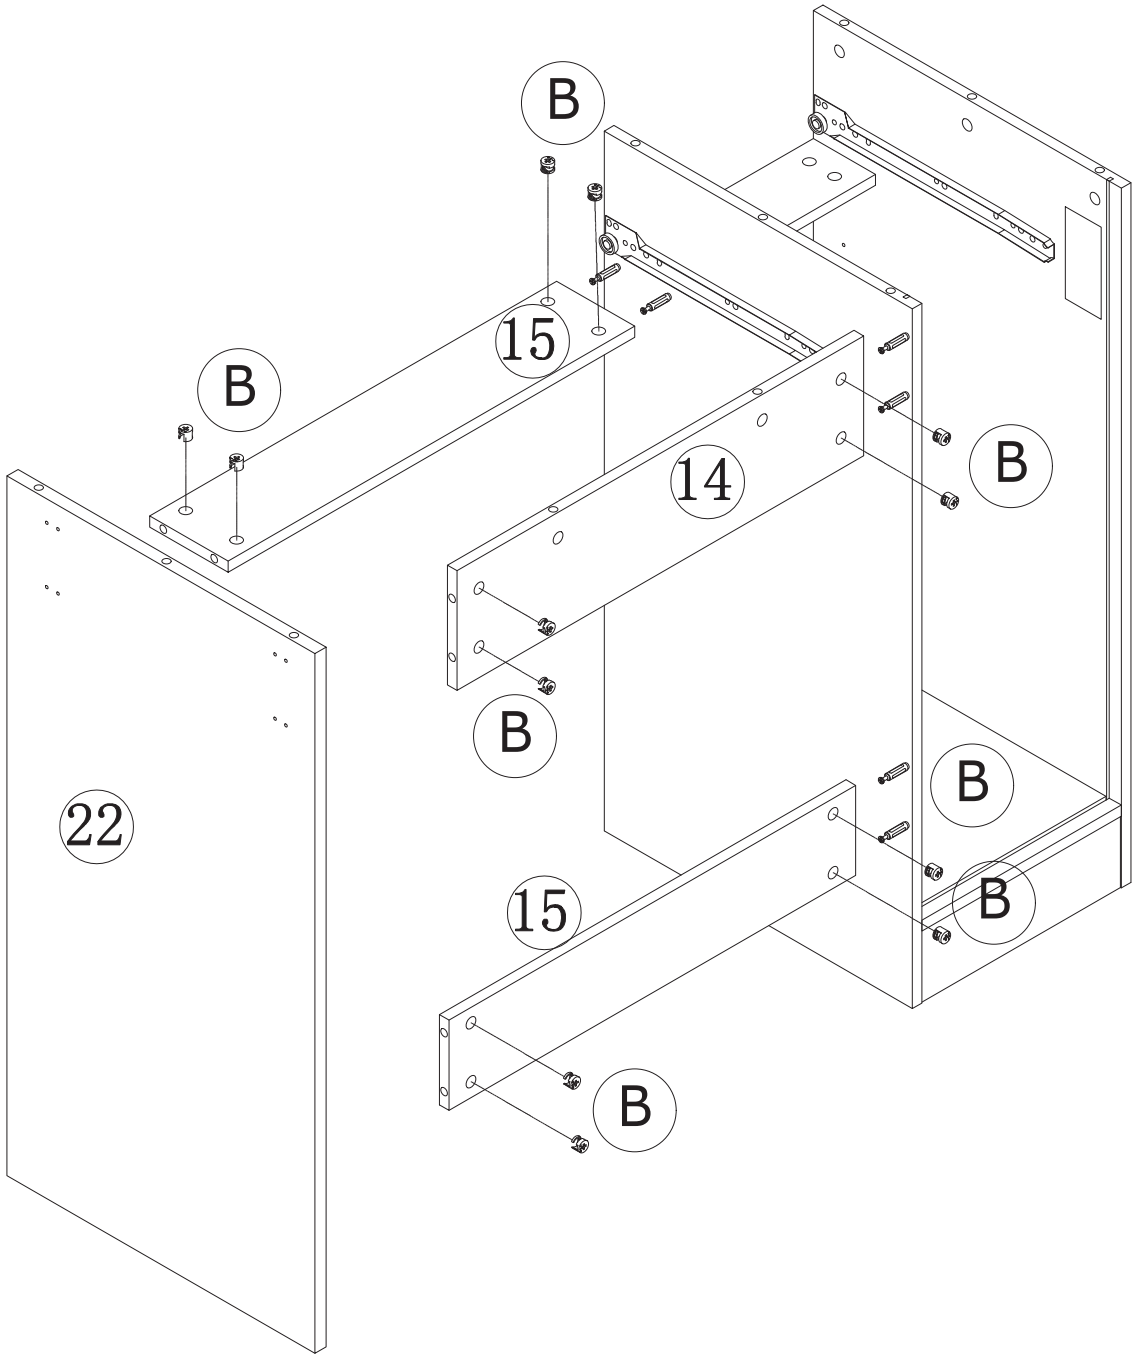


15

17 x 1



Refer to the diagram and slide panel (17) into the the parts assembled in Step 14.

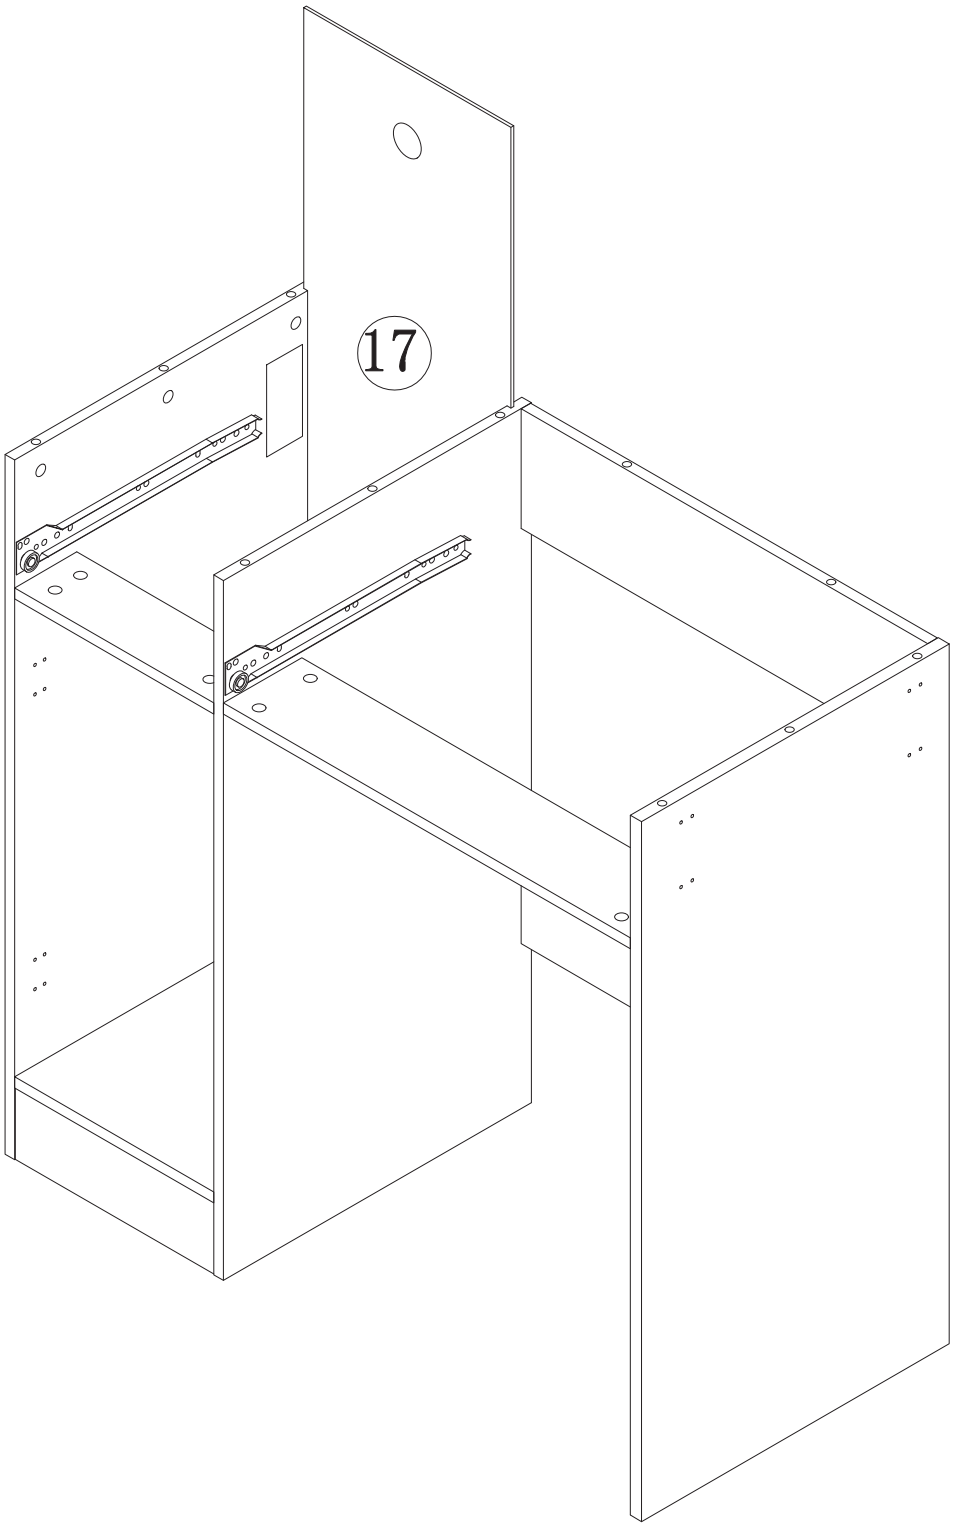

haewonservice@163.com

16


B x 11




∅12 x 10 mm


24 x 1





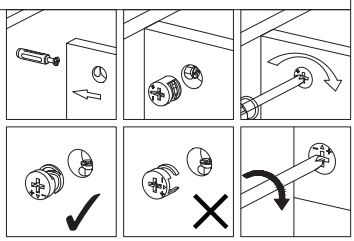

Align screw (A) on panel (24) with the holes shown in the illustration.
Cover the panel and secure the screws in place using cam lock (B).

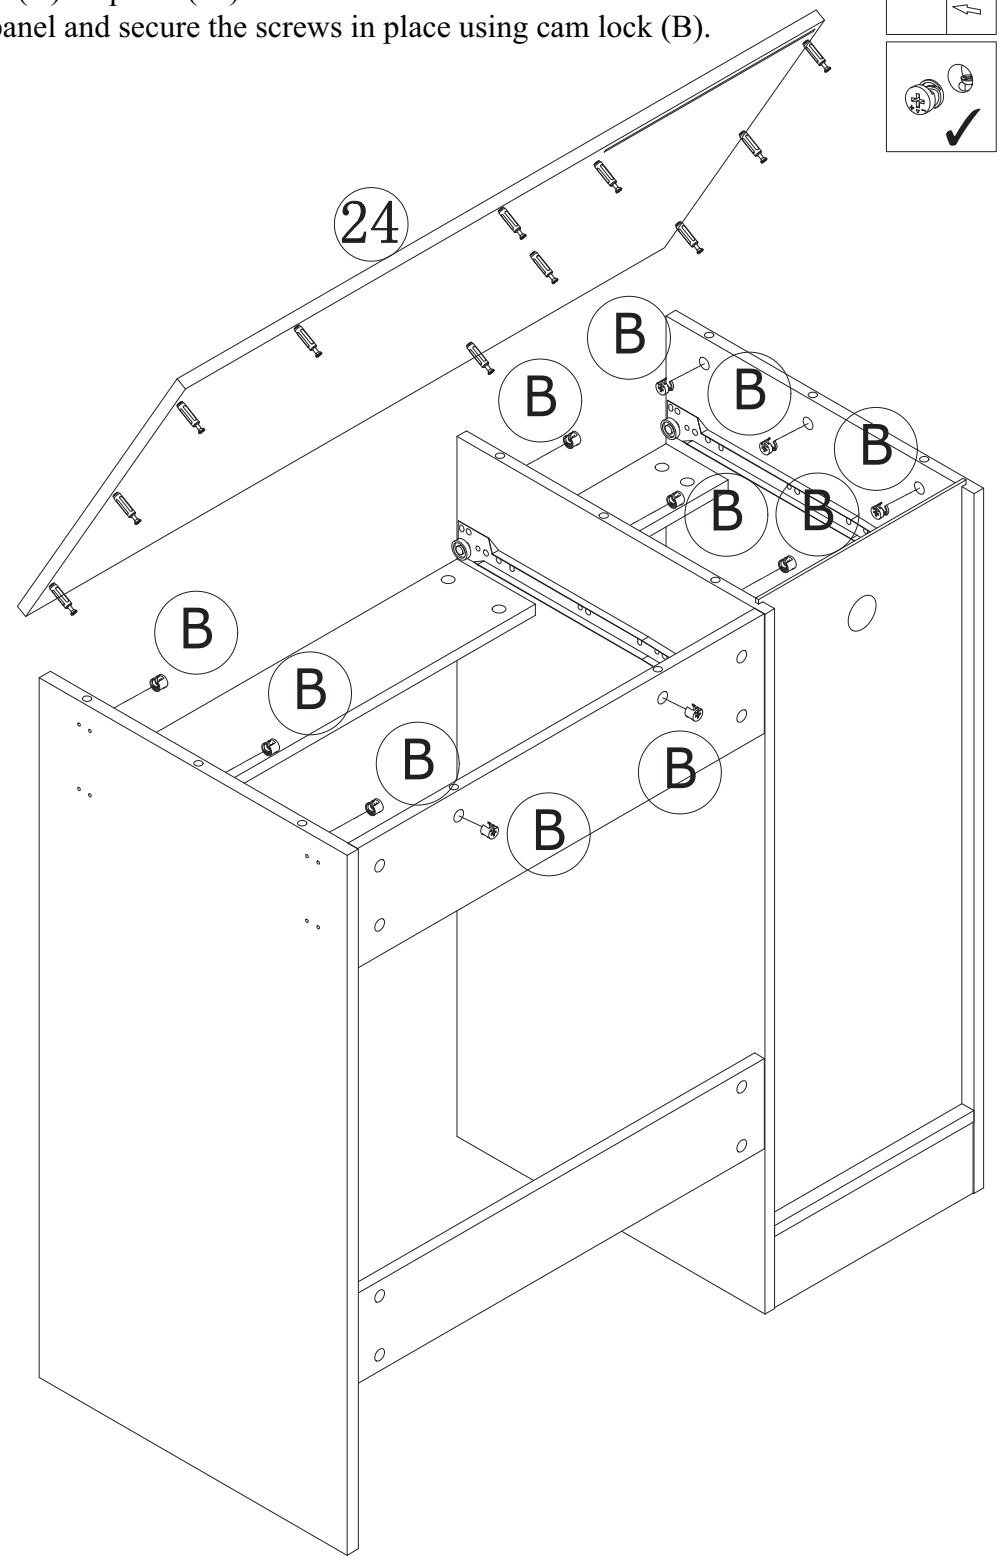

17

B x 12





∅12 x 10 mm

26 x 1 28 x 3


27 x 1






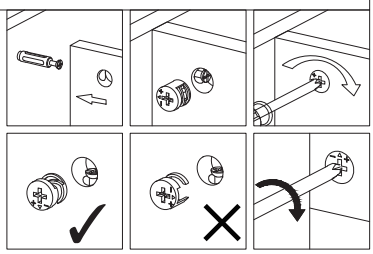

Align screw (A) on panel (26) with the holes in panel (28) and secure them in place using cam lock (B).

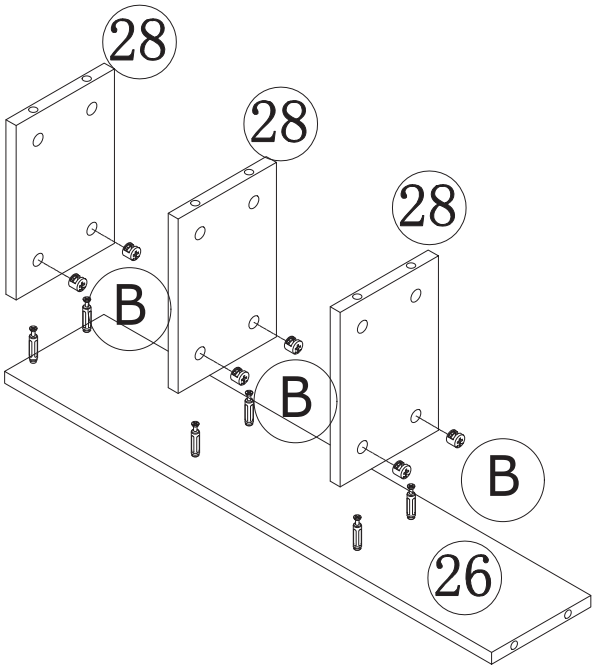


Next, align screw (A) on panel (27) with the holes in panels (28), and secure it in place using cam lock (B).

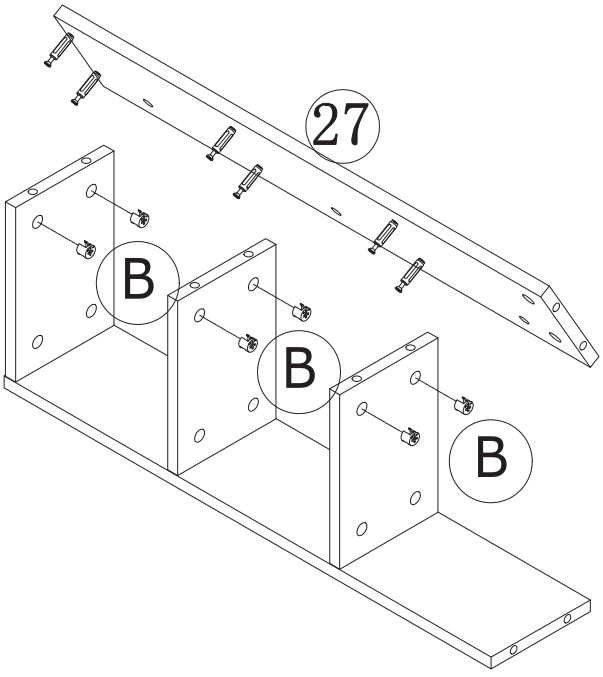


haewonservice@163.com

18

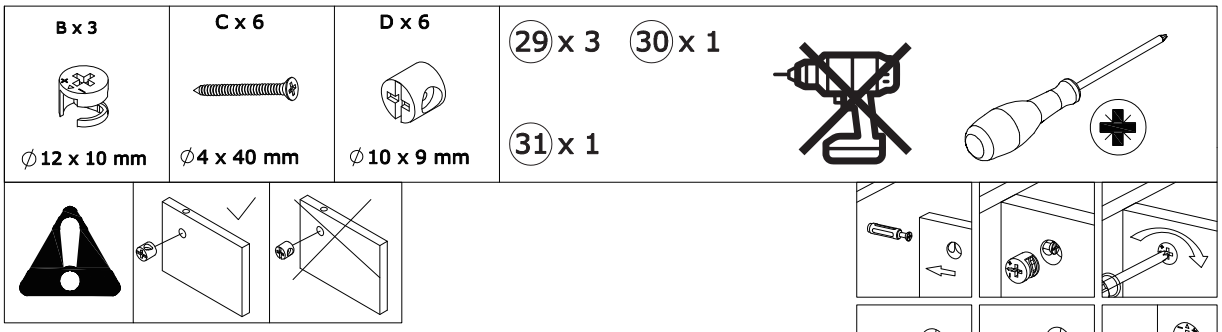

Align screw (A) on panel (30) with the holes in panel (29) and secure them in place using cam lock (B).
Then, screw part (D) into panel (29).Align the holes on panel (29) and panel (31), and secure them from the back using screw (C).

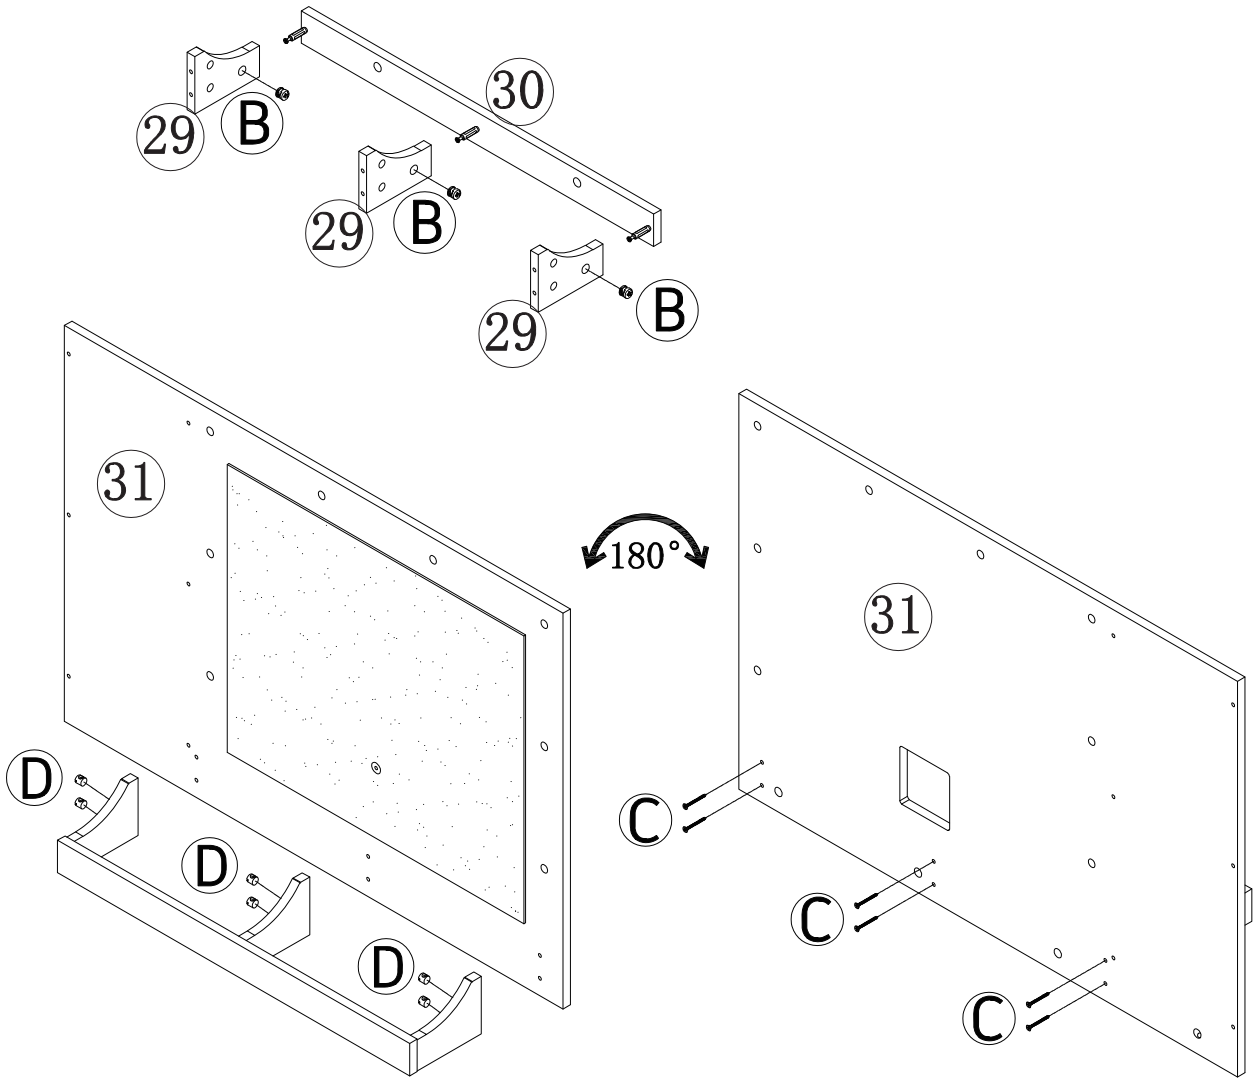



haewonservice@163.com

19


C x 6	D x 6
	
∅4 x 40 mm	∅10 x 9 mm





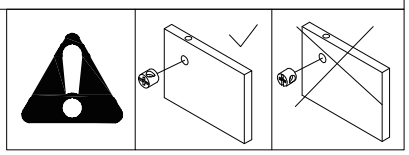

Screw part (D) into panel (26) and (27).Then, align the holes on panels (26) and (27) with the holes on panel (31), and secure them from the back using screw (C).

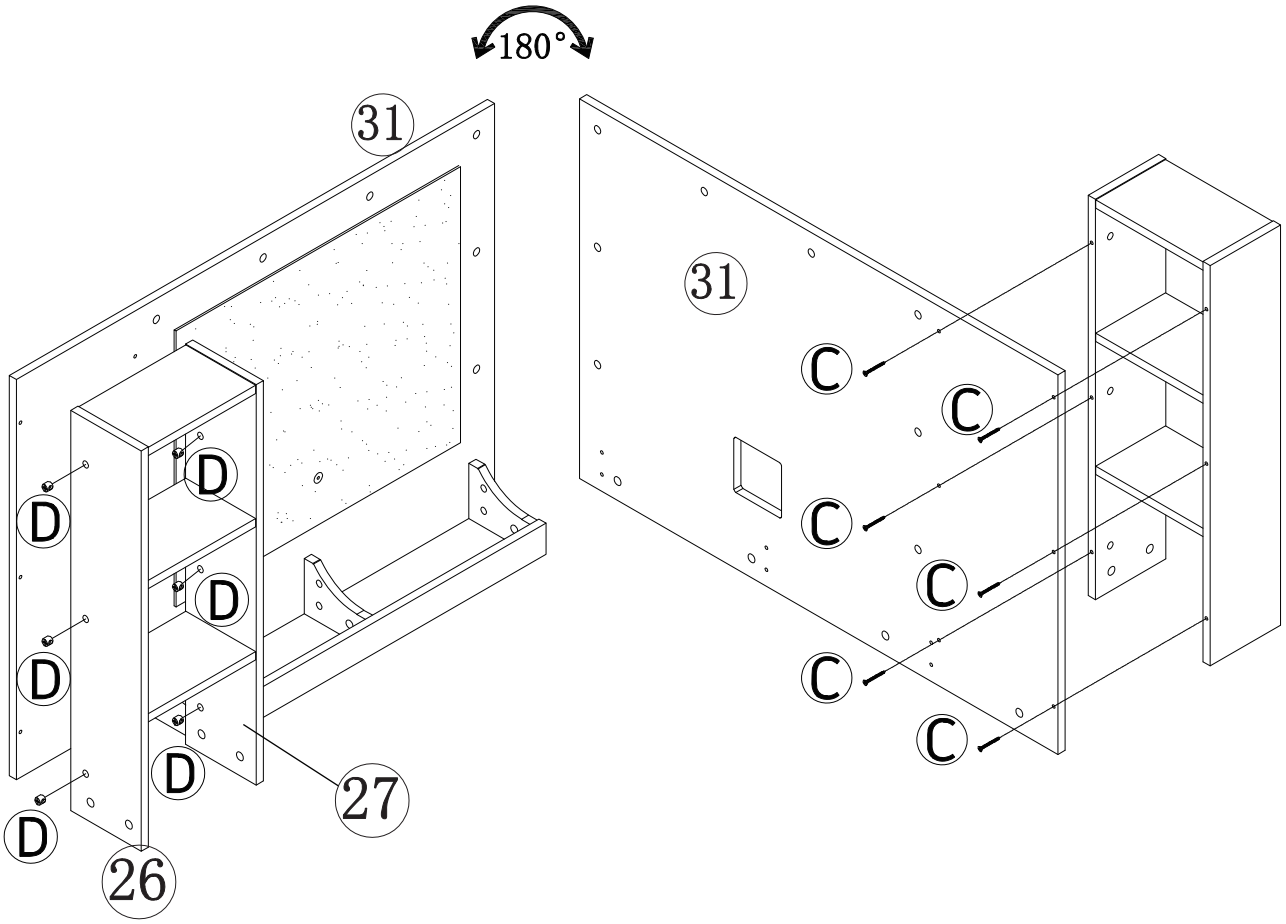

haewonservice@163.com

20


B x 10




∅12 x 10 mm





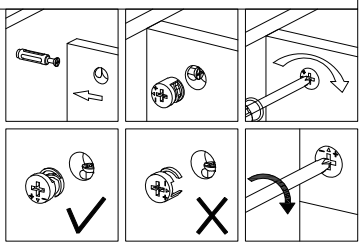


Align the hole on the assembled components from Step 19 with screw (A) on panel (24). Insert them and secure with cam lock (B) in the corresponding position.

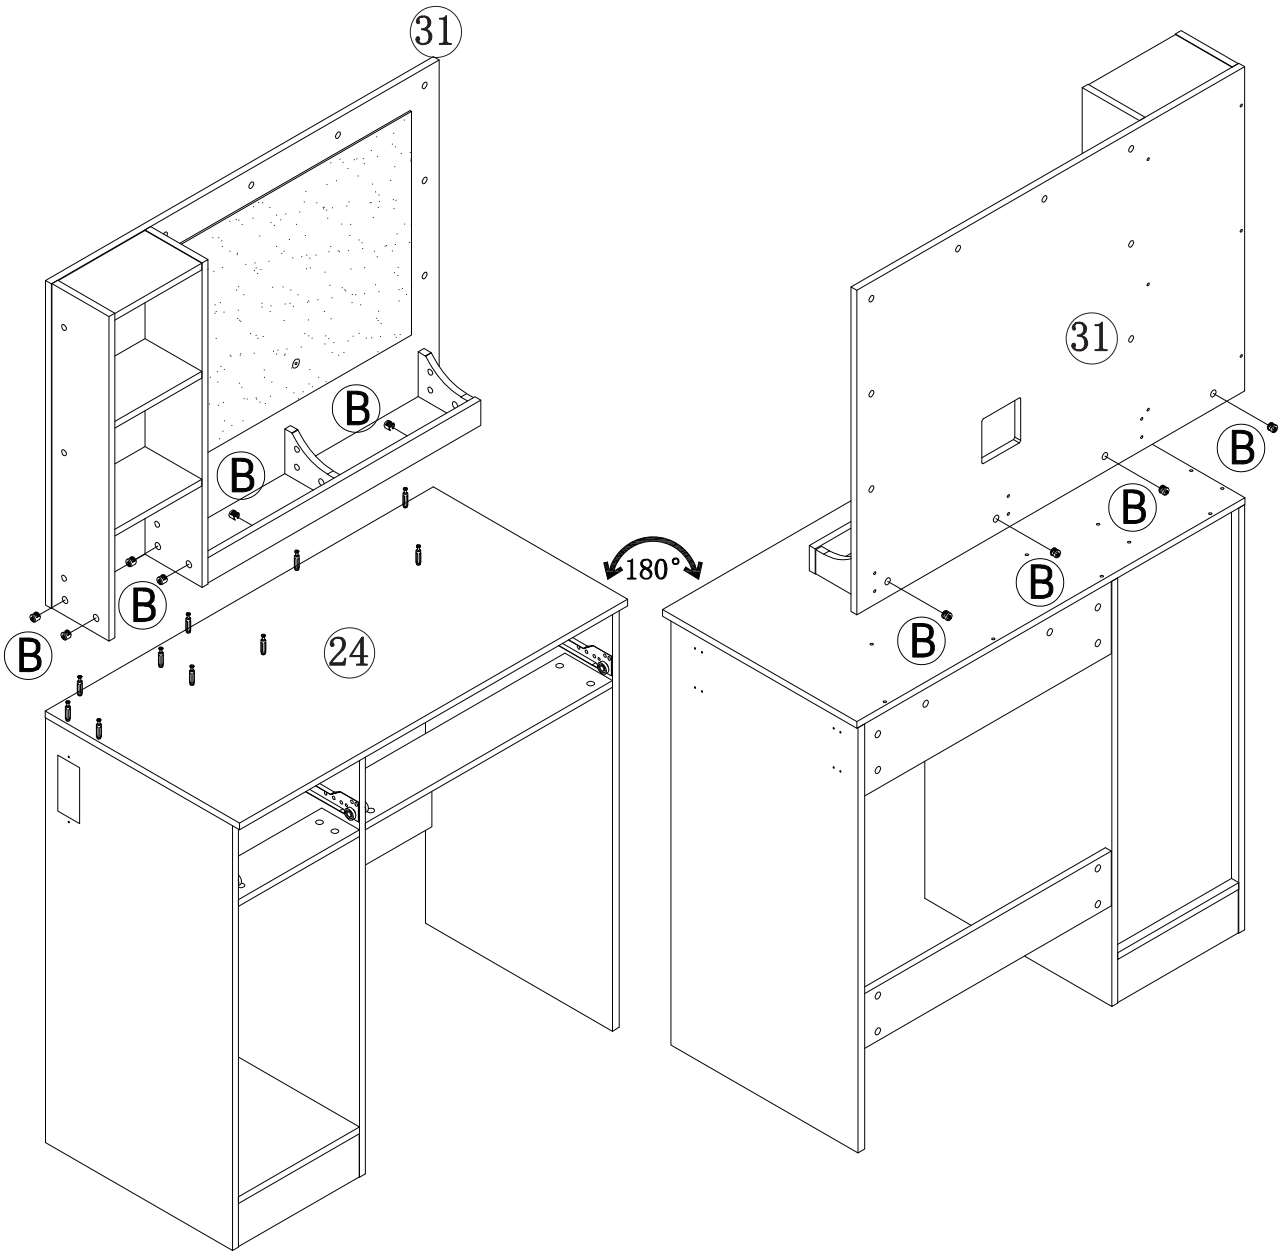


haewonservice@163.com

21

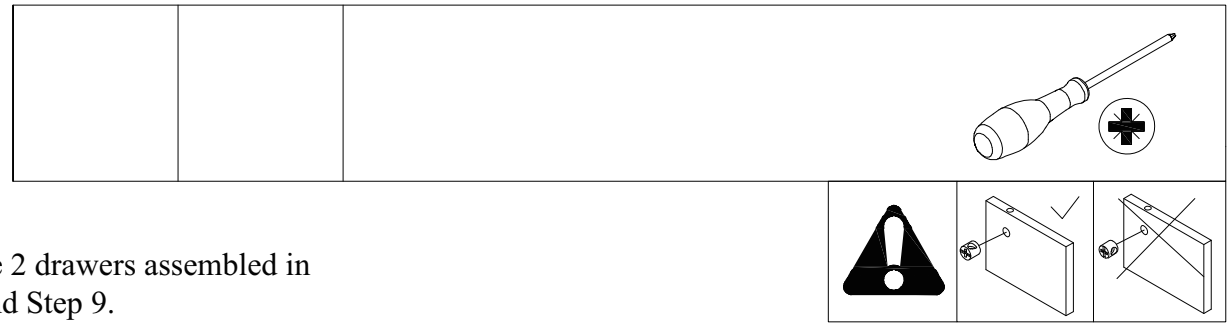

Insert the 2 drawers assembled in
Step 7 and Step 9.

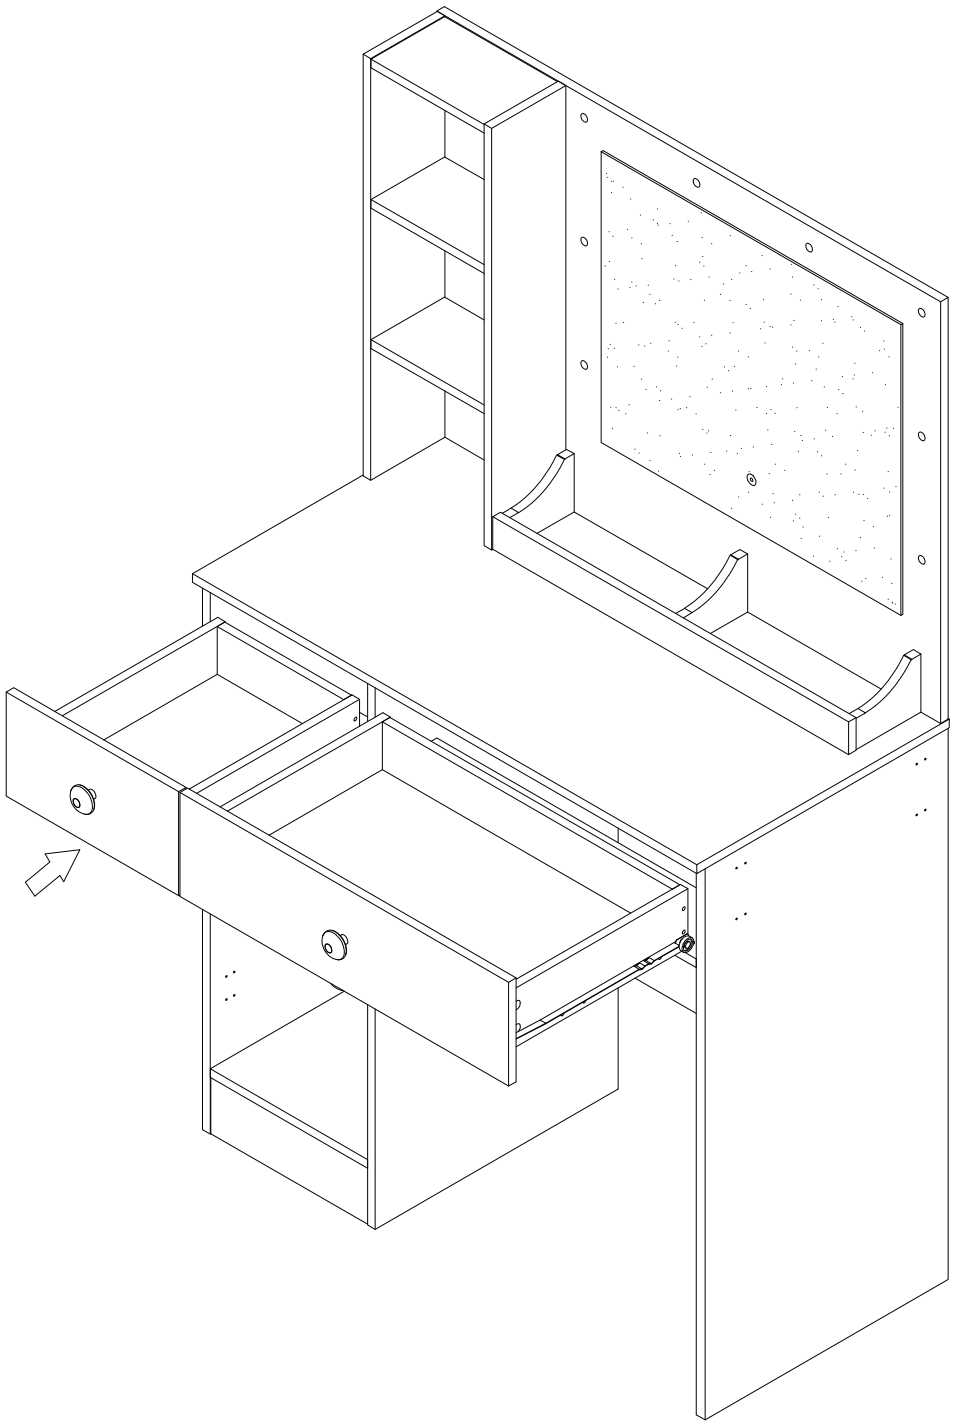


haewonservice@163.com

22

G x 12	J x 2	E x 1	F x 1	18 x 1
∅3.5x 12mm			∅4 x 20 mm	


The position of the door frame can be adjusted forward, backward, left, and right using these two screws.





Pass screw (F) through the panel (18) to attach with the cabinet handle (E).
Next, use part (J) to connect panel (18) to the assembled parts in step 21, and secure it in place with screws (G).

haewonservice@163.com

23

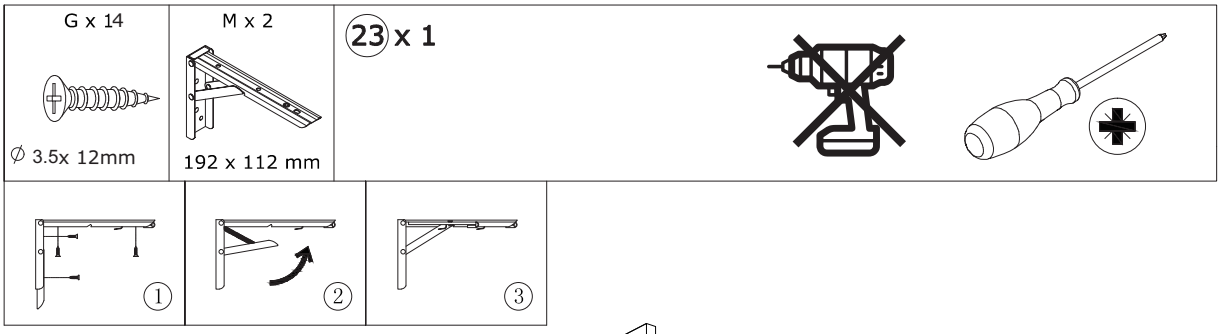

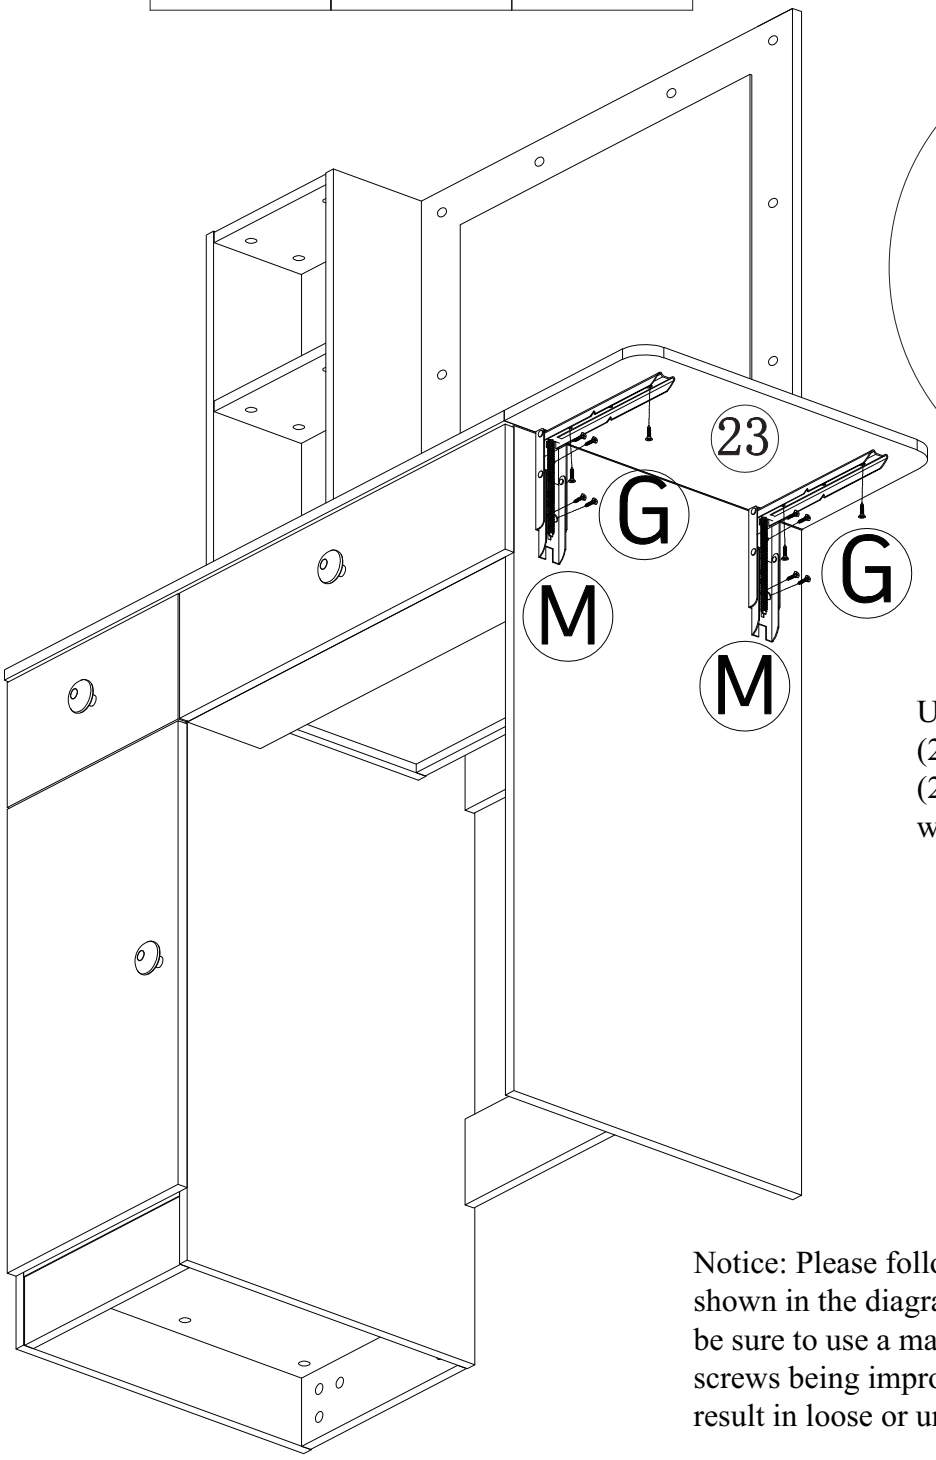

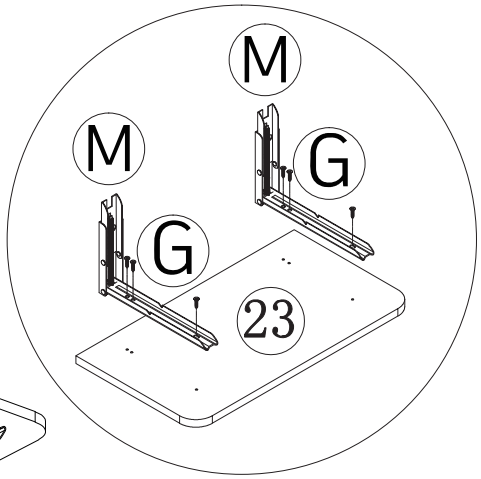

Use part (M) to connect panel (23) to the assembly from Step (22), and secure it in place with screws (G).


Notice: Please follow the installation instructions shown in the diagram above.When assembling, be sure to use a manual screwdriver to avoid screws being improperly tightened, which could result in loose or unsecured parts.

haewonservice@163.com


24


N x 8	P x 8	
∅35 mm	14*14*5	

Insert bulb (N) into the hole on panel (31) and secure it with nut (P).

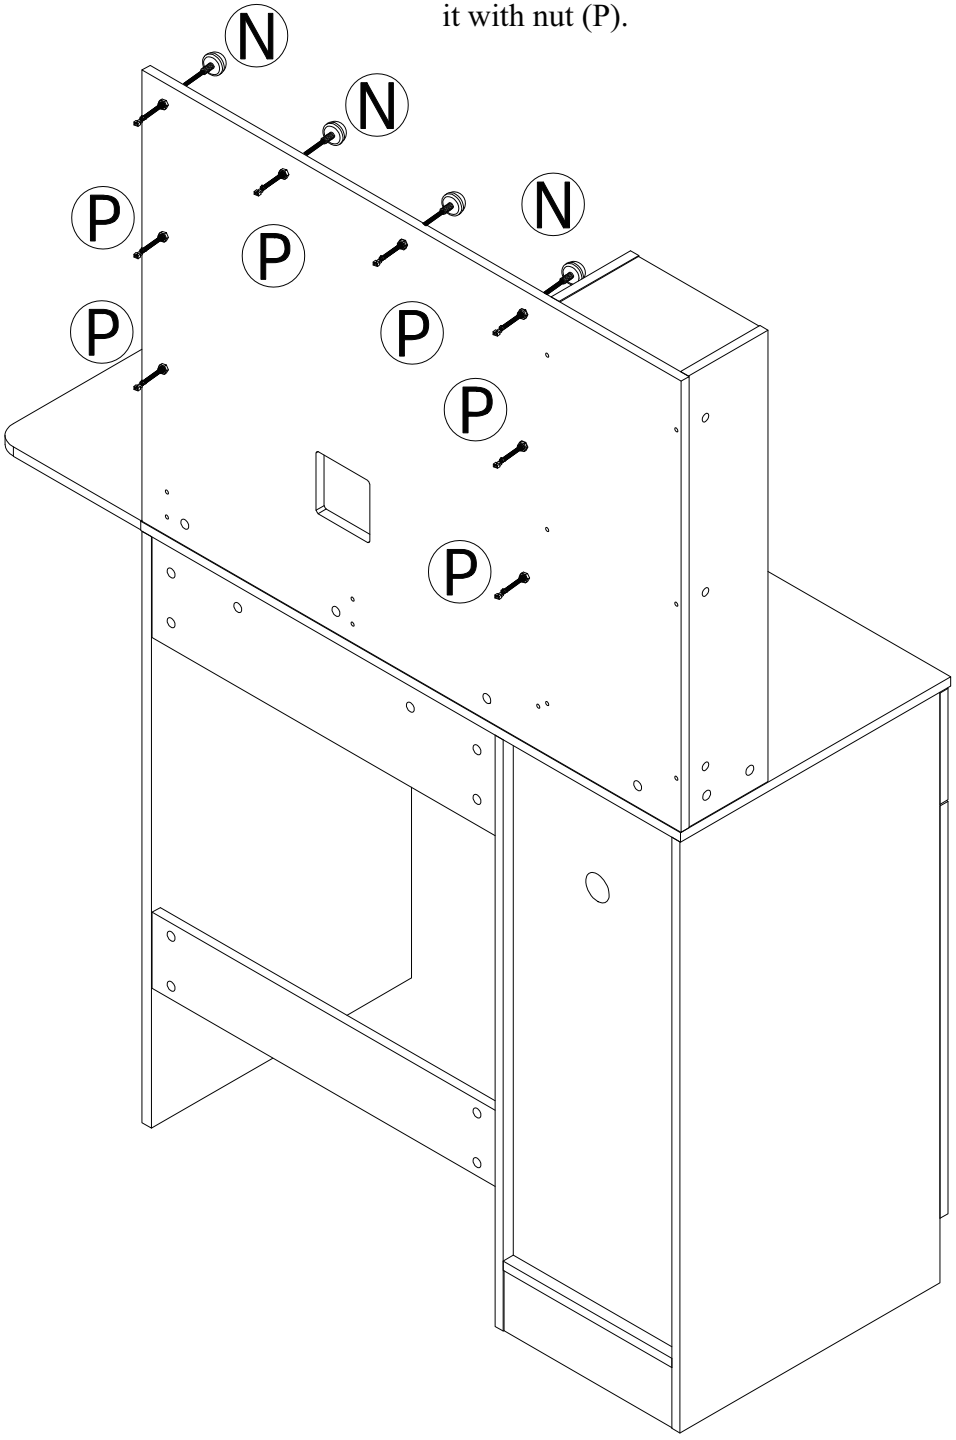


25

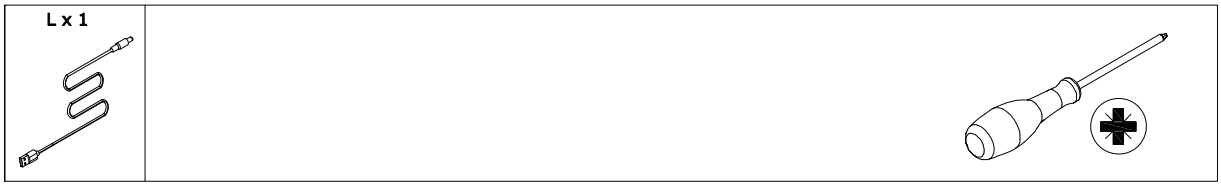






Connect the wire on panel (31).

Connect the USB port (L)
to the port on panel (31).

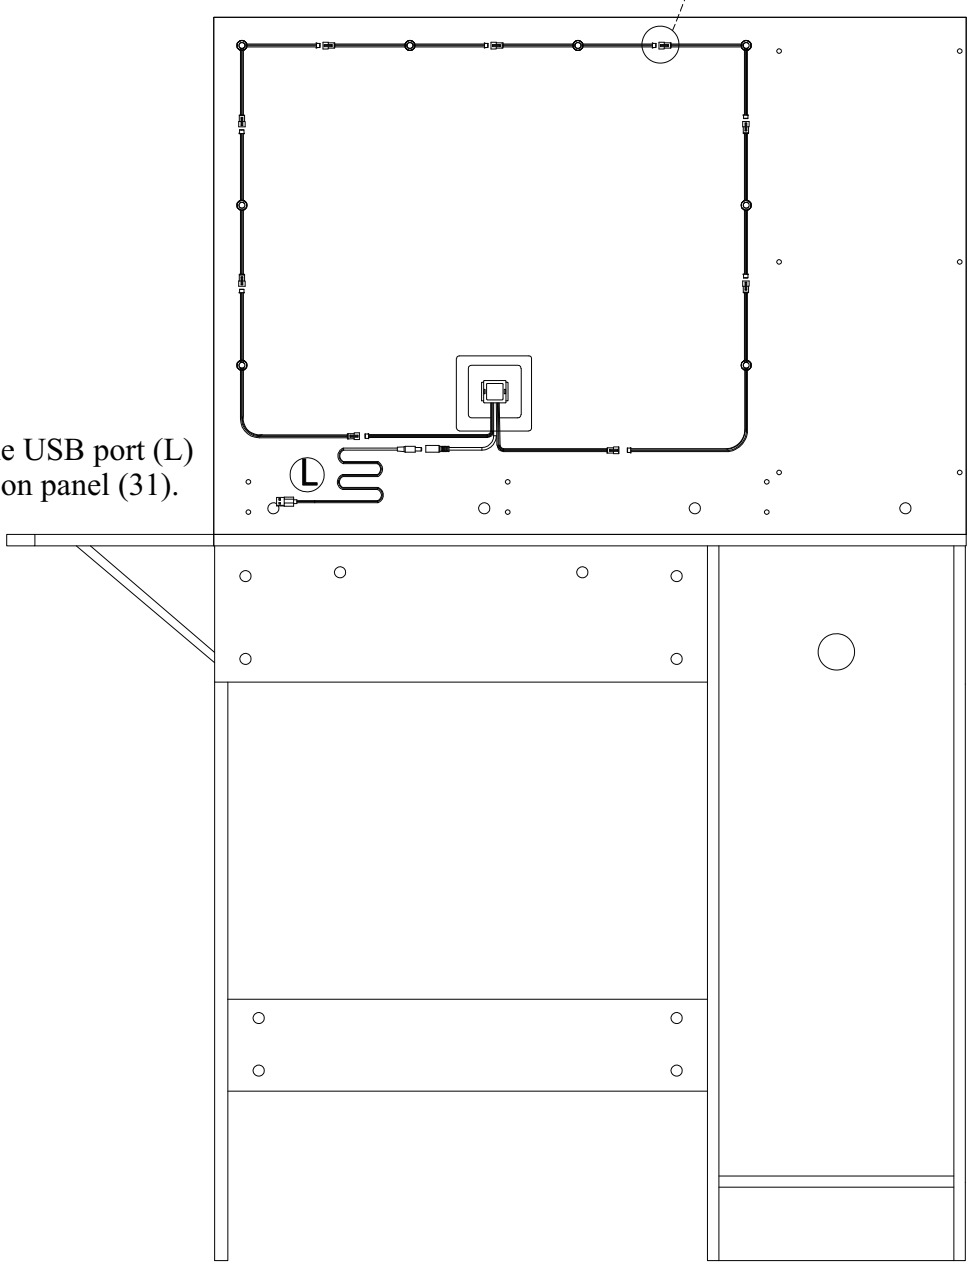


haewonservice@163.com

26

G x 2	H x 1		
 ∅3.5x 12mm			

Install power strip (H) into panel (20) and secure it with screw (G).

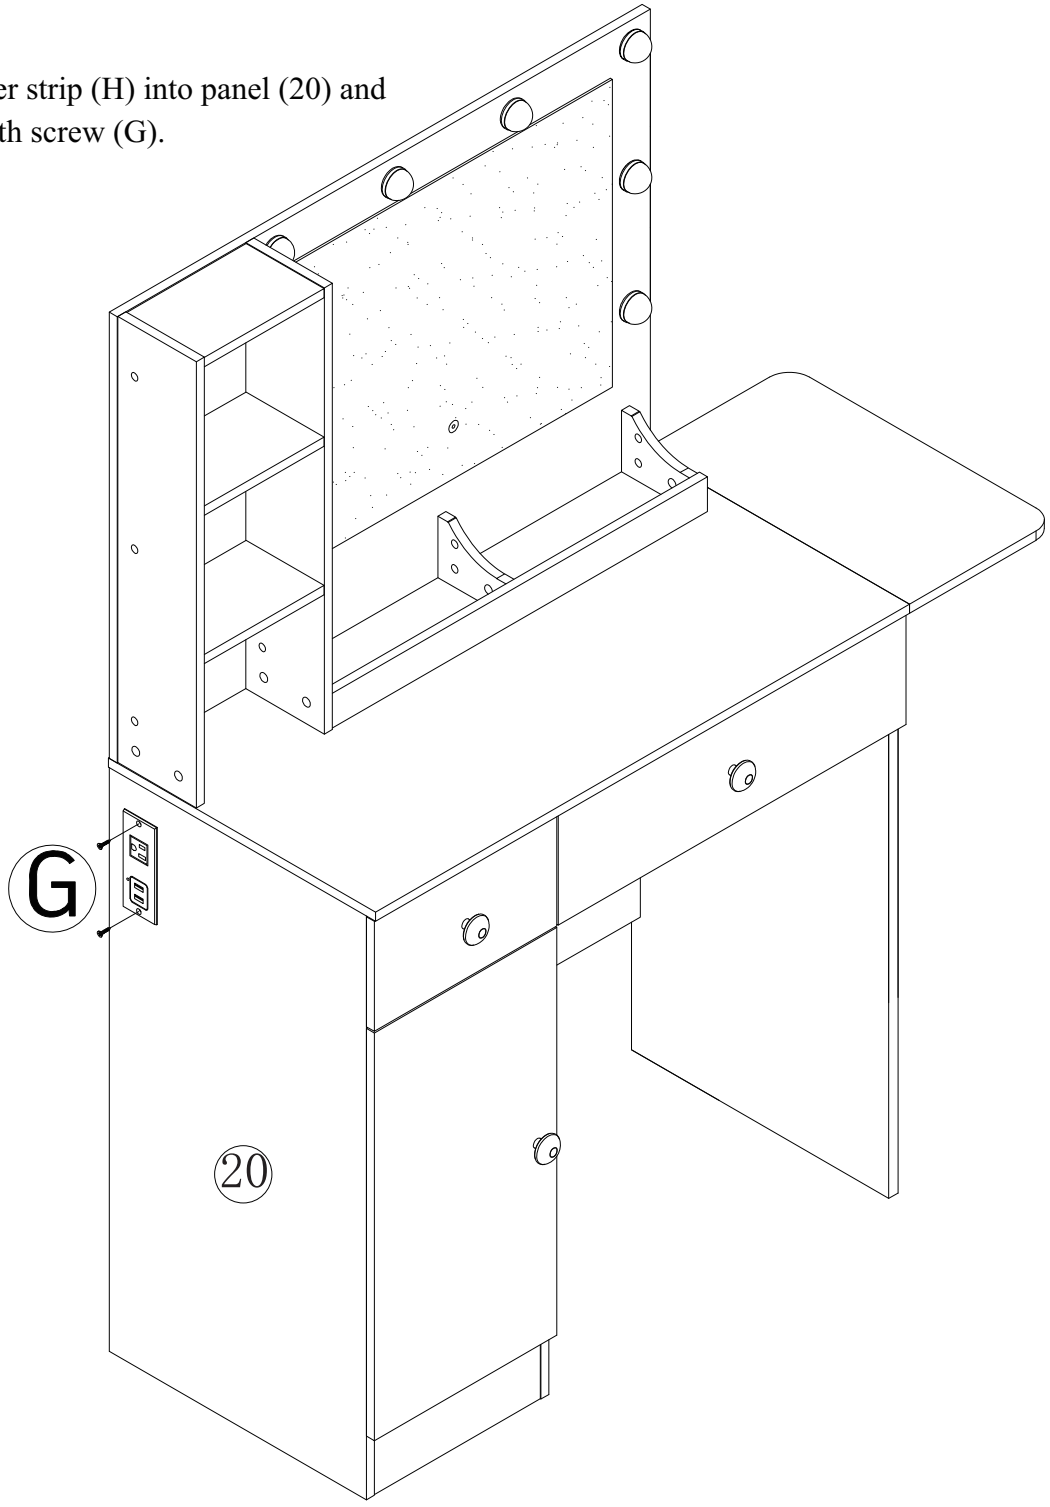

haewonservice@163.com

27


B x 4





∅12 x 10 mm

2 x 1 4 x 1

3 x 1



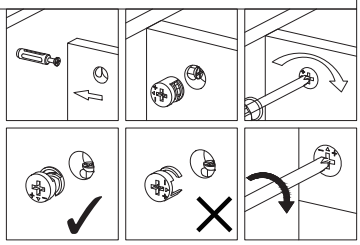

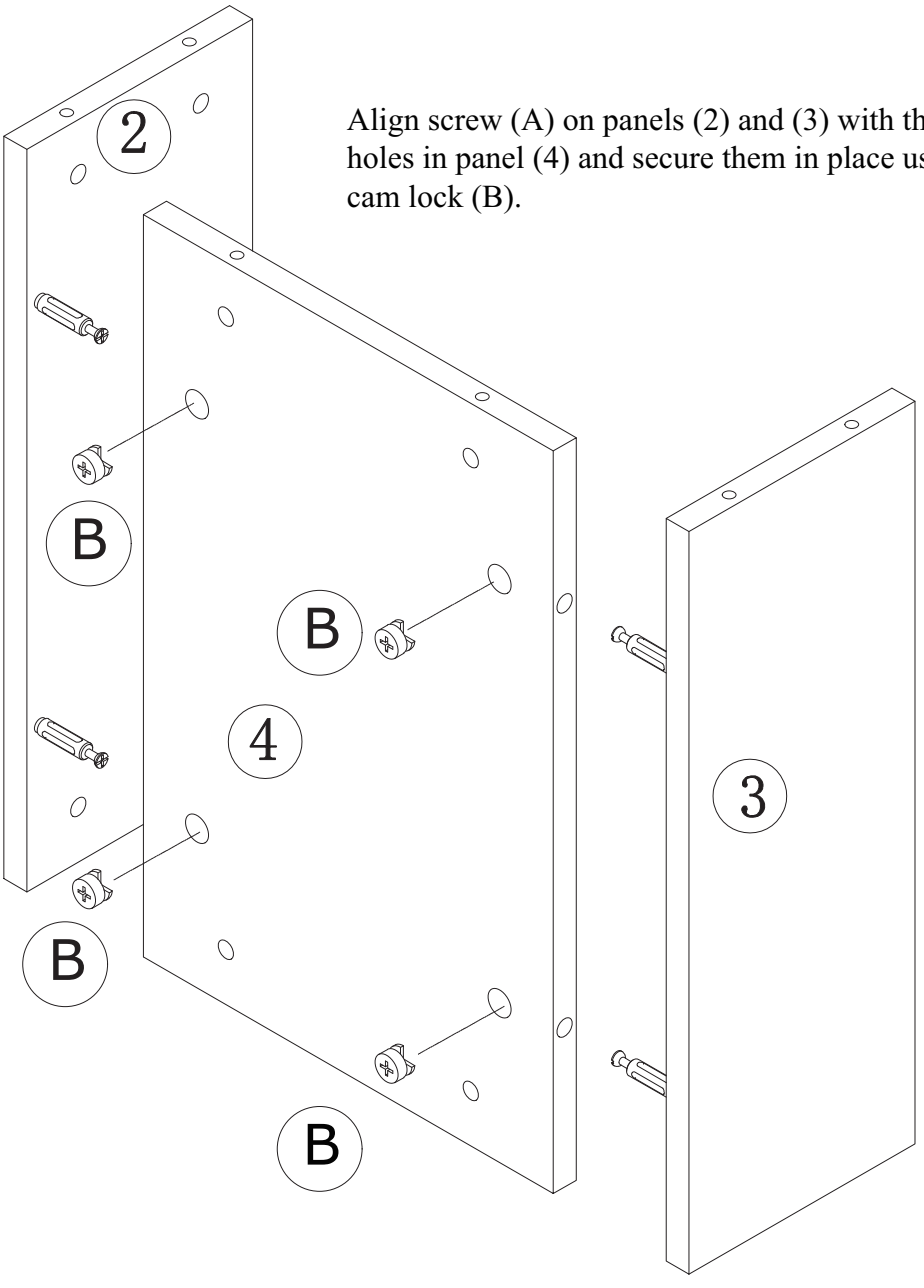



Align screw (A) on panels (2) and (3) with the holes in panel (4) and secure them in place using cam lock (B).

haewonservice@163.com


28

C x 12	D x 12	G x 12	J x 2	1 x2 5 x1
∅4 x 40 mm	∅10 x 9 mm	∅3.5x 12mm		

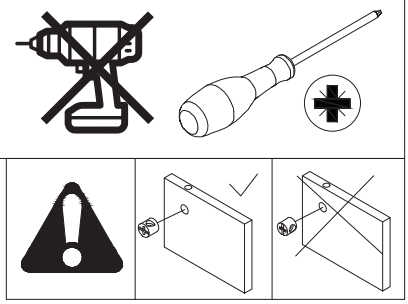


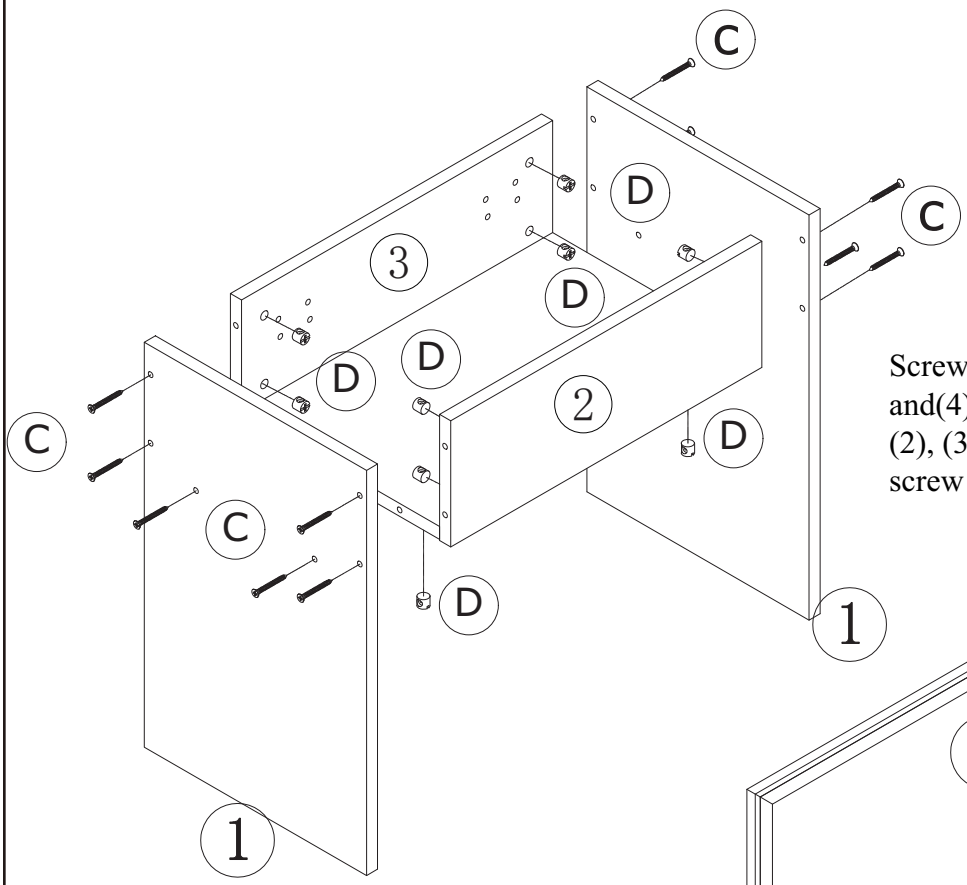

Screw part (D) into panels (2), (3), and(4).Align the holes on panels (1), (2), (3), and(4), and secure them using screw (C)

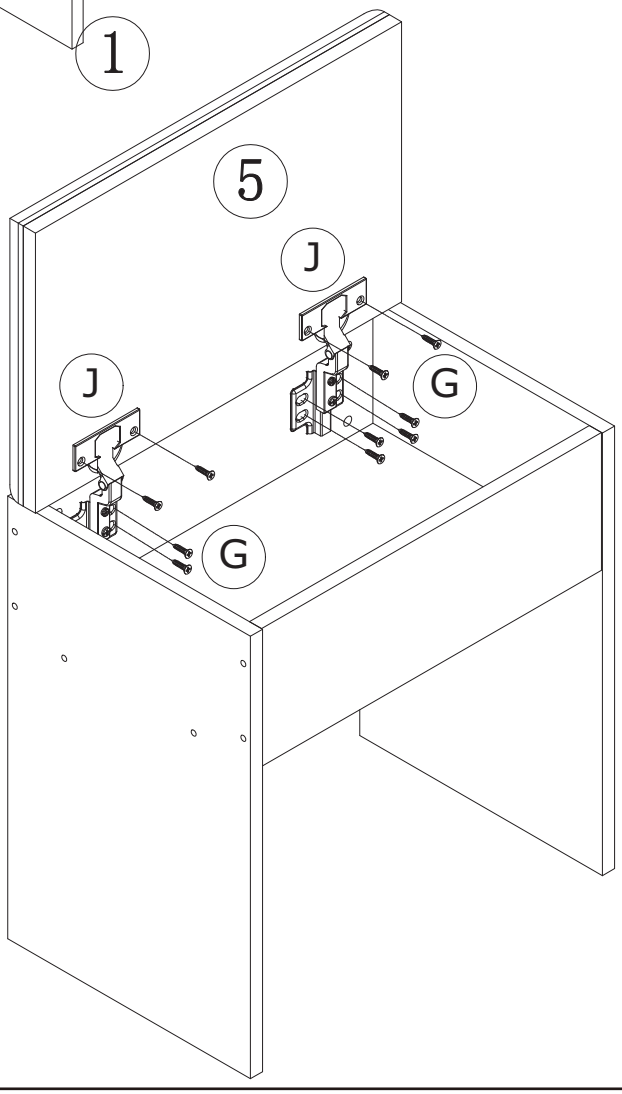

Use part (J) to connect cushion (5) to the assembly, and secure it in place with screws (G)

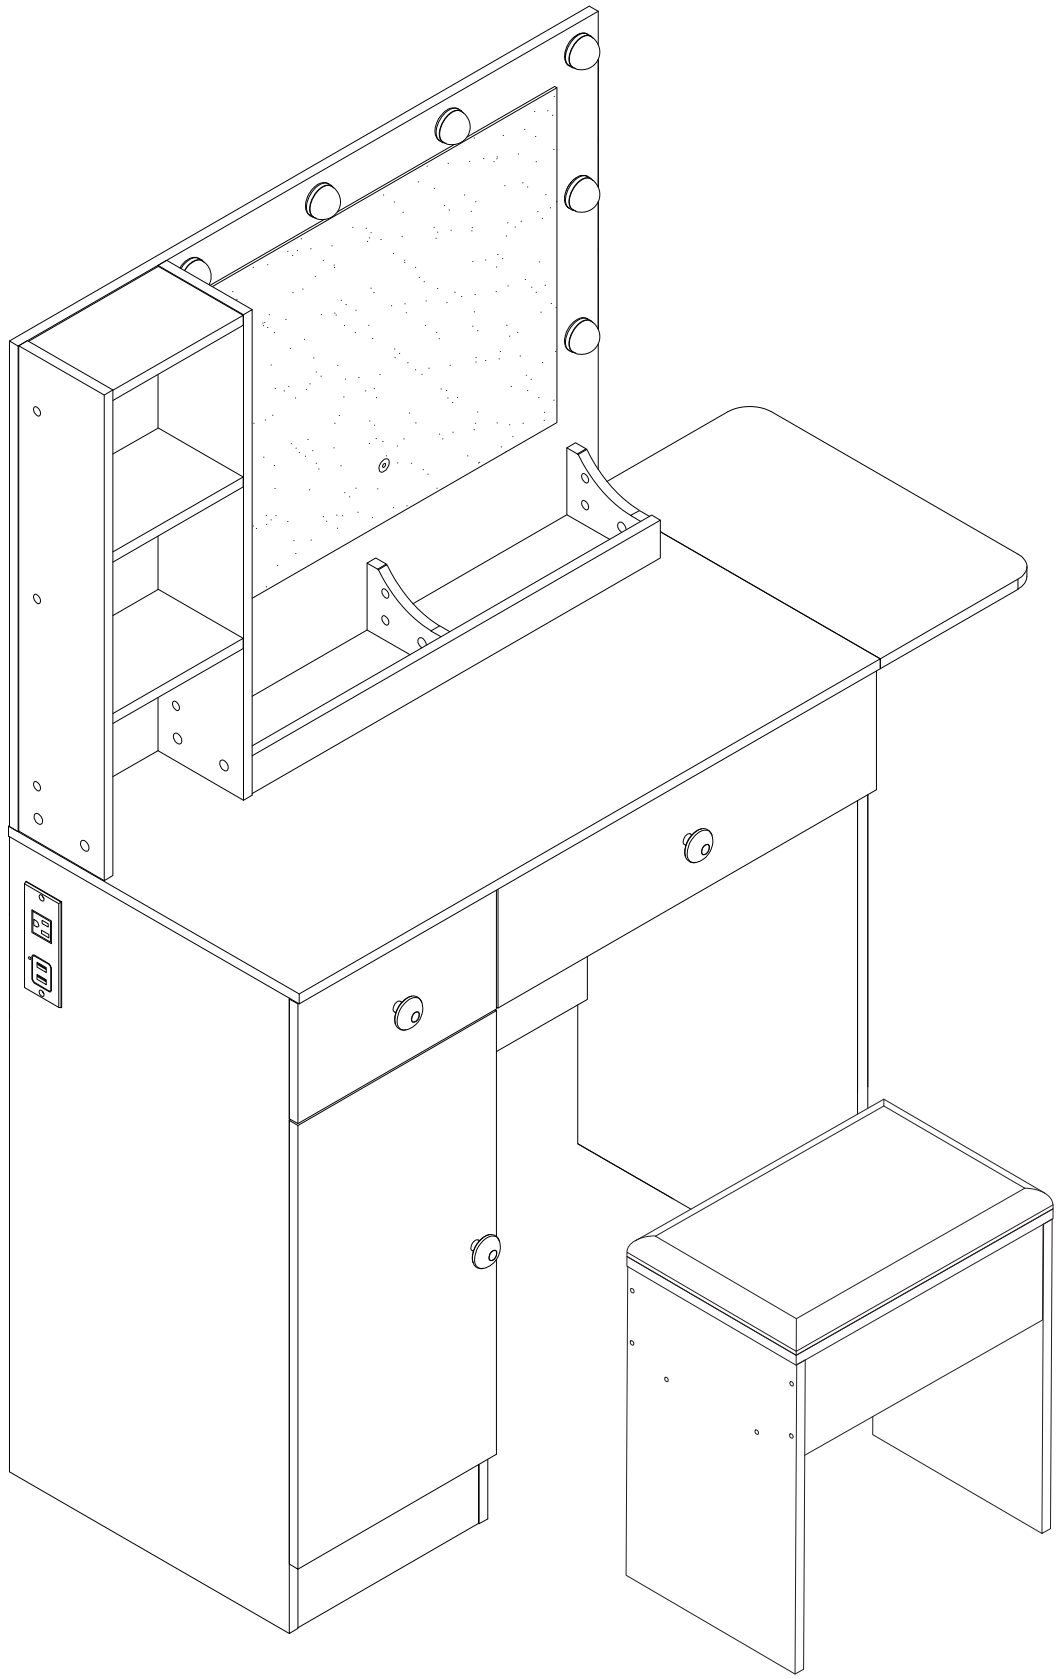


- Usage of touch sensitive light strip
- Three-color switching + stepless dimming
- Turn it on for white light, click again for warm light, and click for the third time for neutral light;

you can long press stepless dimming under different colors of lights.


- Turn on for white light and long press for dimming
- Click again for warm light and long press for
- dimmingThird click for neutral light and long press for
- dimming Last click to turn offthe light



WARNING - FIRE & ELECTROCUTION HAZARD



1. INDOOR USE ONLY. DO NOTUSE OUTDOORS, IN BATHROOM, POOL, KITCHEN SINK ORANYWETAREA.
2. DO NOTDAISY-CHAIN - Never plug this power strip into another power tapension cord, multi outlet adapter or power inverter.
3. DO NOTOVERLOAD.Total connected power cannot exceed the rated wattageprinted on the unit.
   Overloading causes overheating, melting plastic andfire risk.

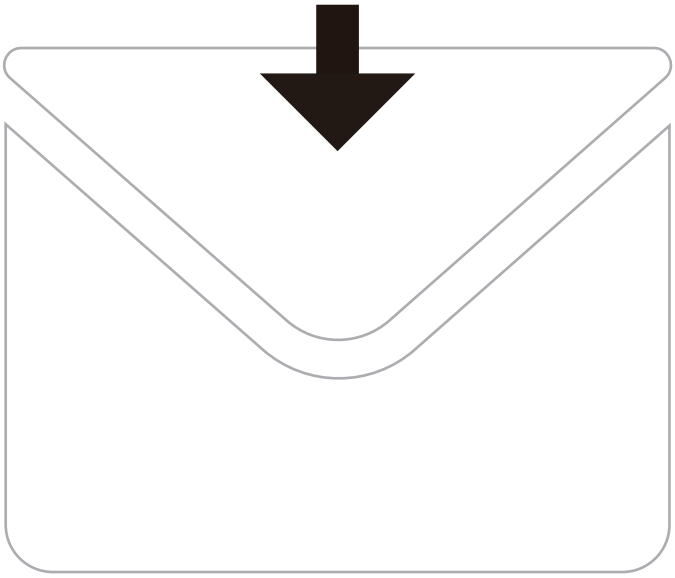

We' d Love to hear from you!

Thank you for your purchase of our product!
If you encounter any problems, please give us an opportunity to improve your experience right away, our team members are more than happy to help.

haewonservice@163.com

We also welcome you to post a product review so that others could benefit from your experience.Thanks again for your support, feedback and time.