




Owner Manual

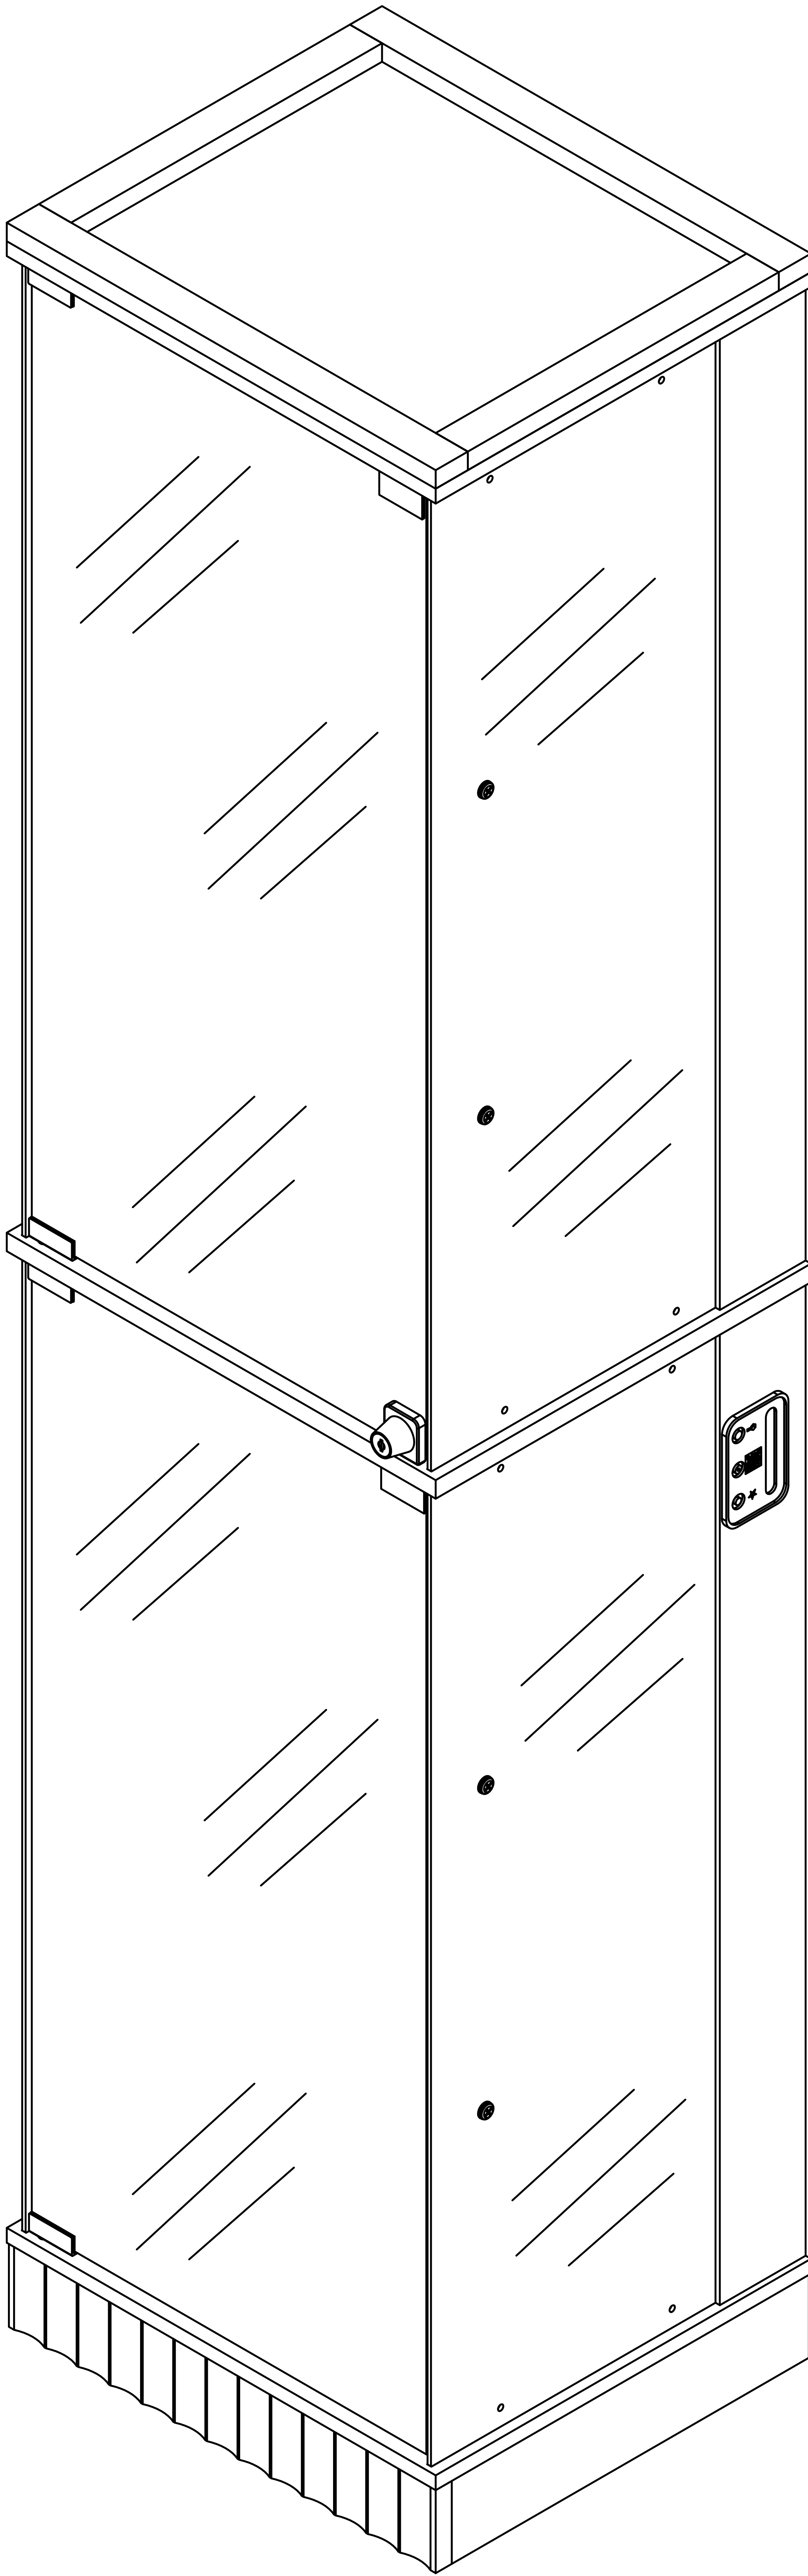


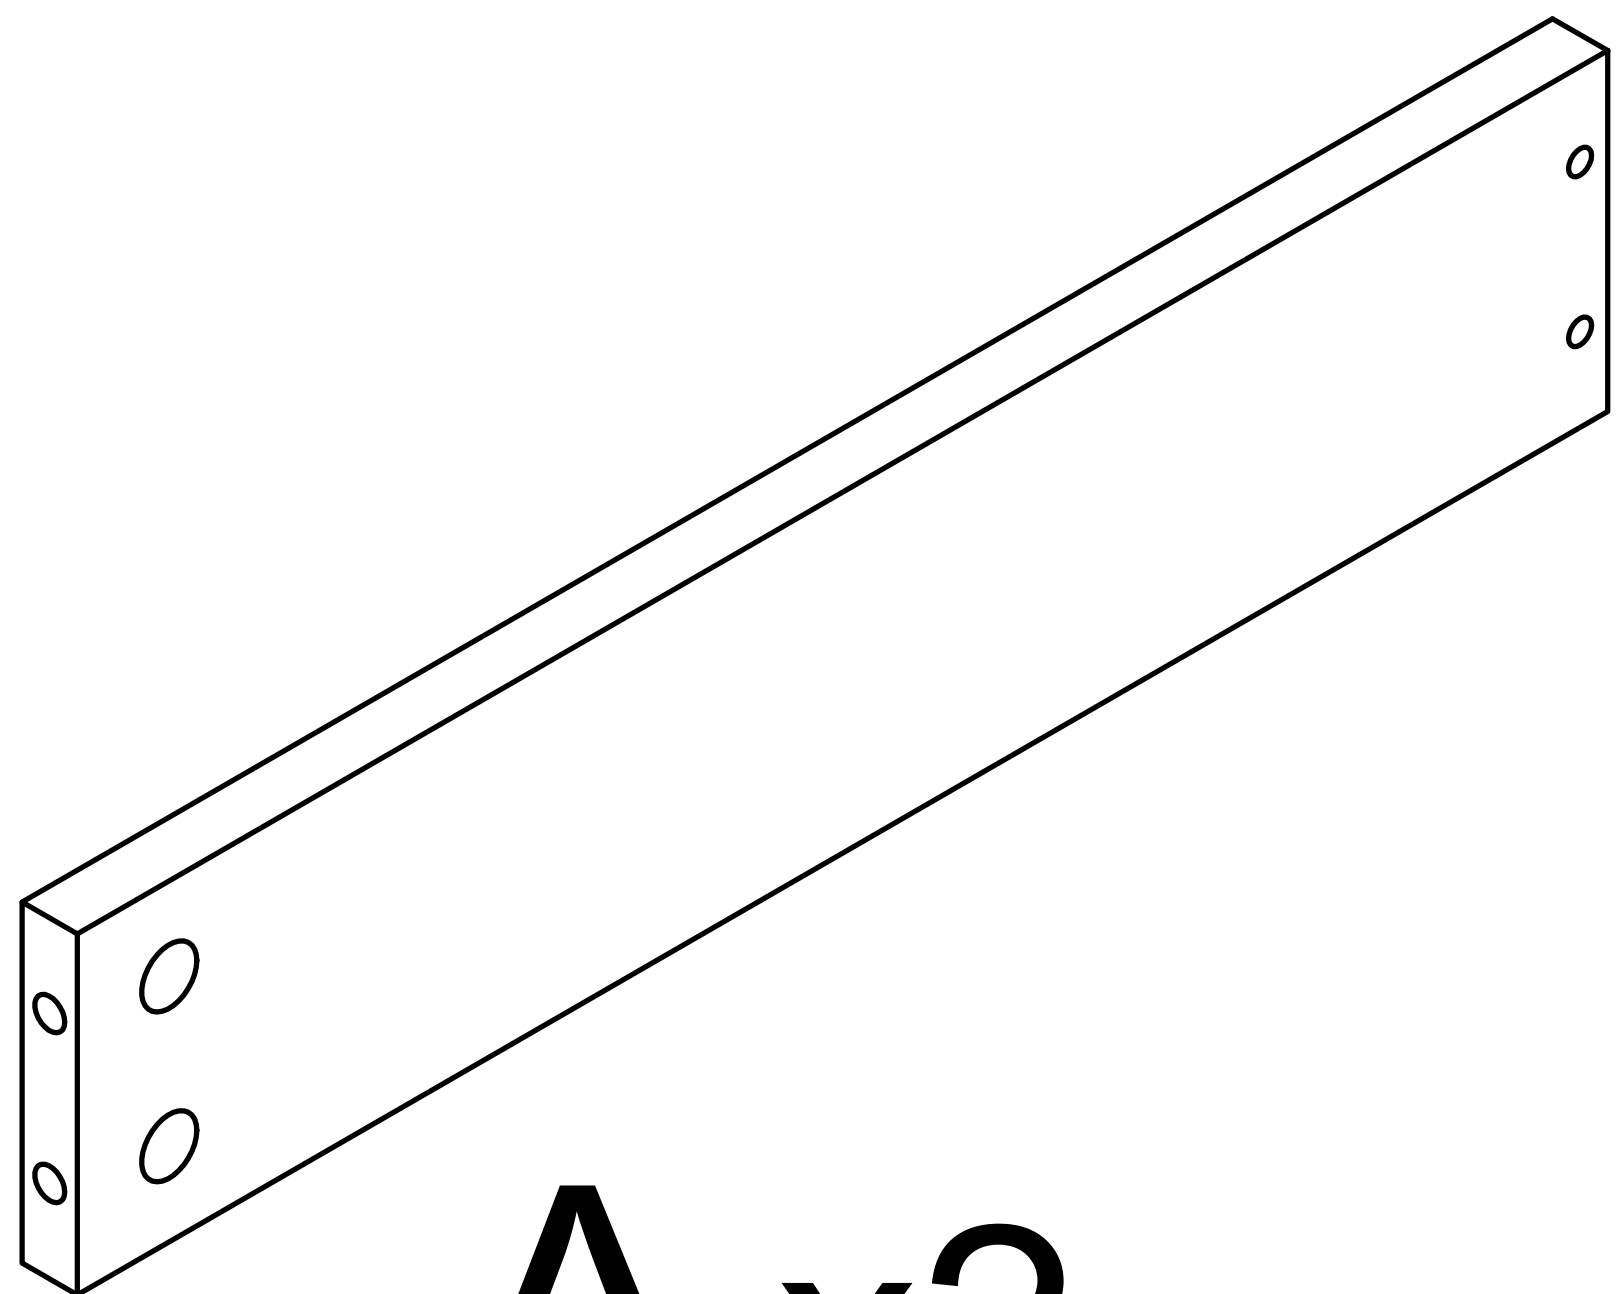


A x2

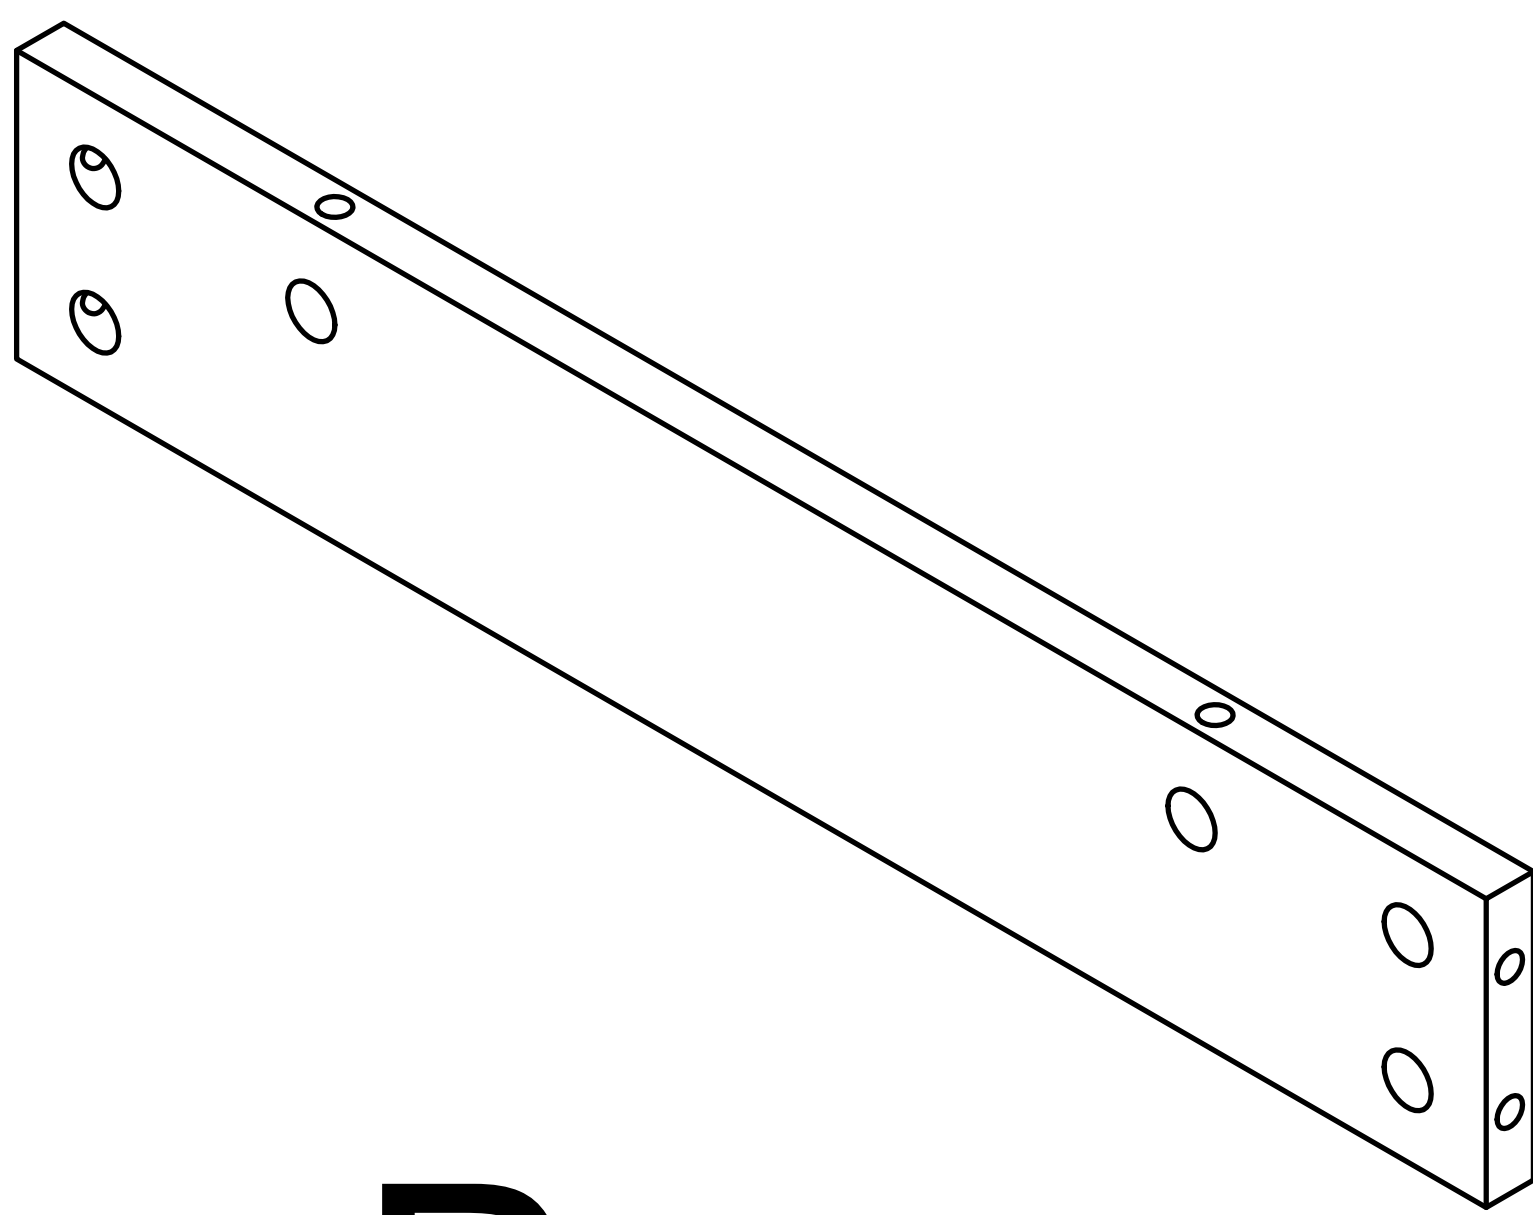


B x1

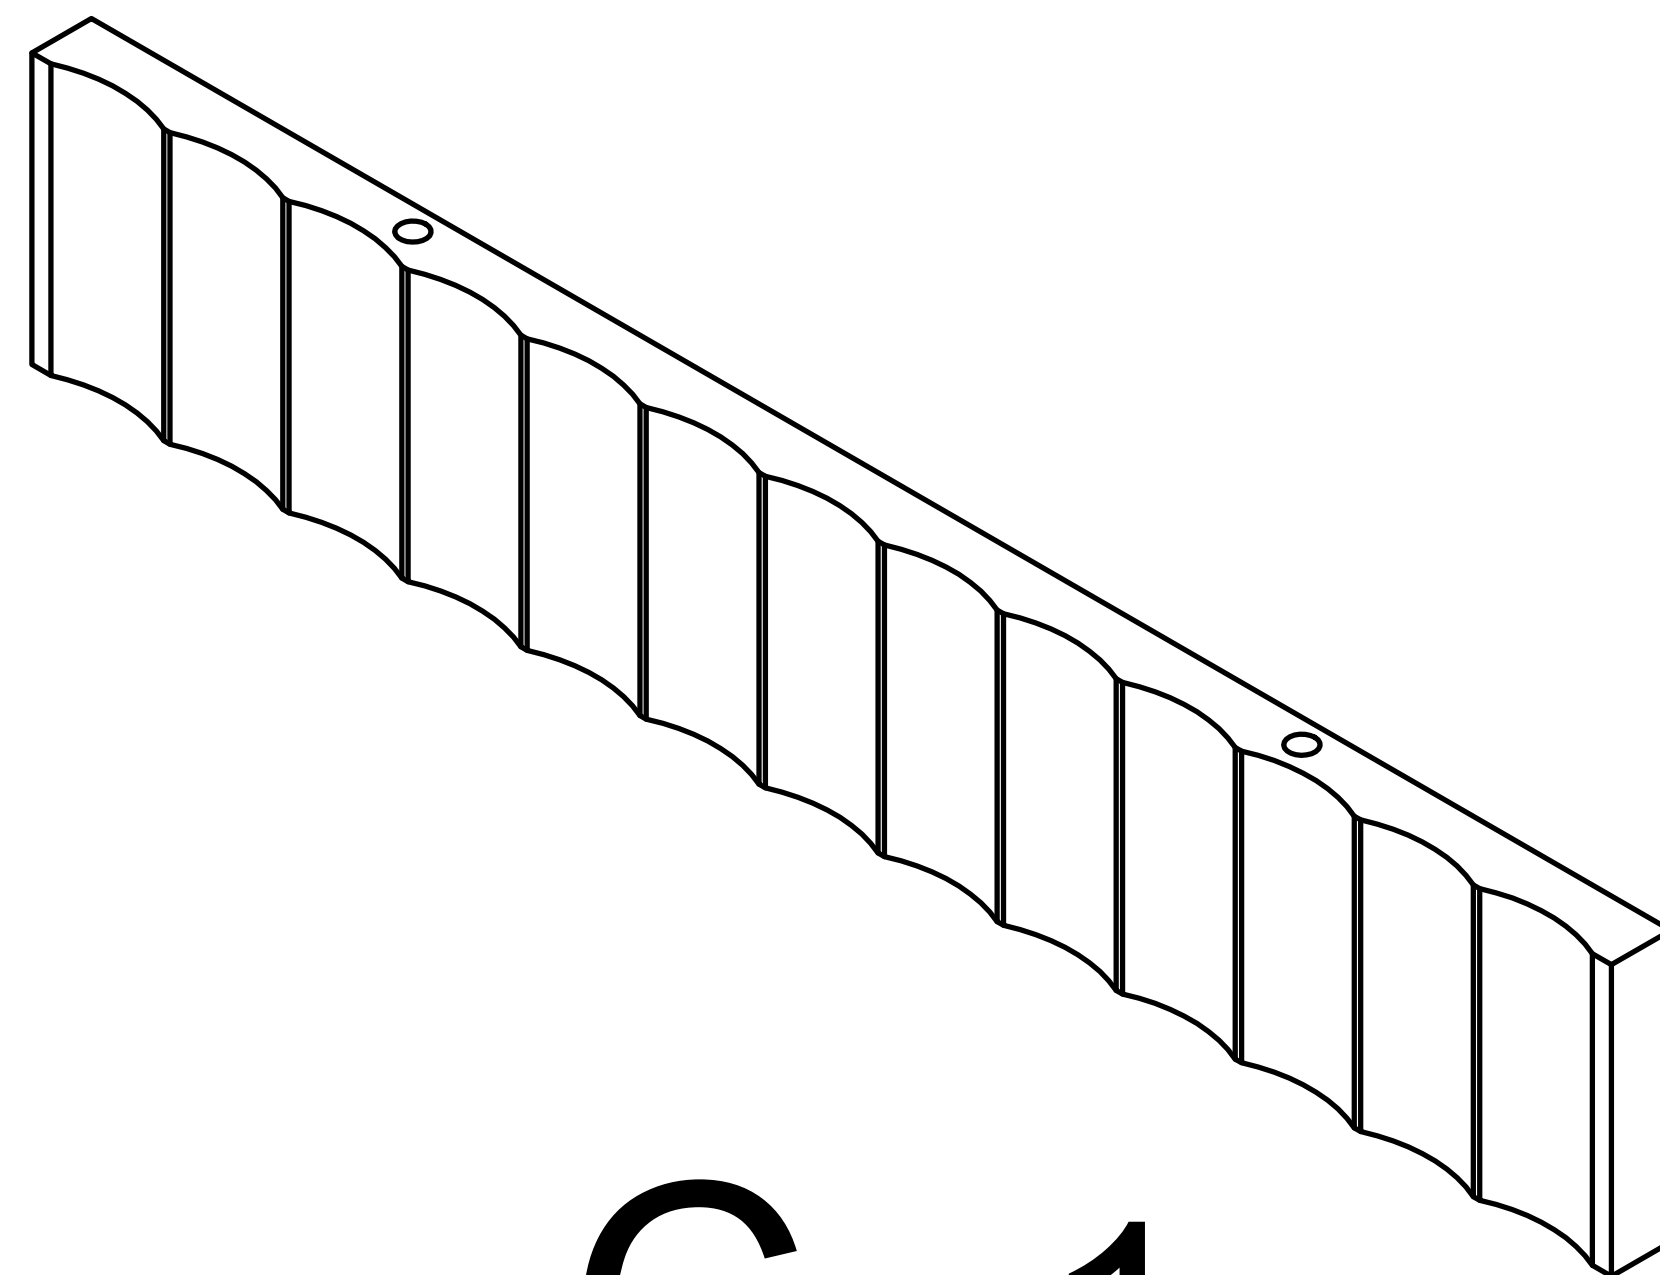


C x1

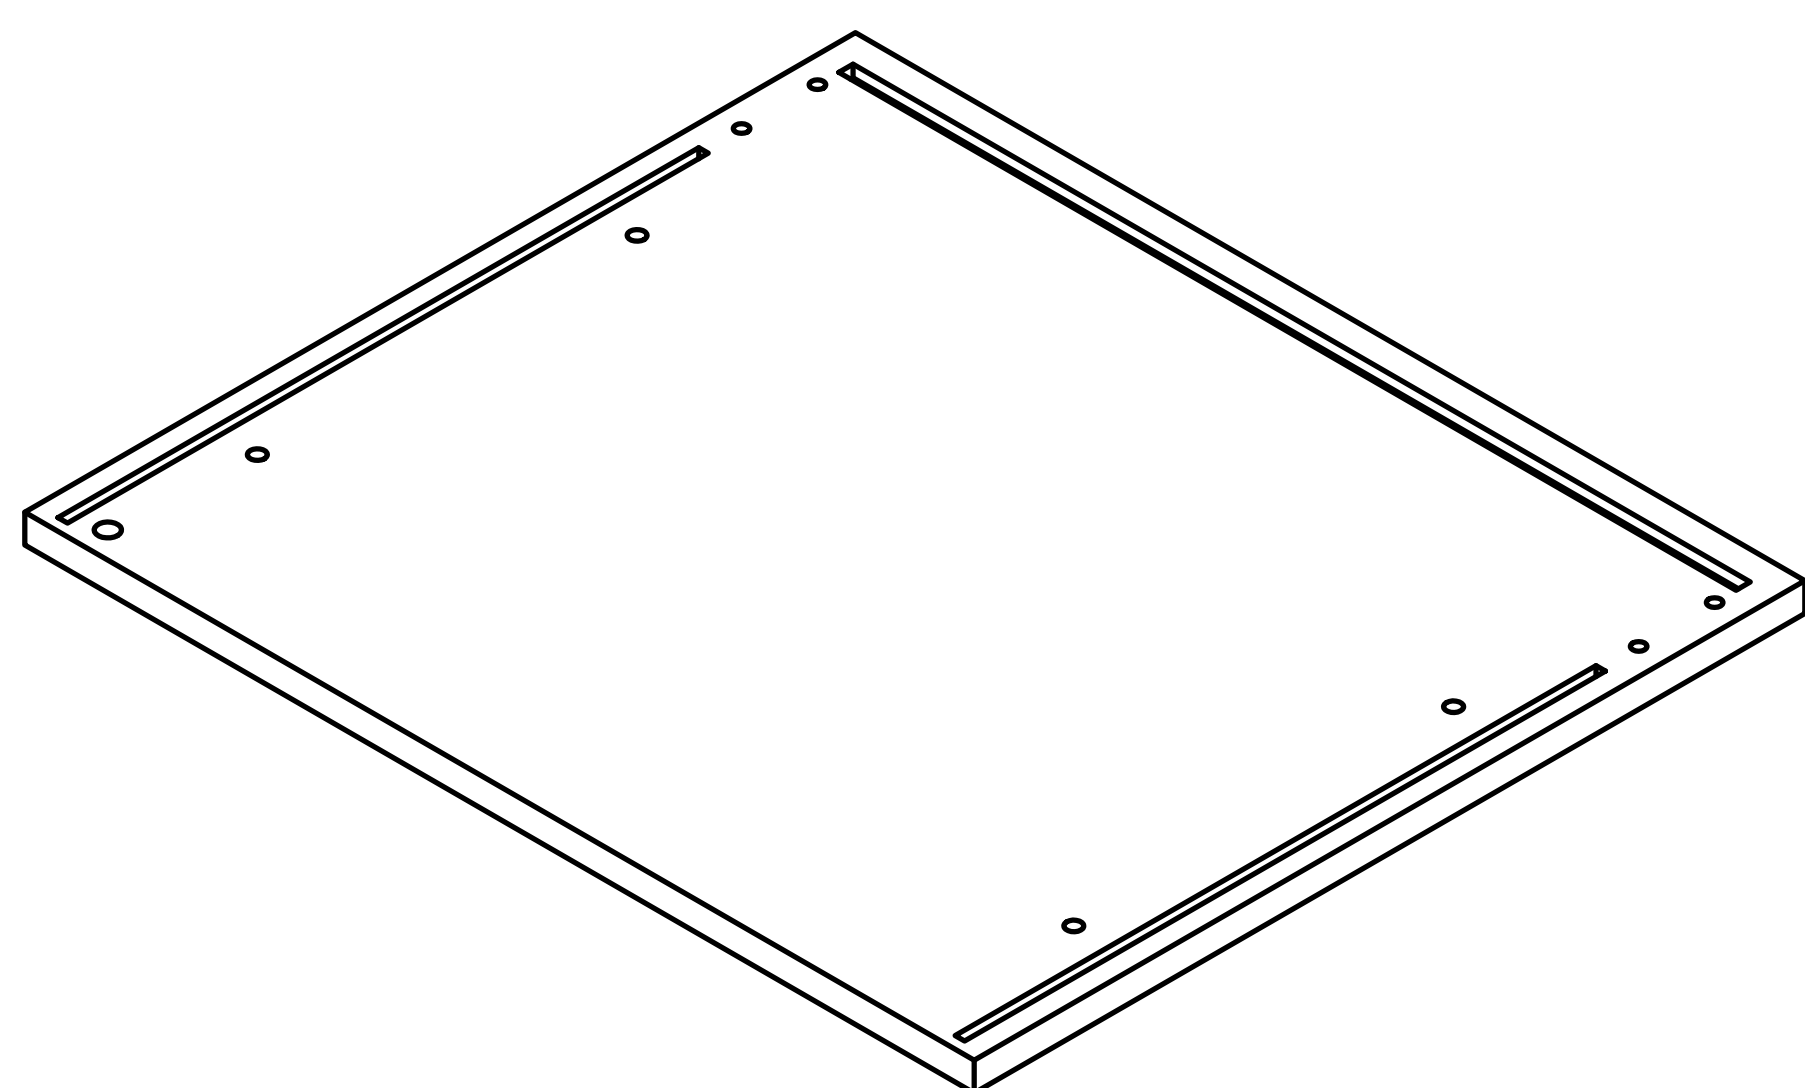


D x1

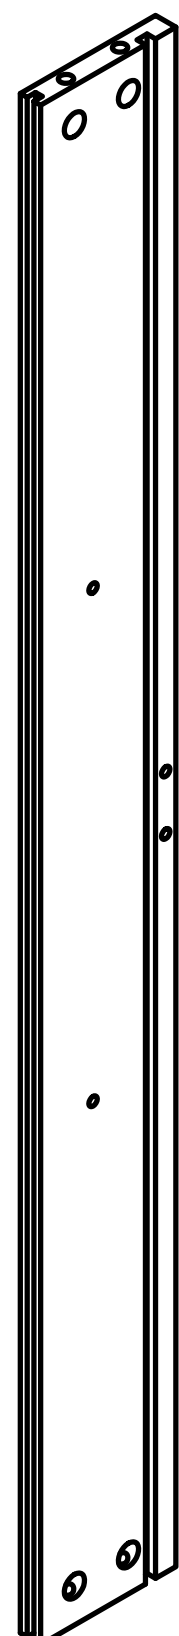


E x1

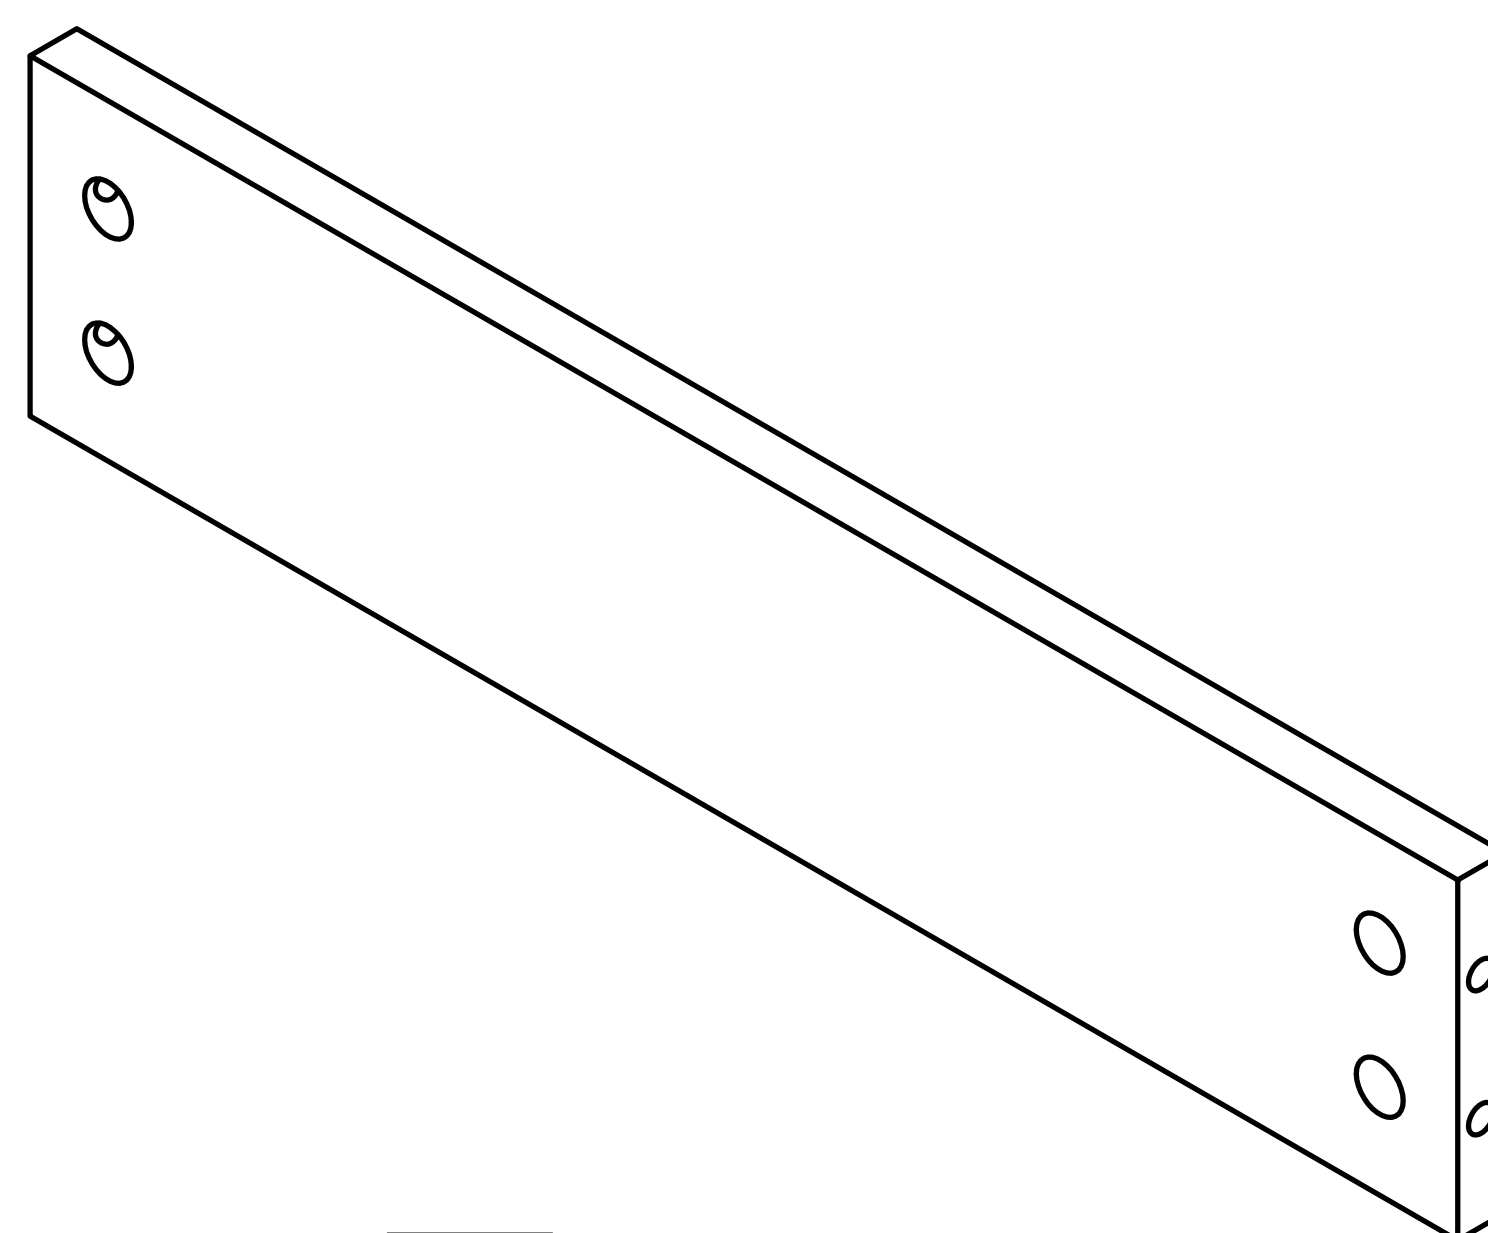


F x2

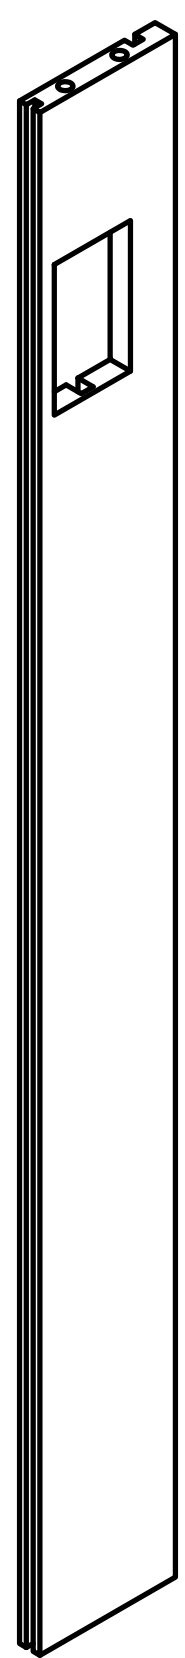


G x1

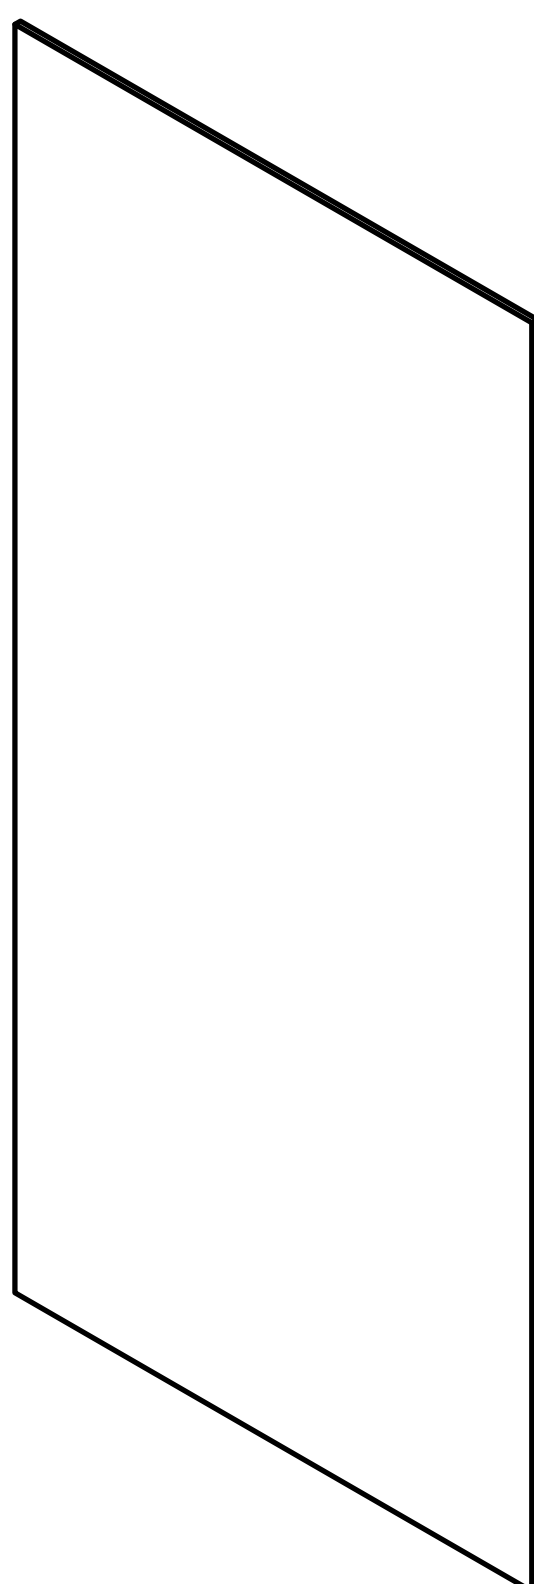


H x2

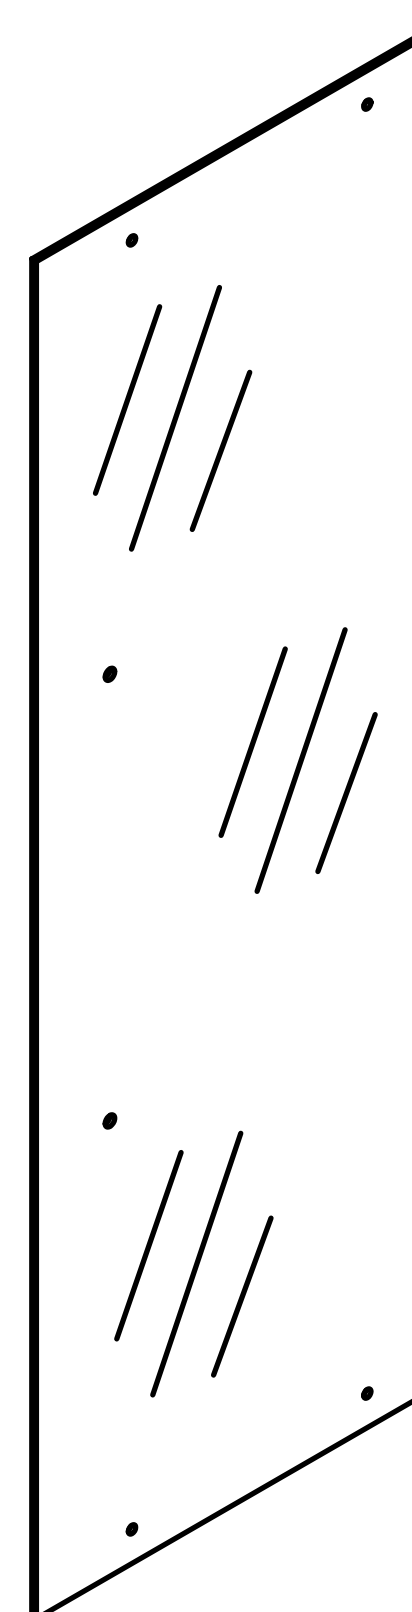


I x2

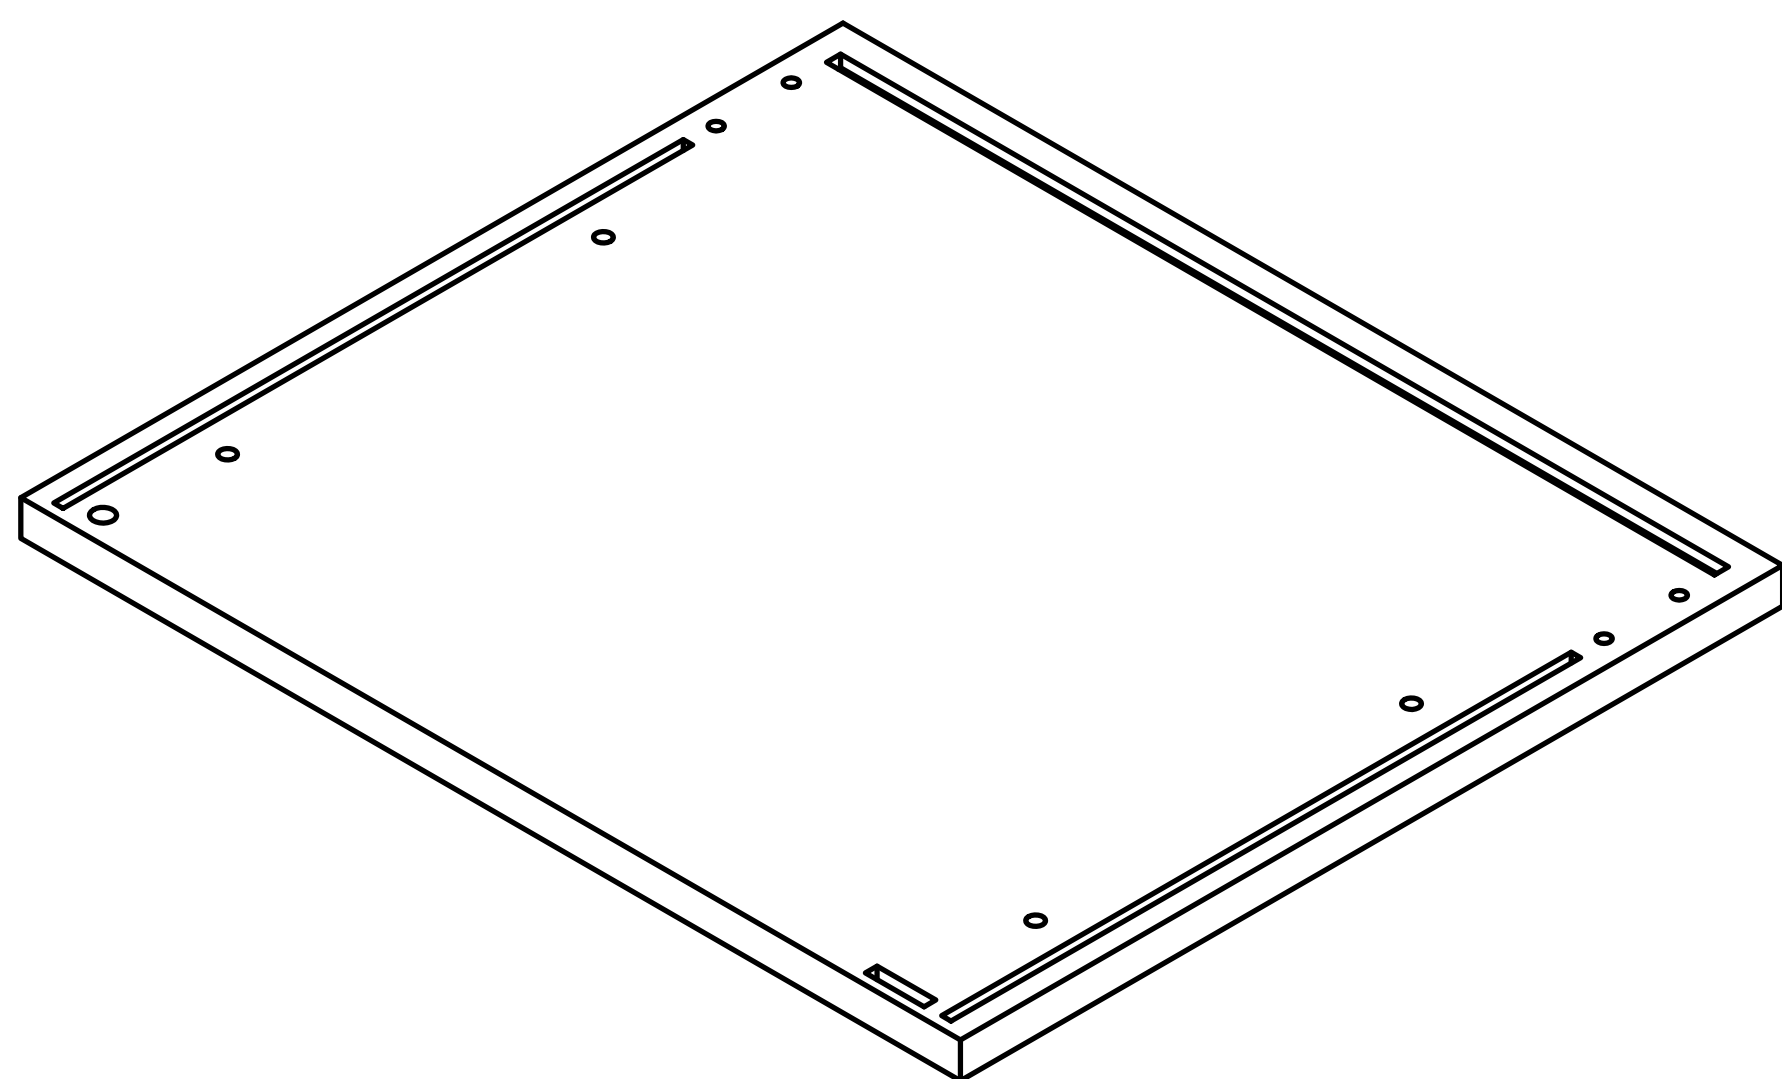


J x1

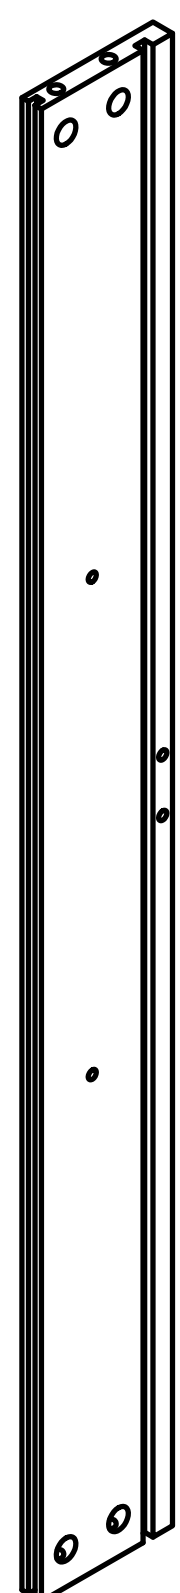


K x2

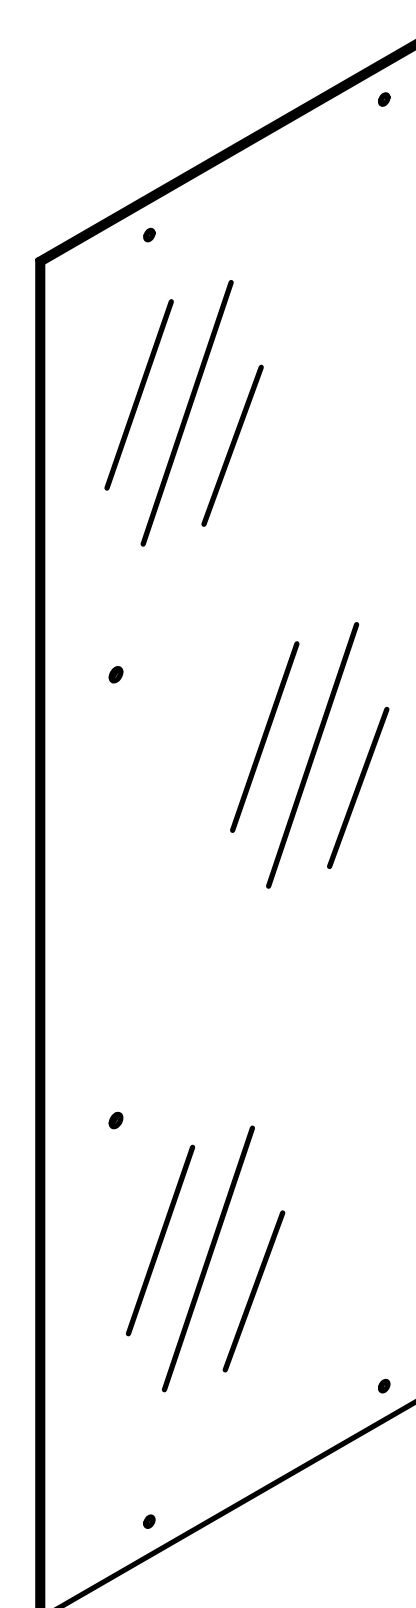


L x2

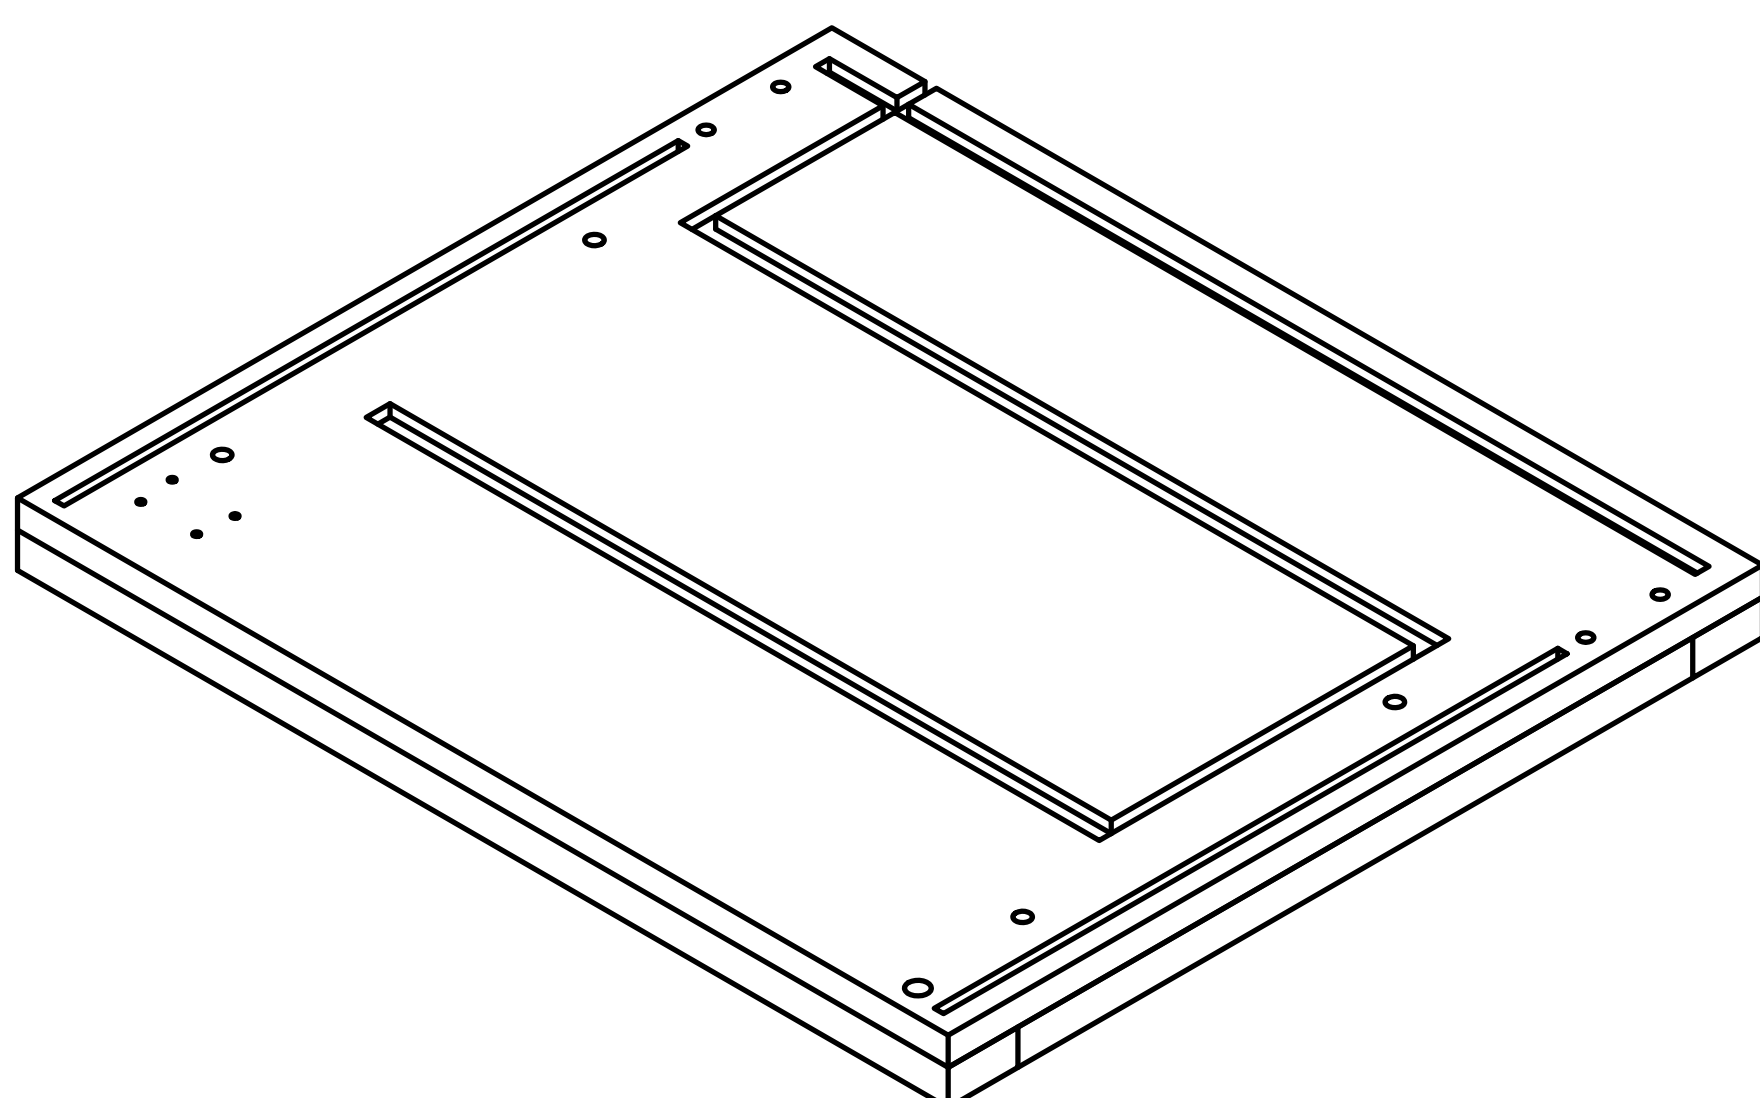


M x1

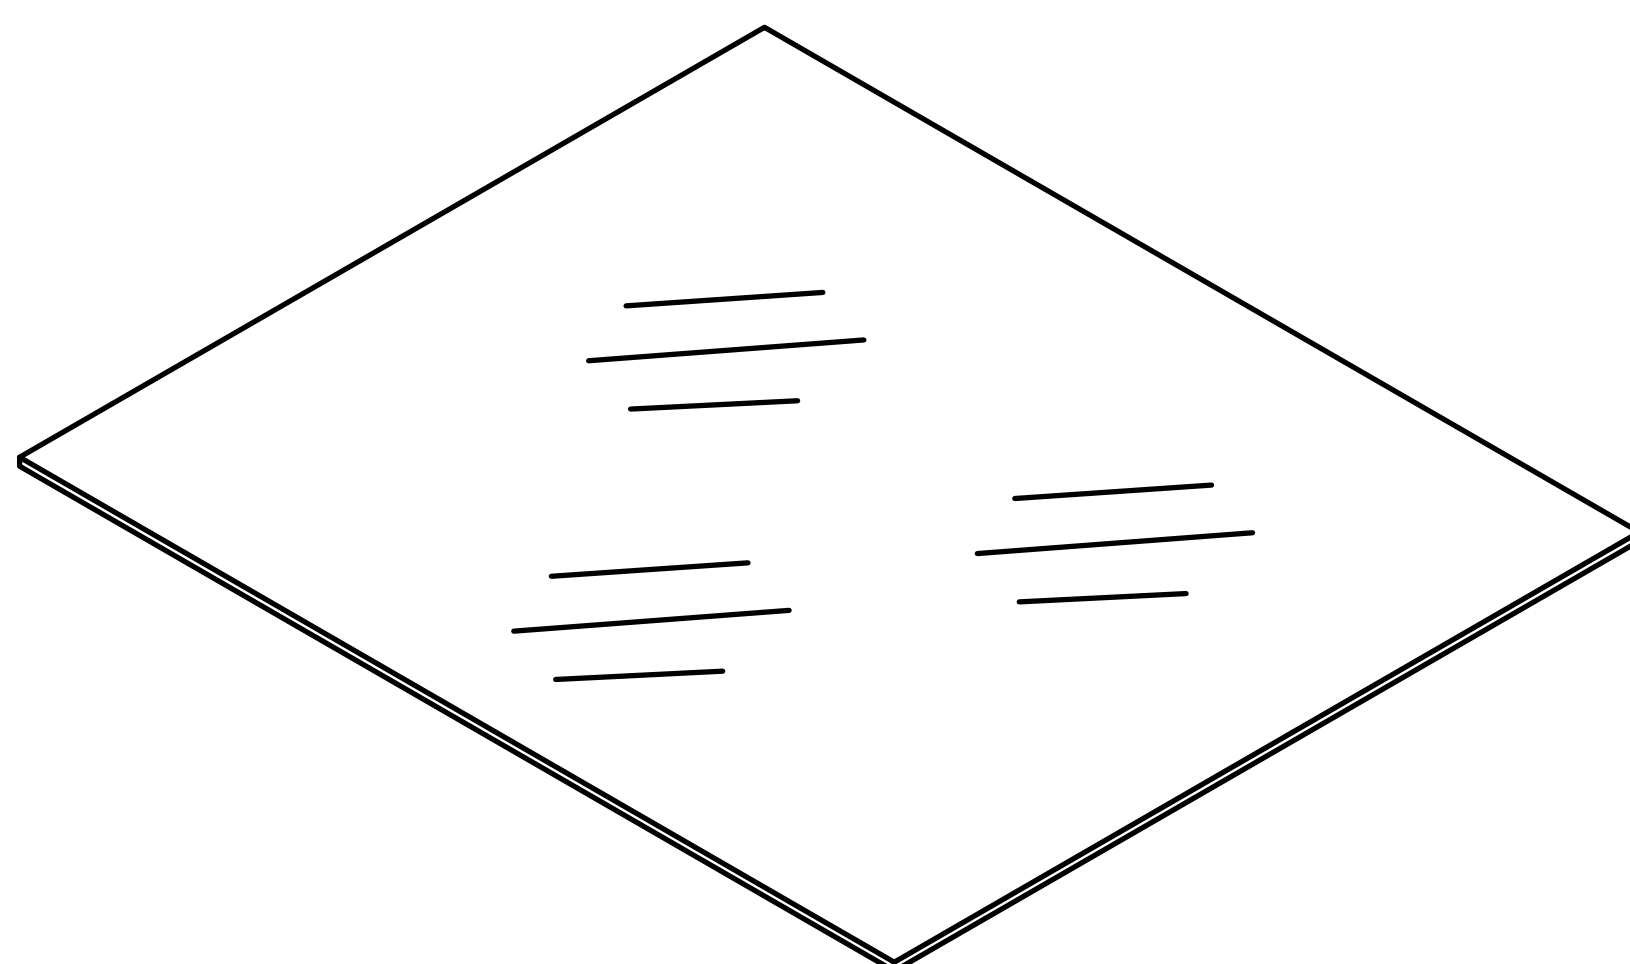



























N x4

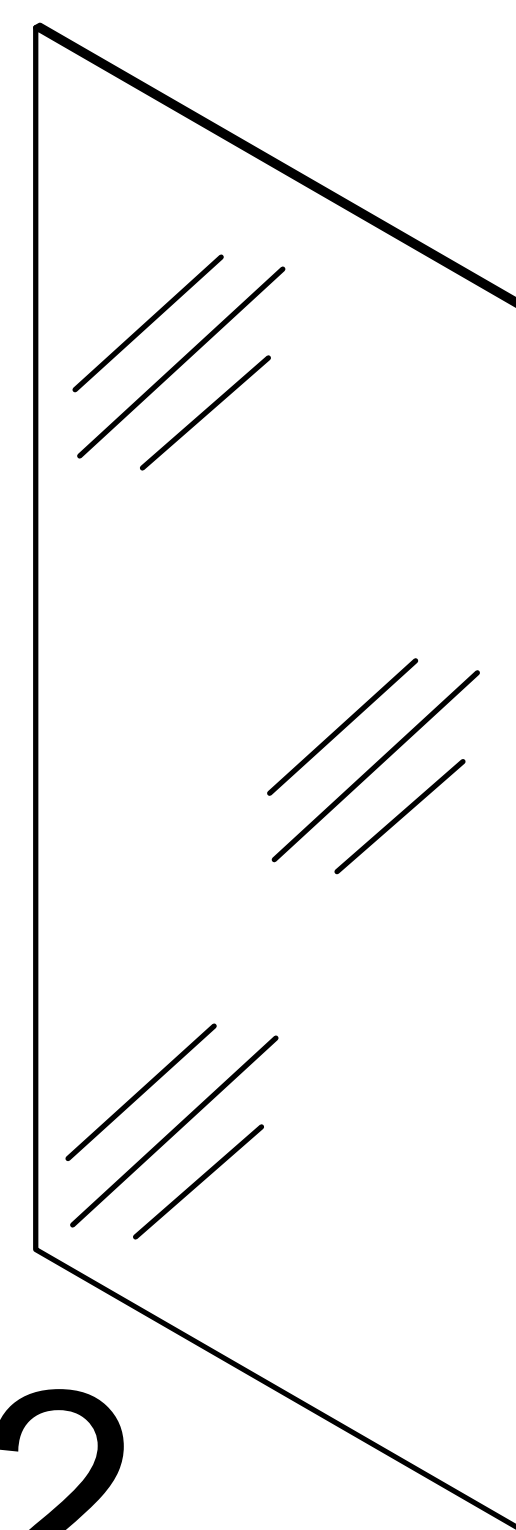


O x2

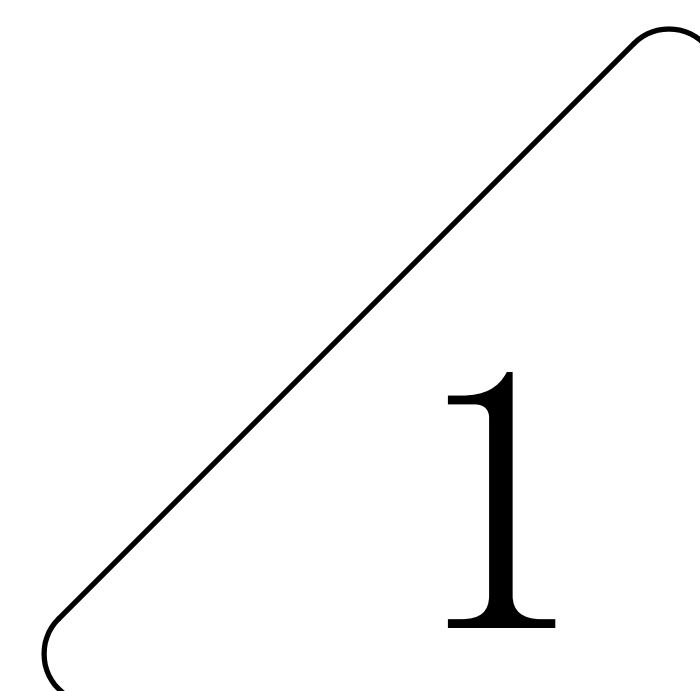

1

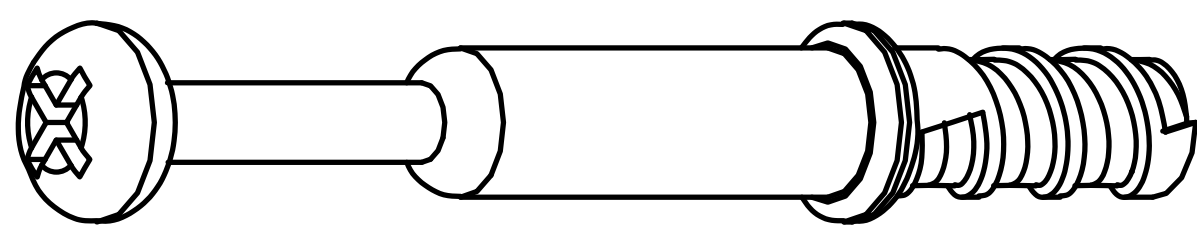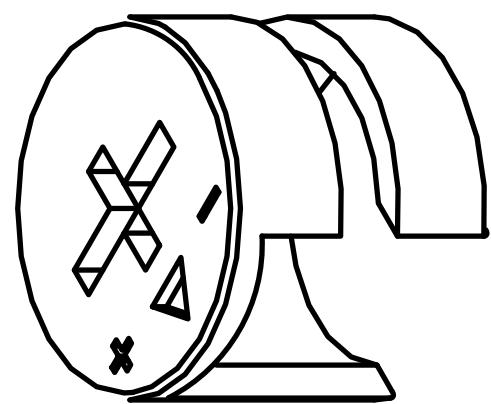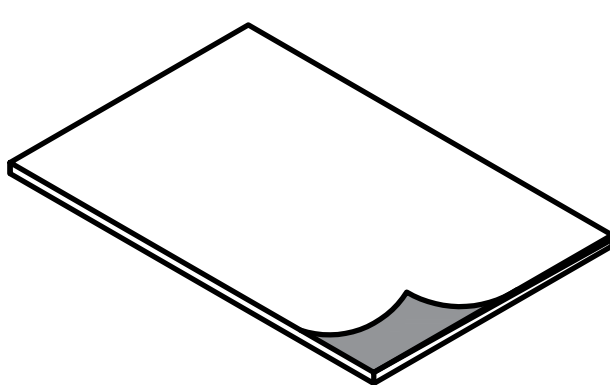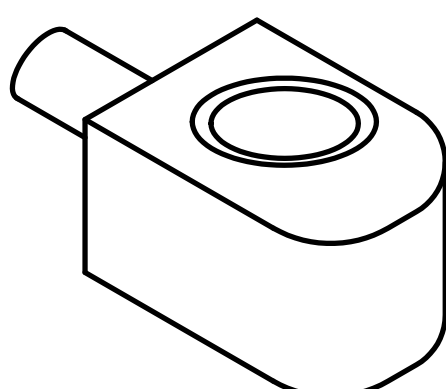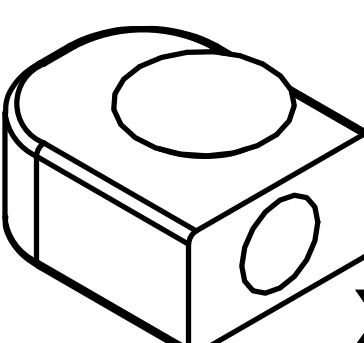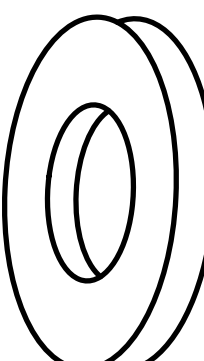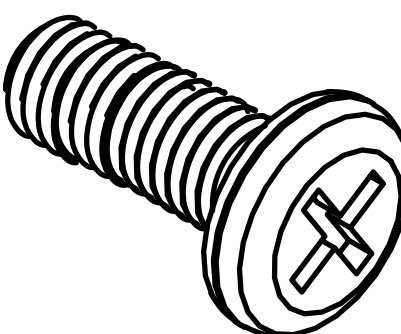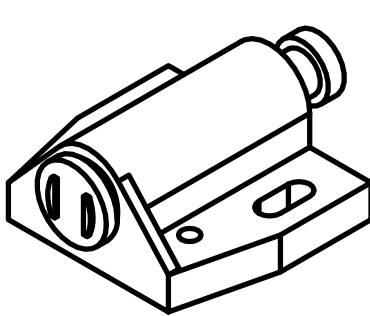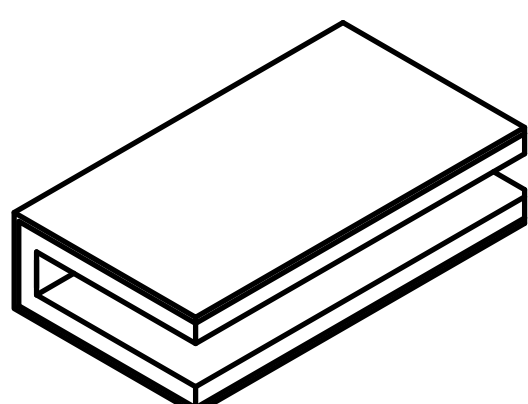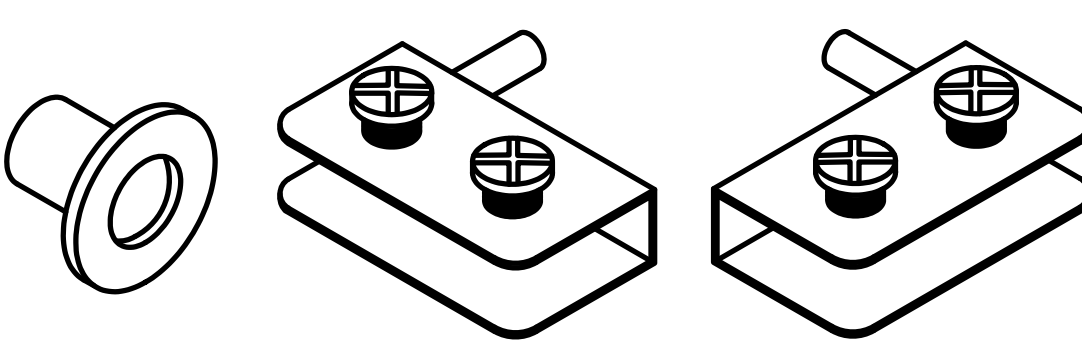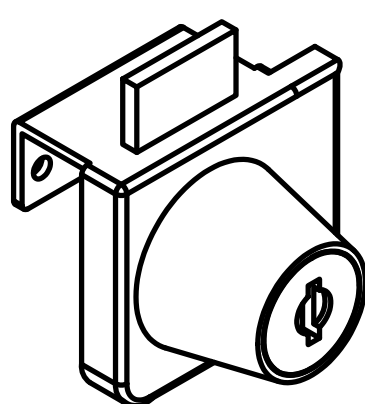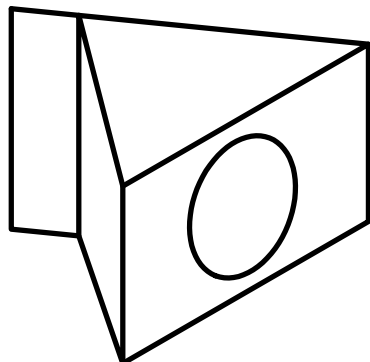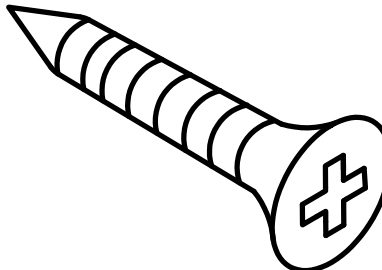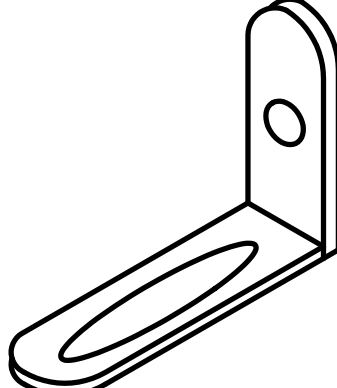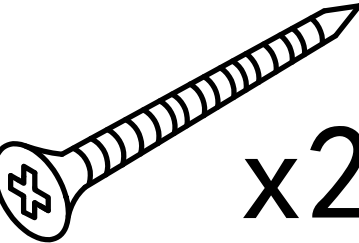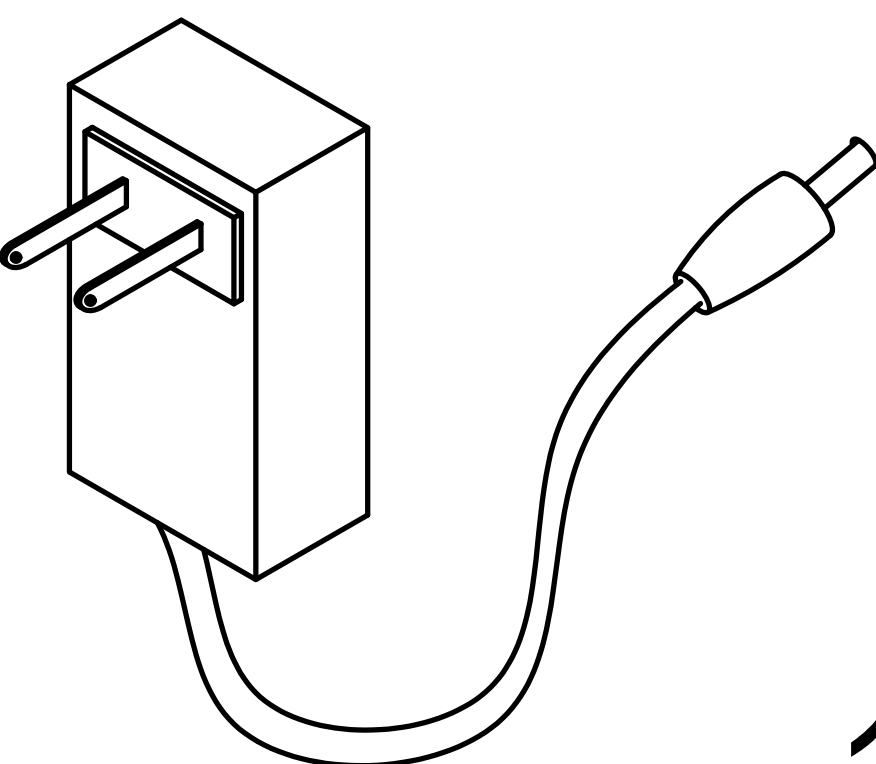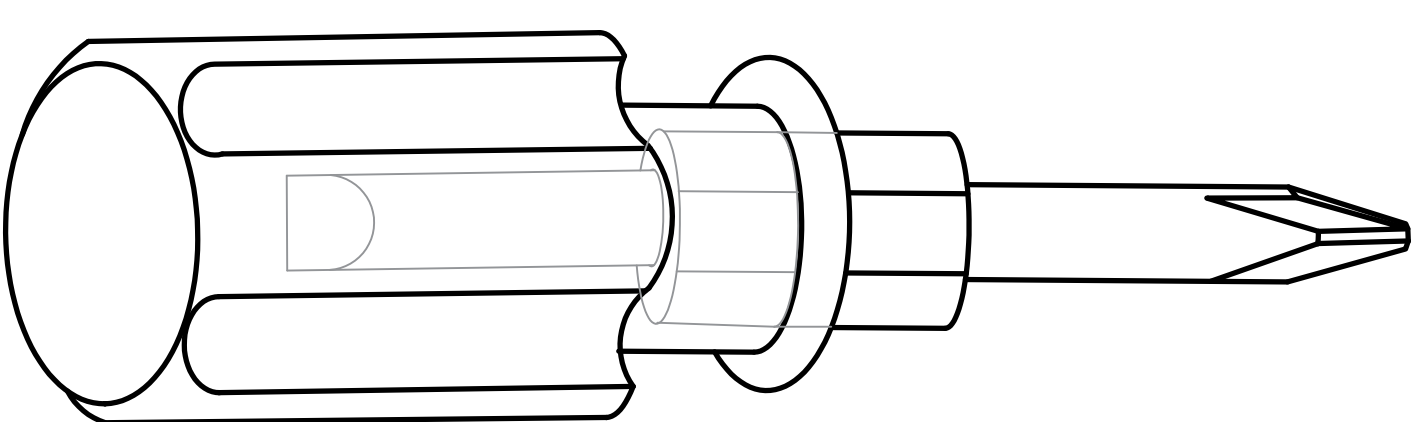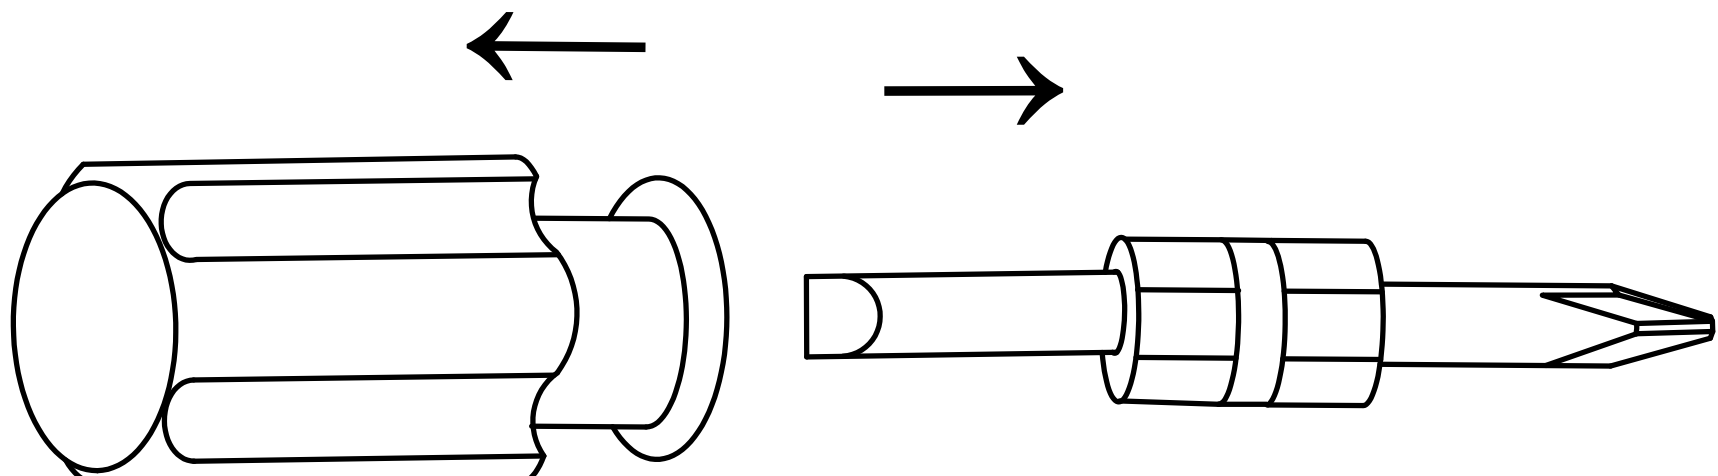
①		Two In One Screw (6x28mm)	36pcs +4pcs
②		Two In One Nut (10x12mm)	36pcs +4pcs
③		Non-slip pads (50x10mm)	4pcs +2pcs
④	 x1  x2  x1	Corner Bracket,Screw (4x8mm)	16pcs +2pcs
⑤		Screw (4x10mm)	16pcs +2pcs
⑥		Laminate Support Nail	8pcs +1pcs
⑦	 x1  x2  x1	Laminate Support Nail(12x6x2mm) & Screw(6x18mm)	8pcs +1pcs
⑧	 	Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Iron sheet	4pcs
		Hinge	8pcs 4pcs 4pcs
⑨	 	Double door glass lock & Key	2pcs 1pcs
⑩	 	Fixing clip & screw (3x16mm)	20pcs +3pcs
⑪	 x2  x4  x2  (3. 5x14mm) x2  x2 (4x45mm)	Anti Fall Hardware	1pcs
AC/DC Adapter (12V $\equiv$ 3. 0A)  1pcs		 1pcs  Double-head screwdriver, use as required 2	

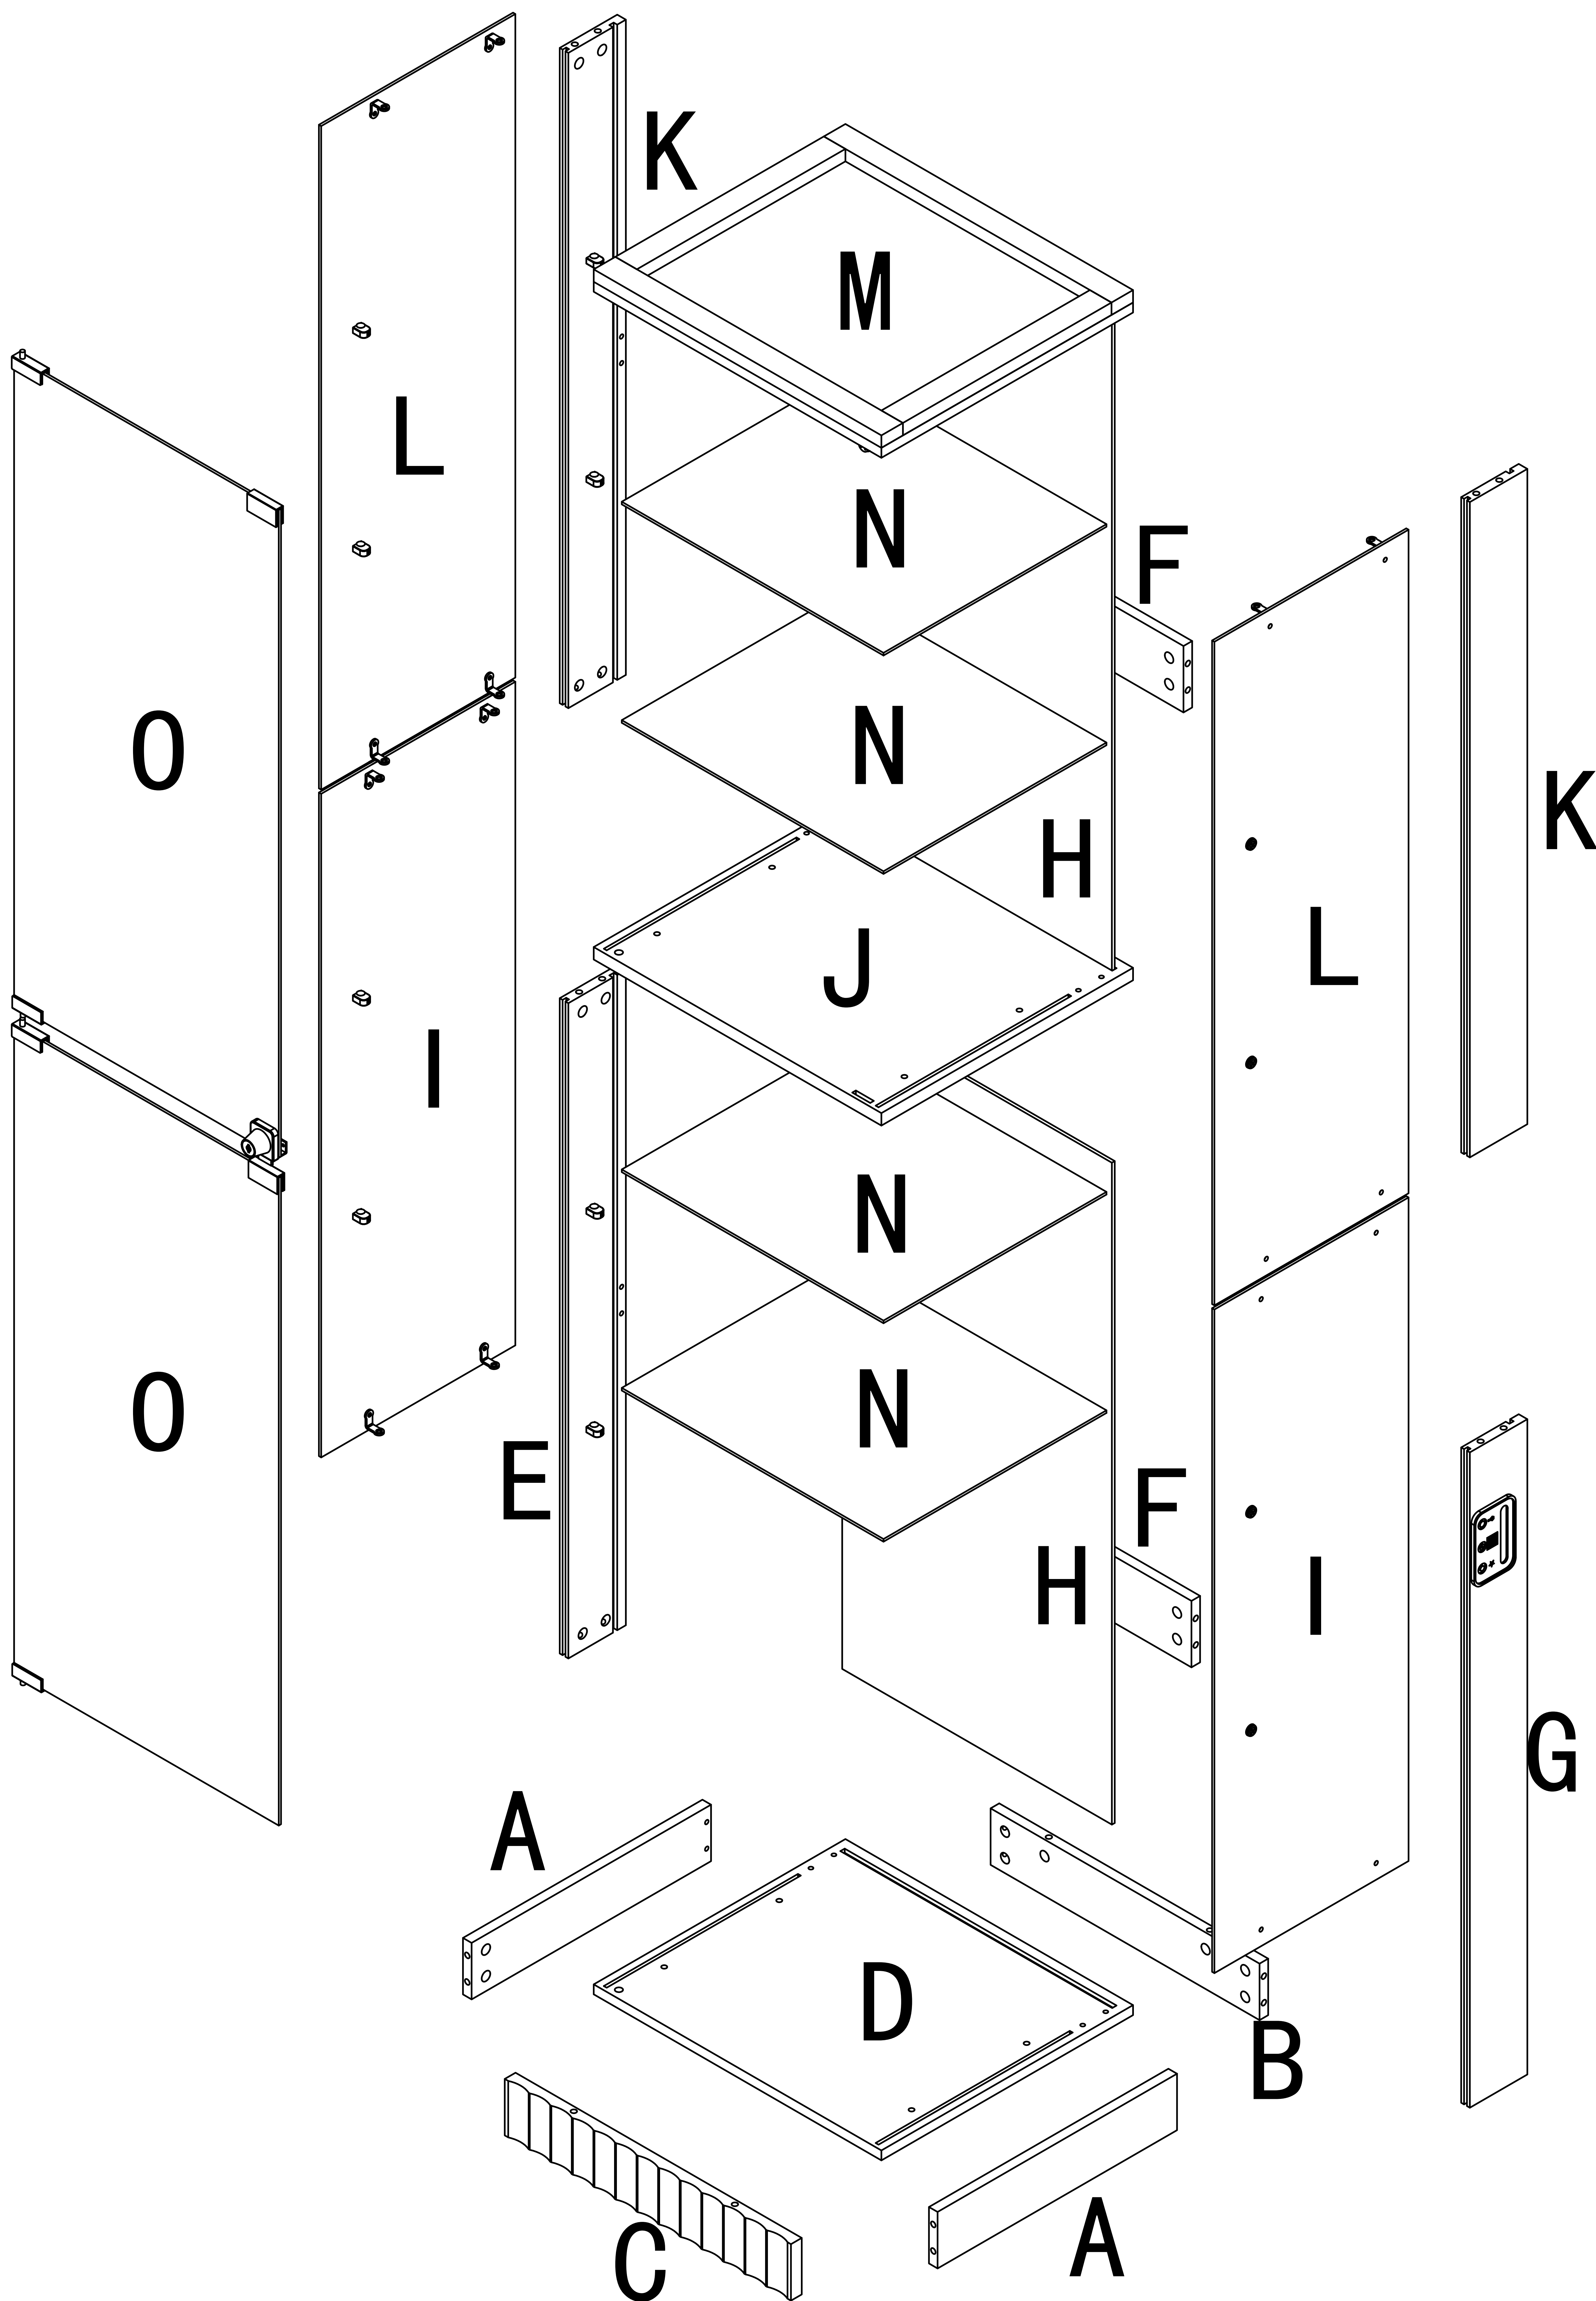


Product structure decomposition

Use parts ① and ②




Step1

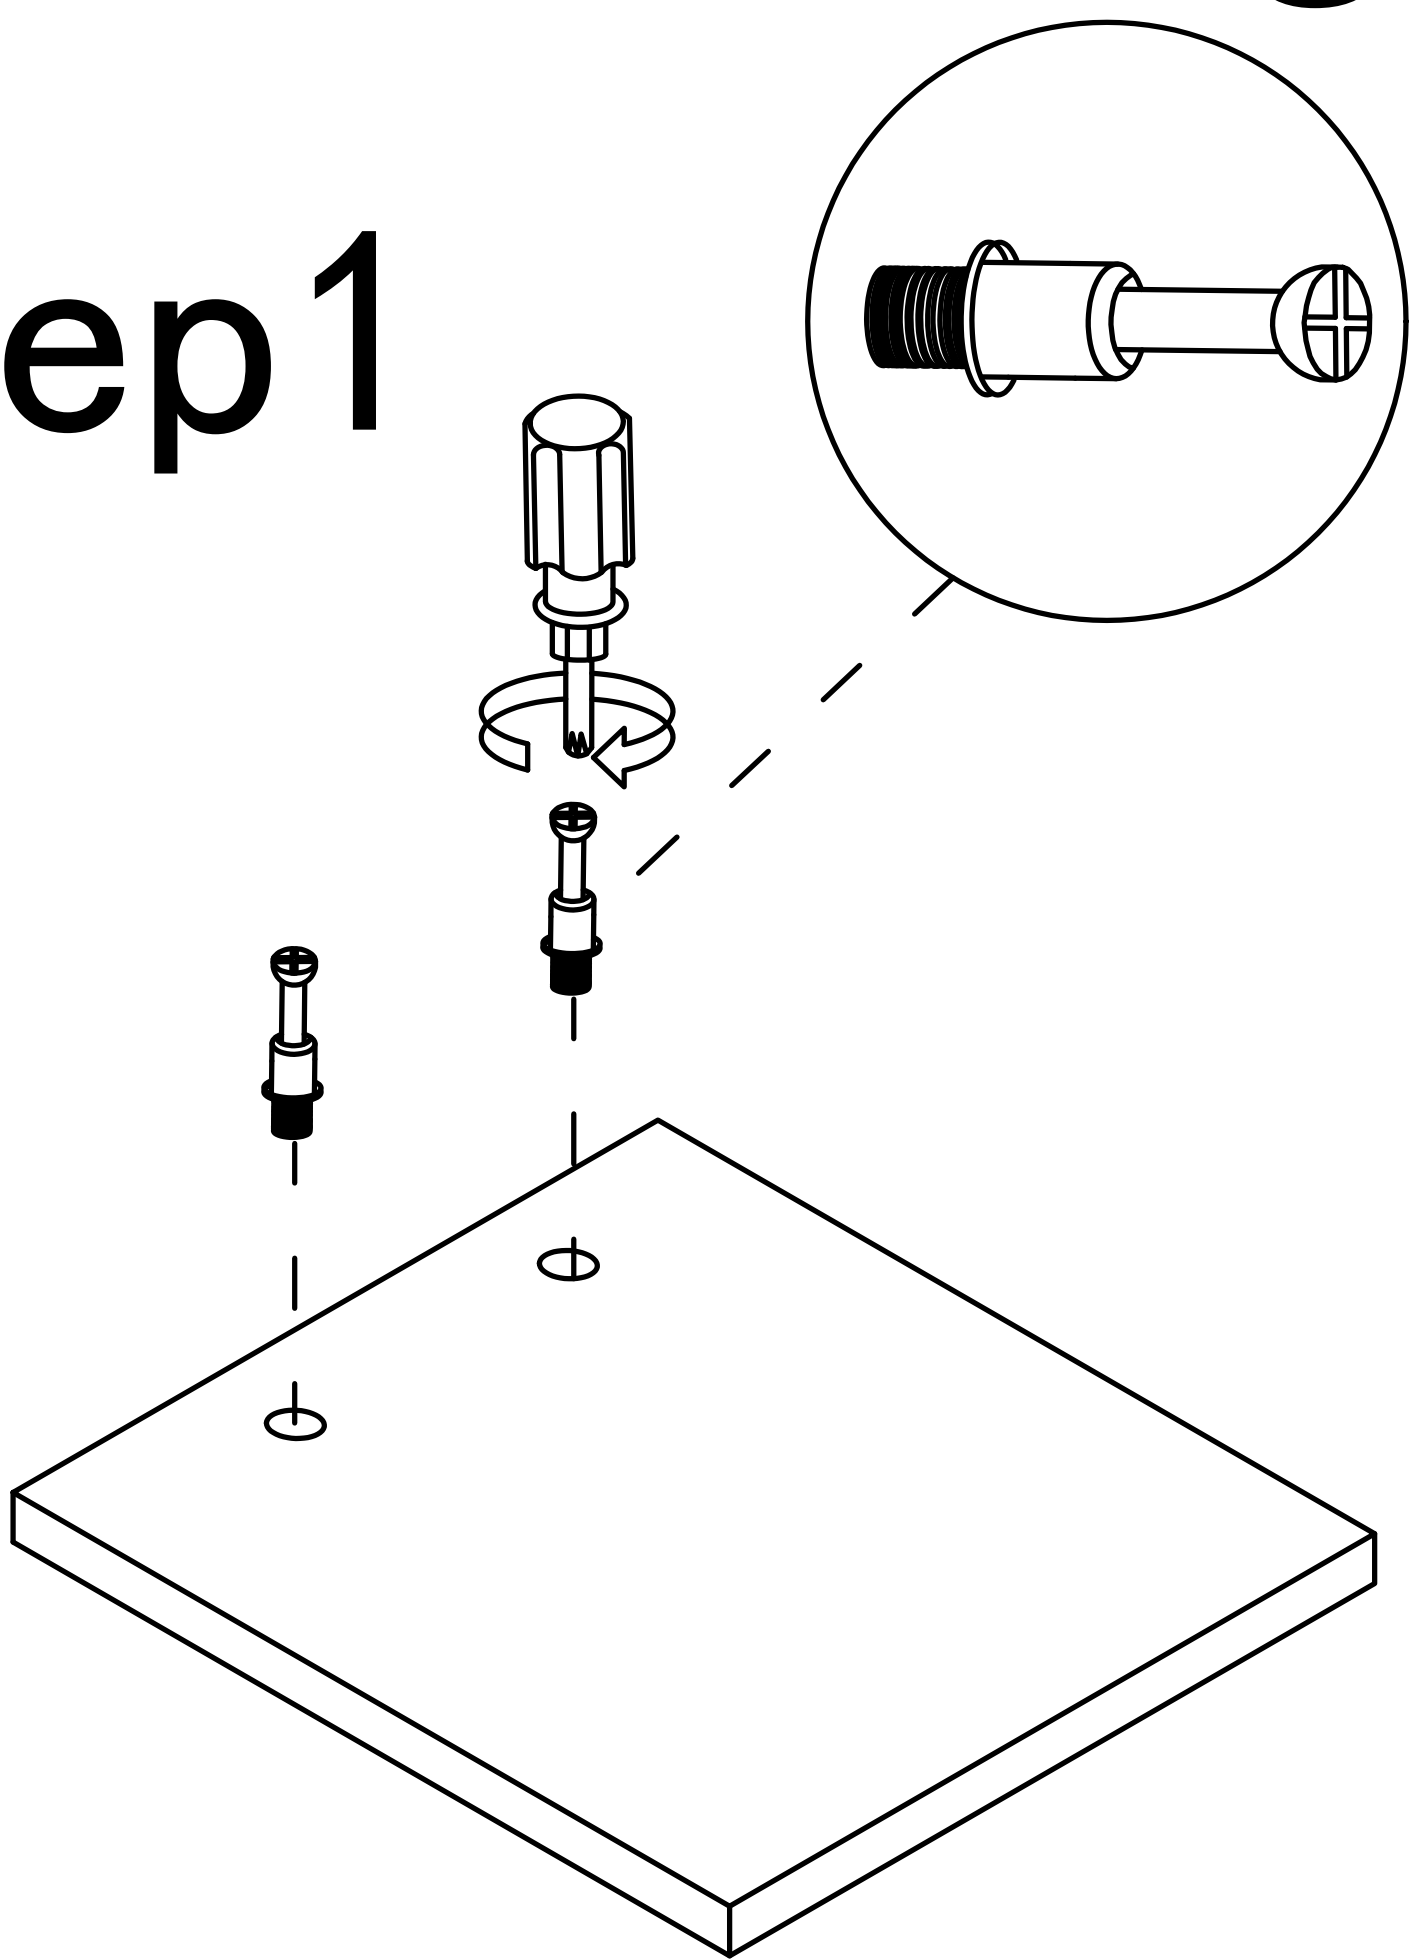

Step2

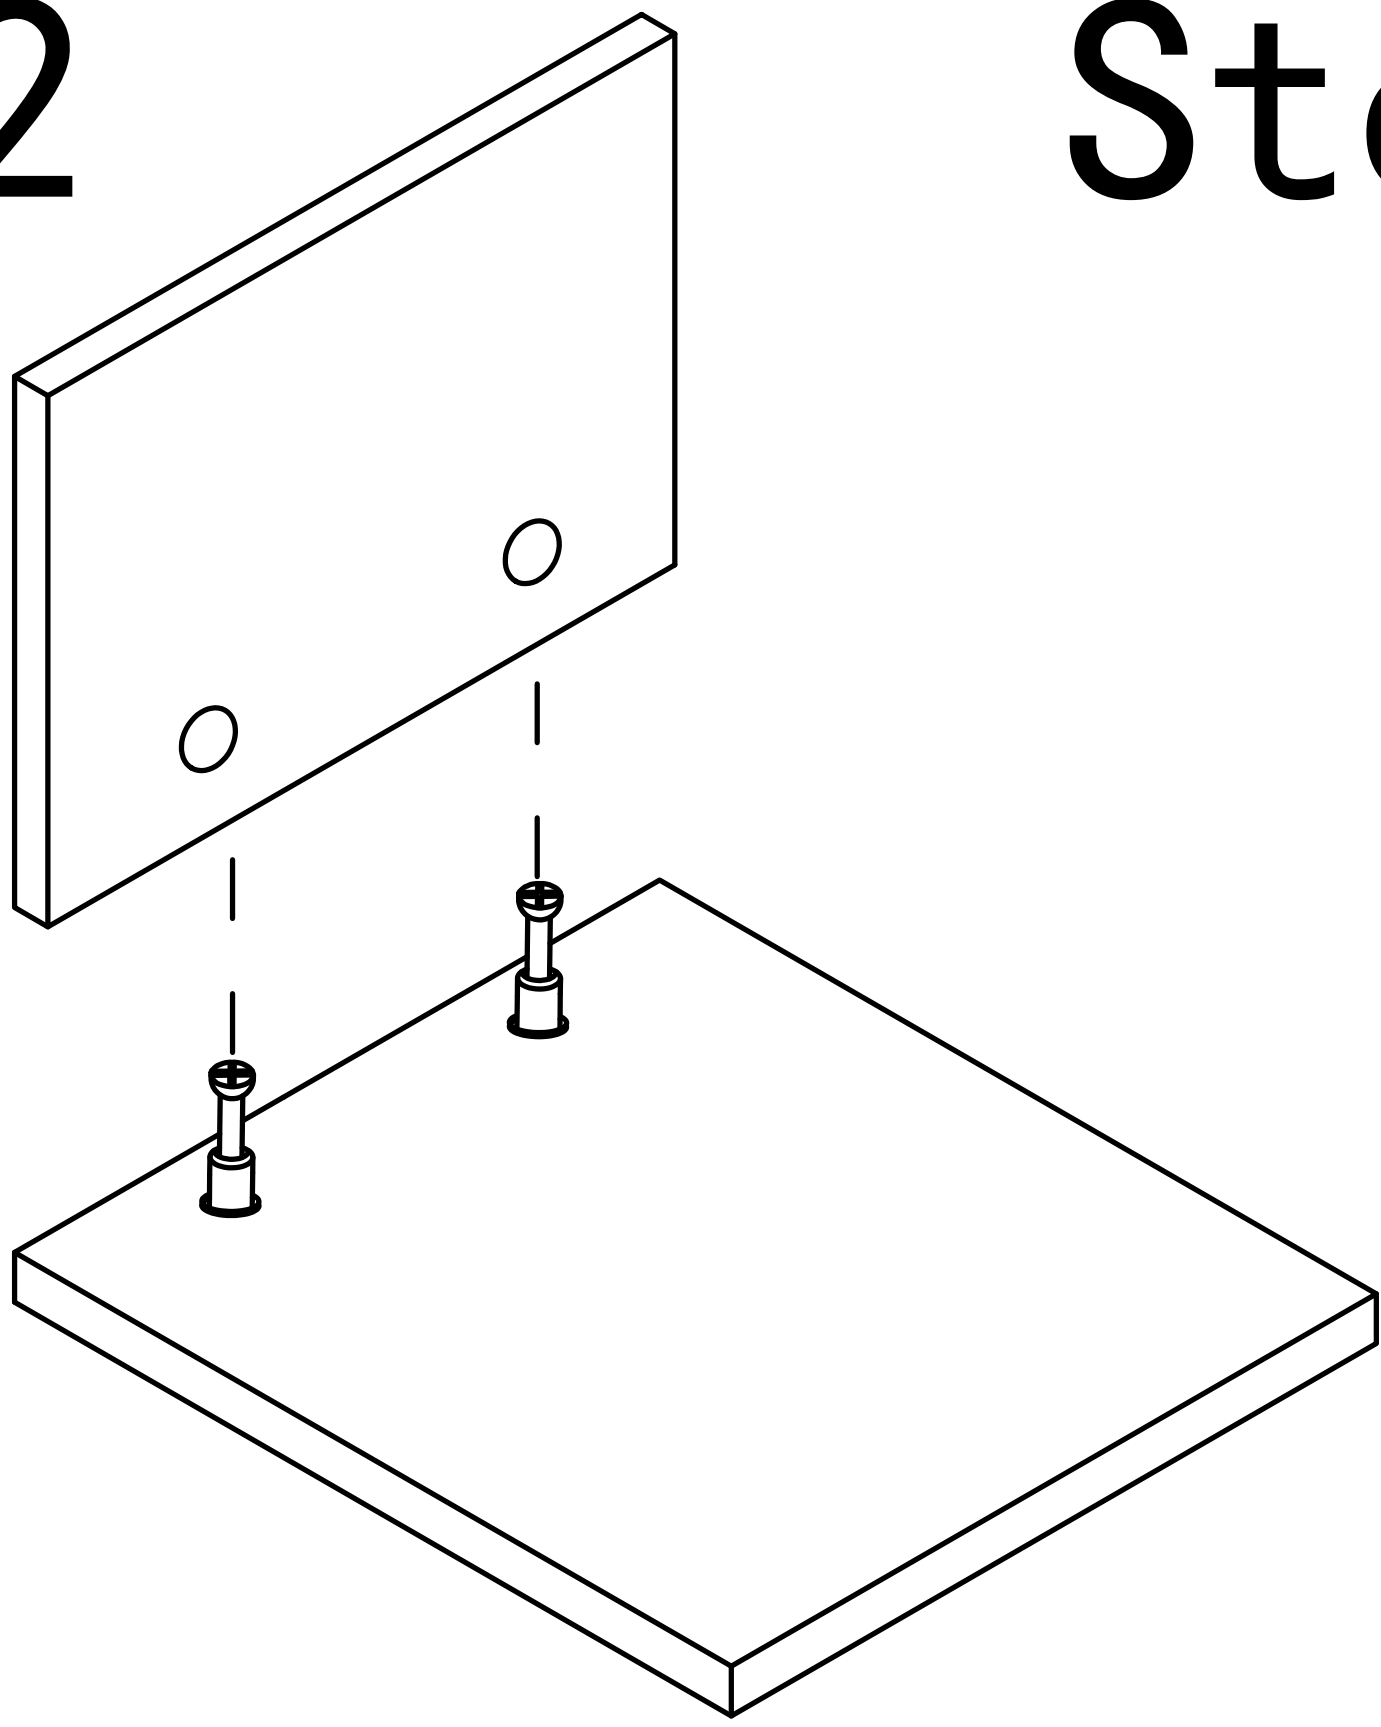

Step3

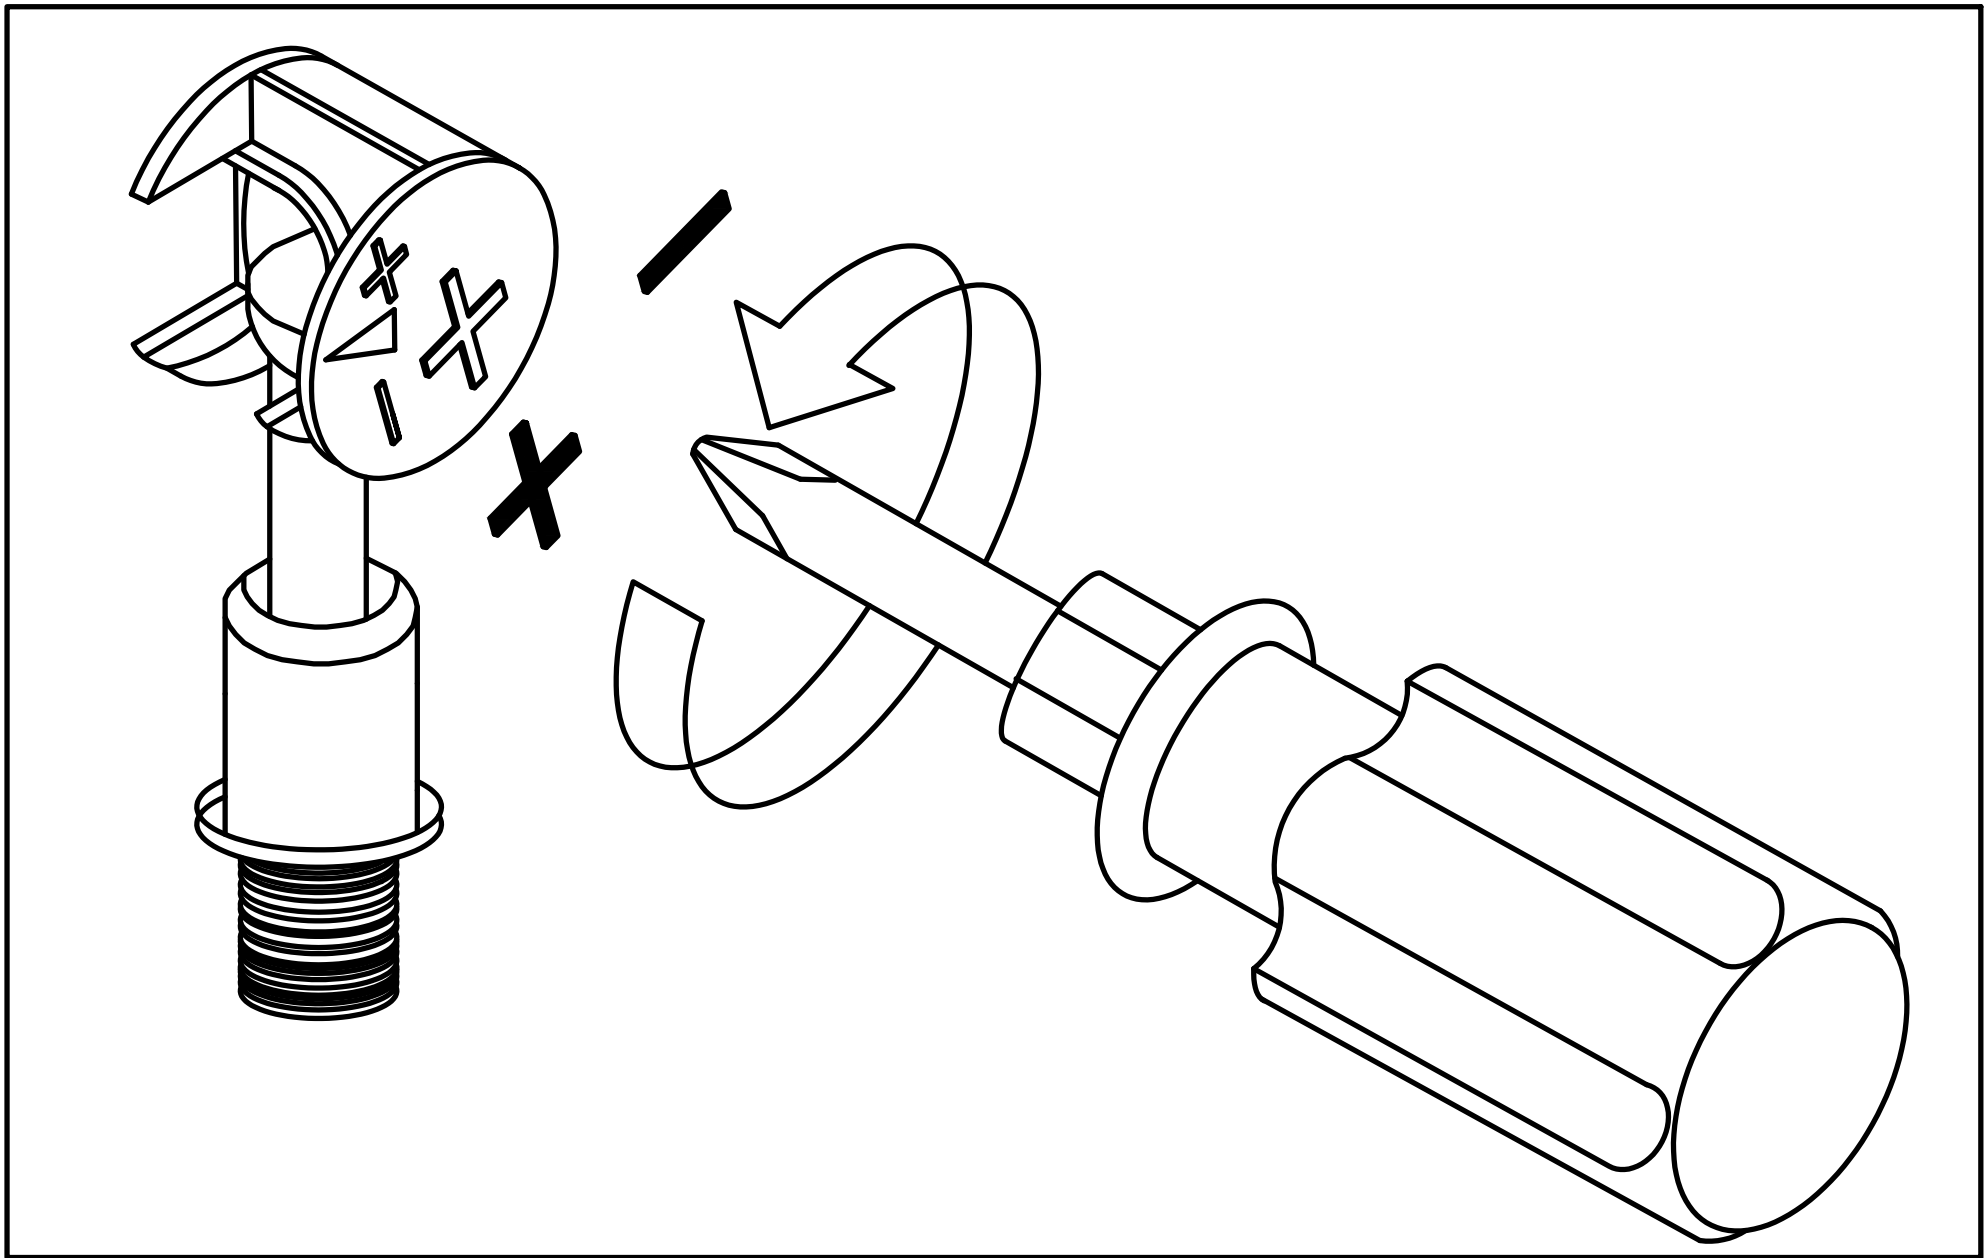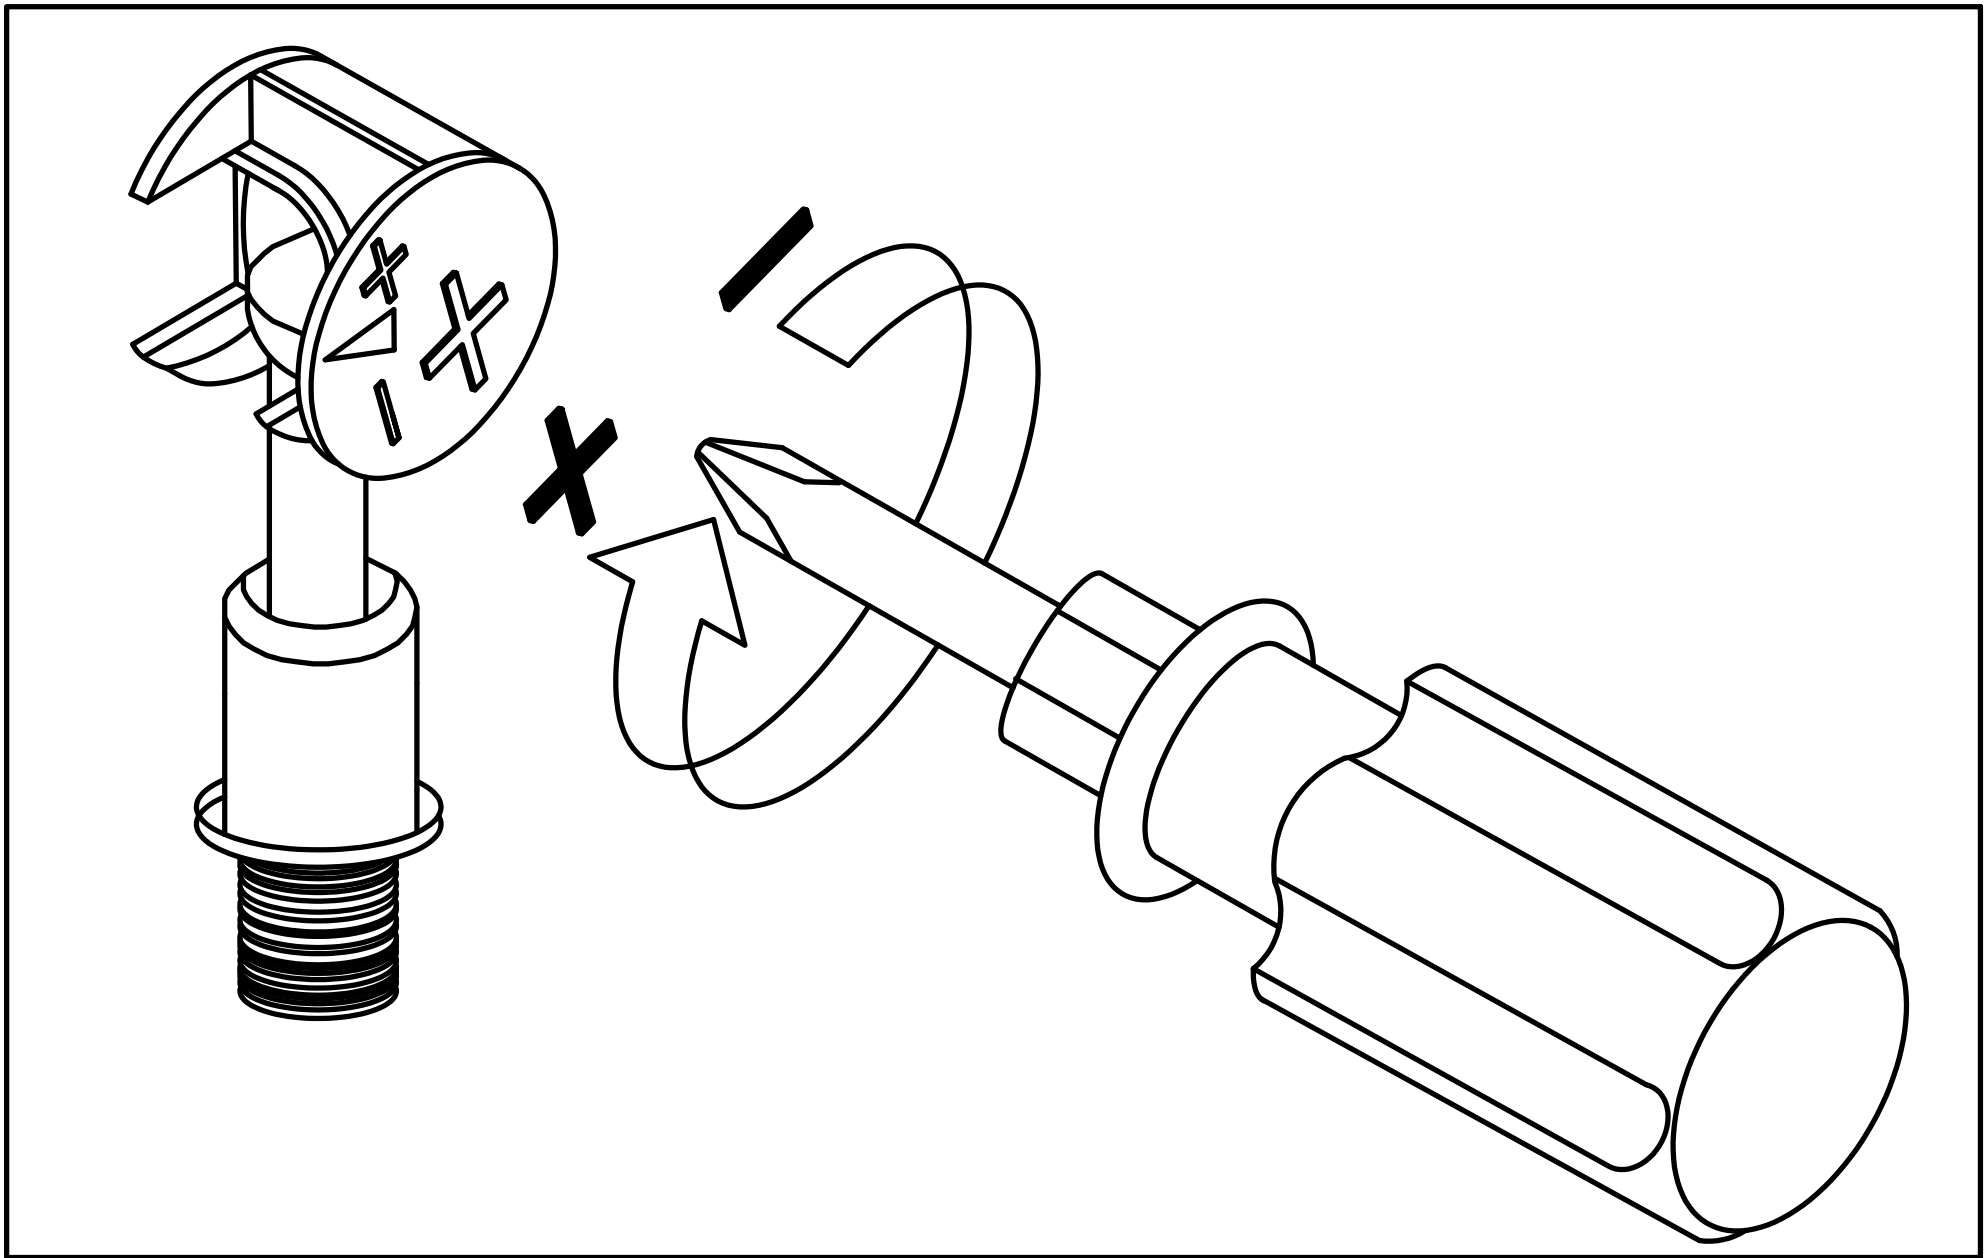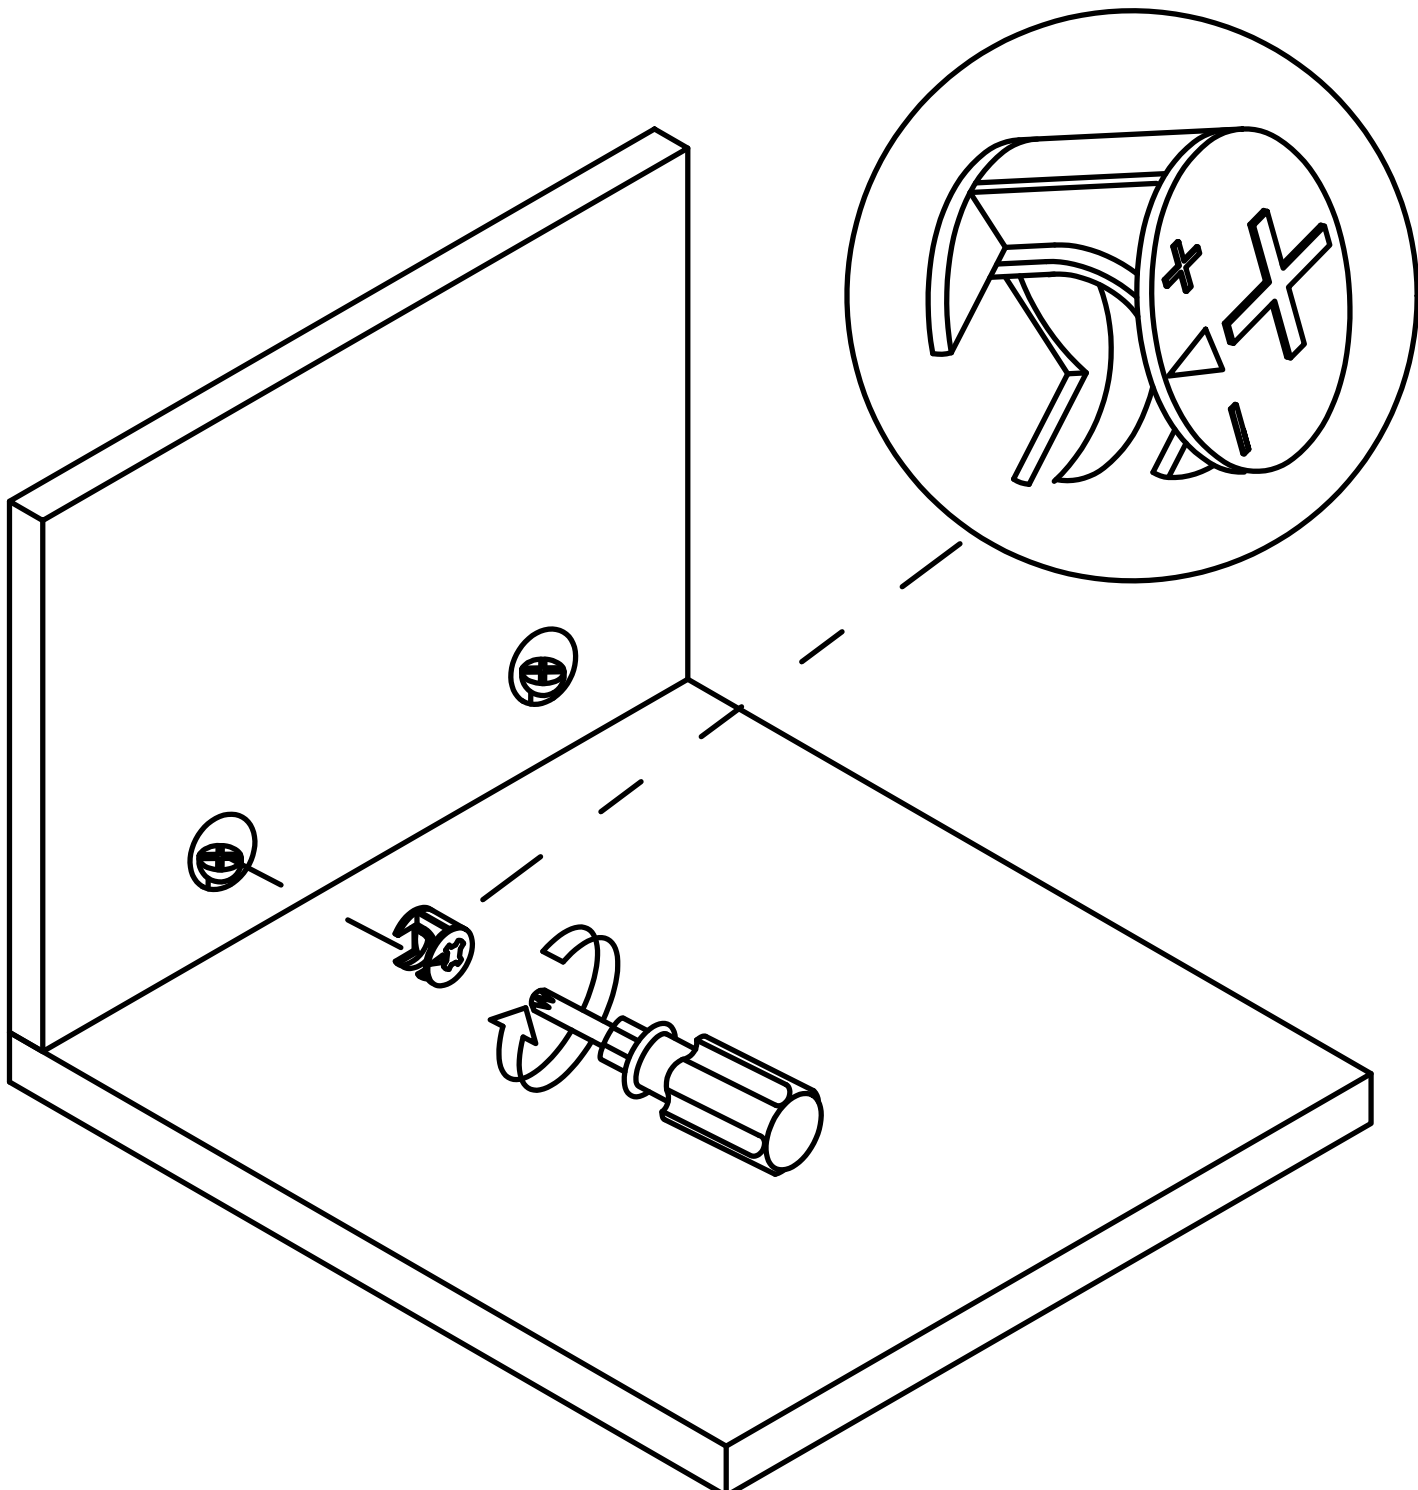


Use a screwdriver to lock in the direction of the "+" sign


Disassemble along the direction of "-" sign

Step 1

①

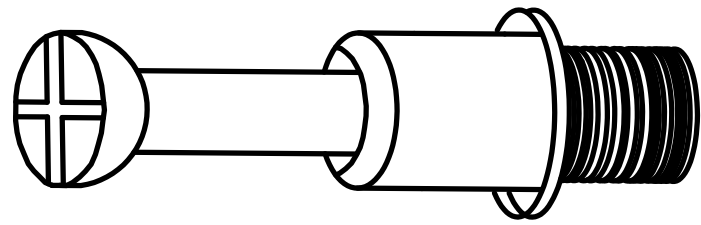


x4

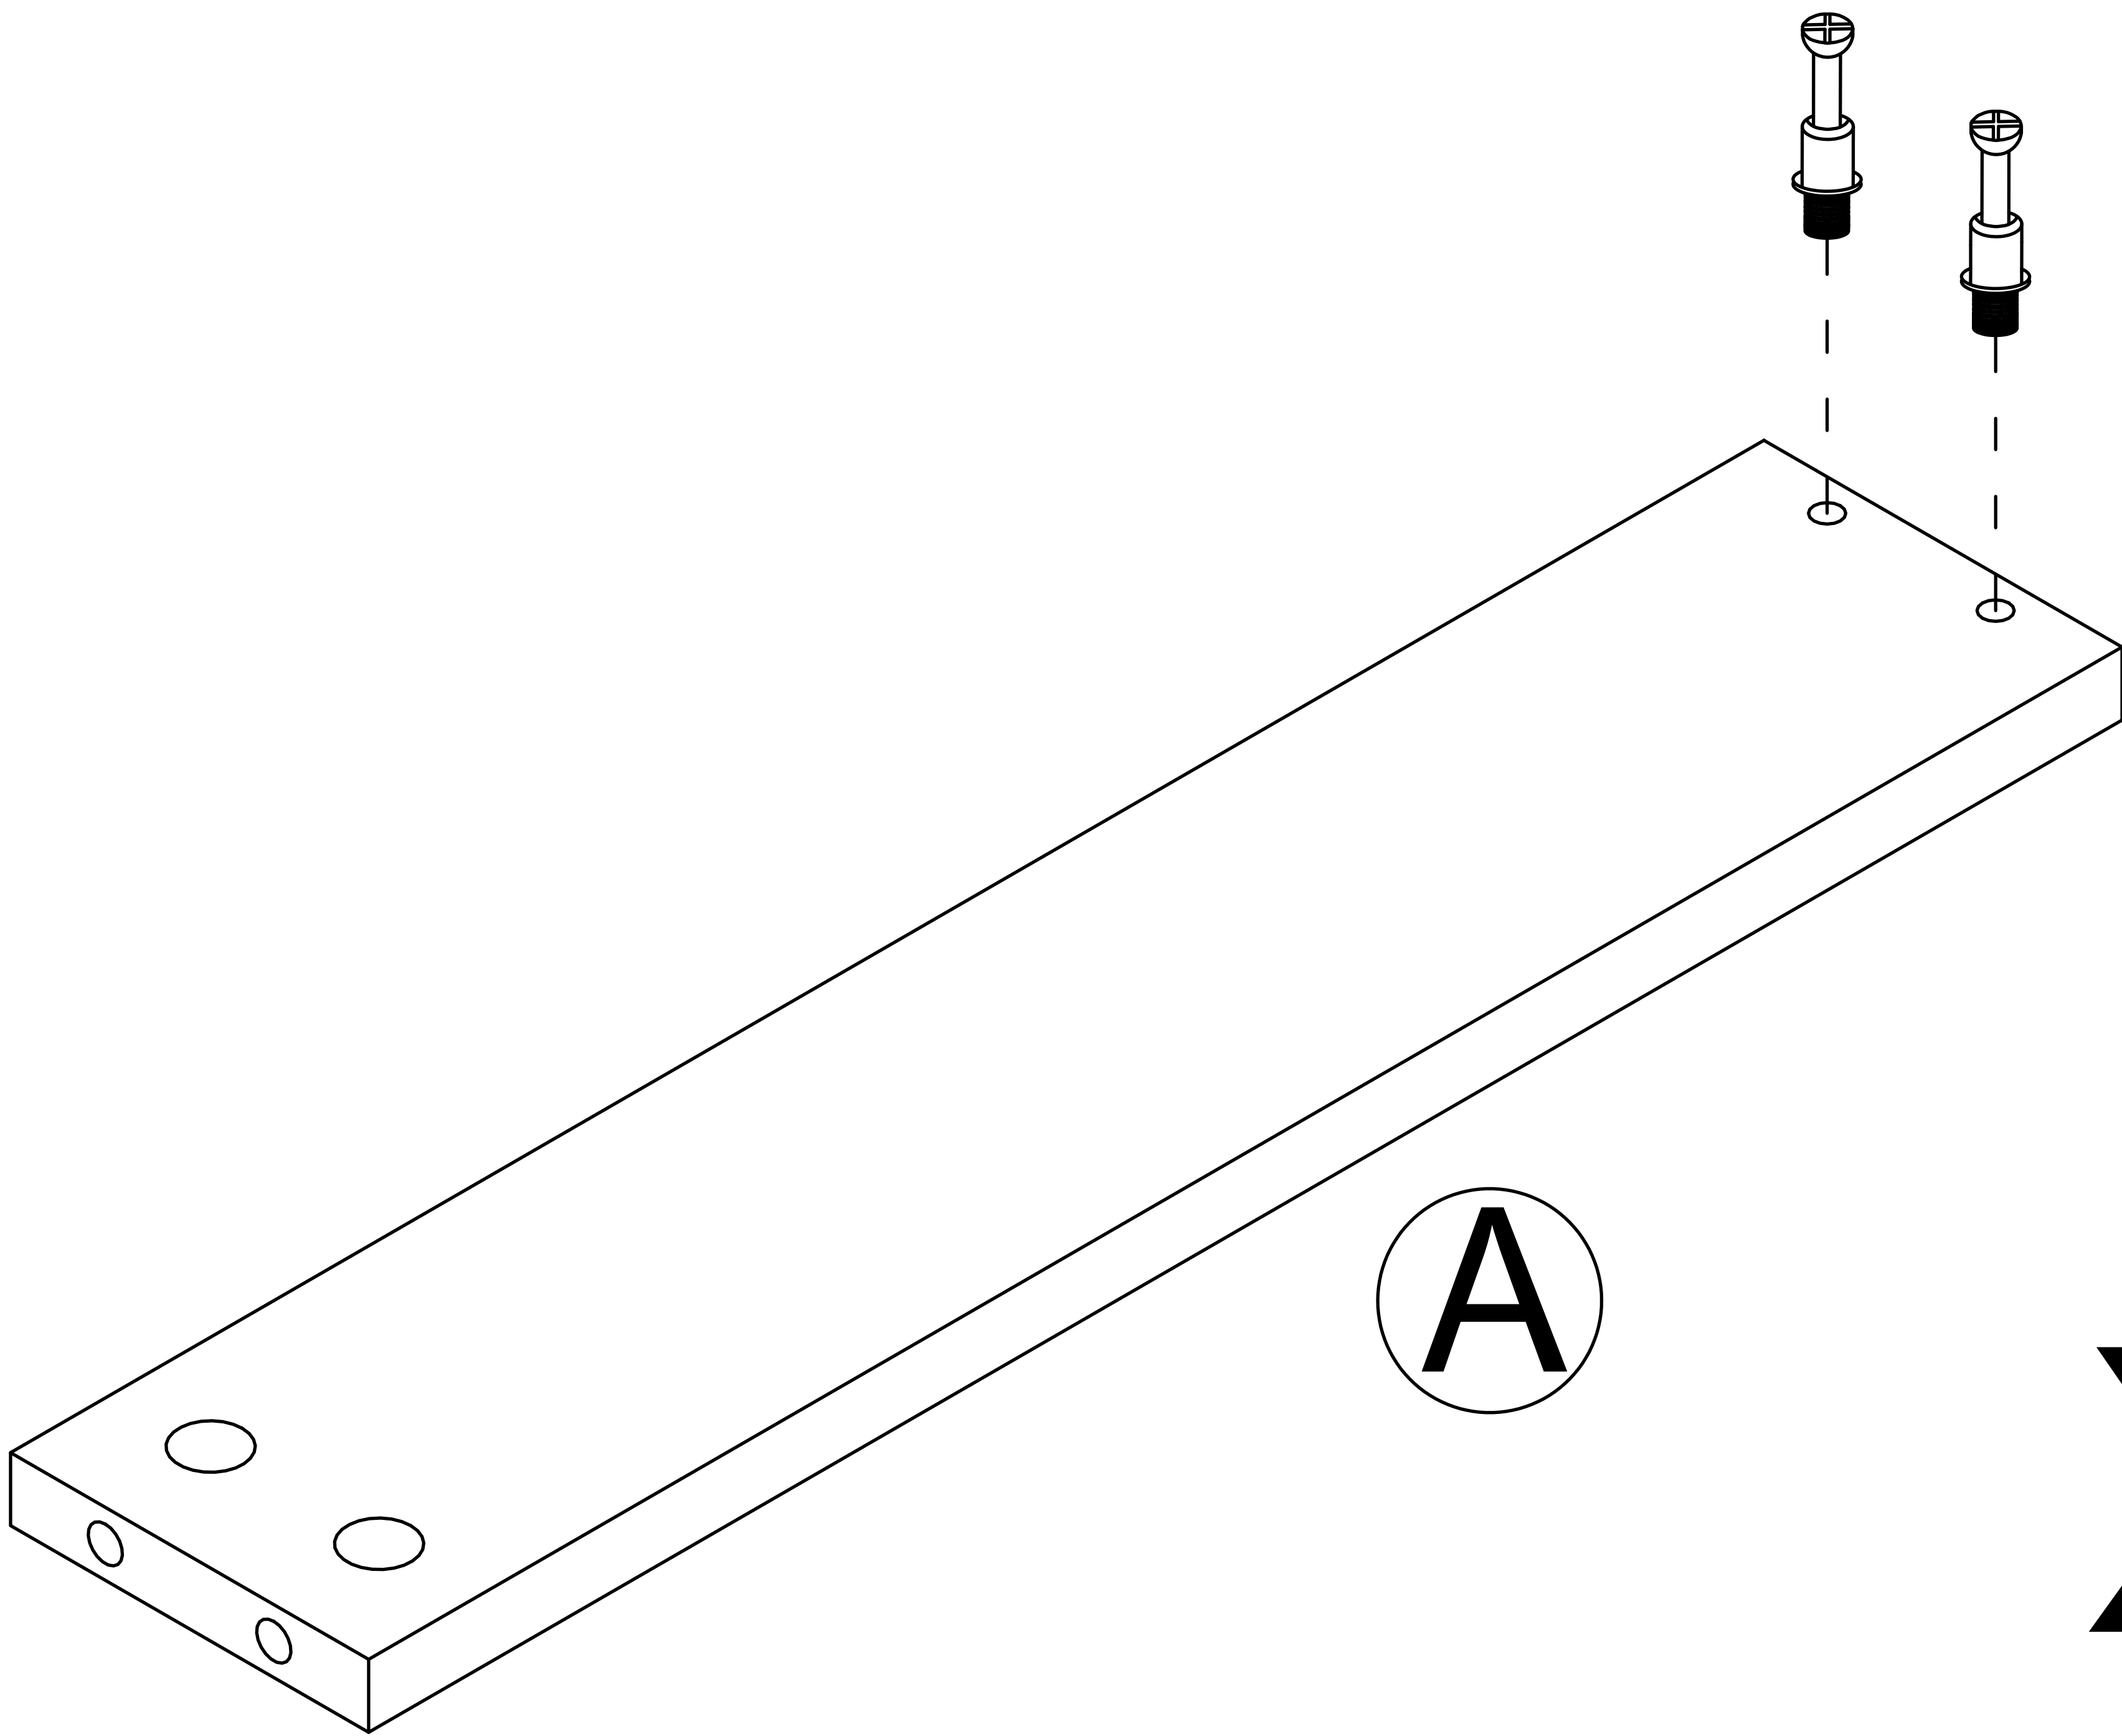


x2

Step 2

2

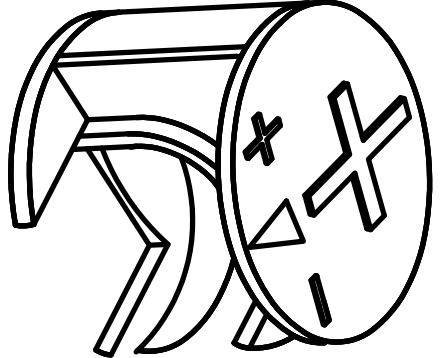


x4

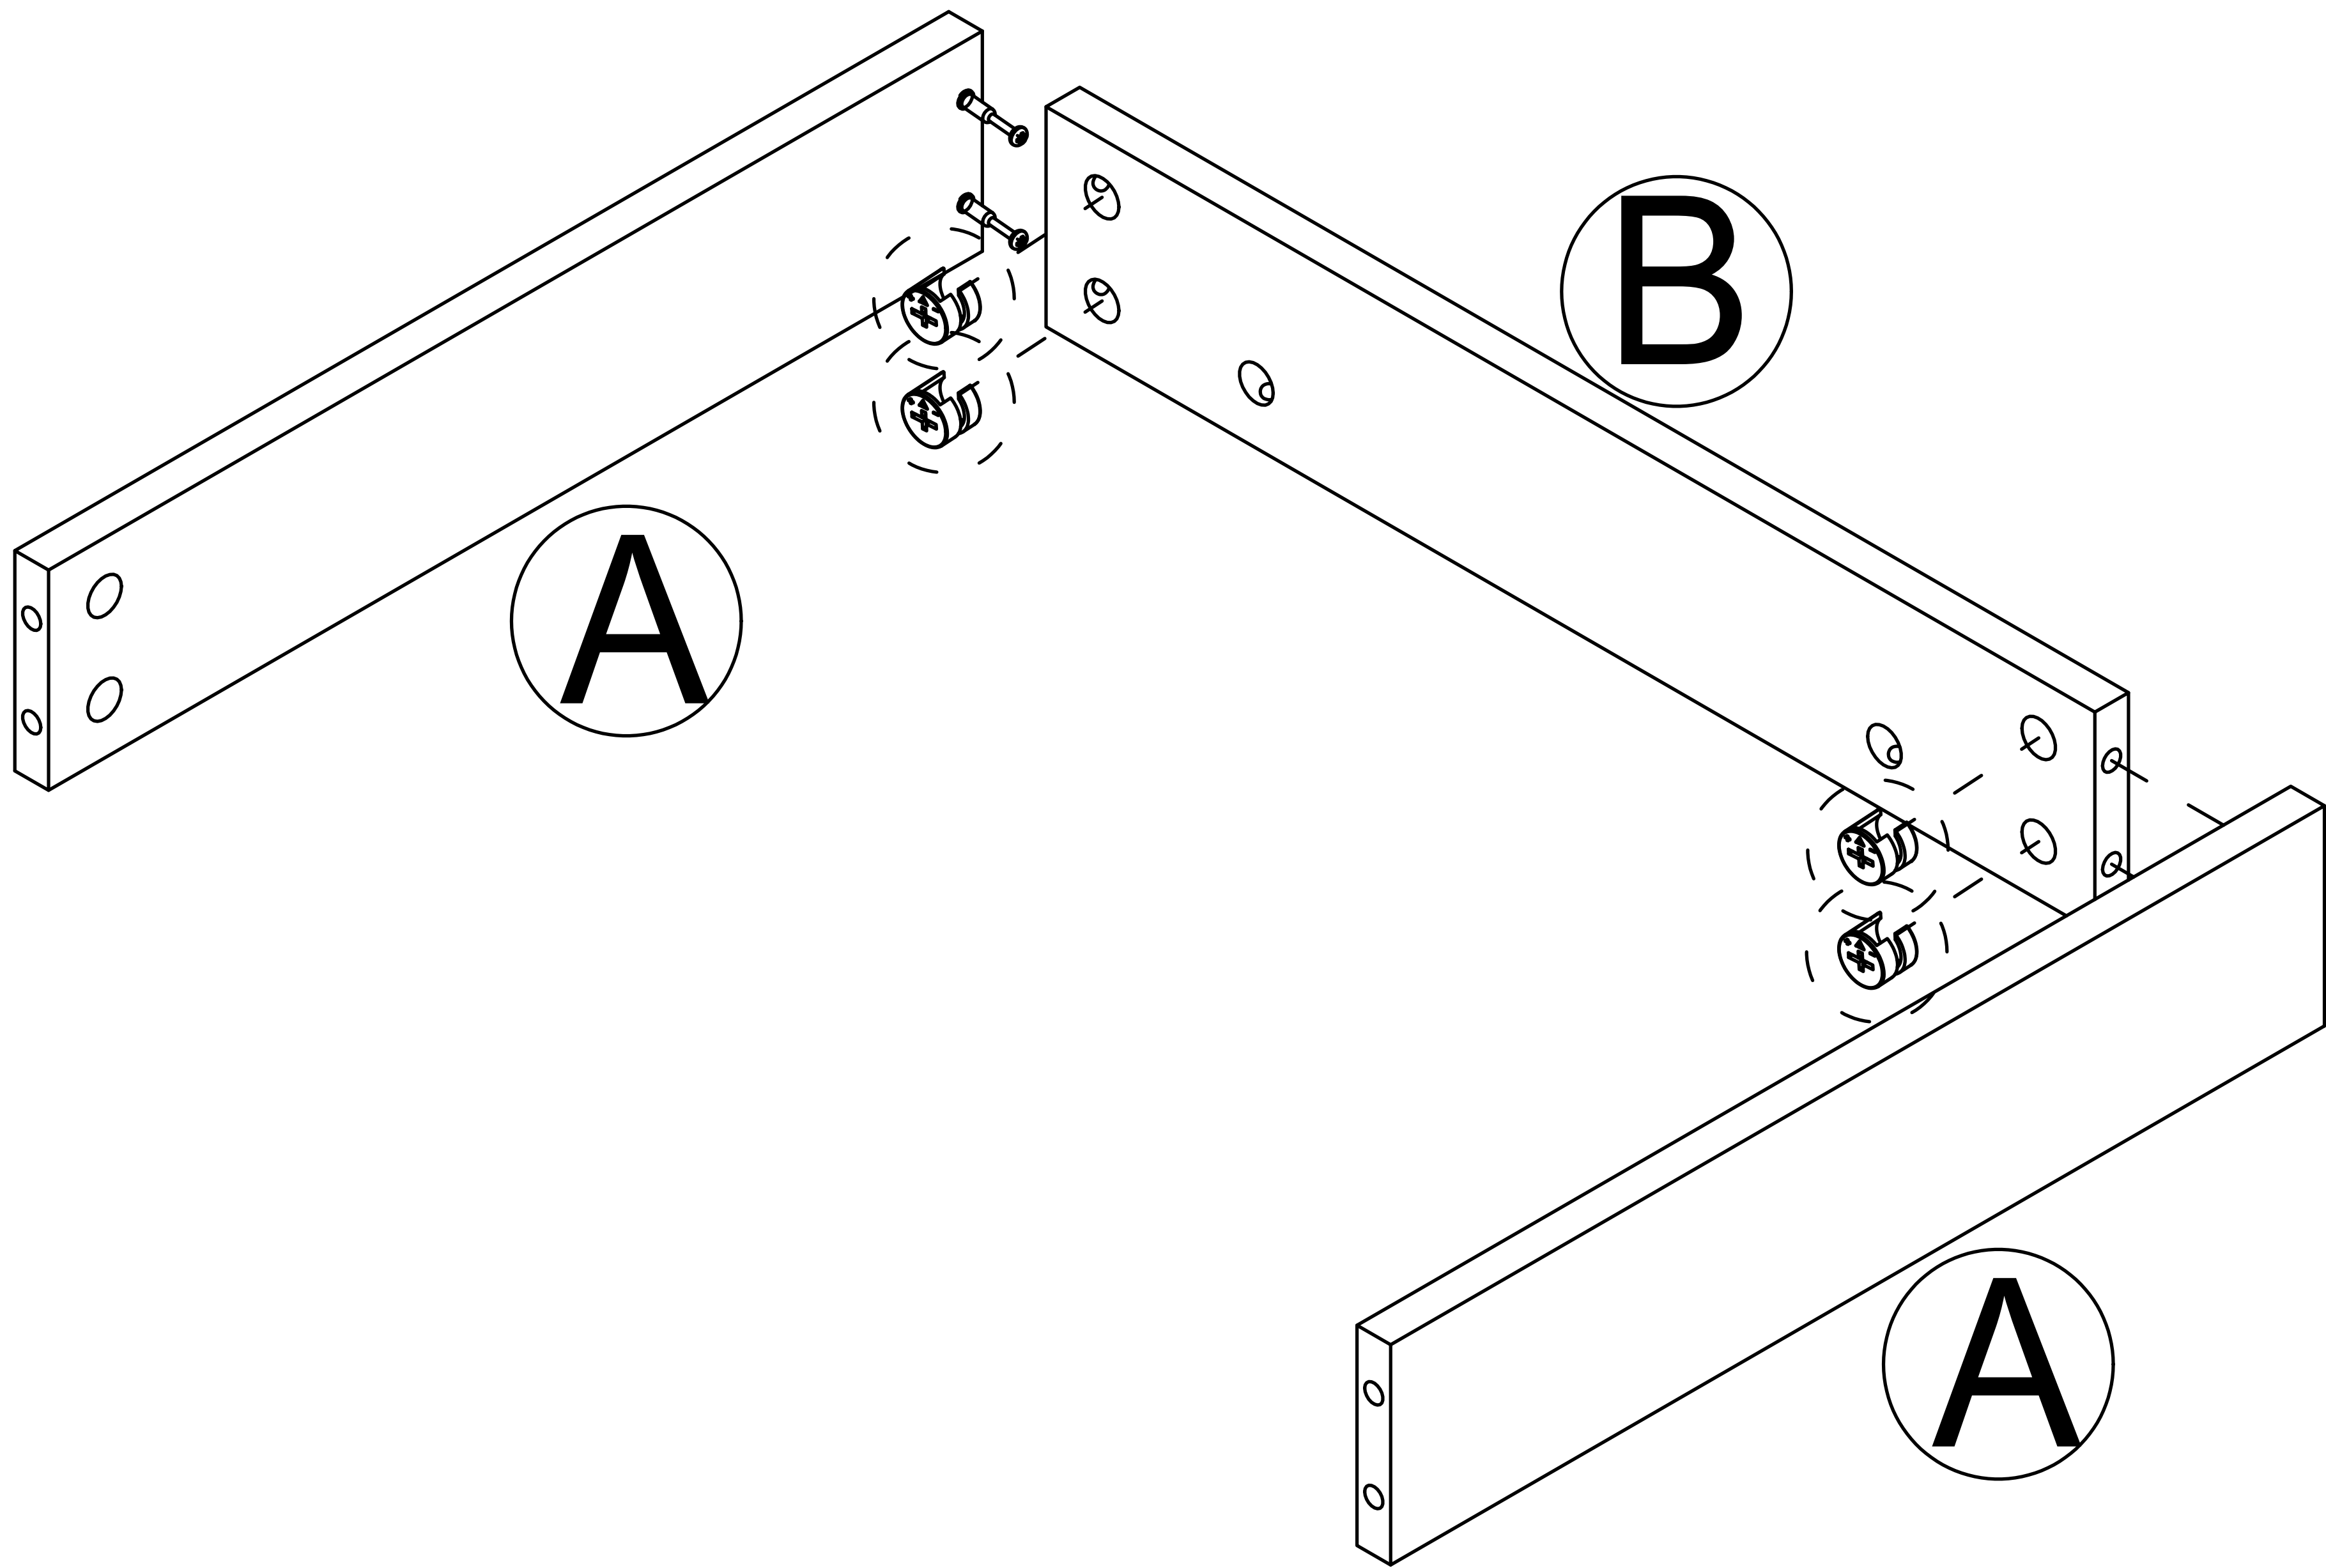


Step 3

1

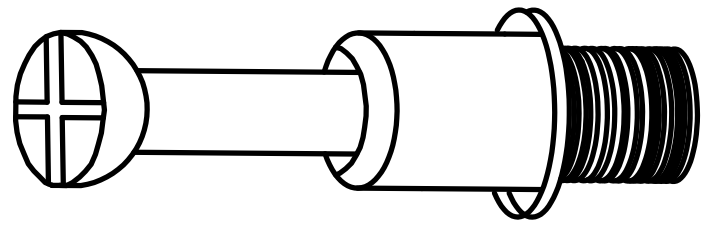


x4

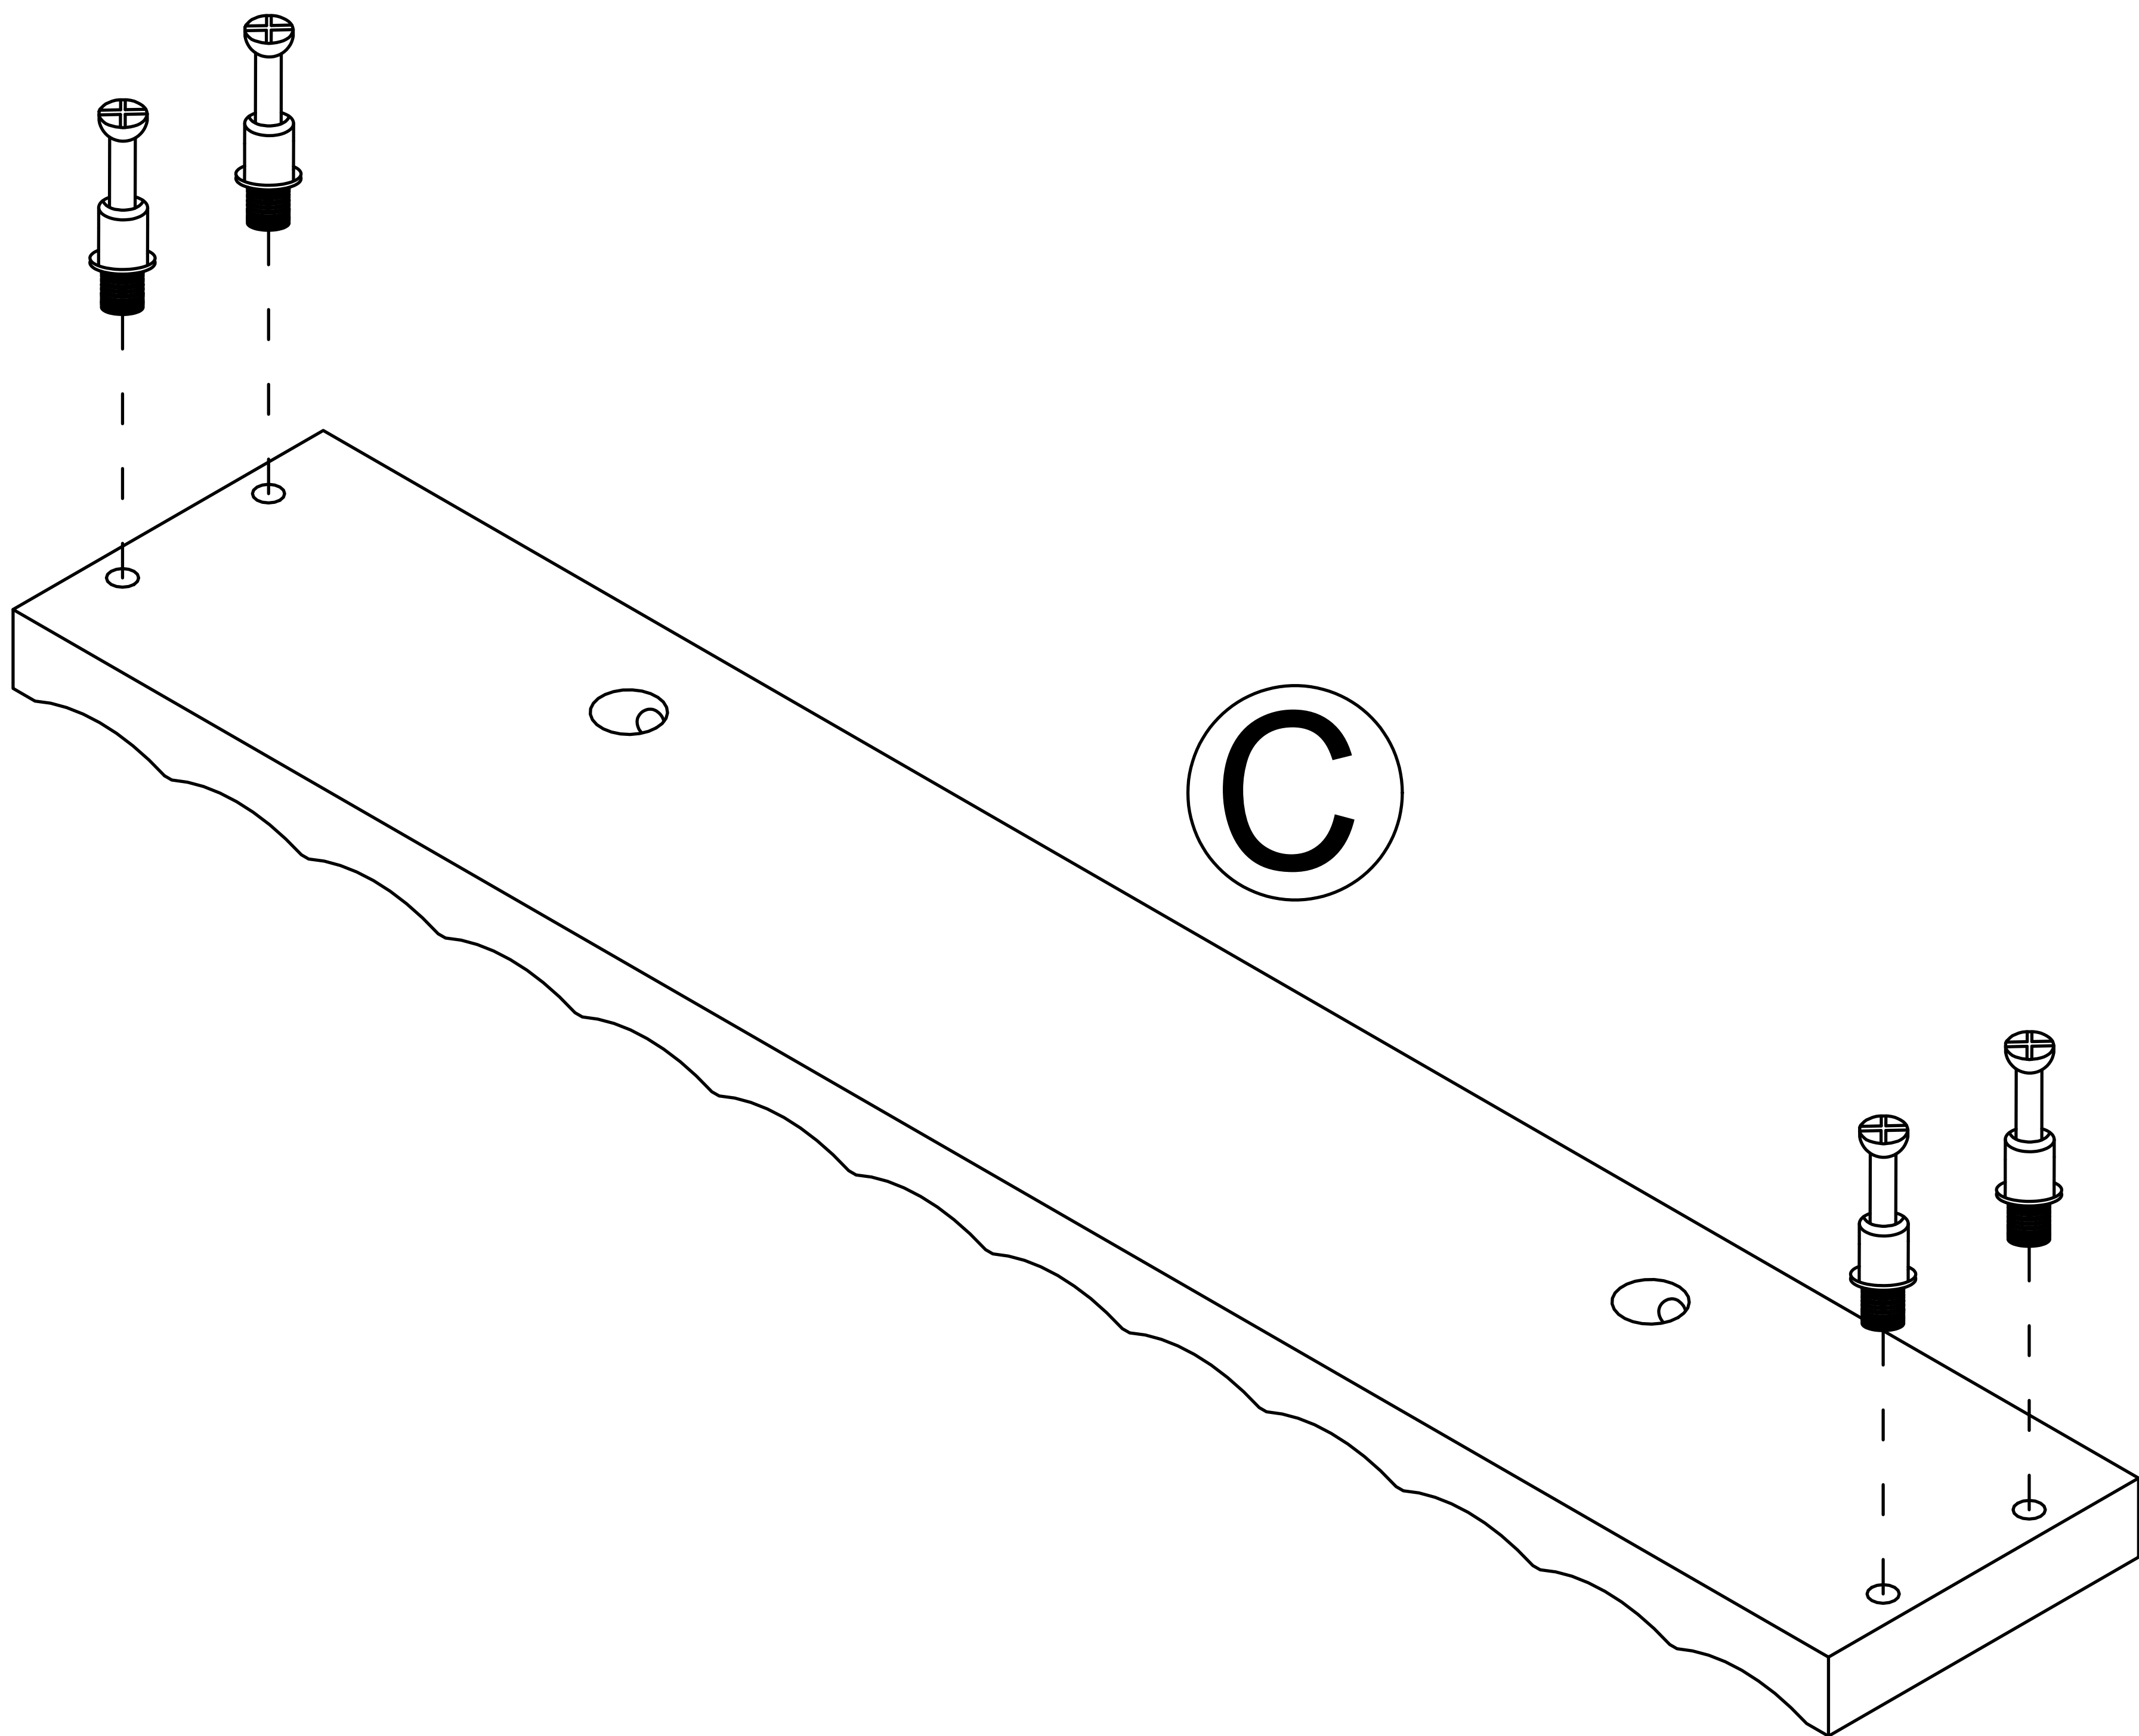


Step 4

2

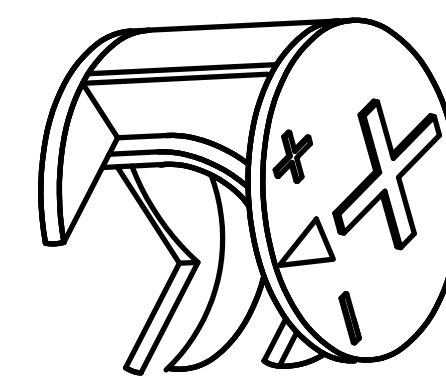


x4

The hole orientation of Plate B and Plate C must be consistent.

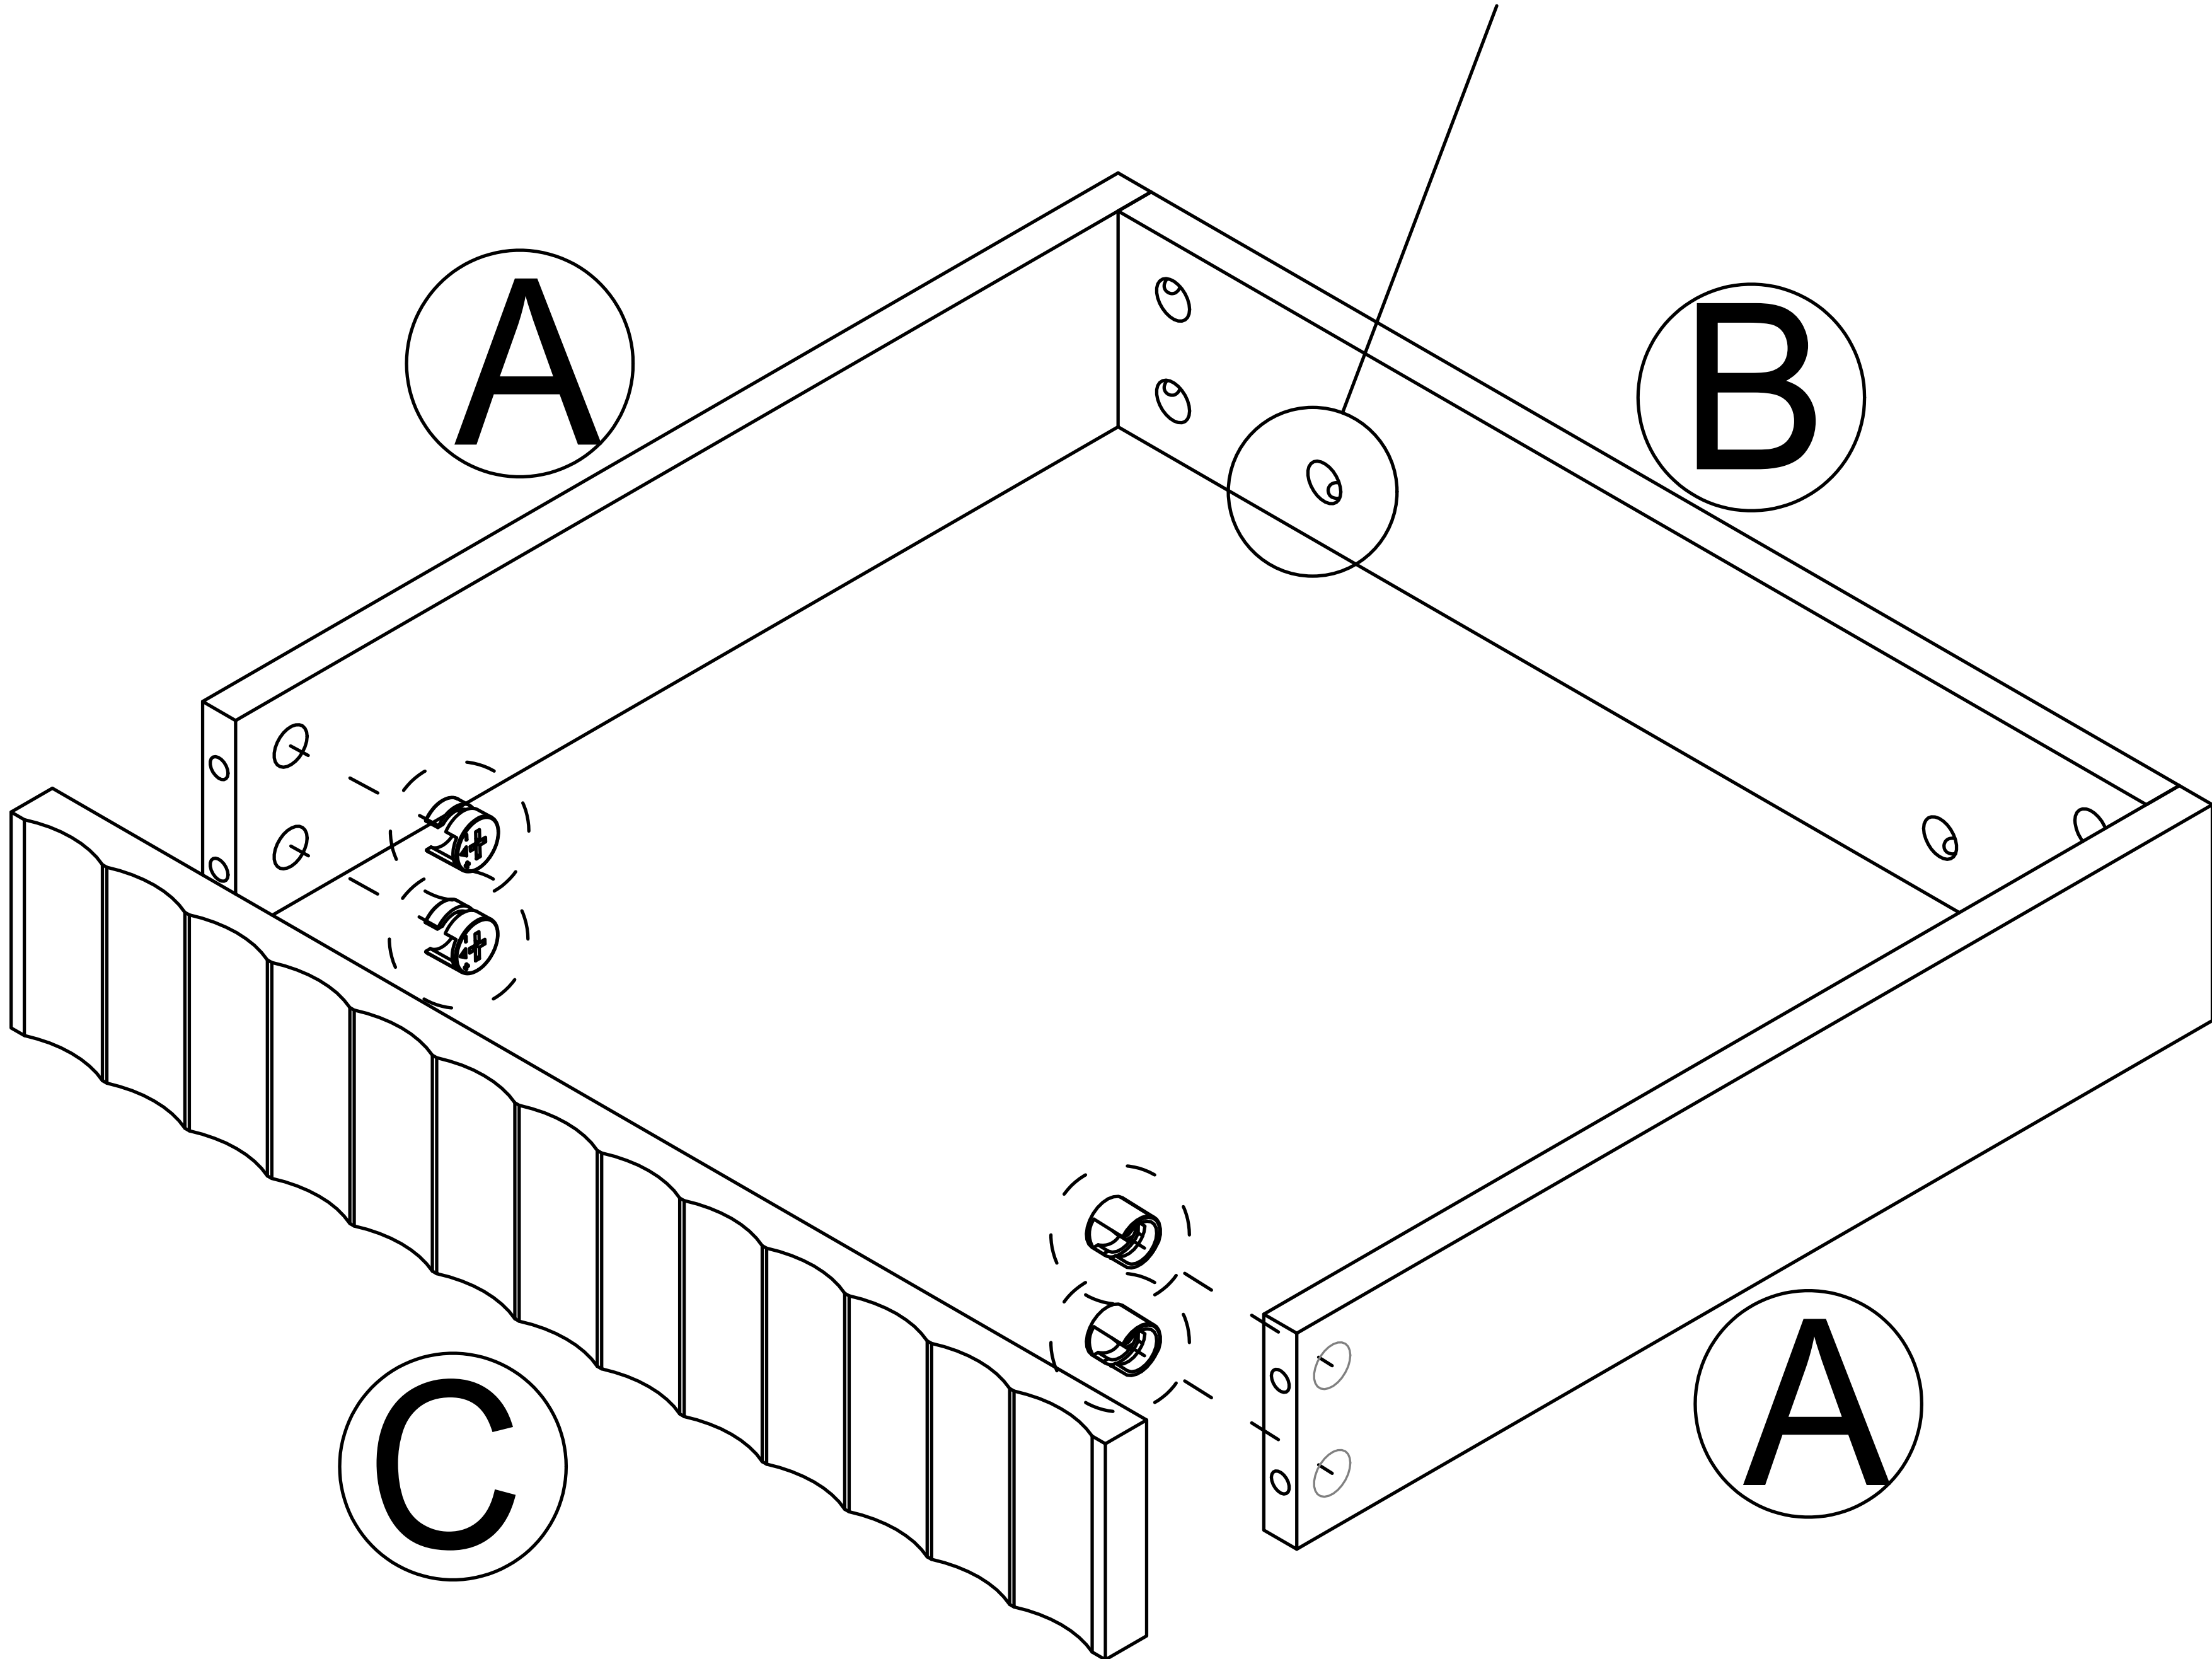


Step 5

1

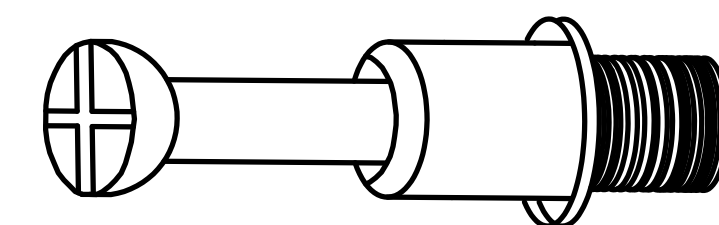


x4

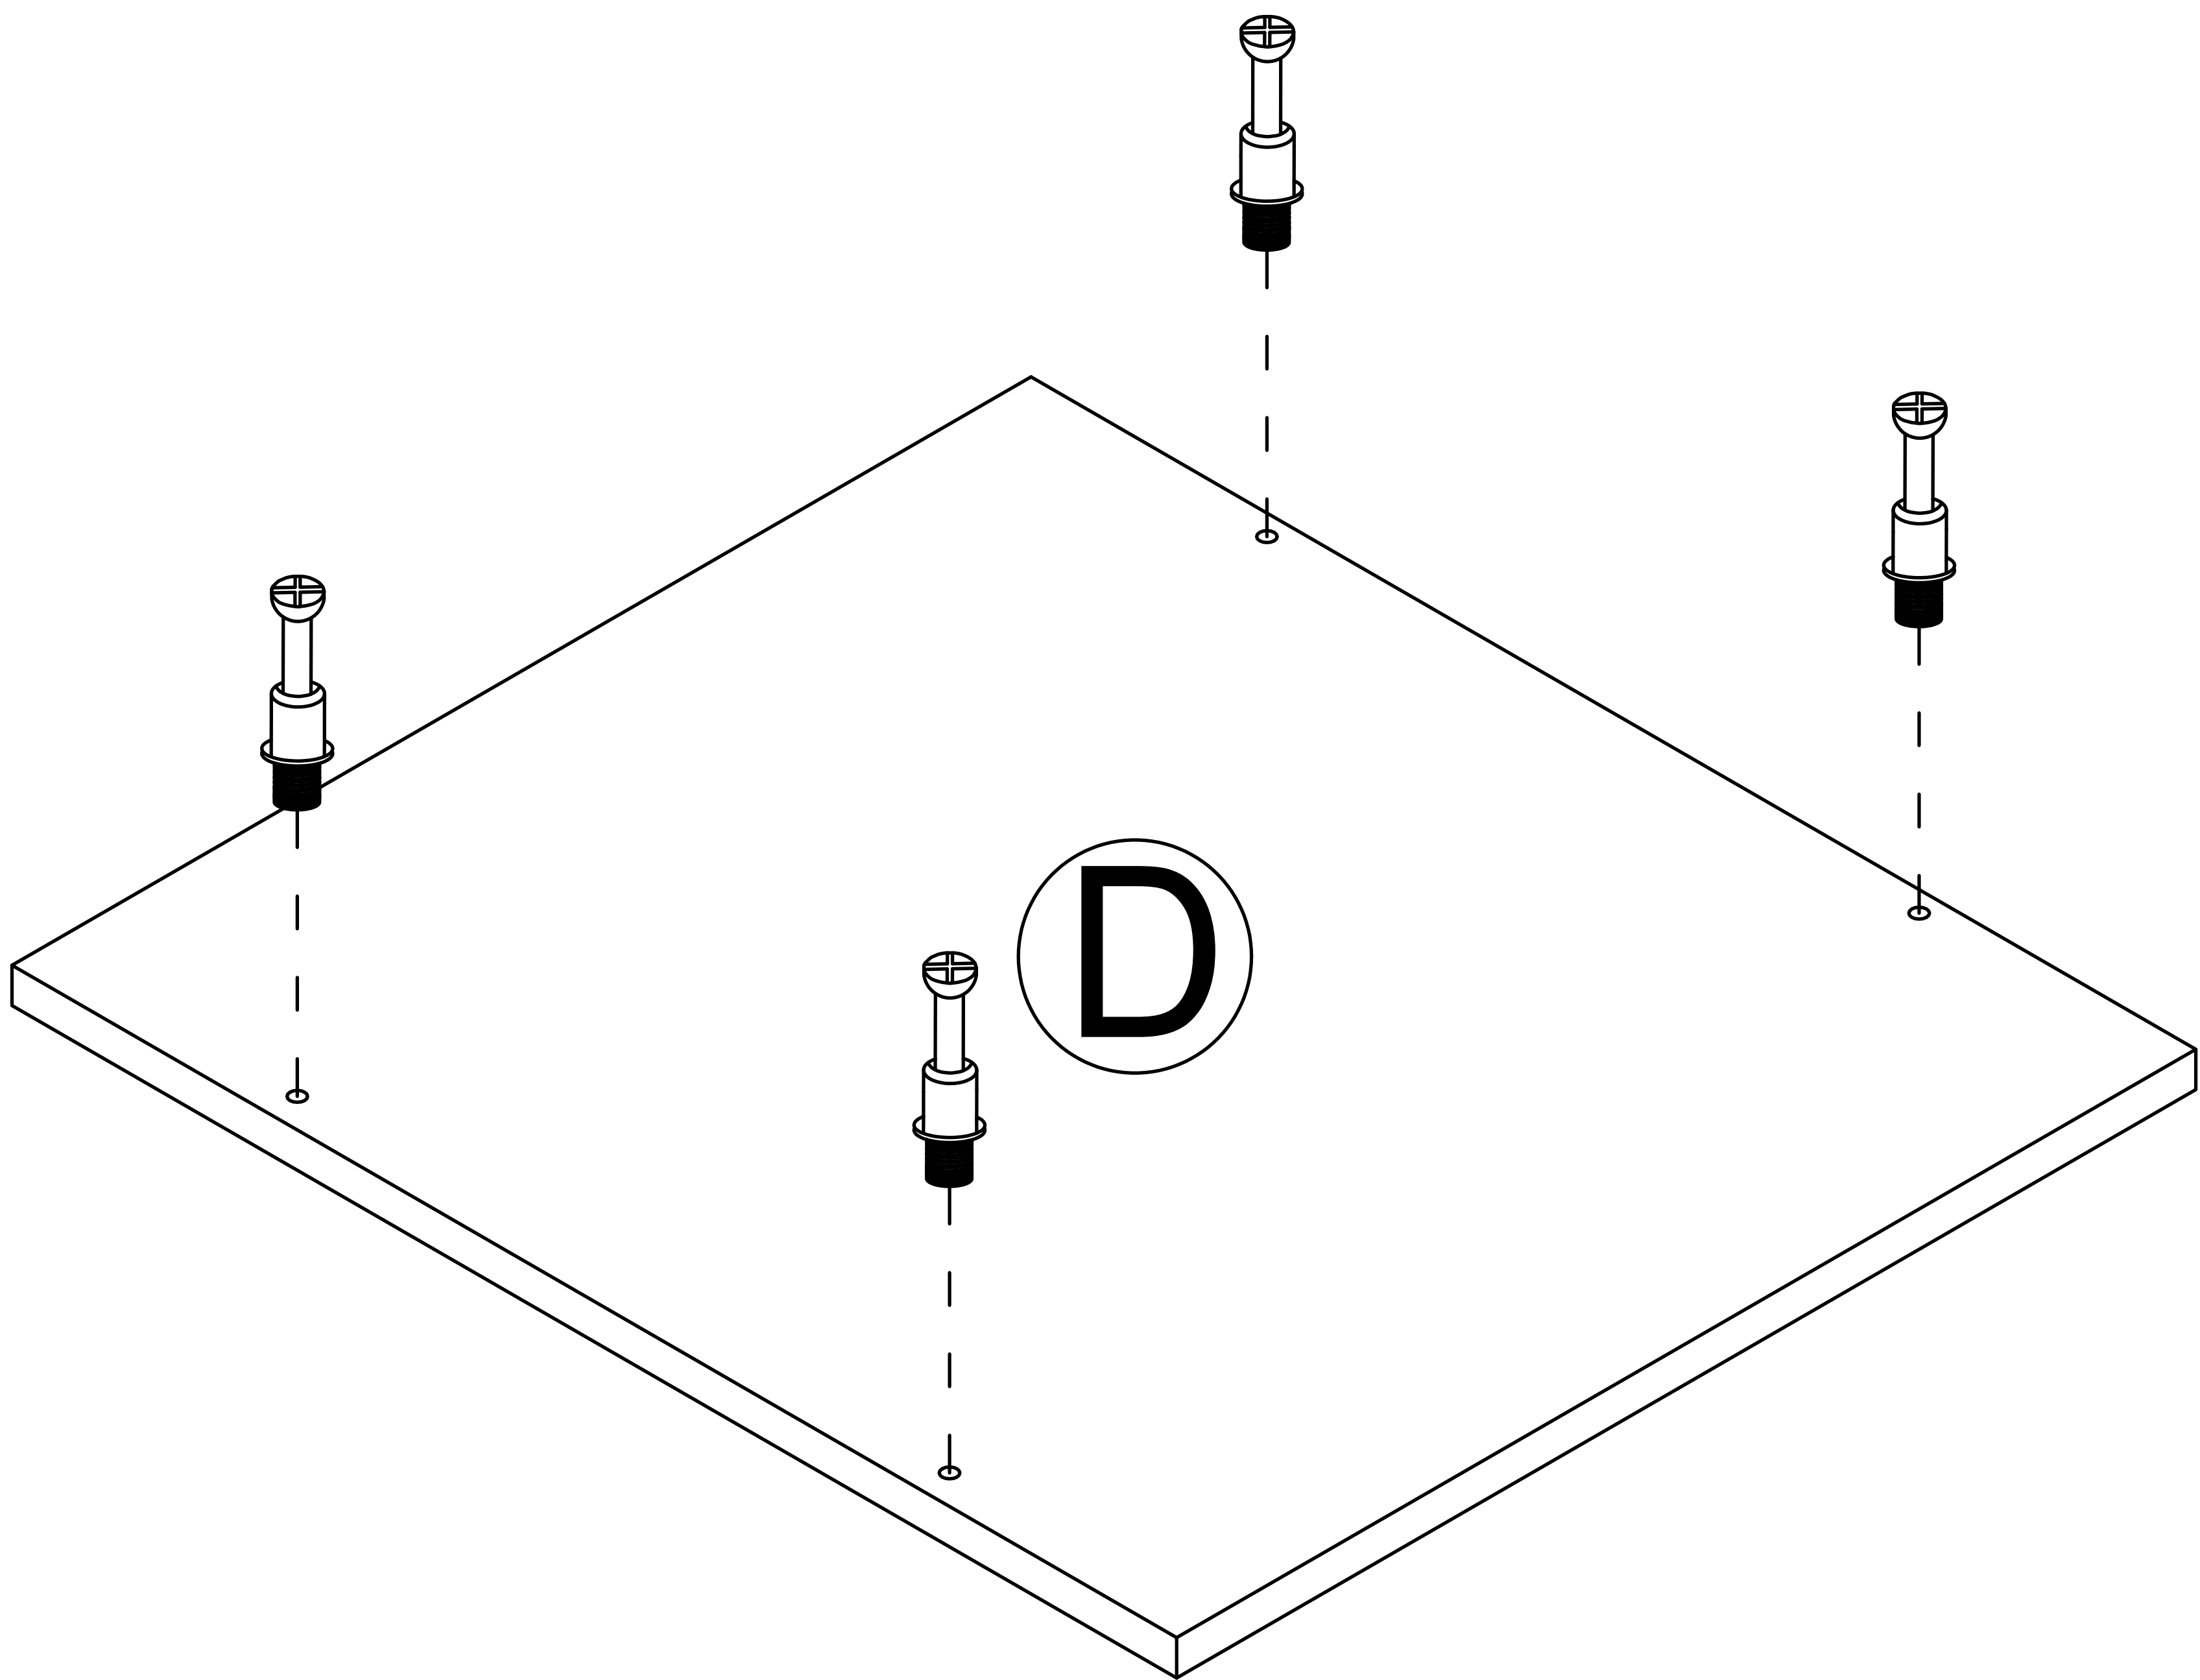


Step 6

2

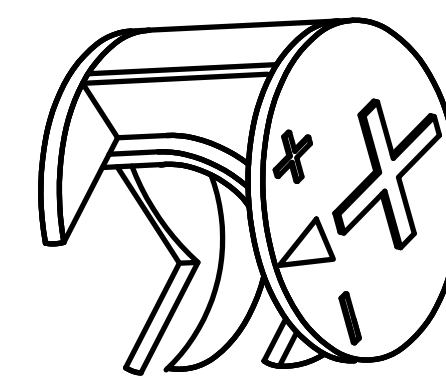


x4

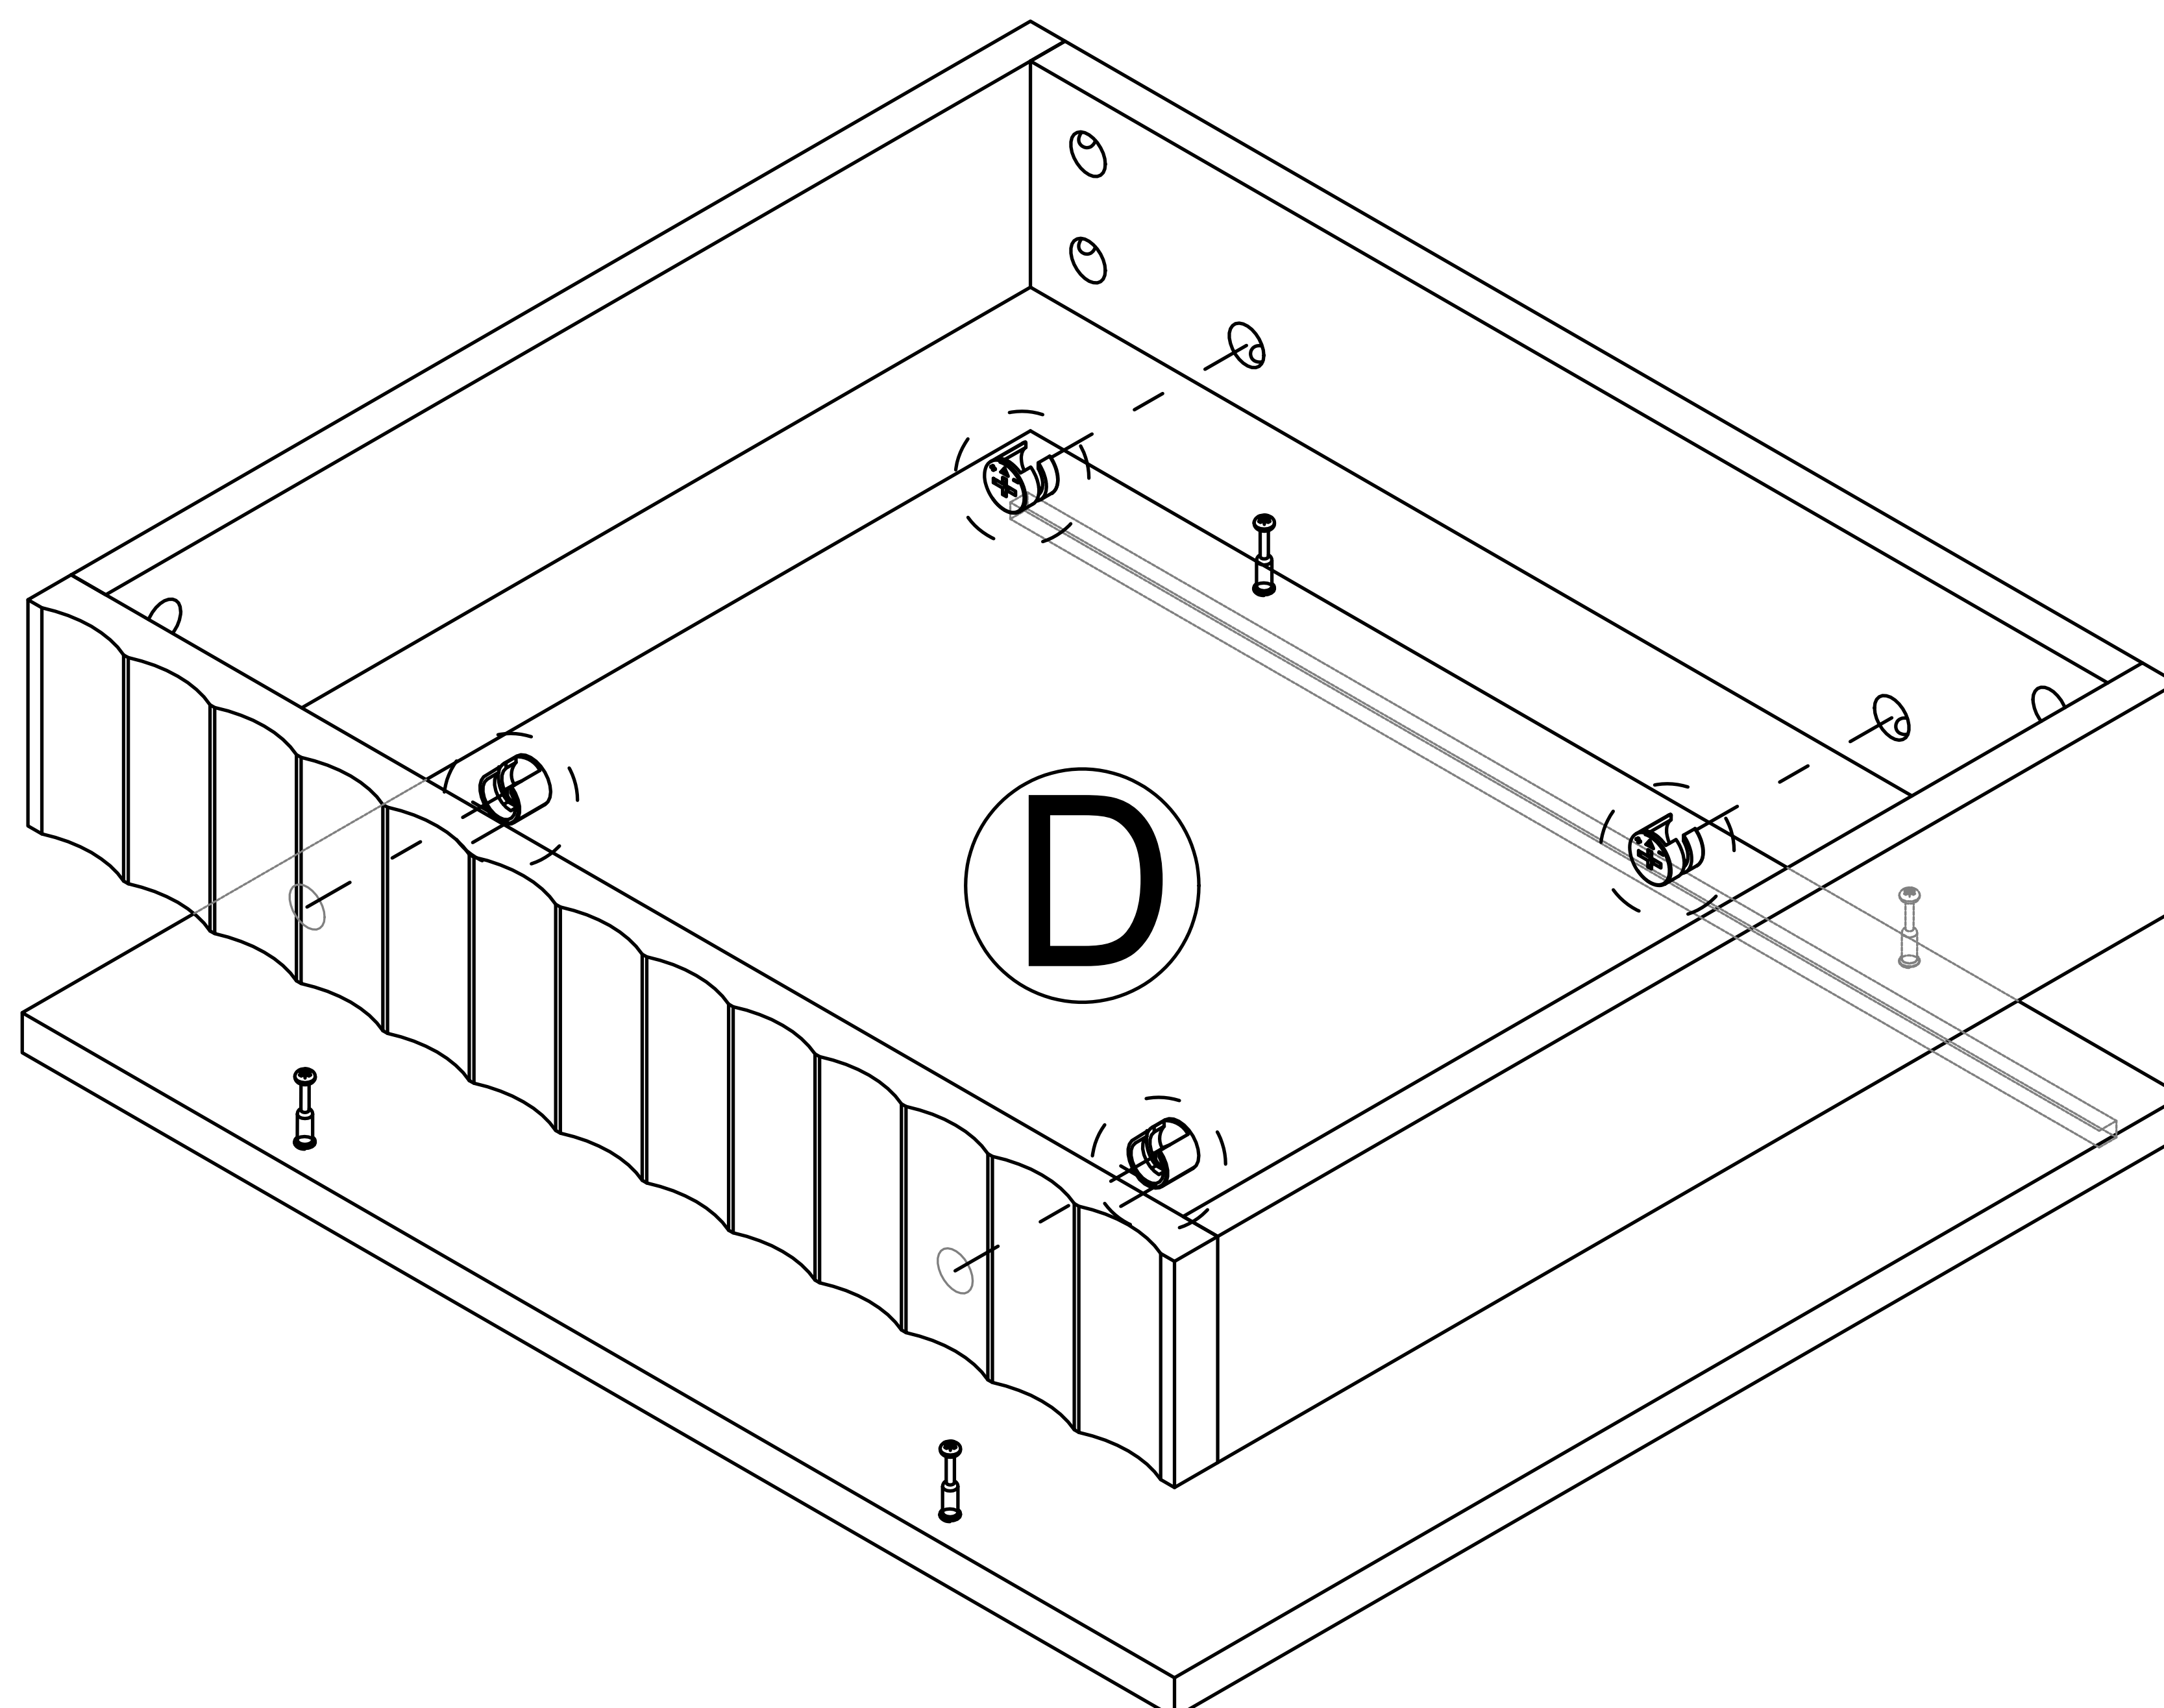


Please note the direction of the slot.

Step 7

3

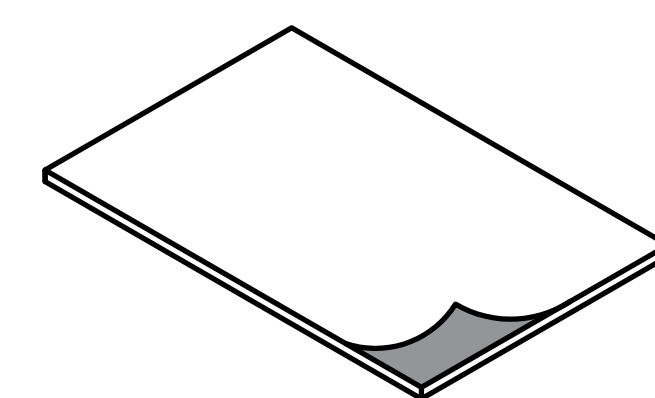

x4

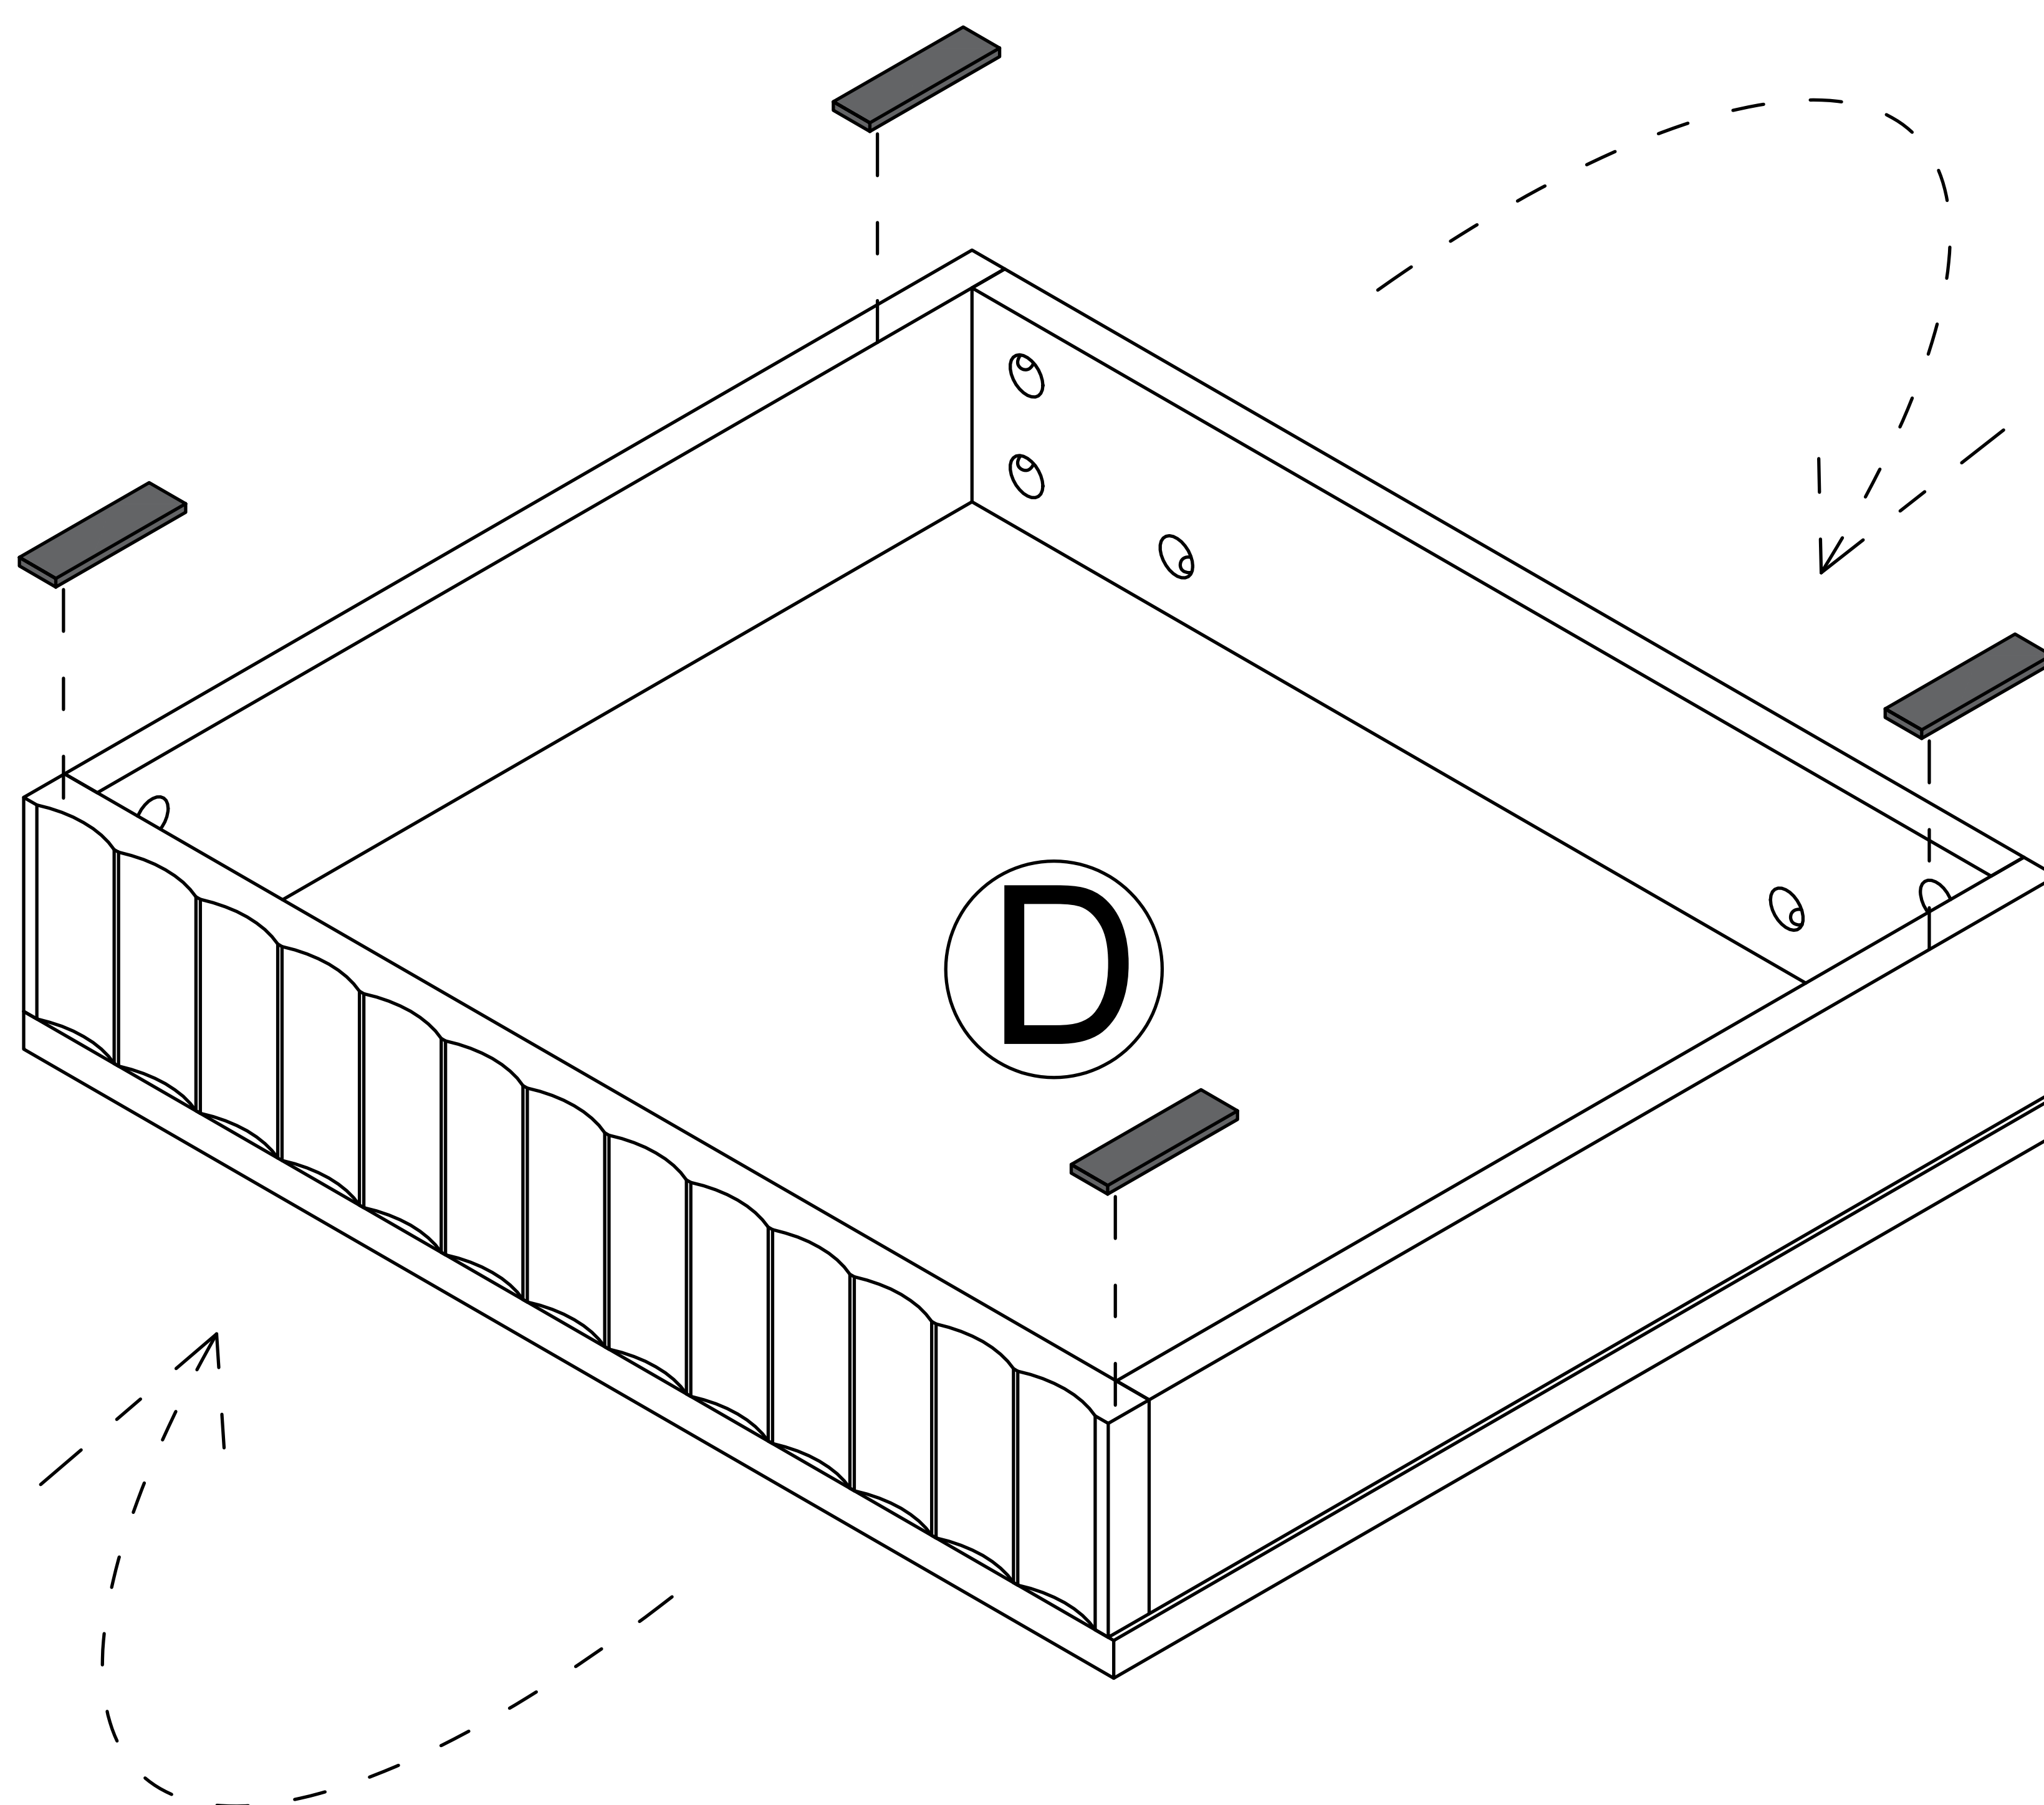


Tear off release paper and stick the black foot pad on the board


7

Step 8

1

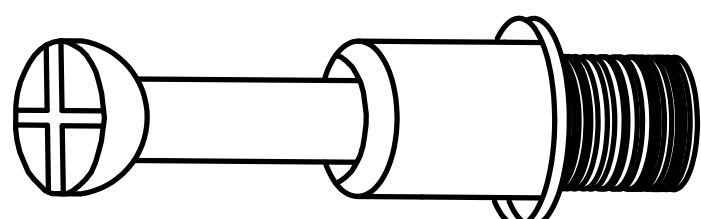


x2

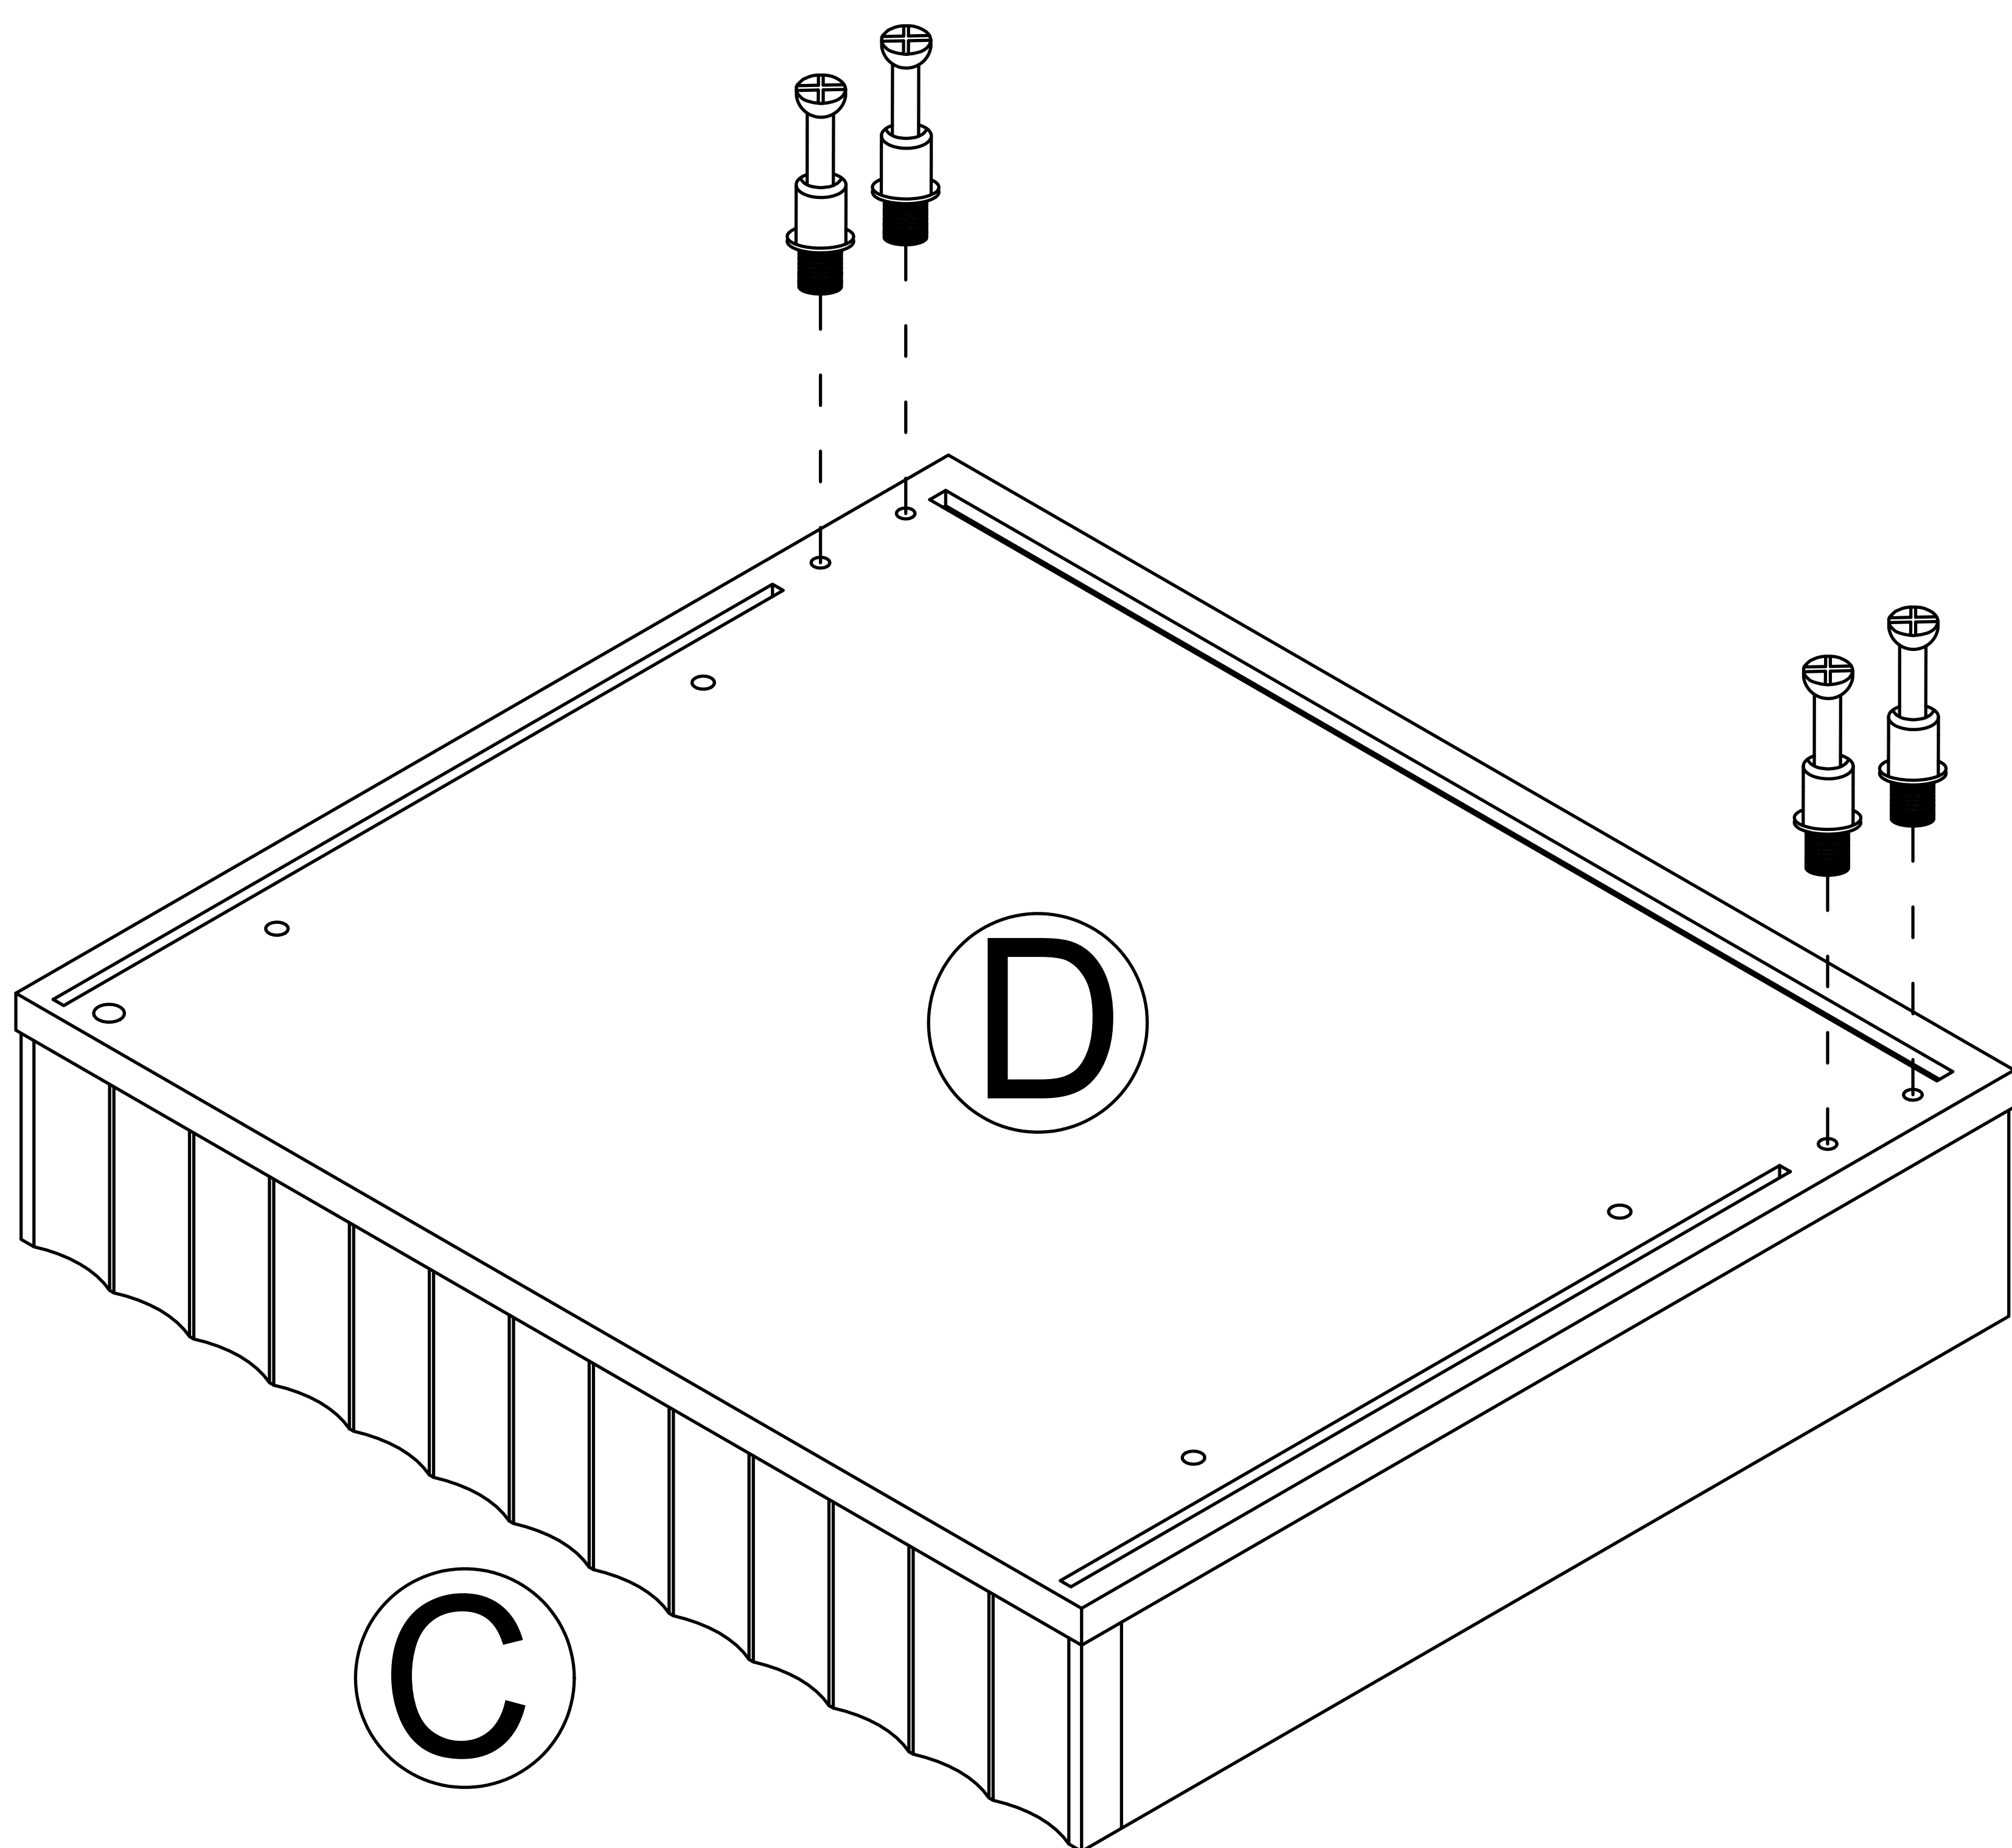


Step 9

1

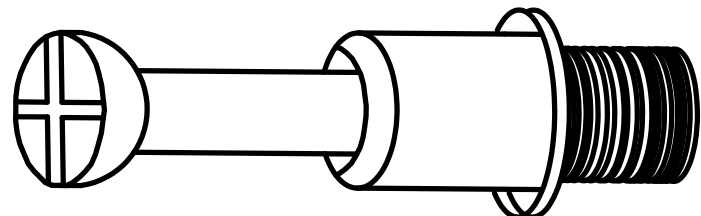



x2

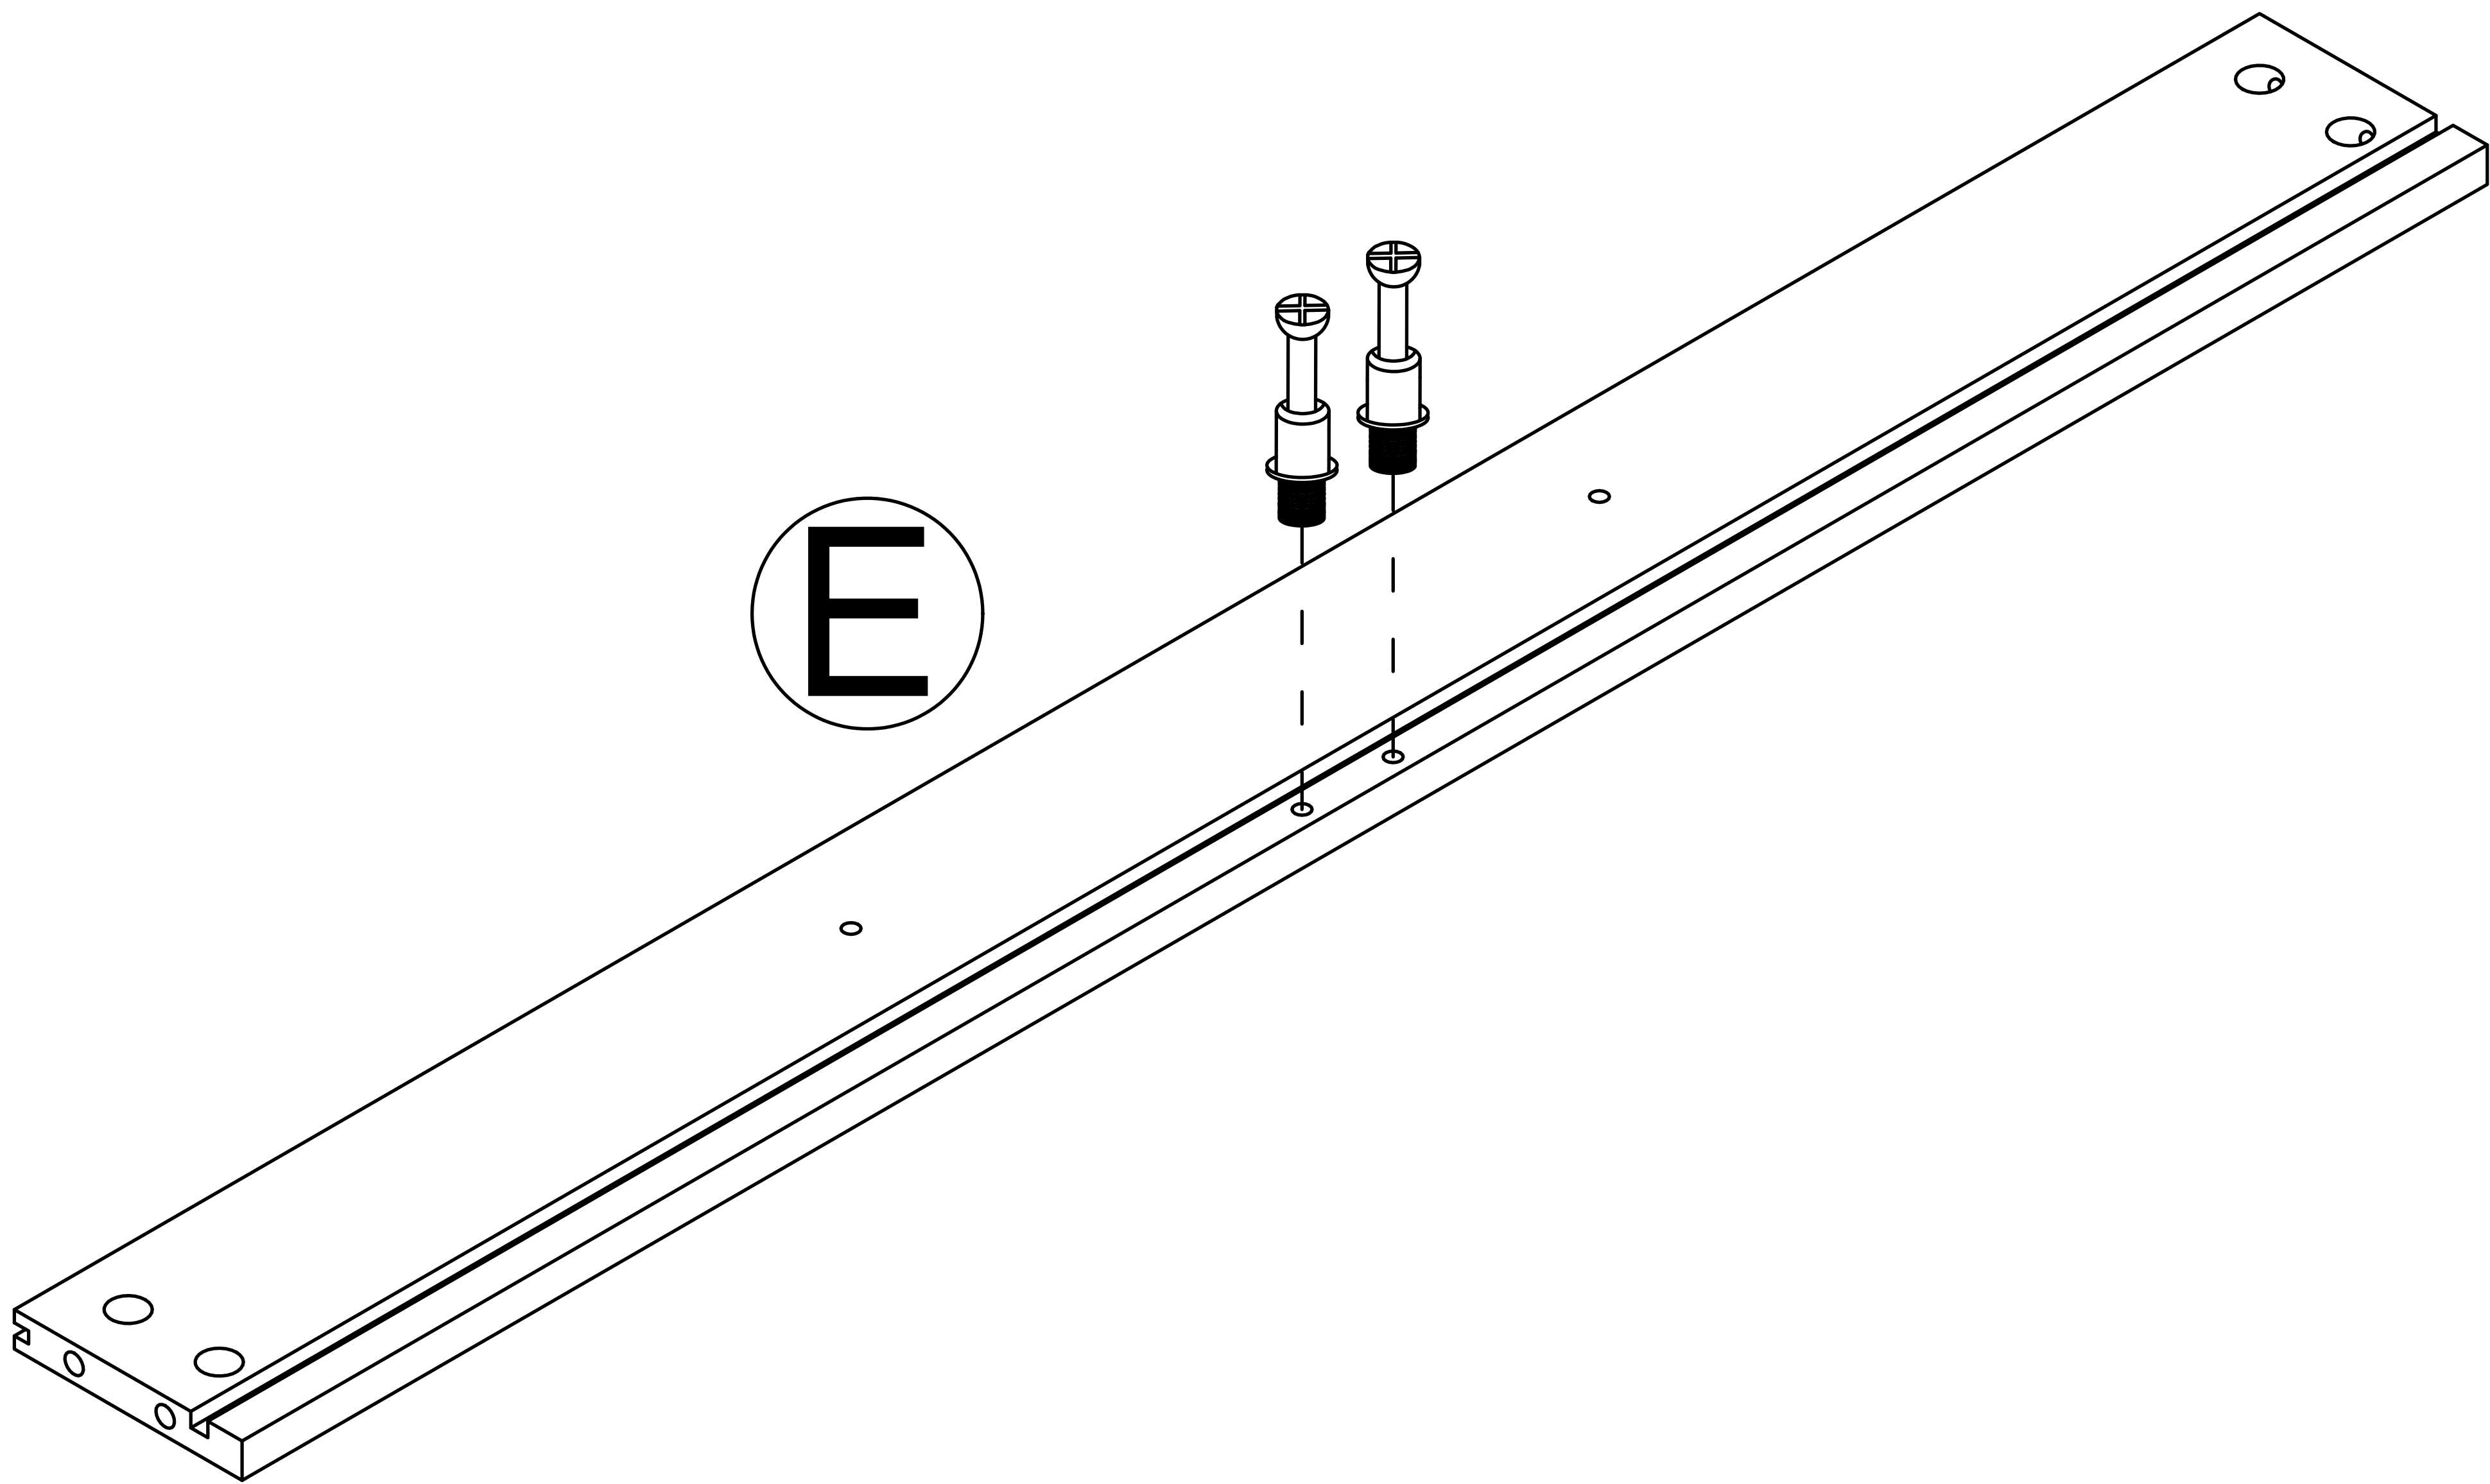

Step 10


1

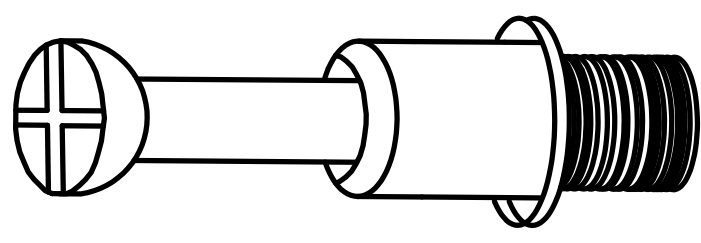

x2

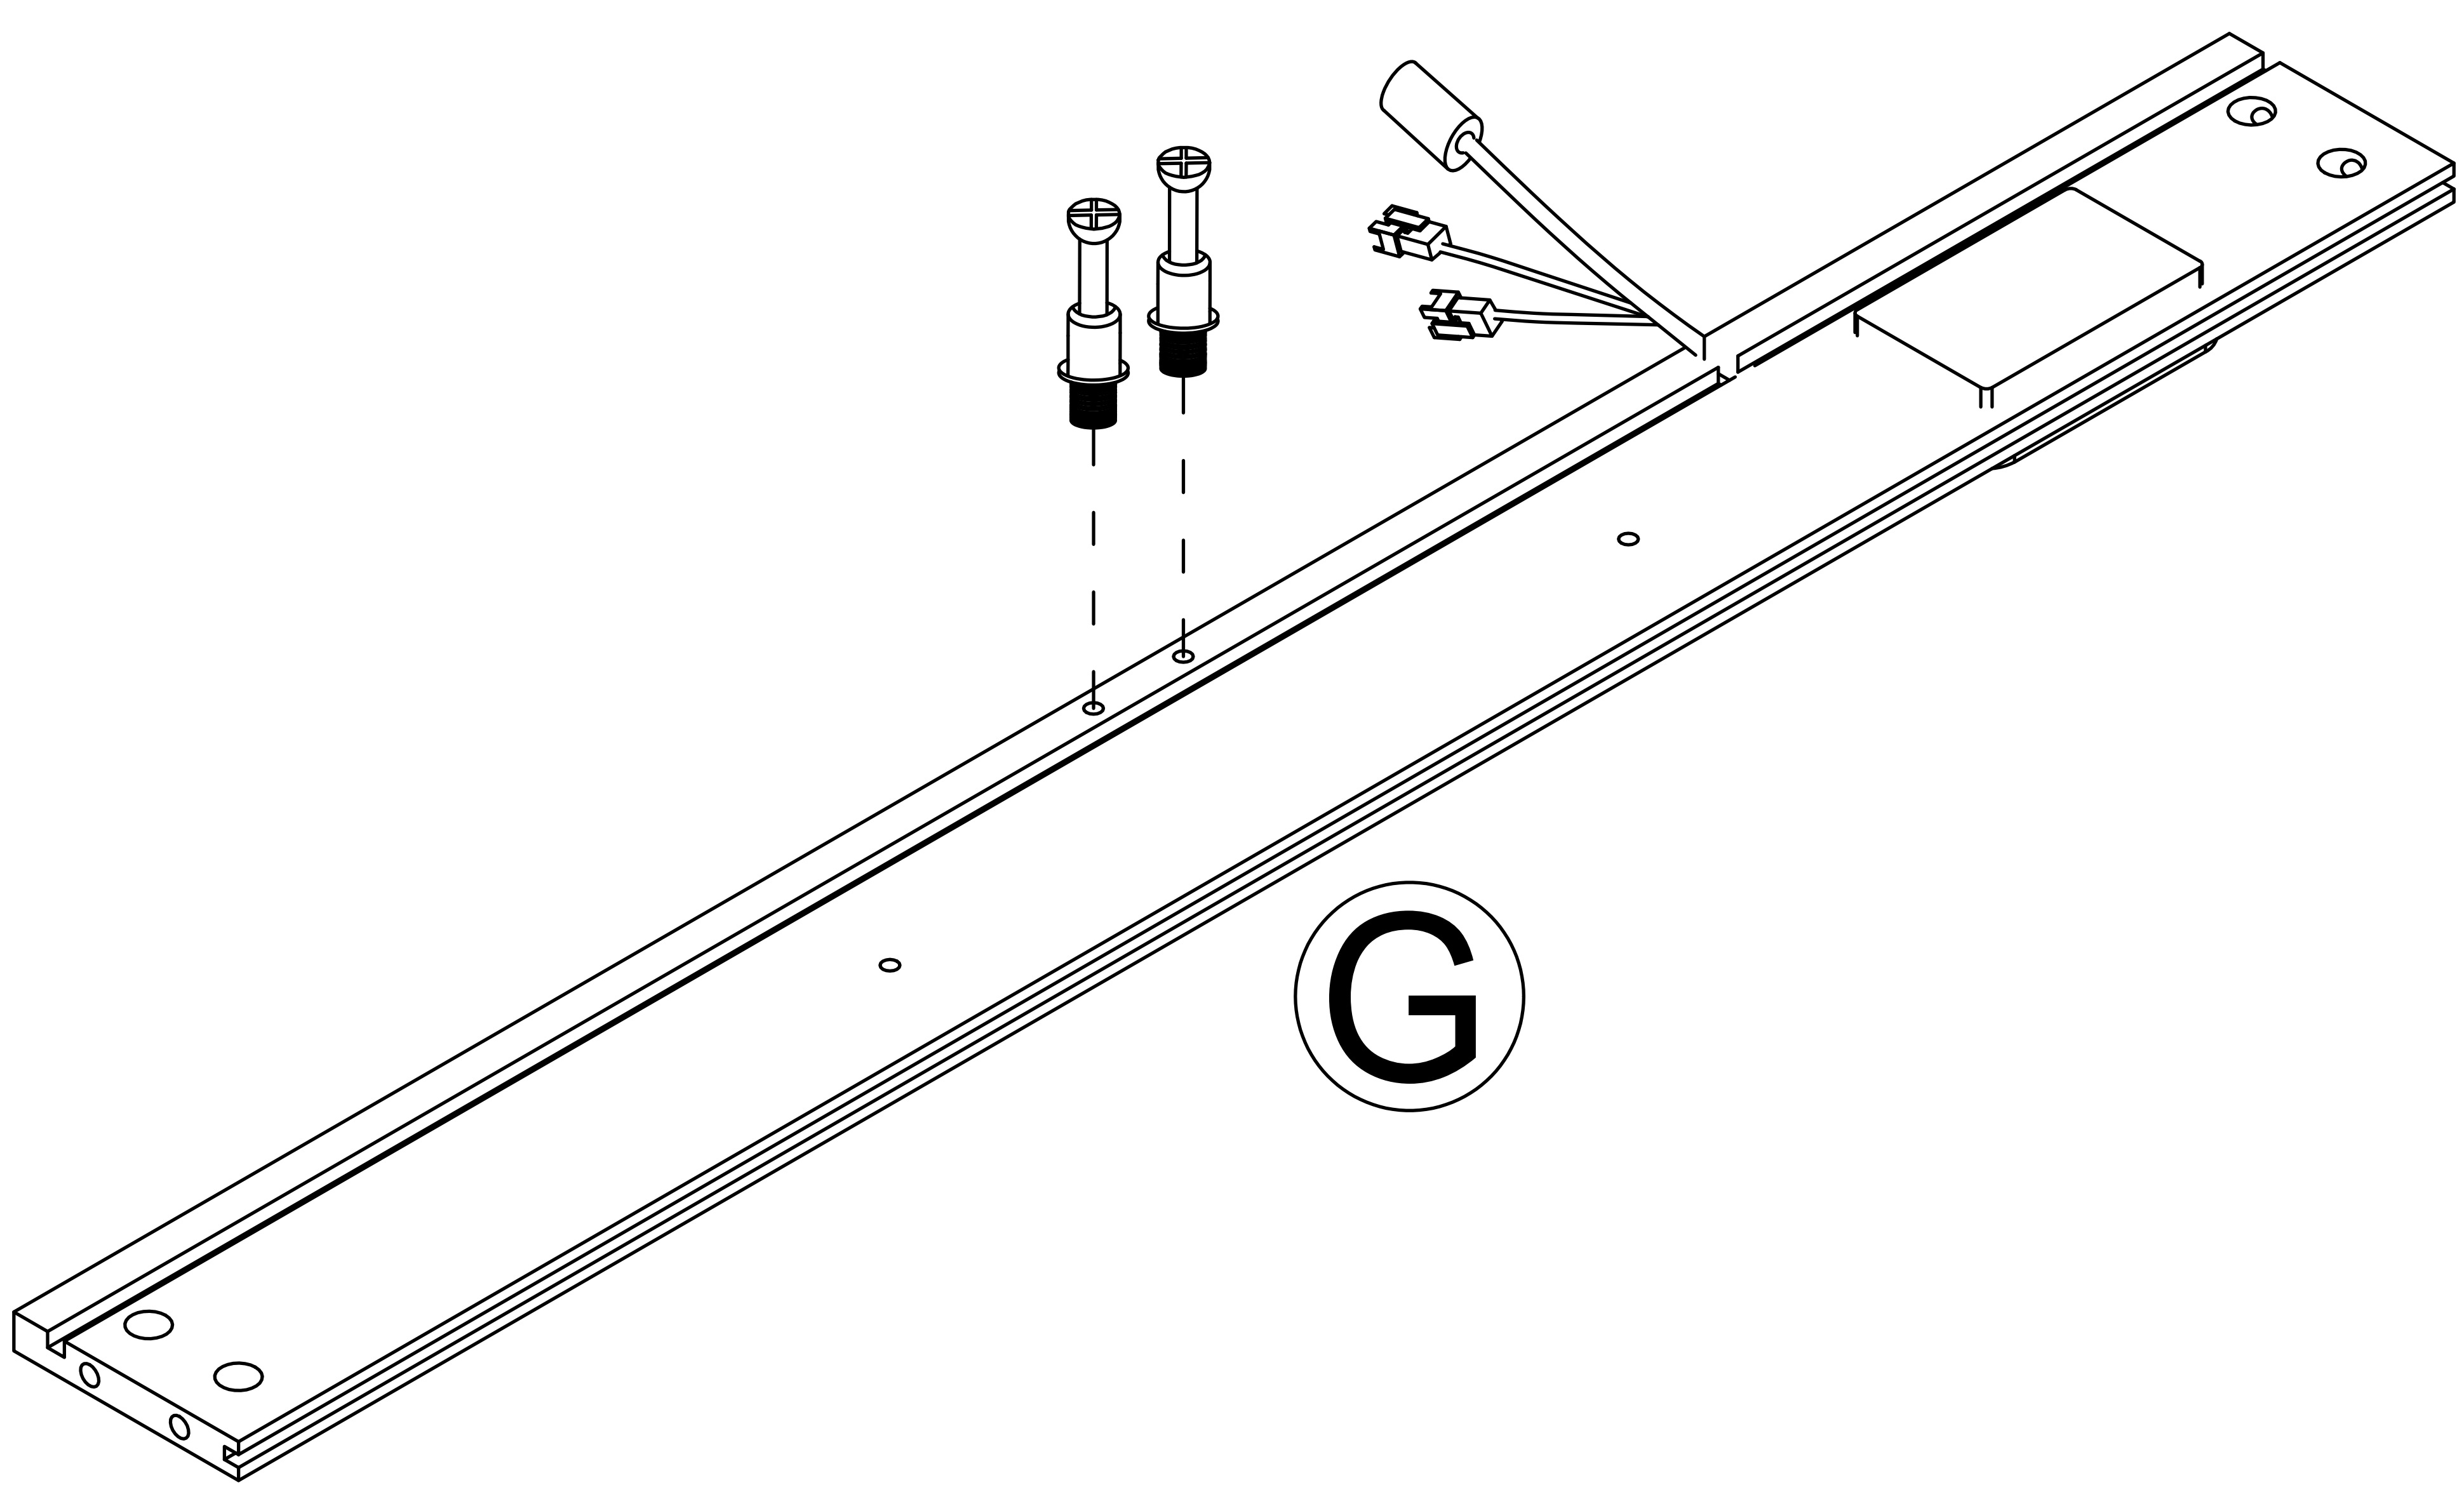

Step 11


2

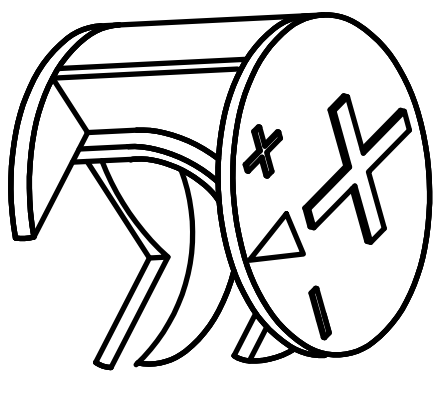

x4

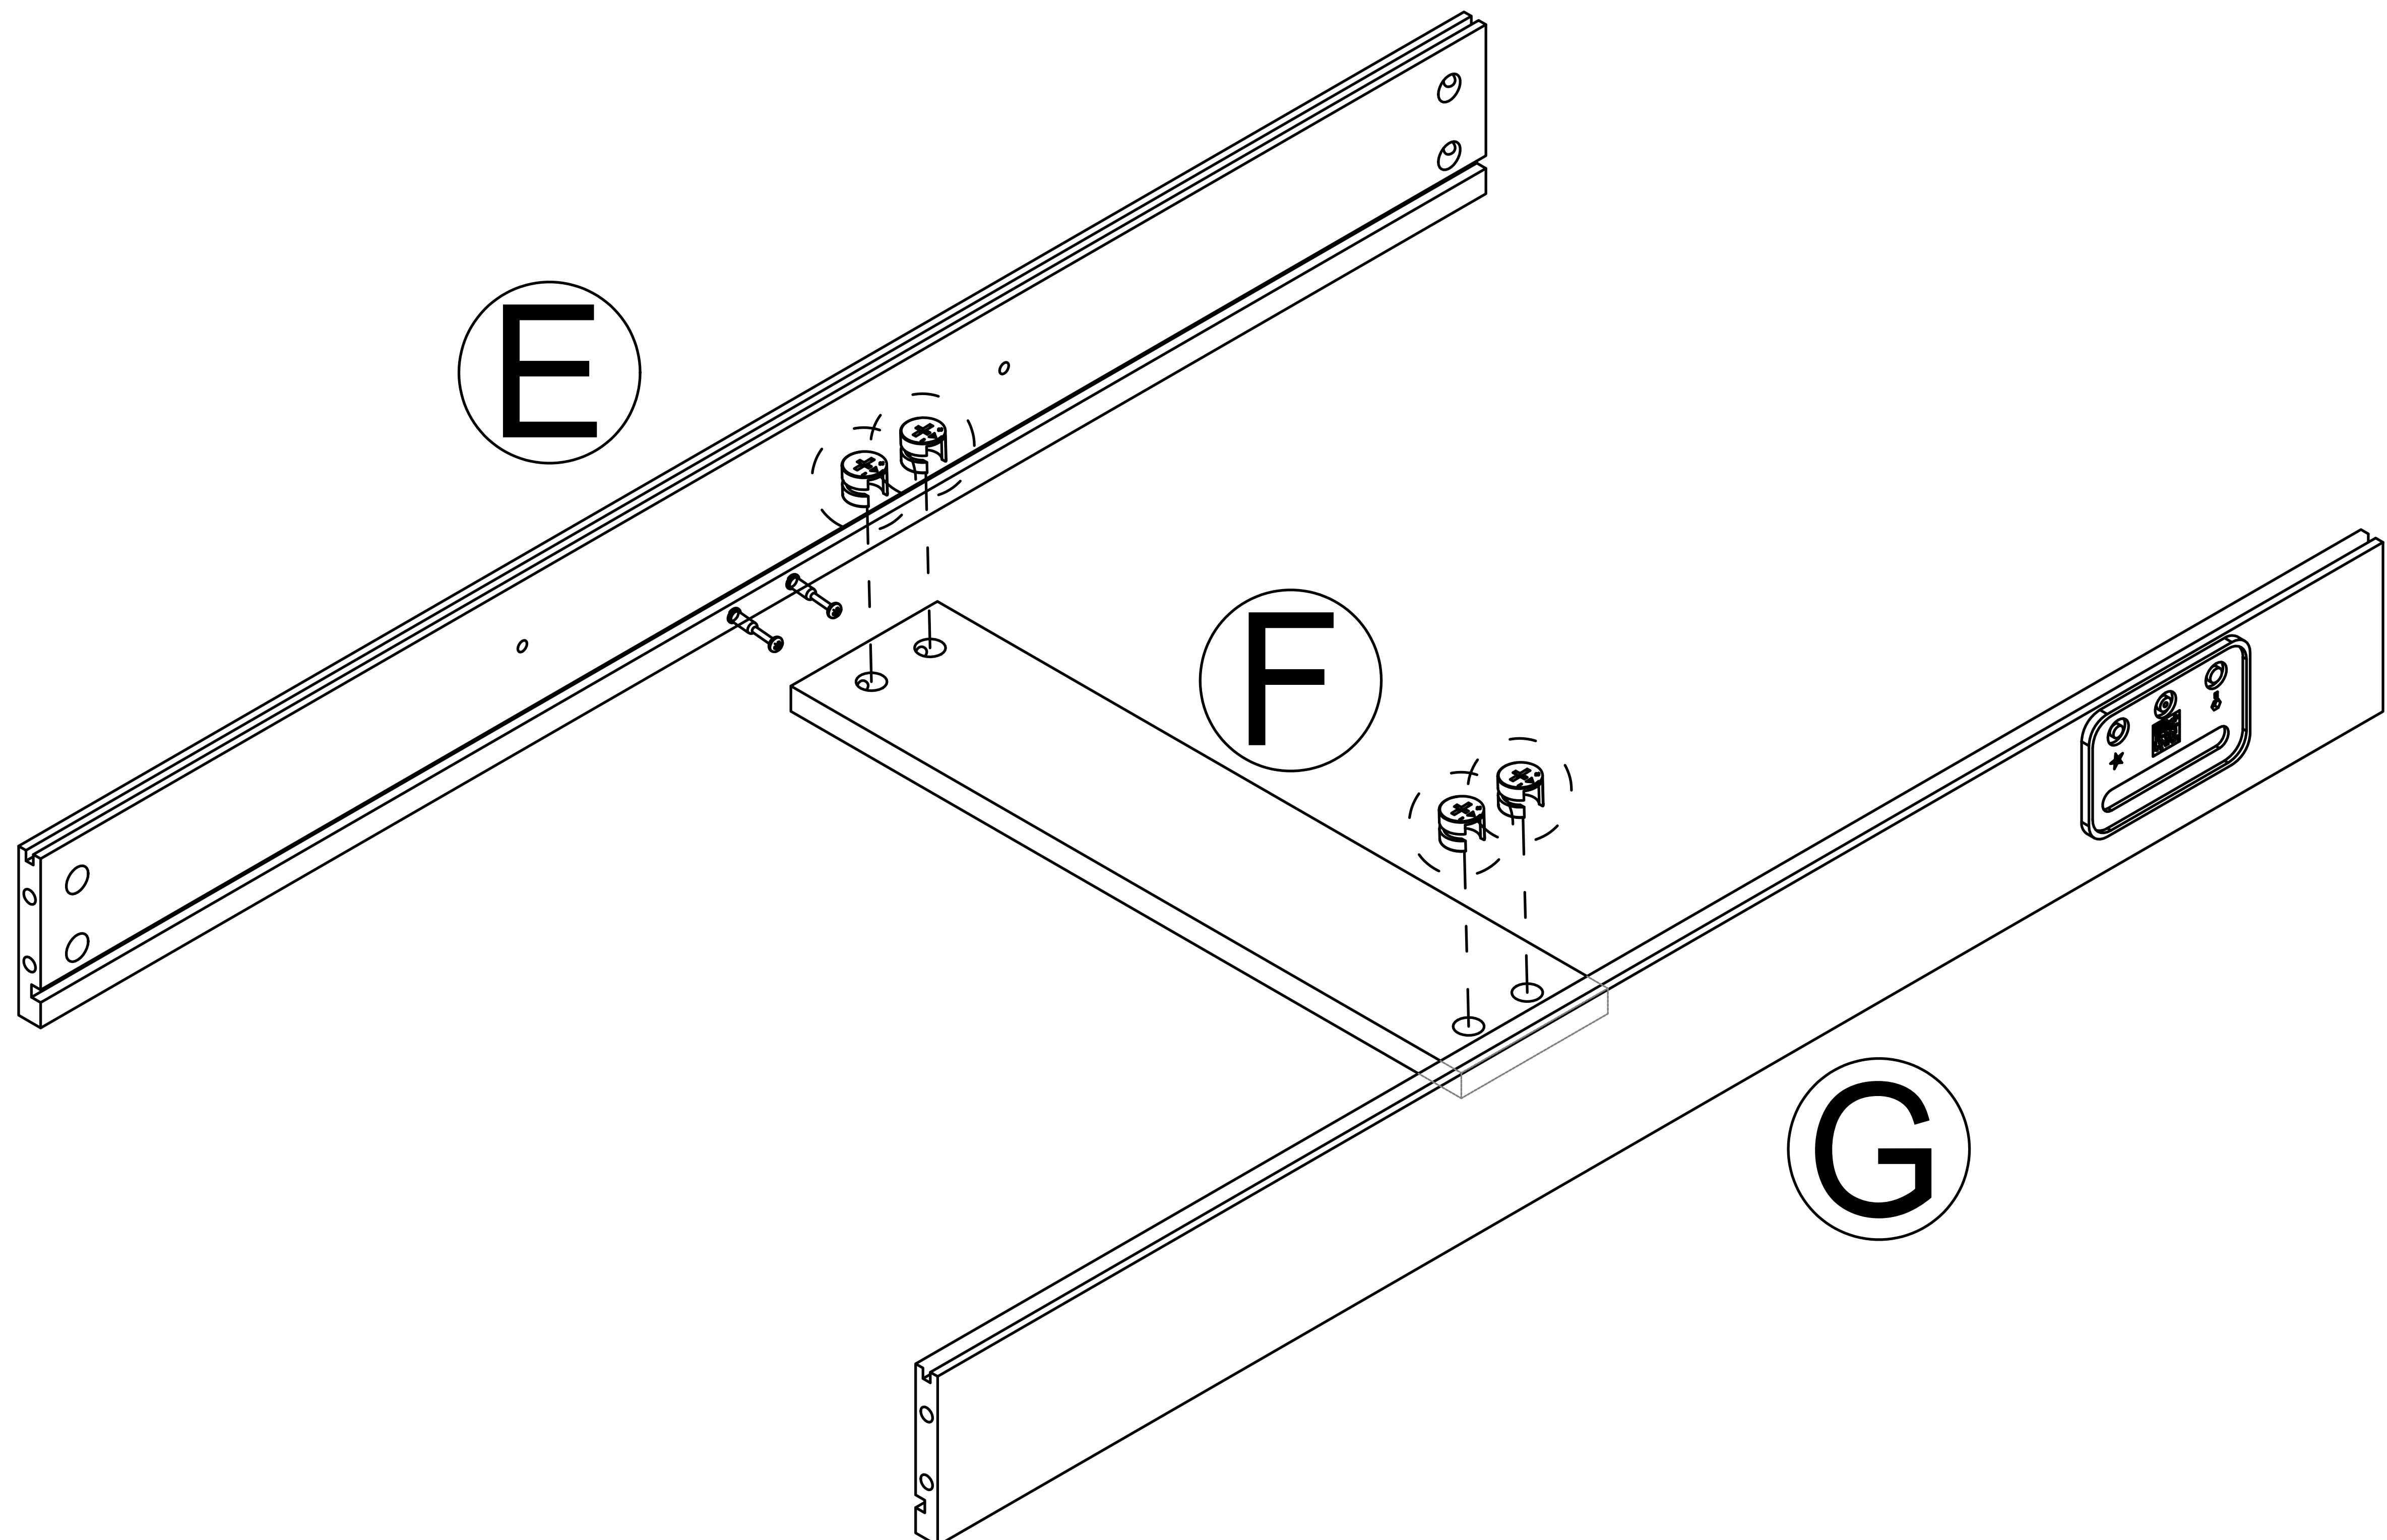

Step 12


2

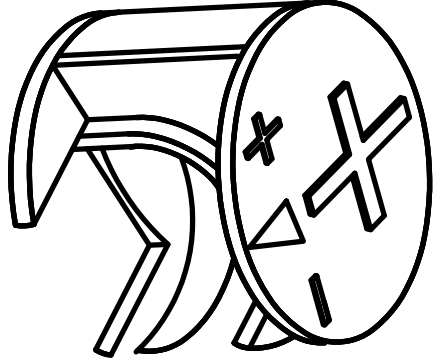
 x4

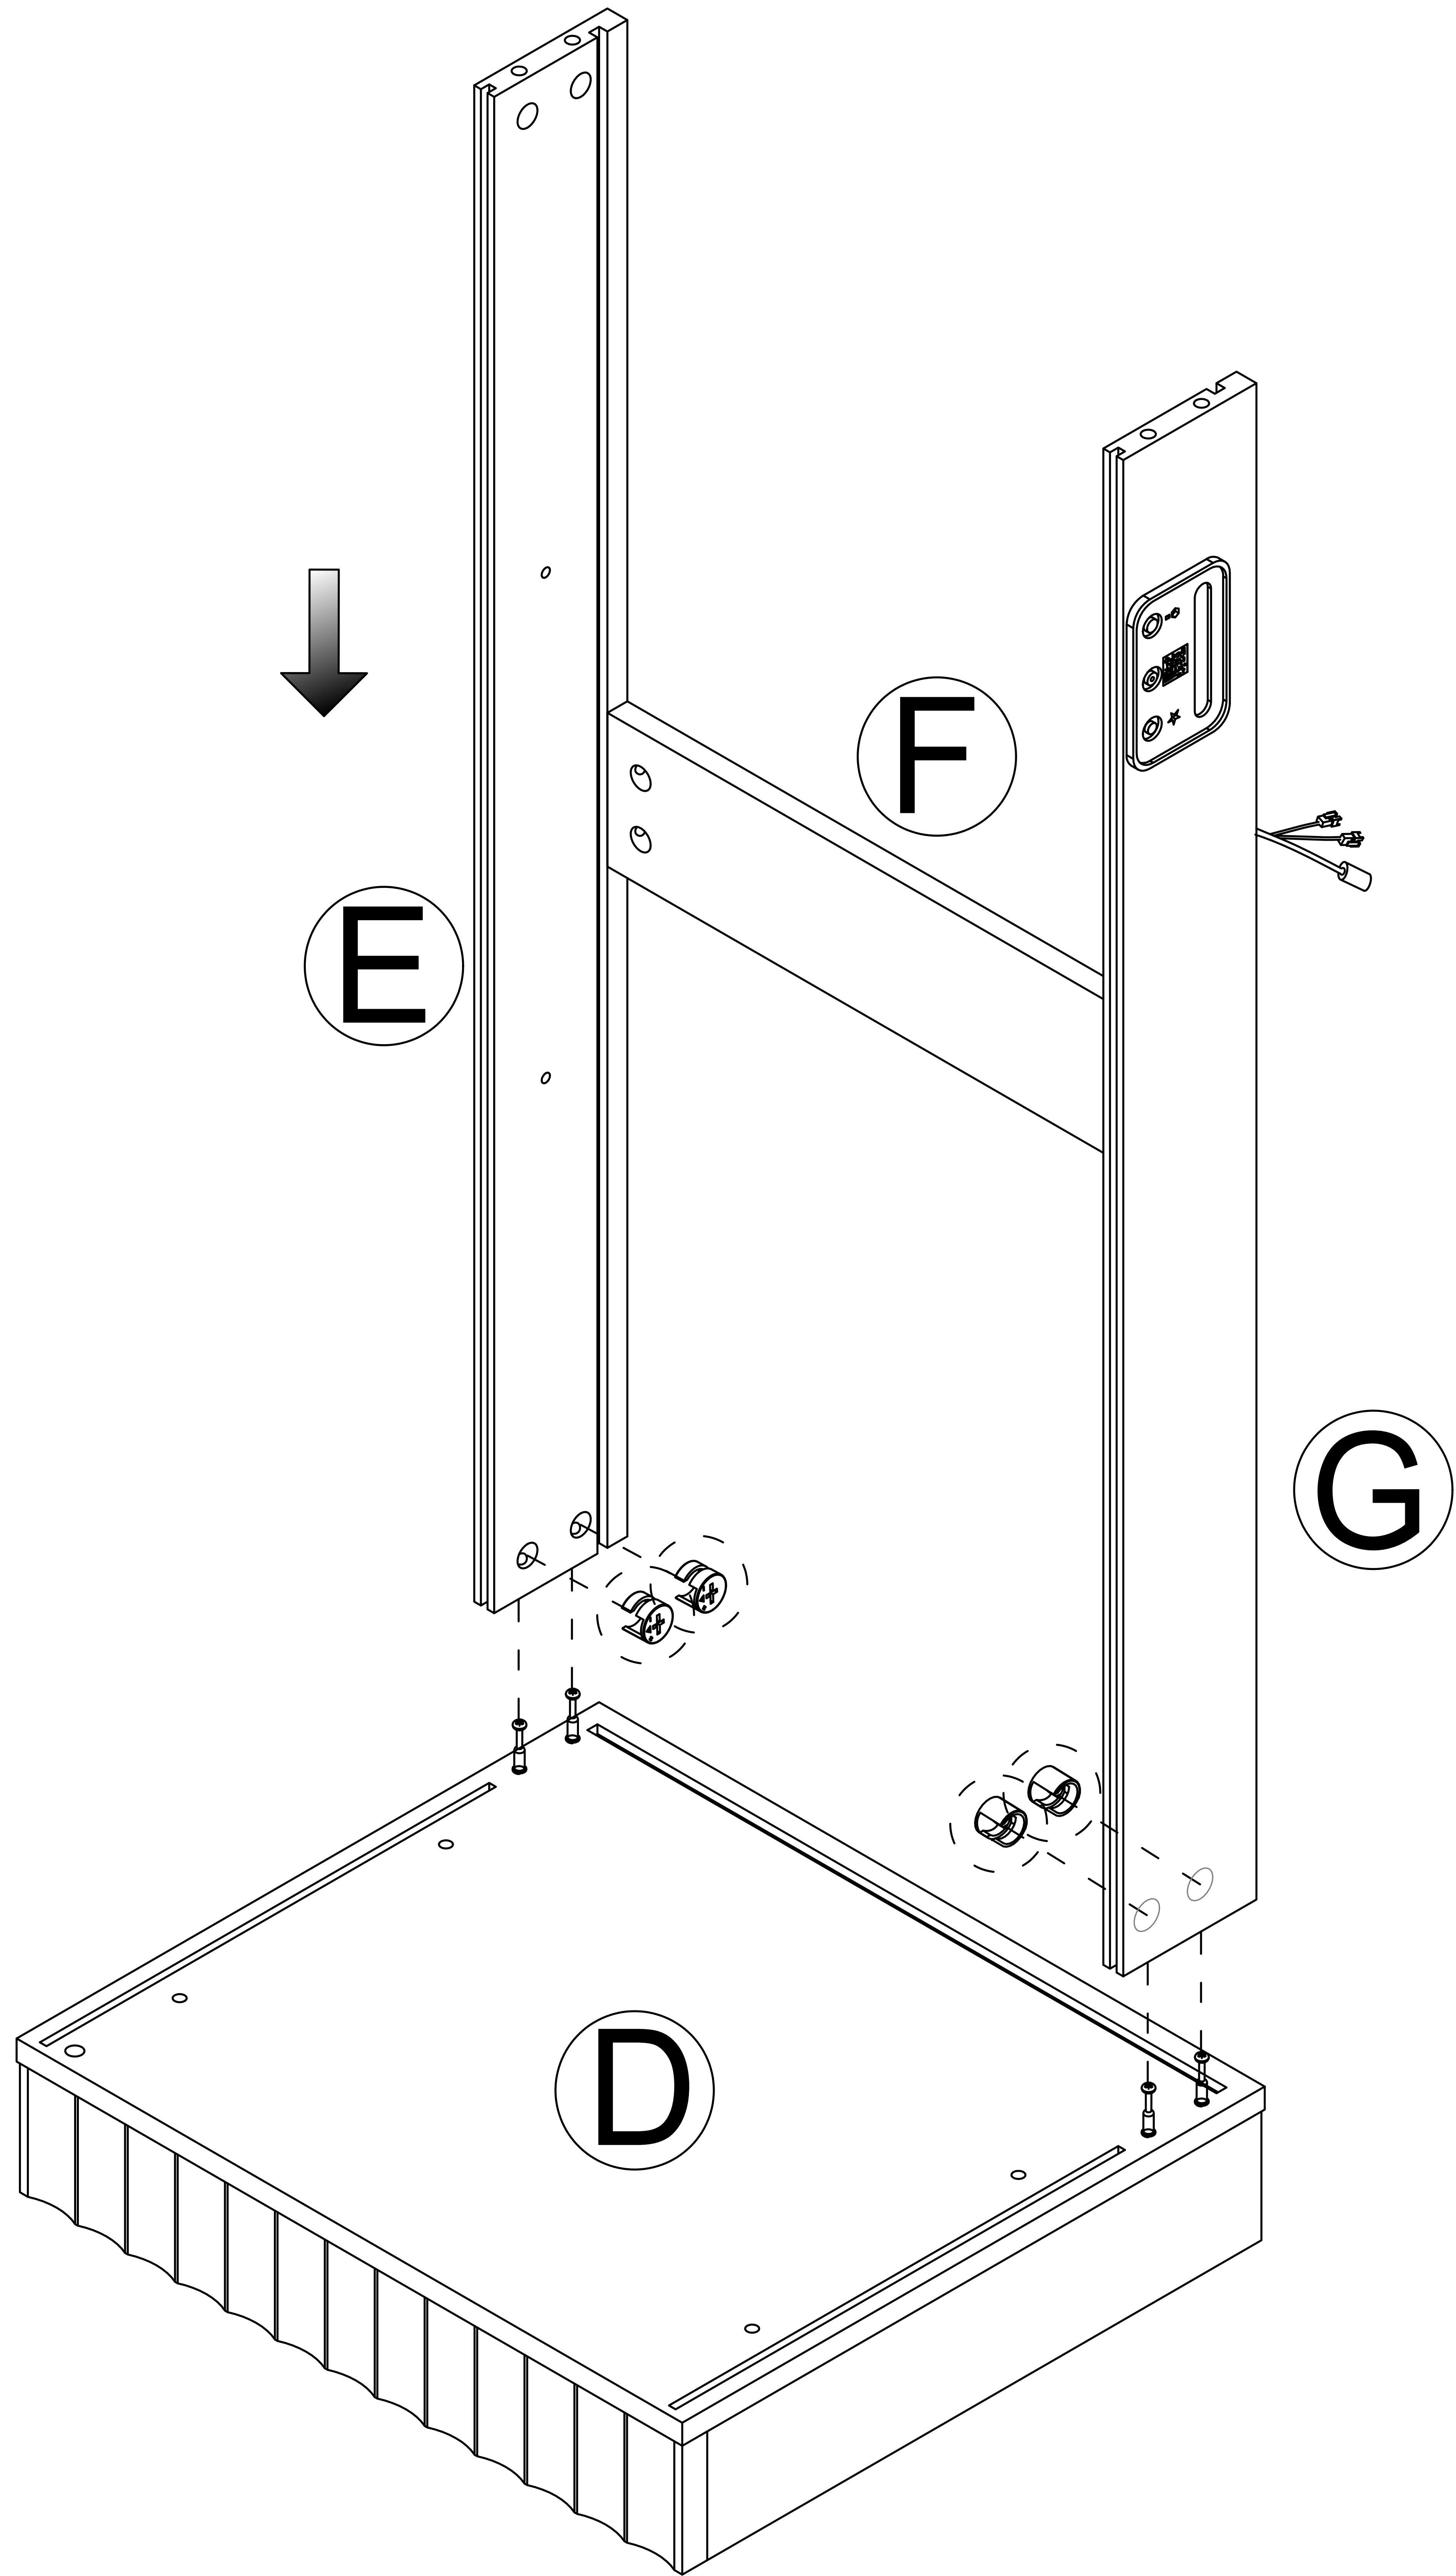

Step 13


2

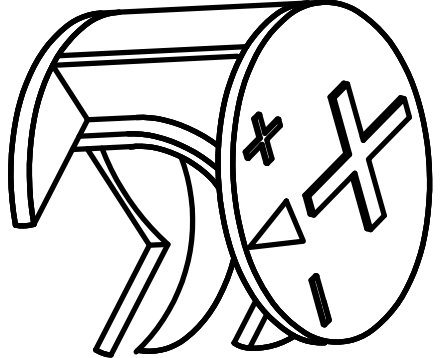 x4

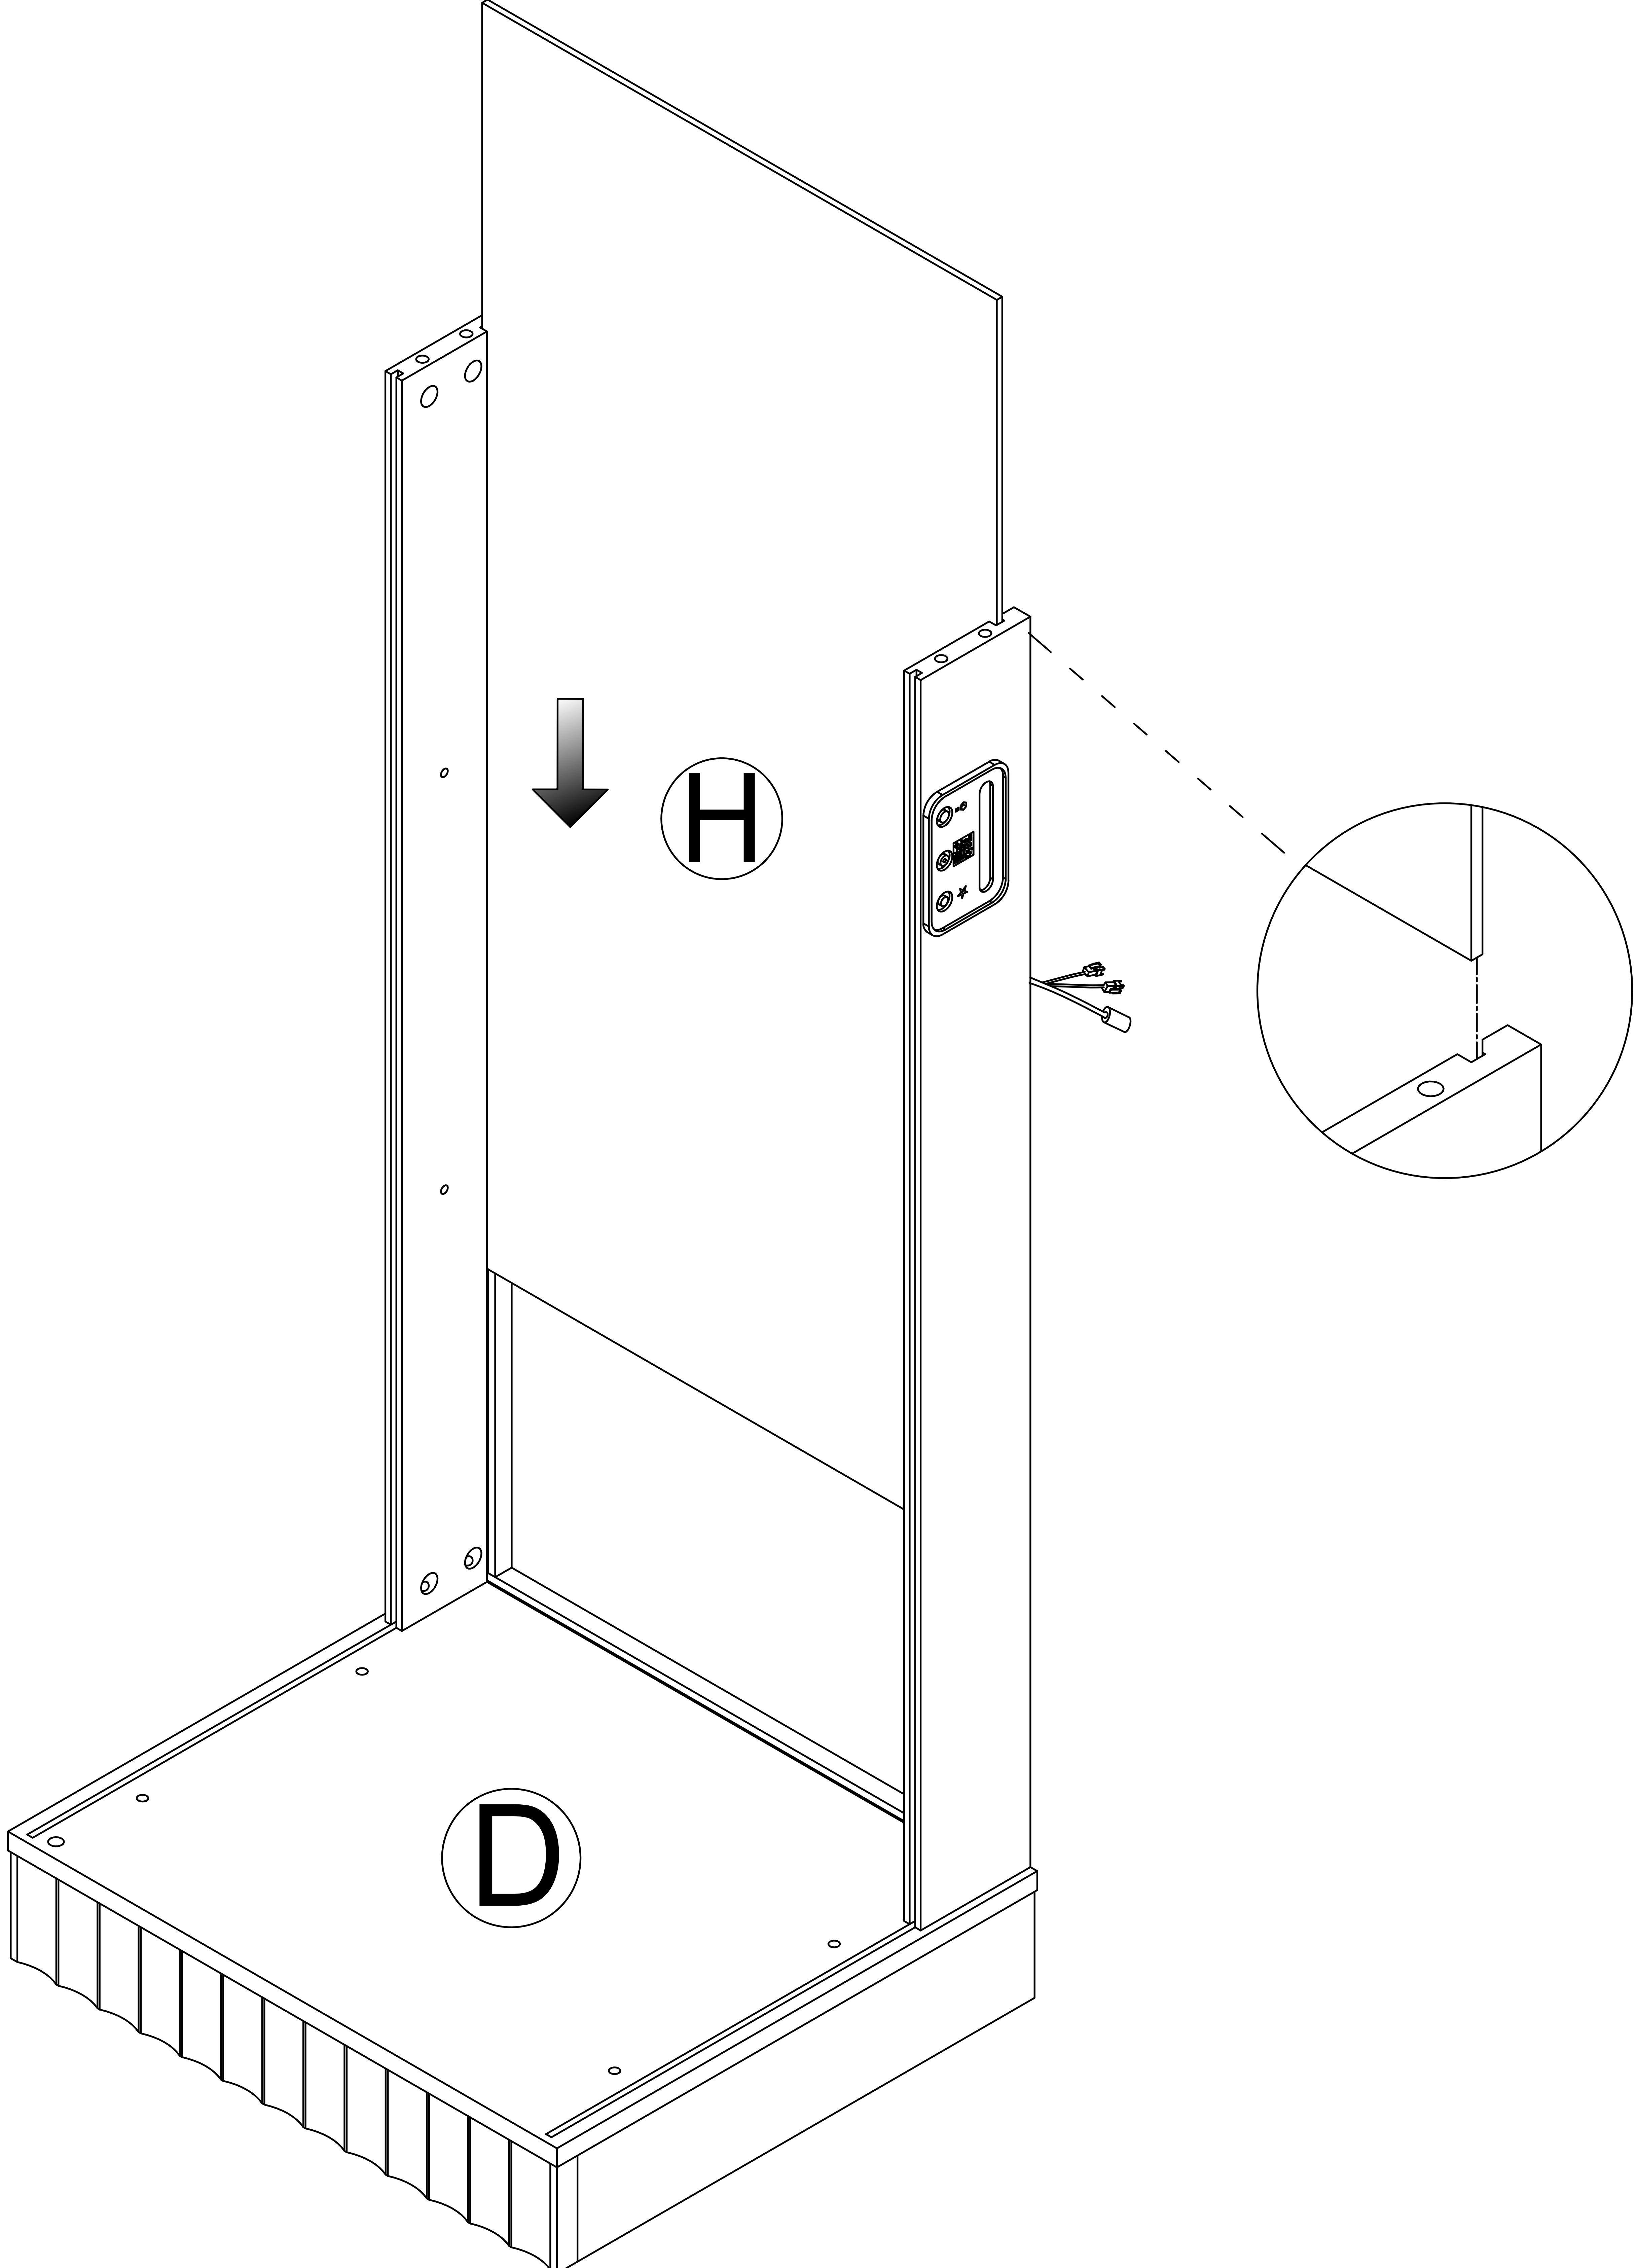

Step 14


4






x4



x8





x4

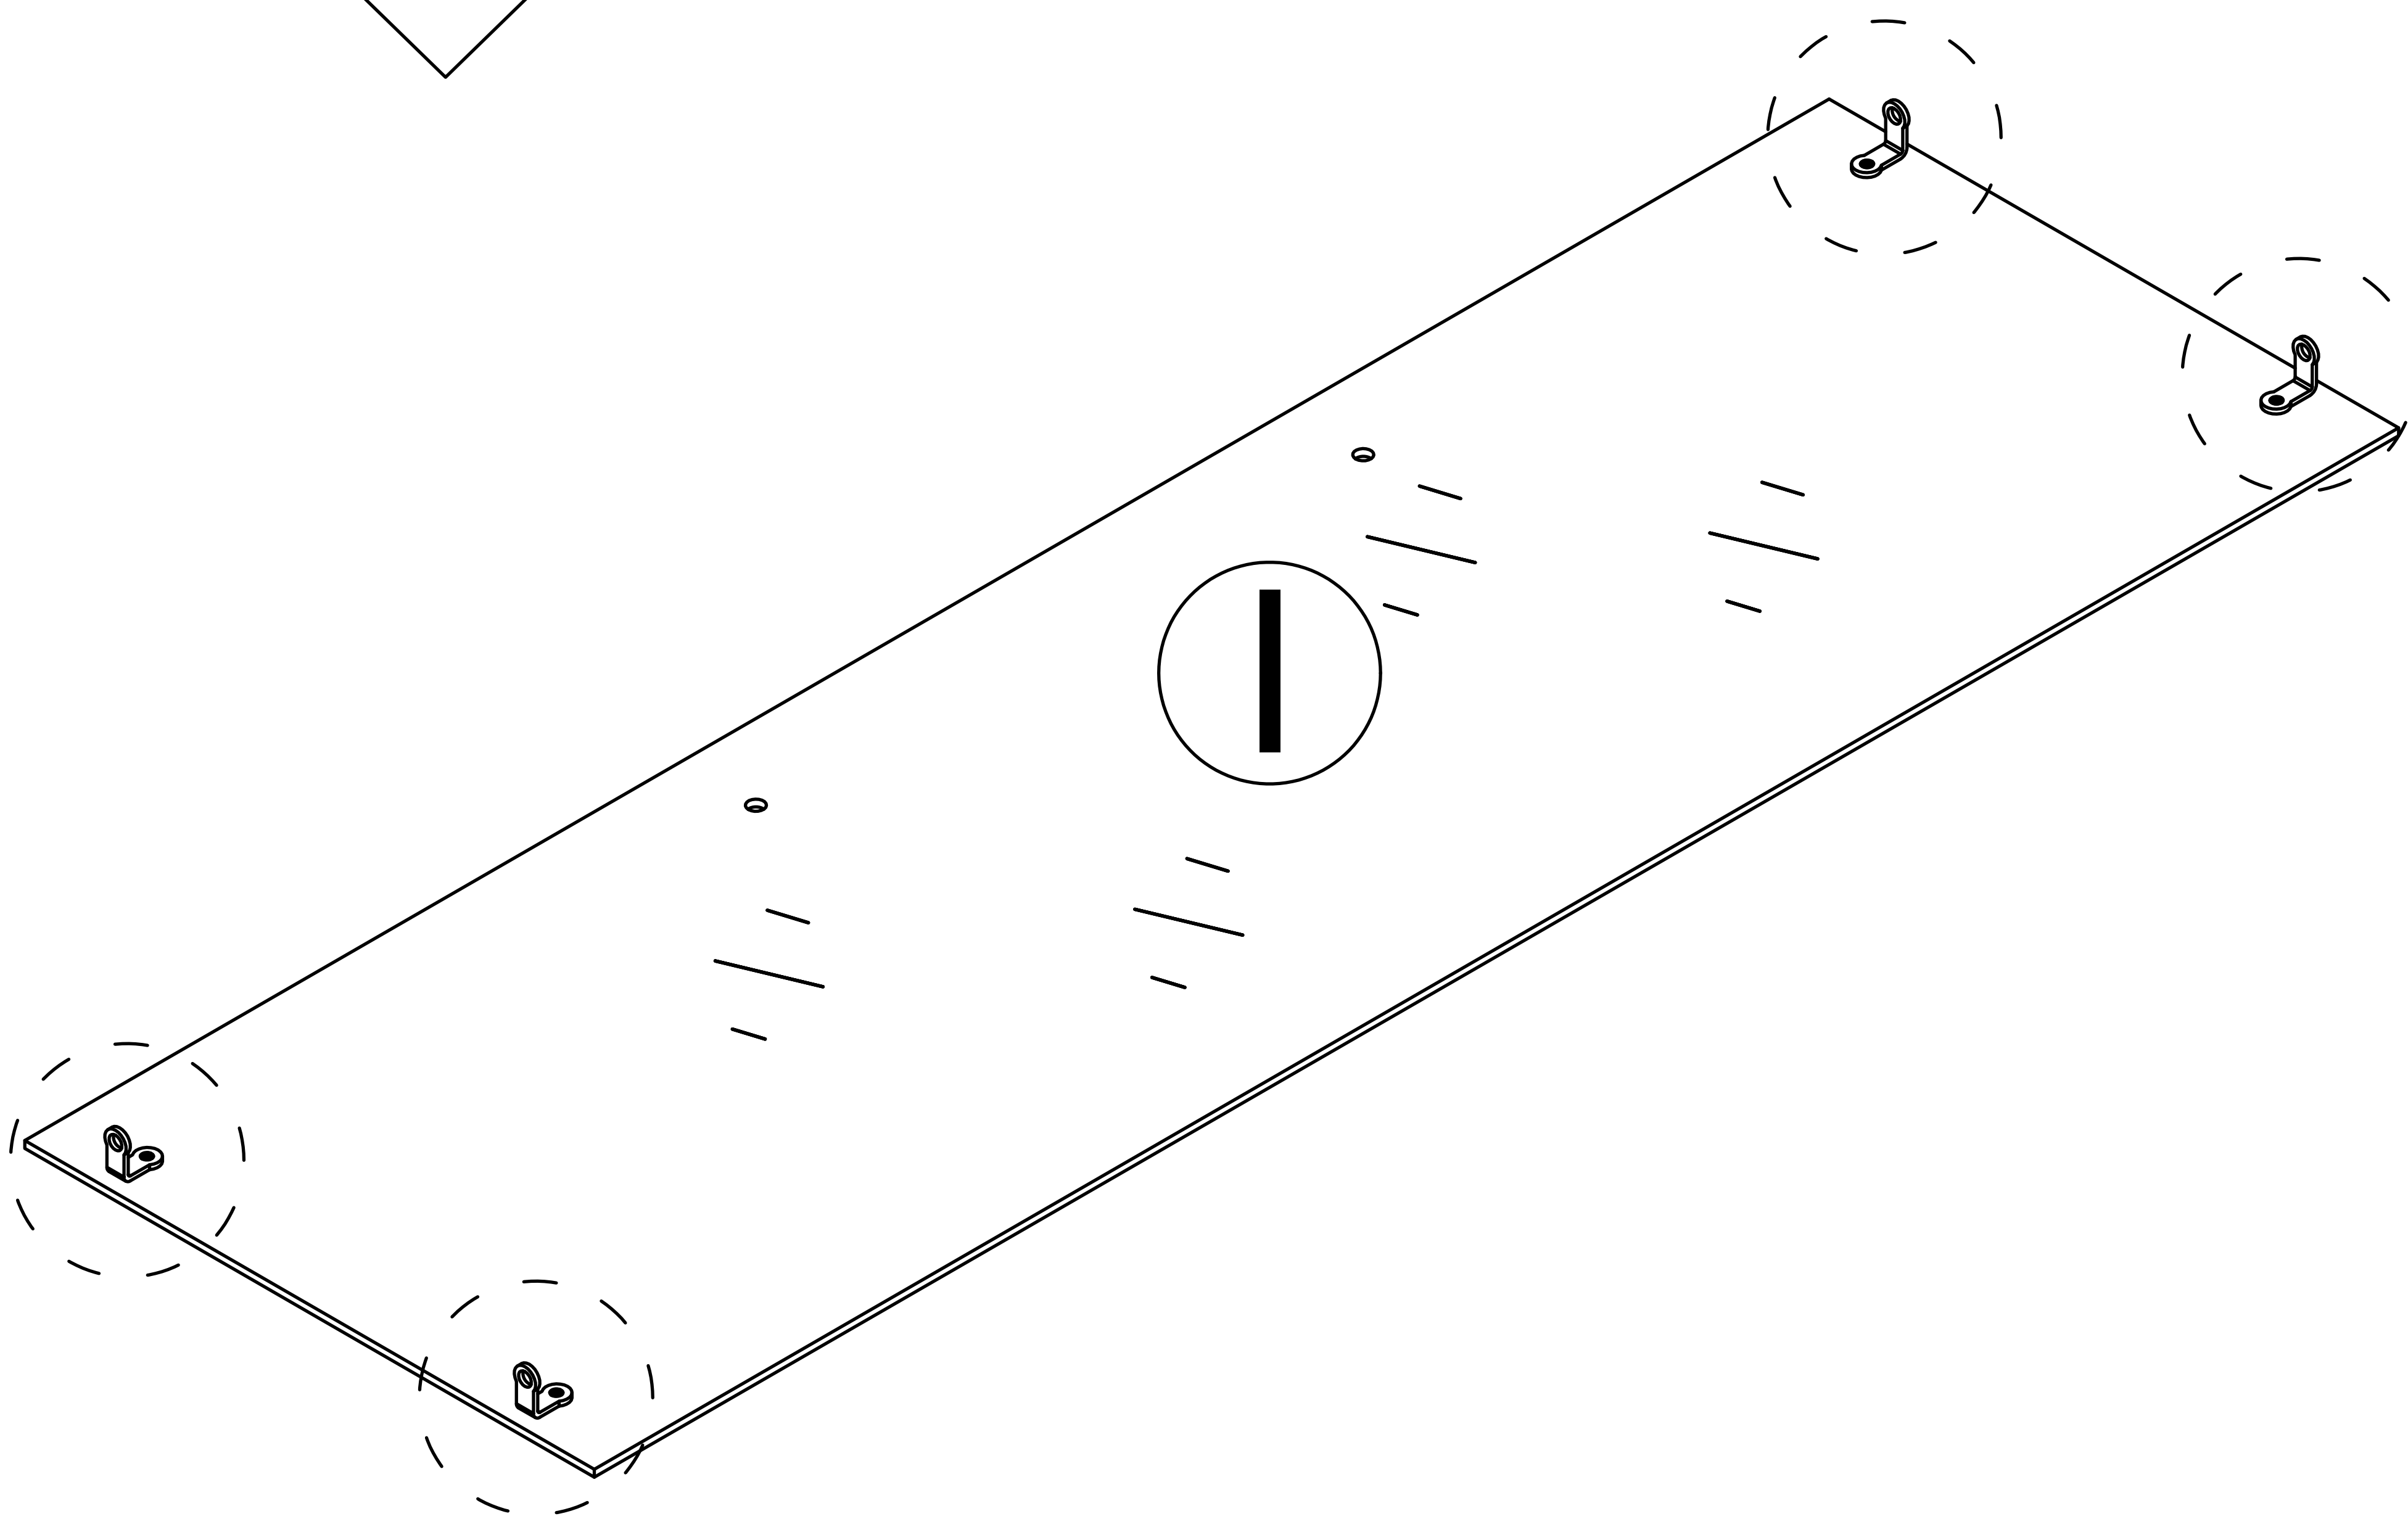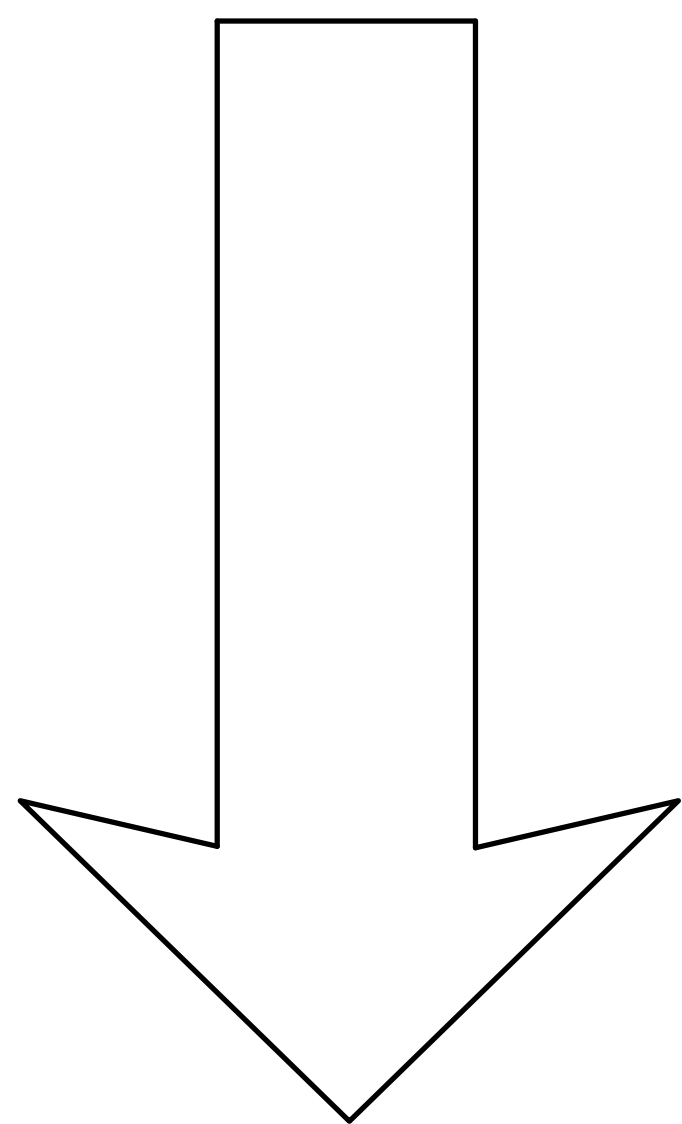
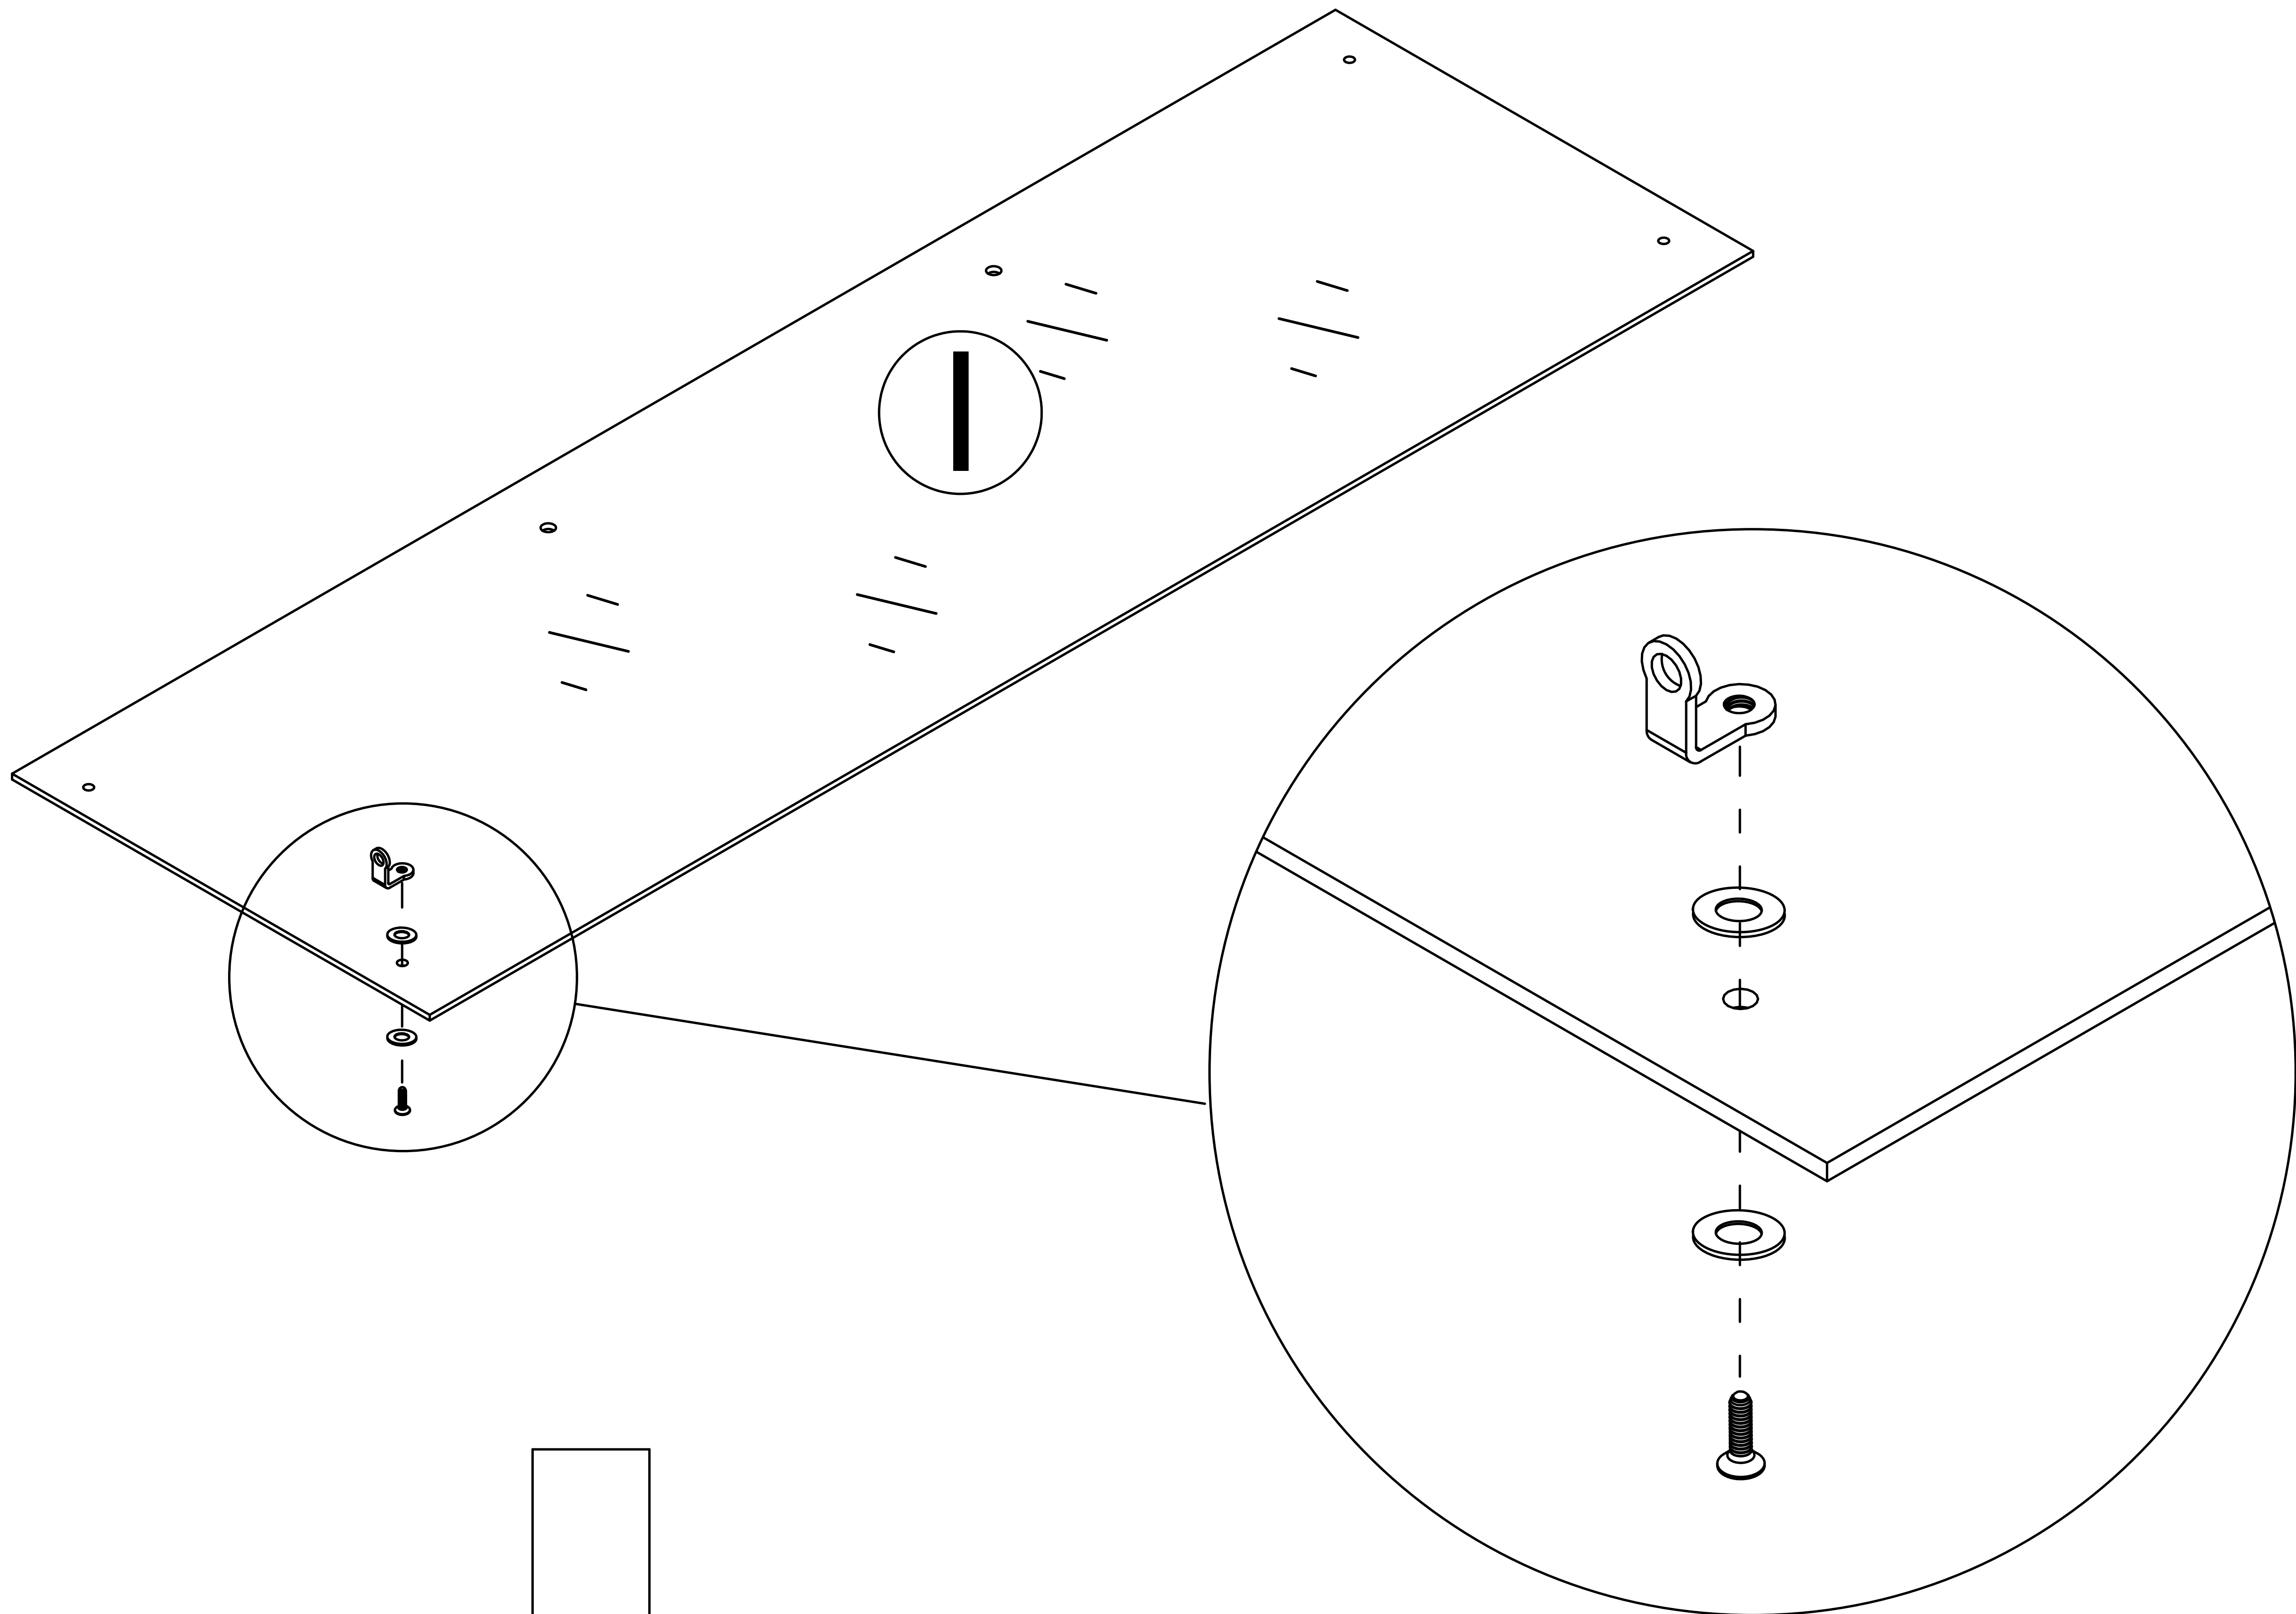


Step 15

5

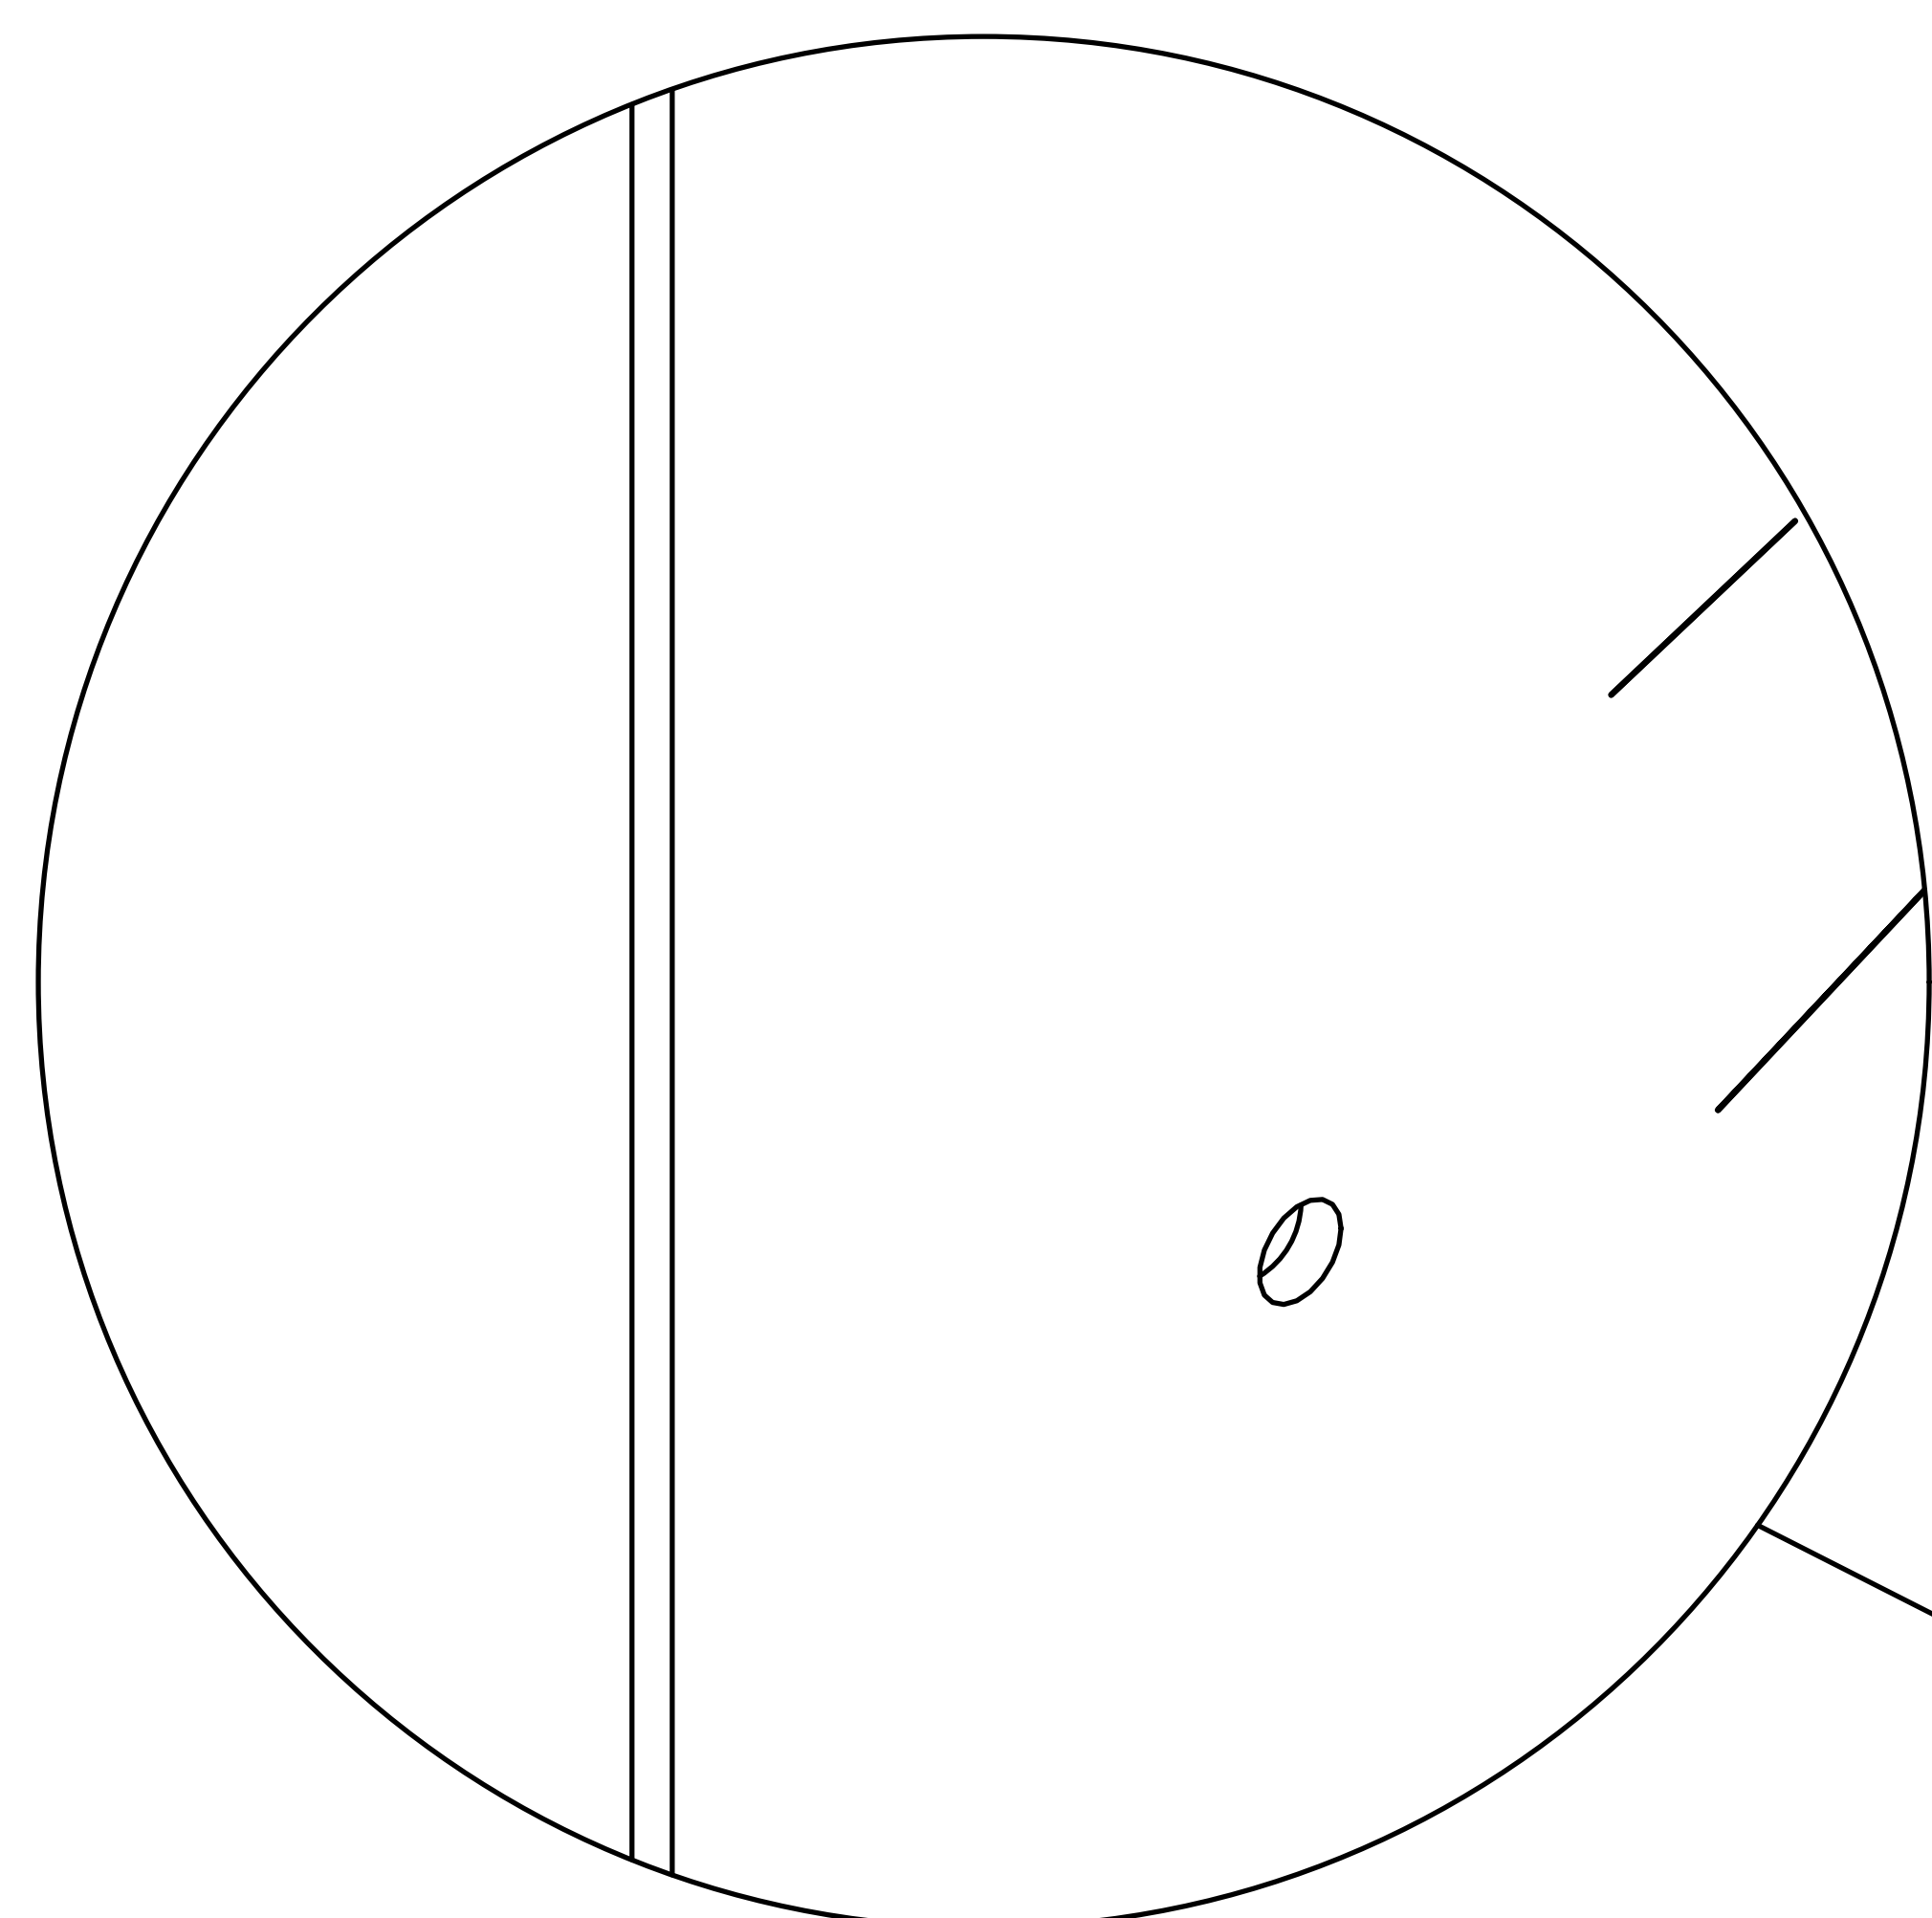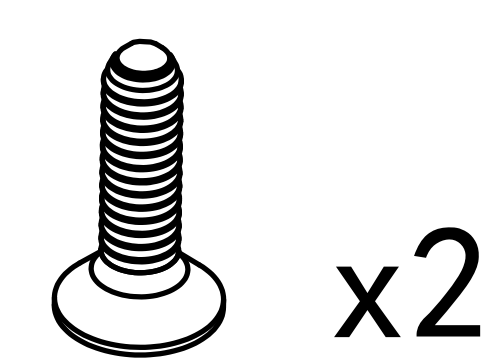


Note hole direction.

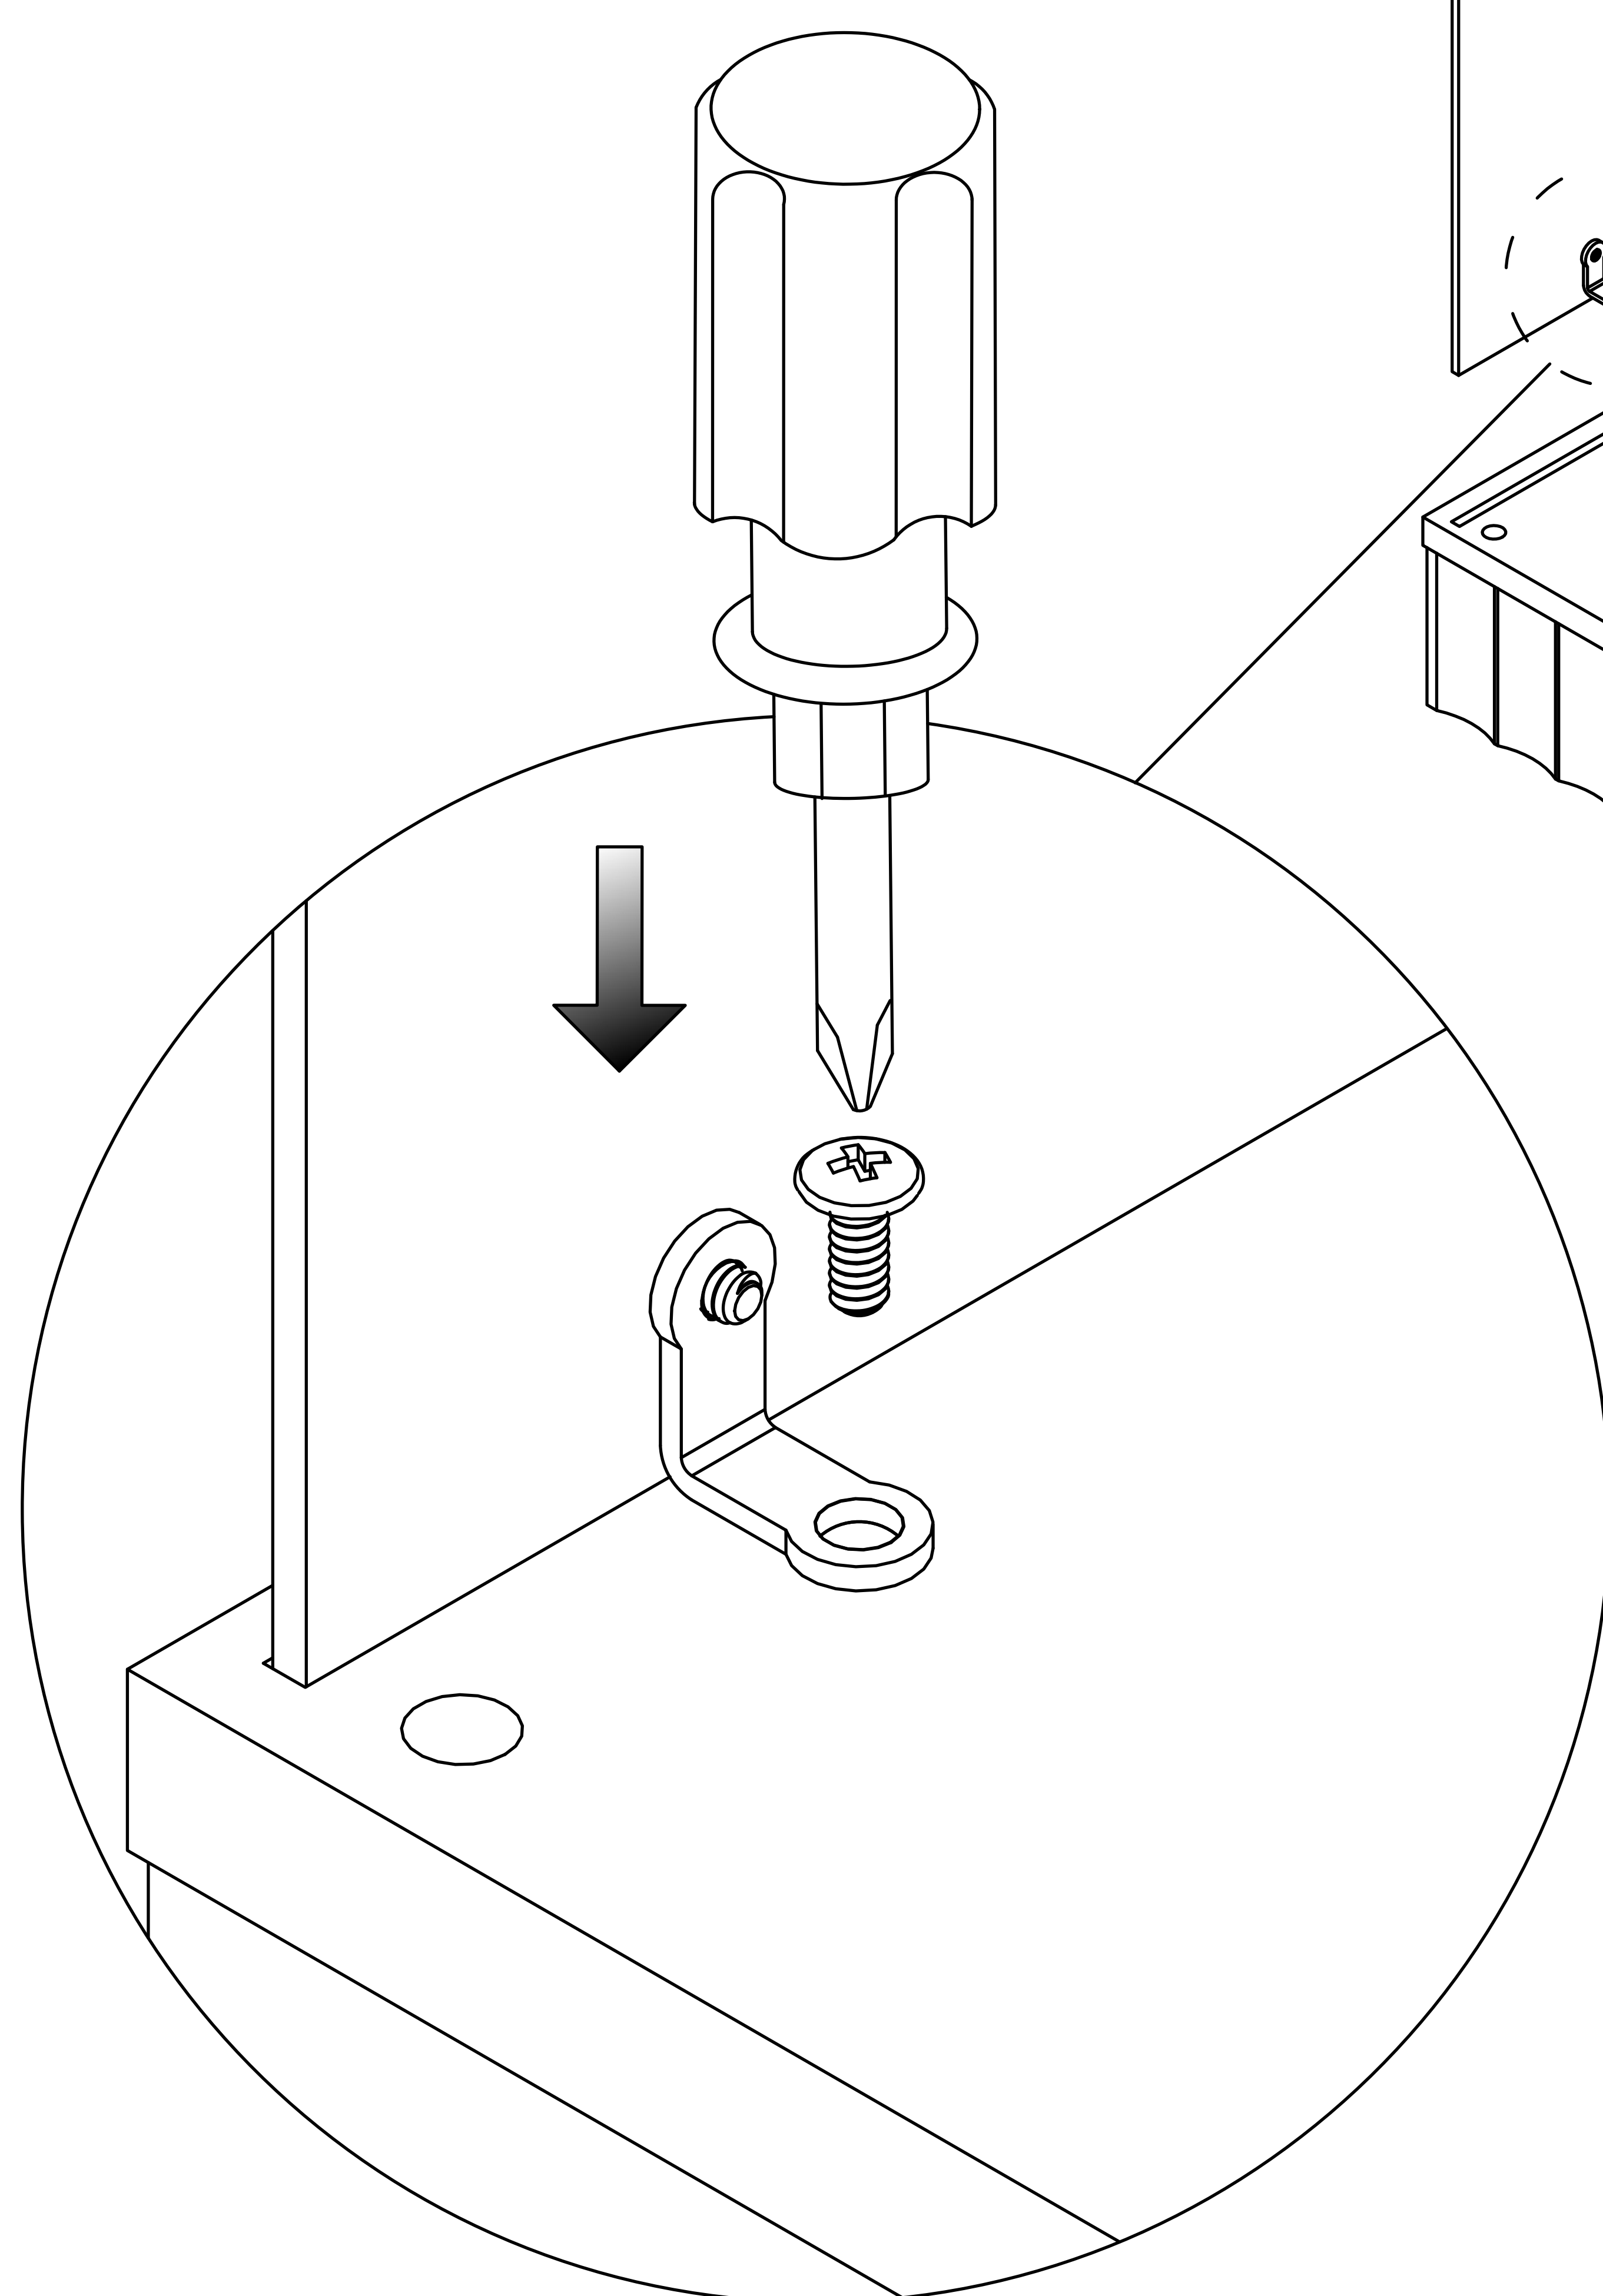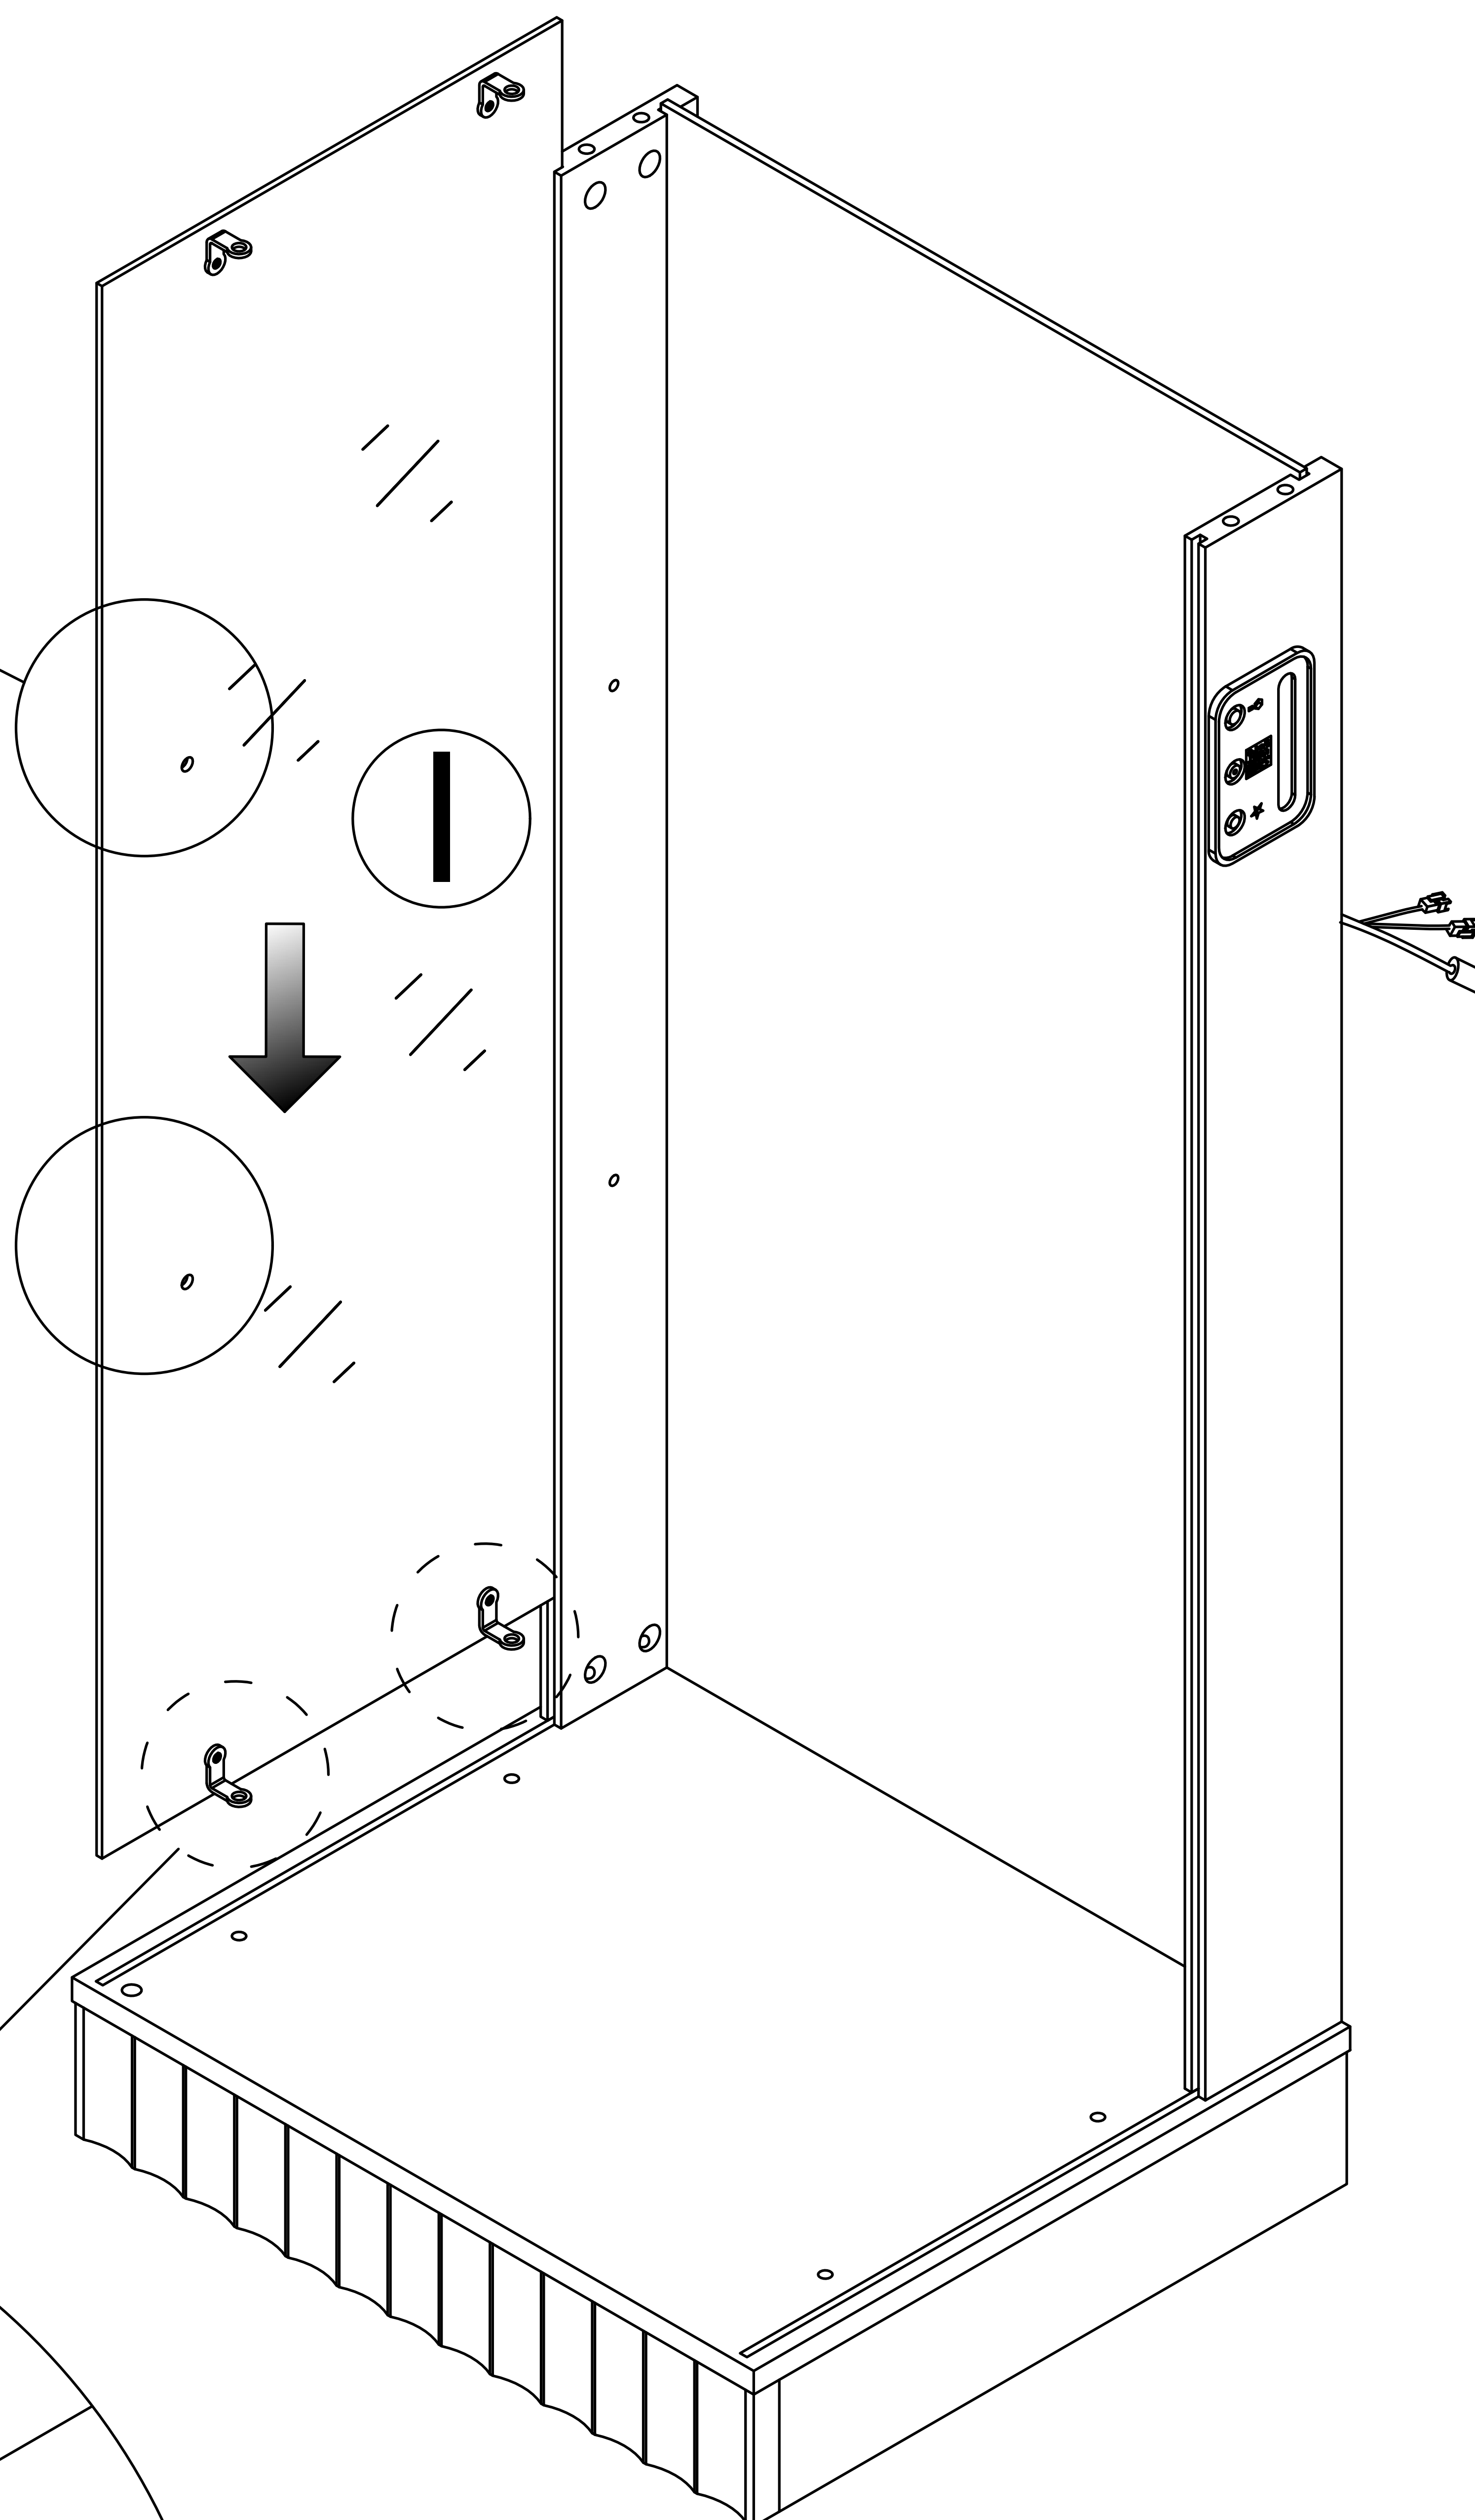


Step 16


4





x4



x8





x4

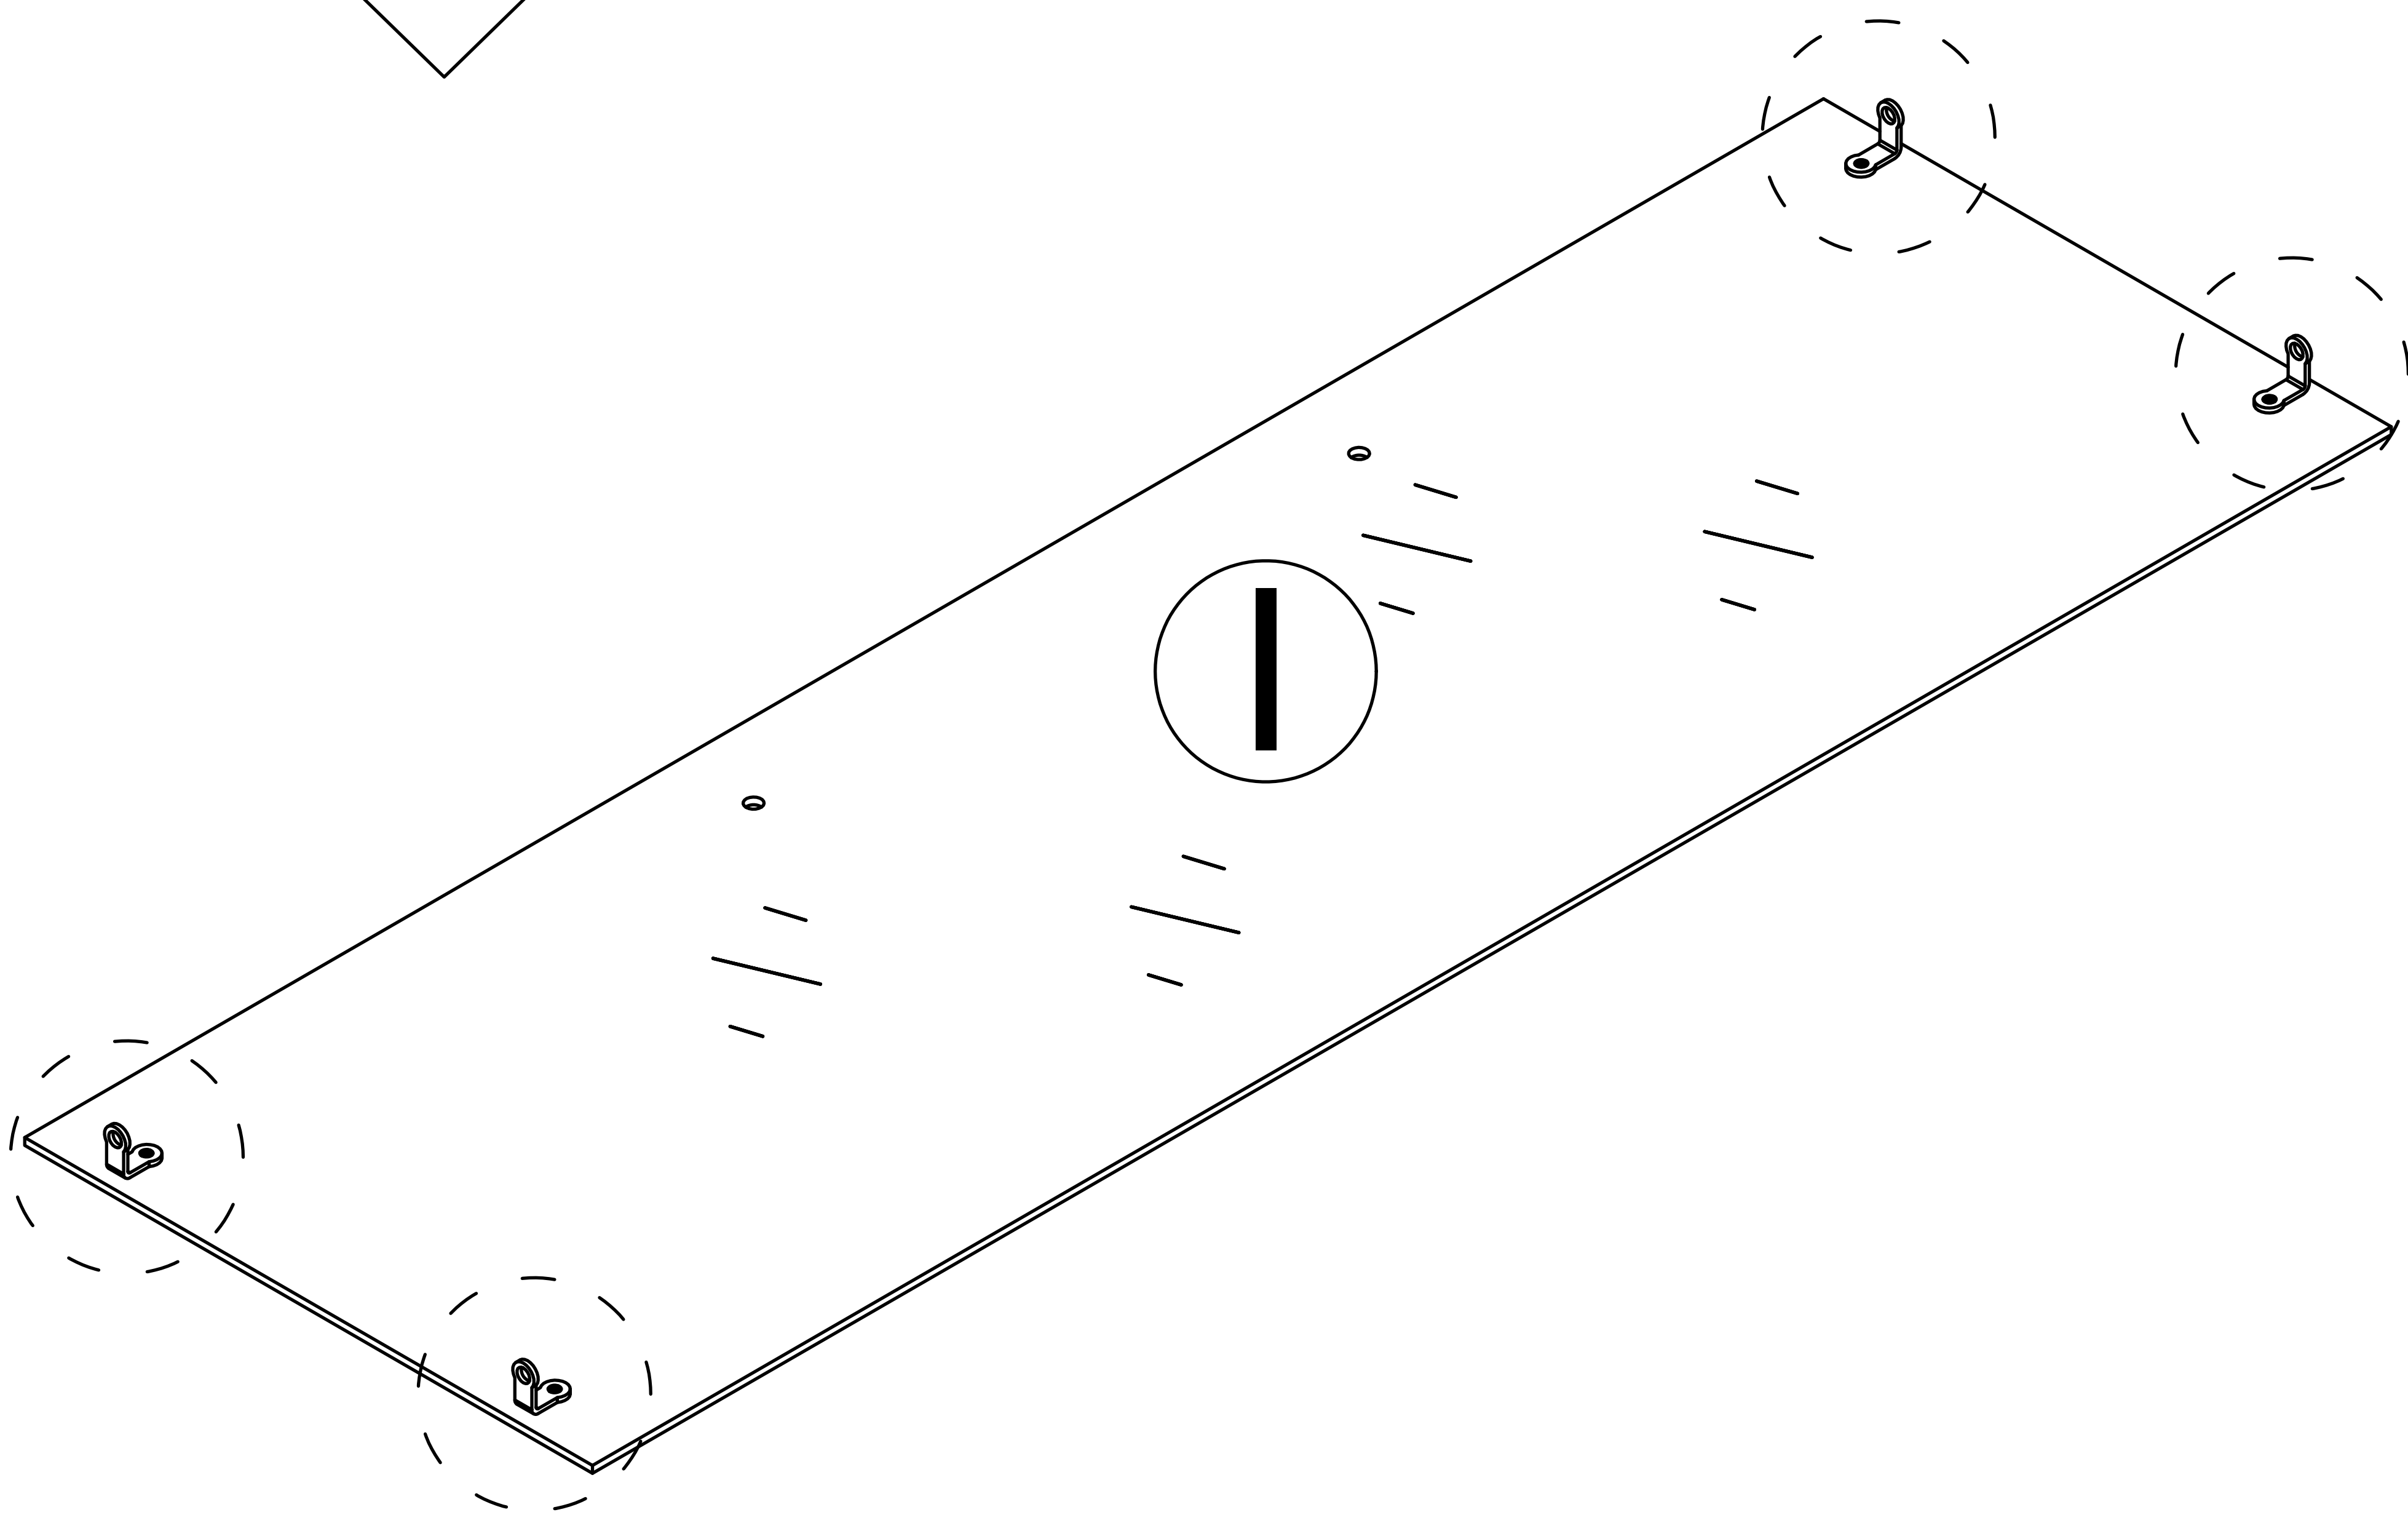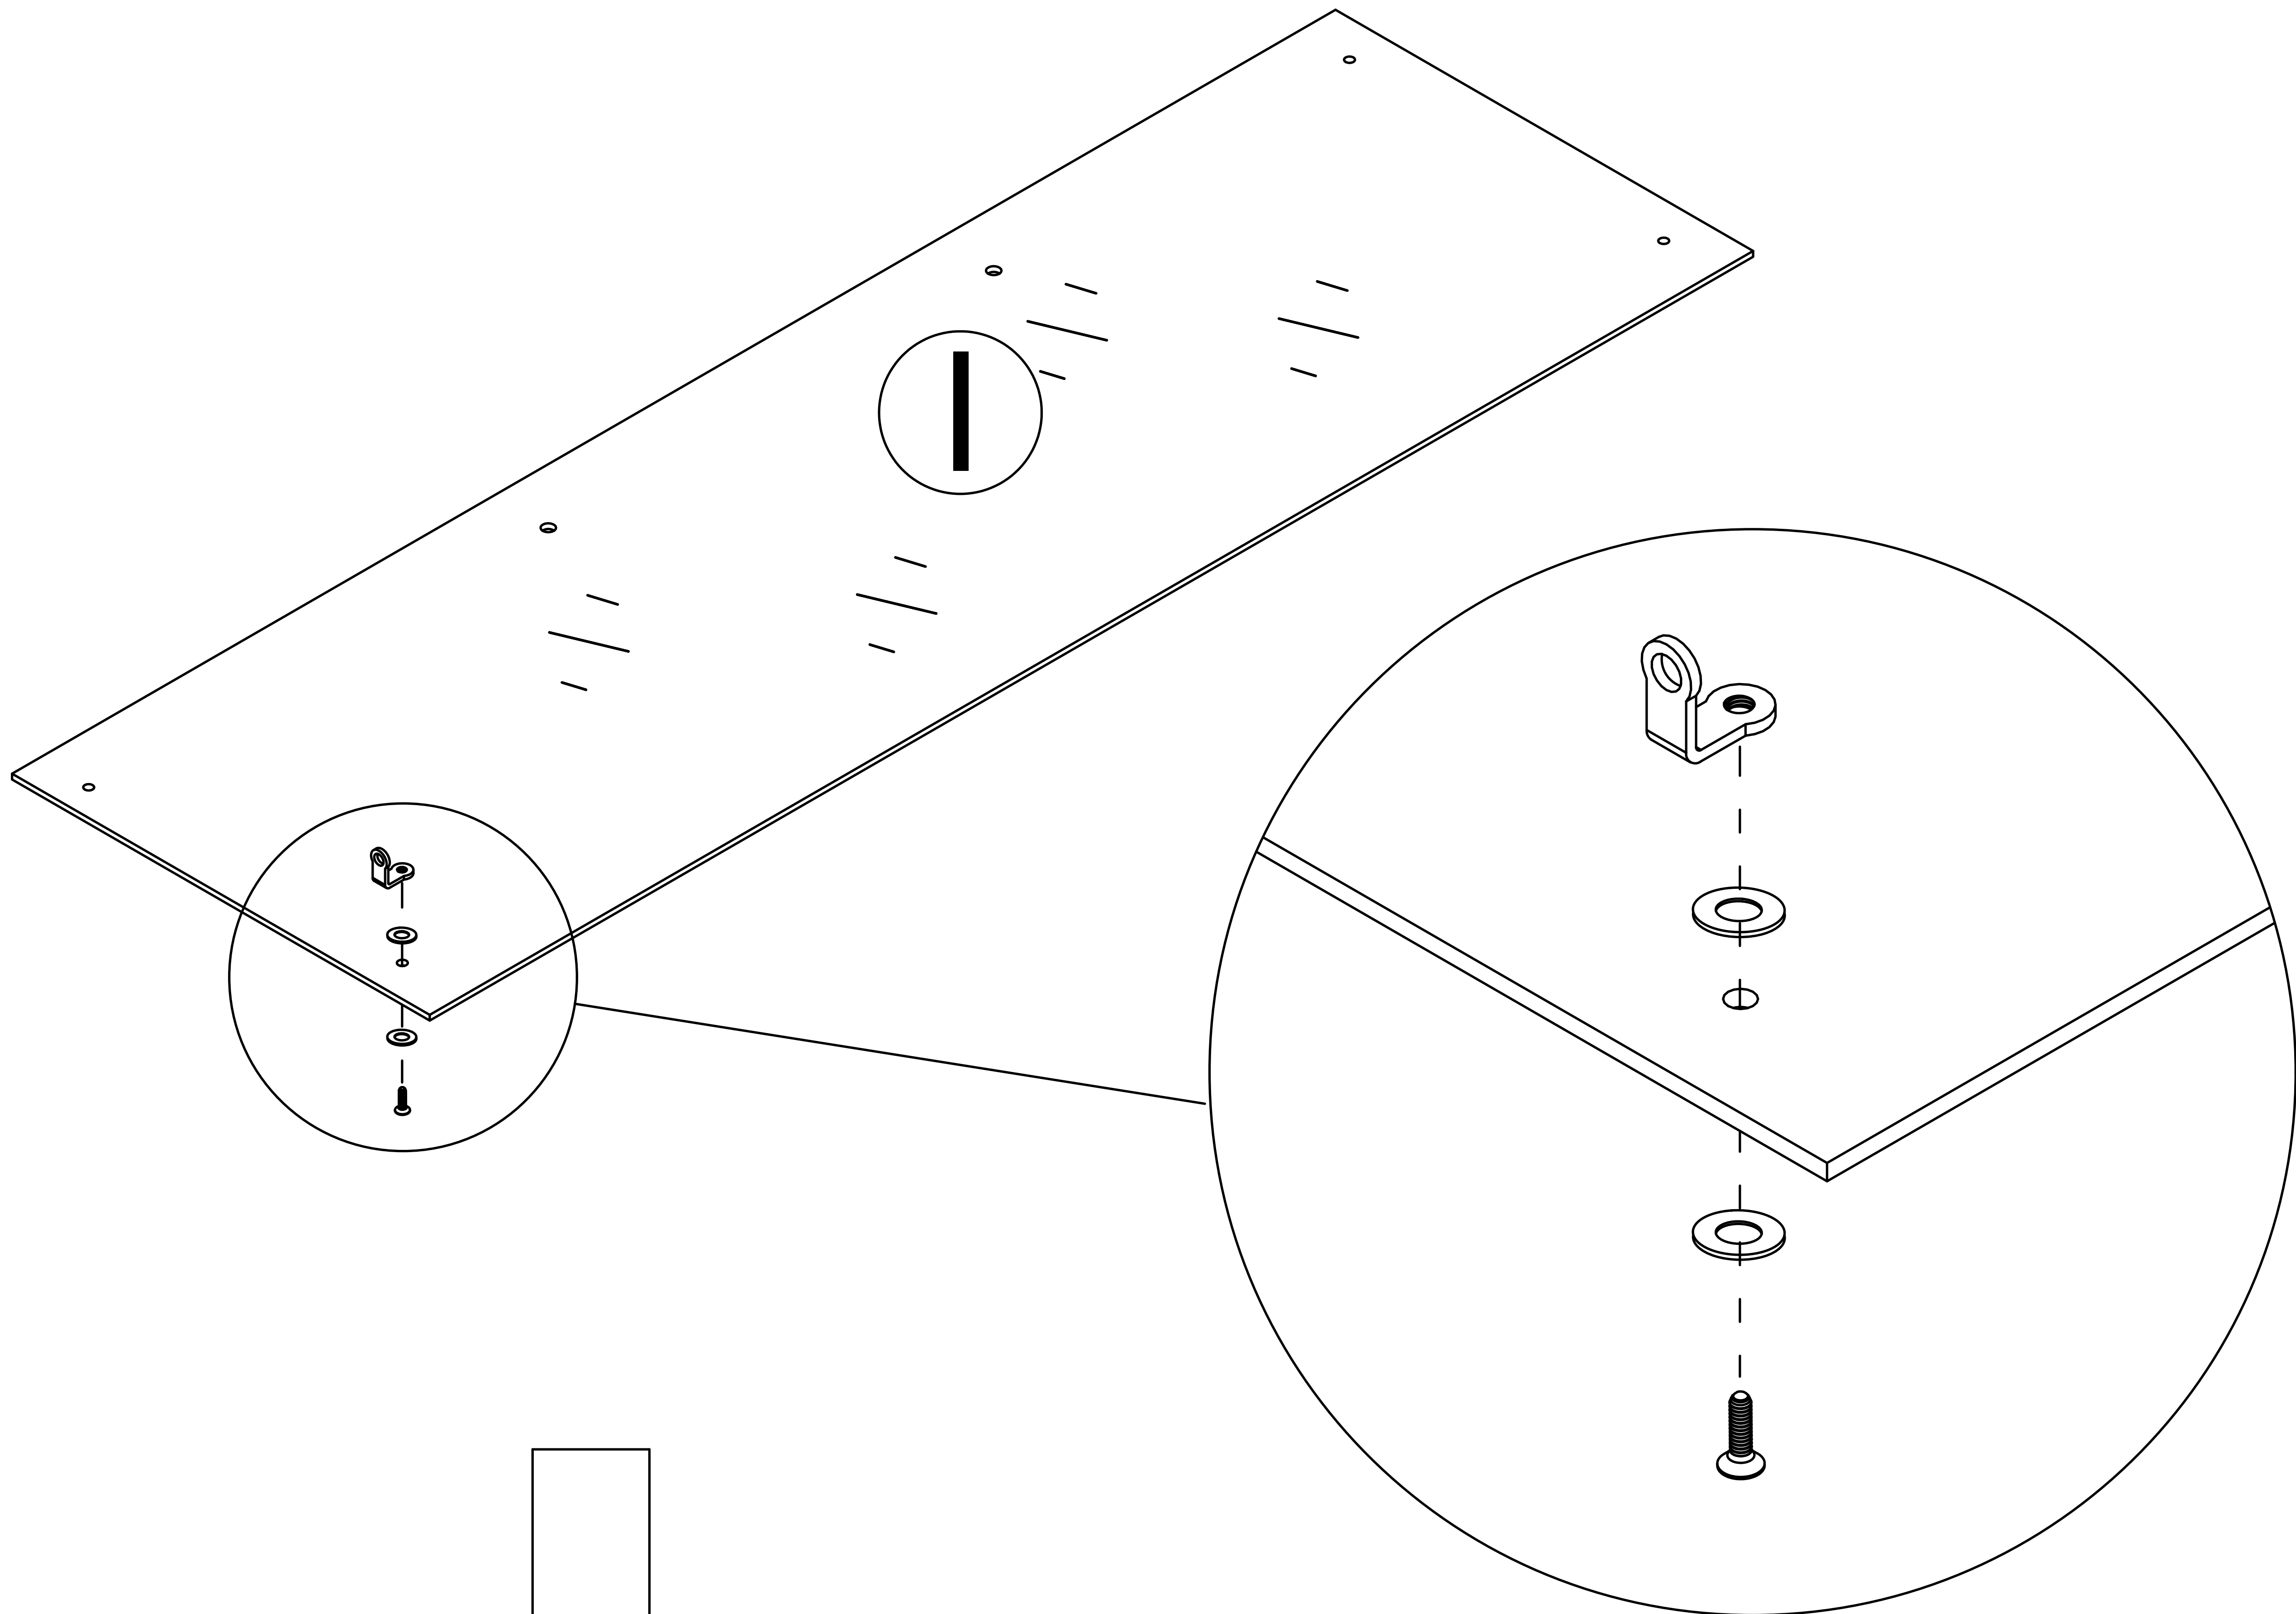


Step 17




5

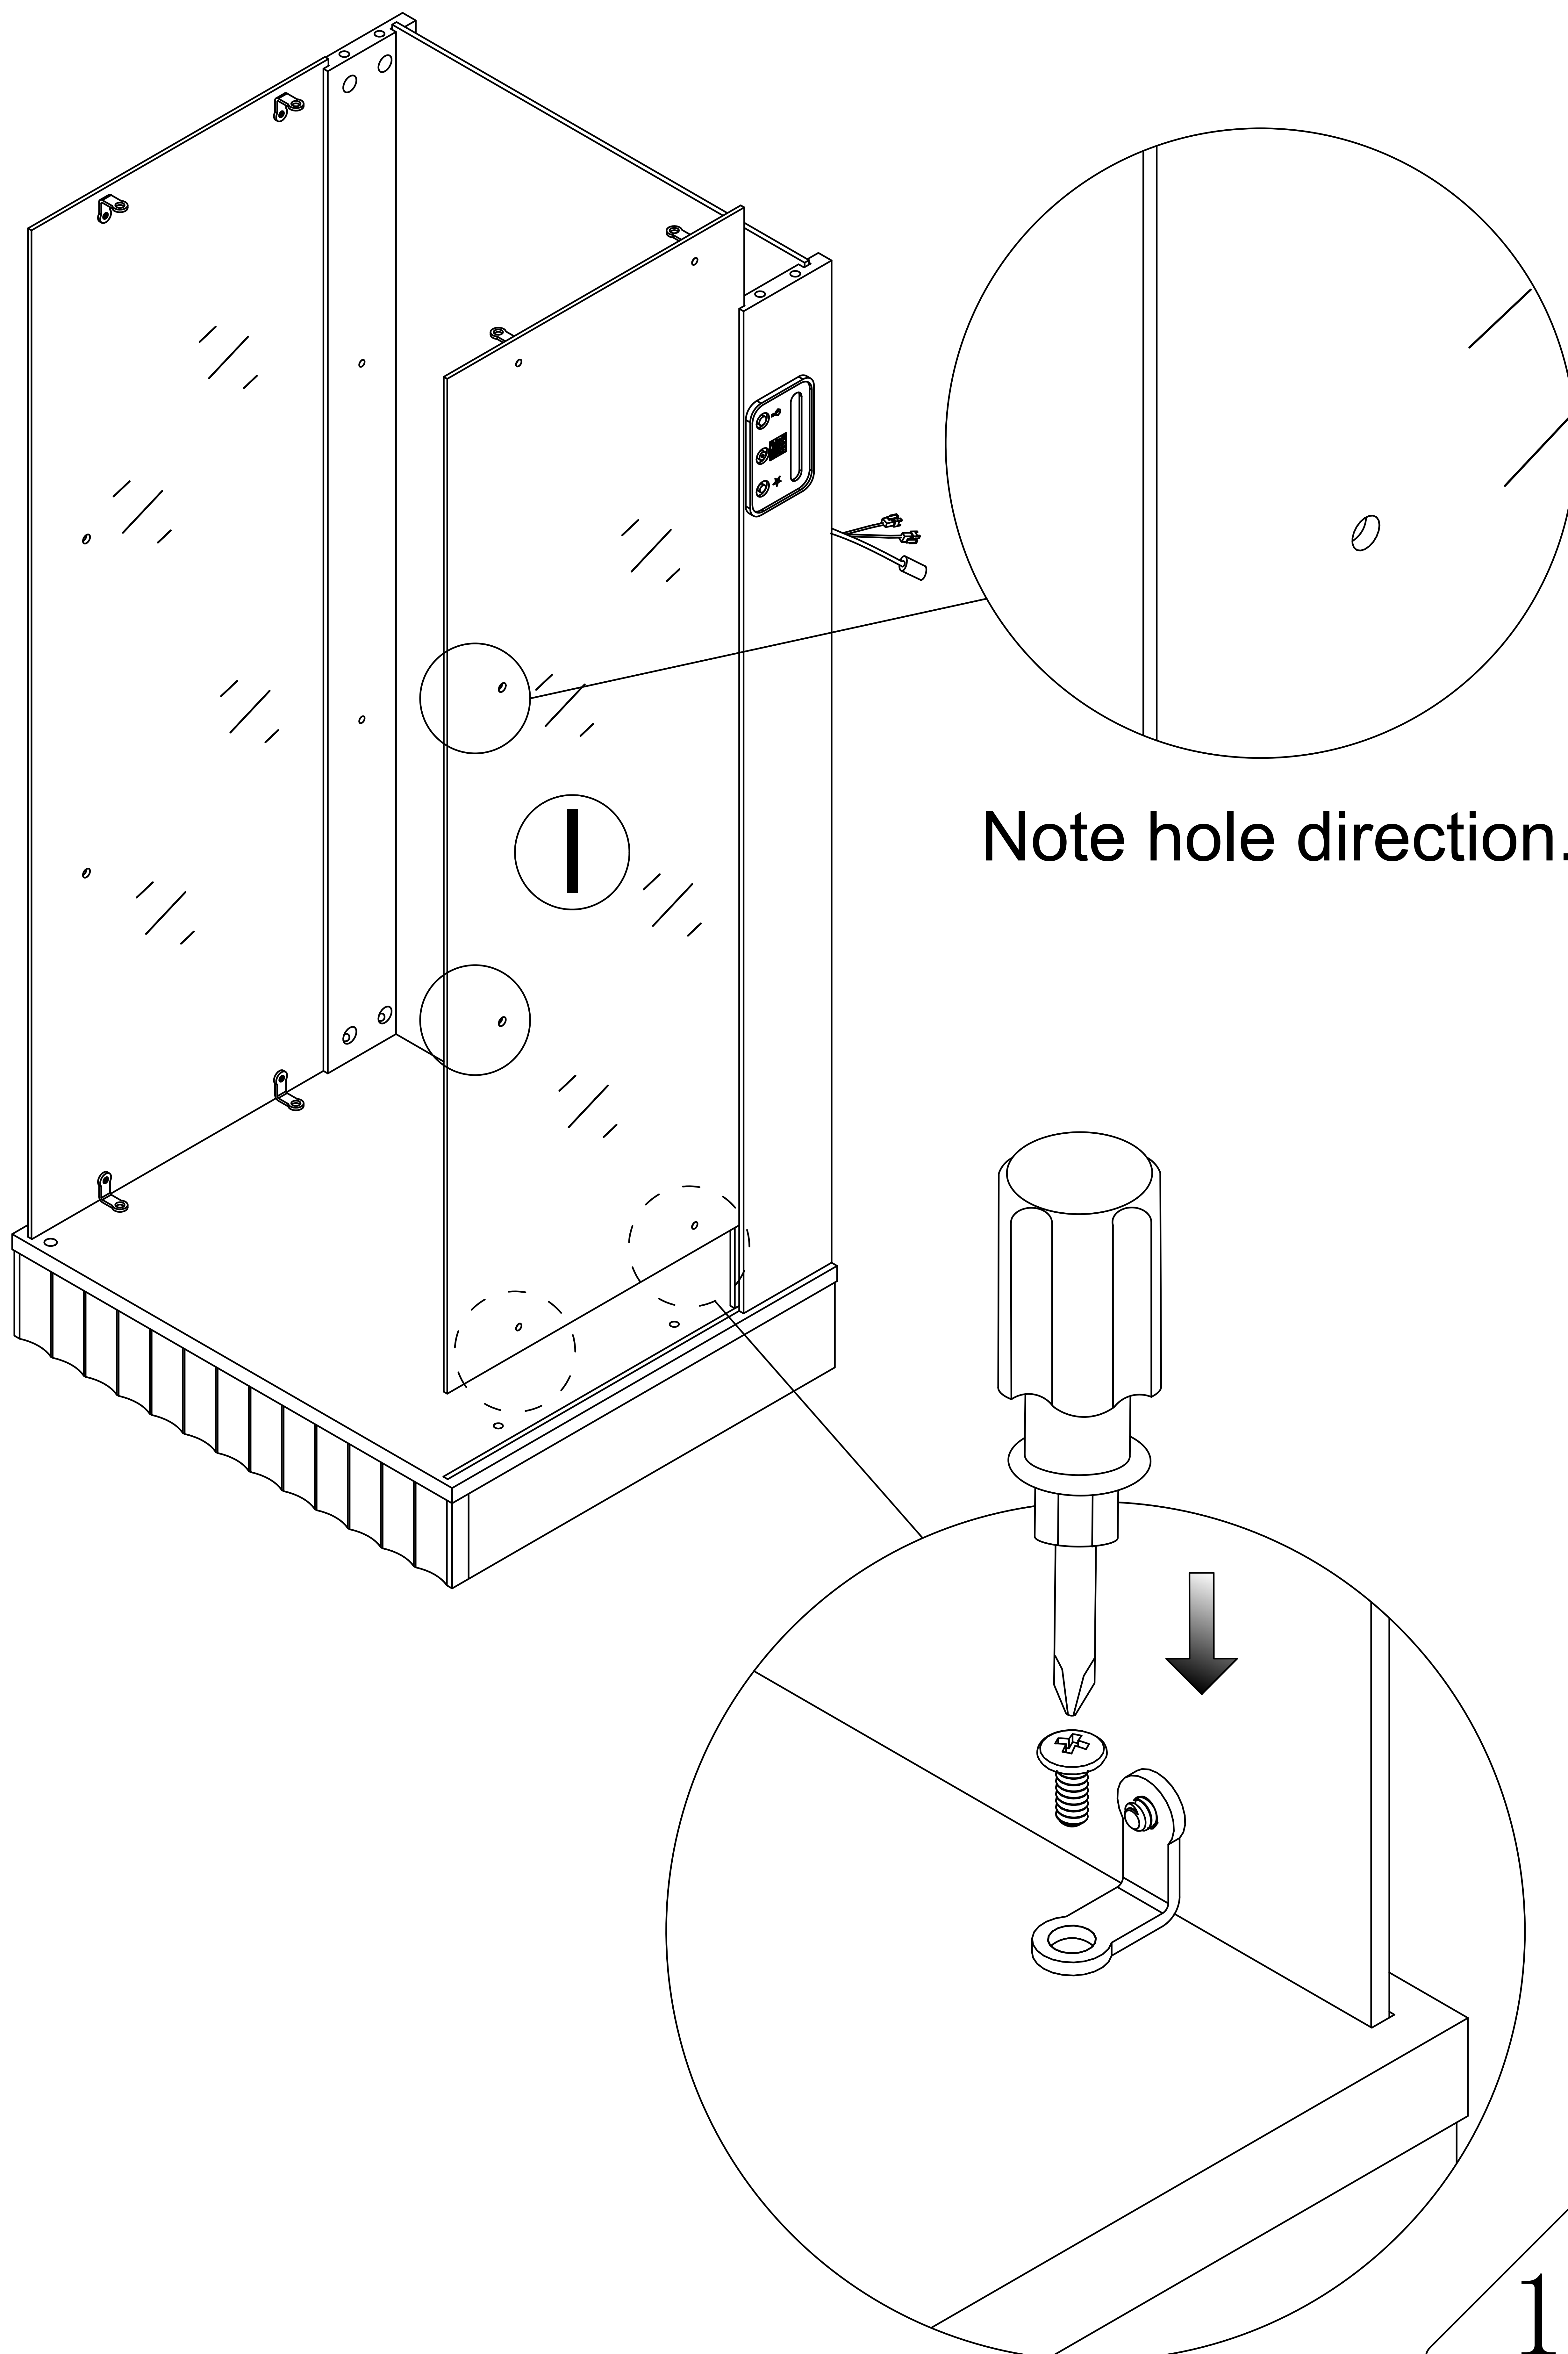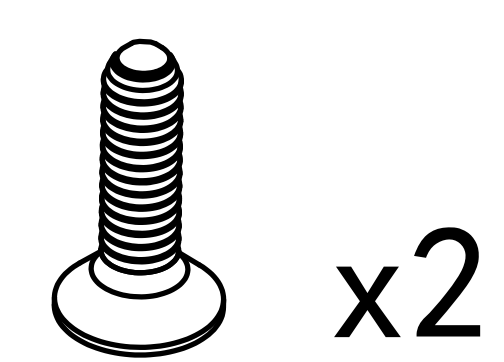


Note hole direction.



Step 18

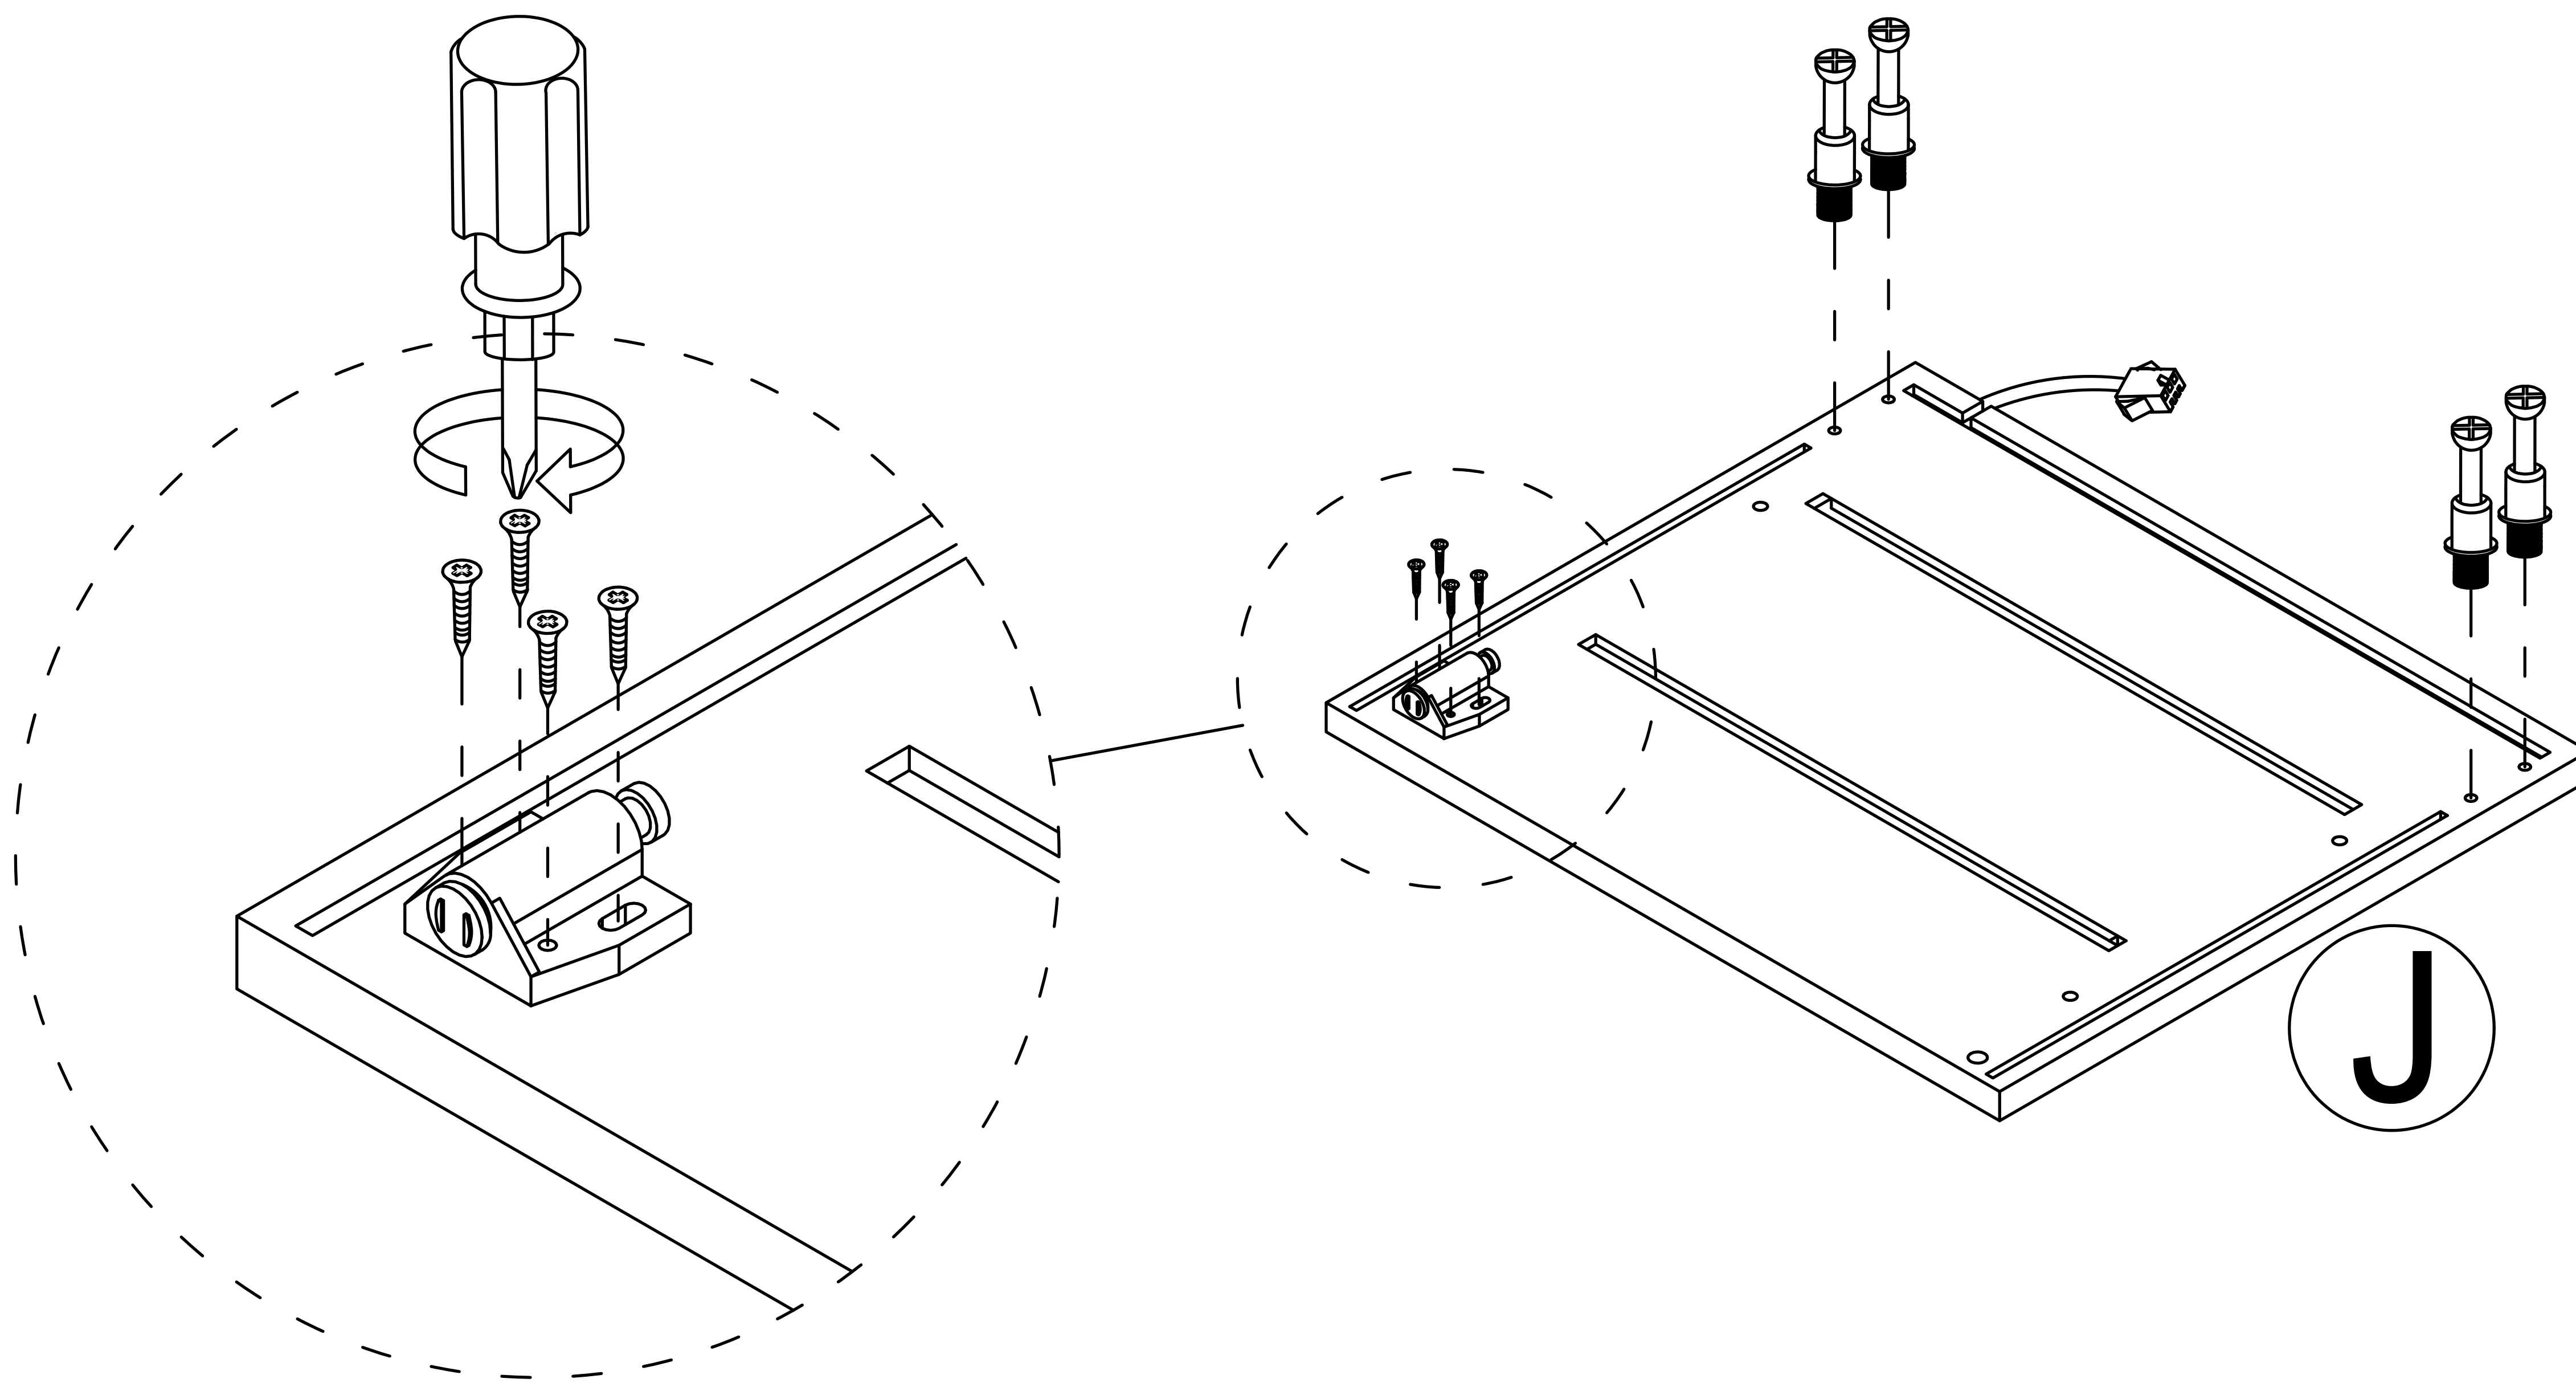

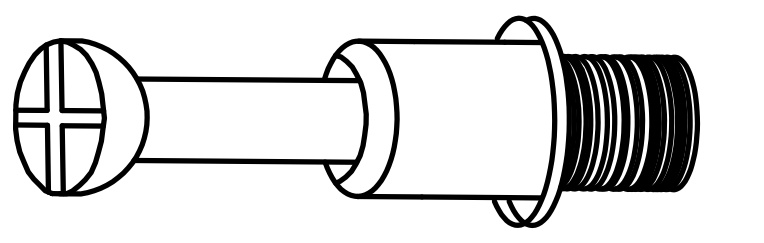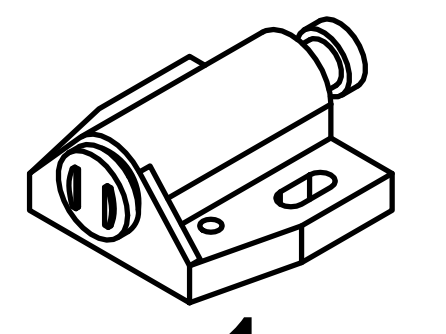- ①  x4
- ⑧  x1  x4


Step 19

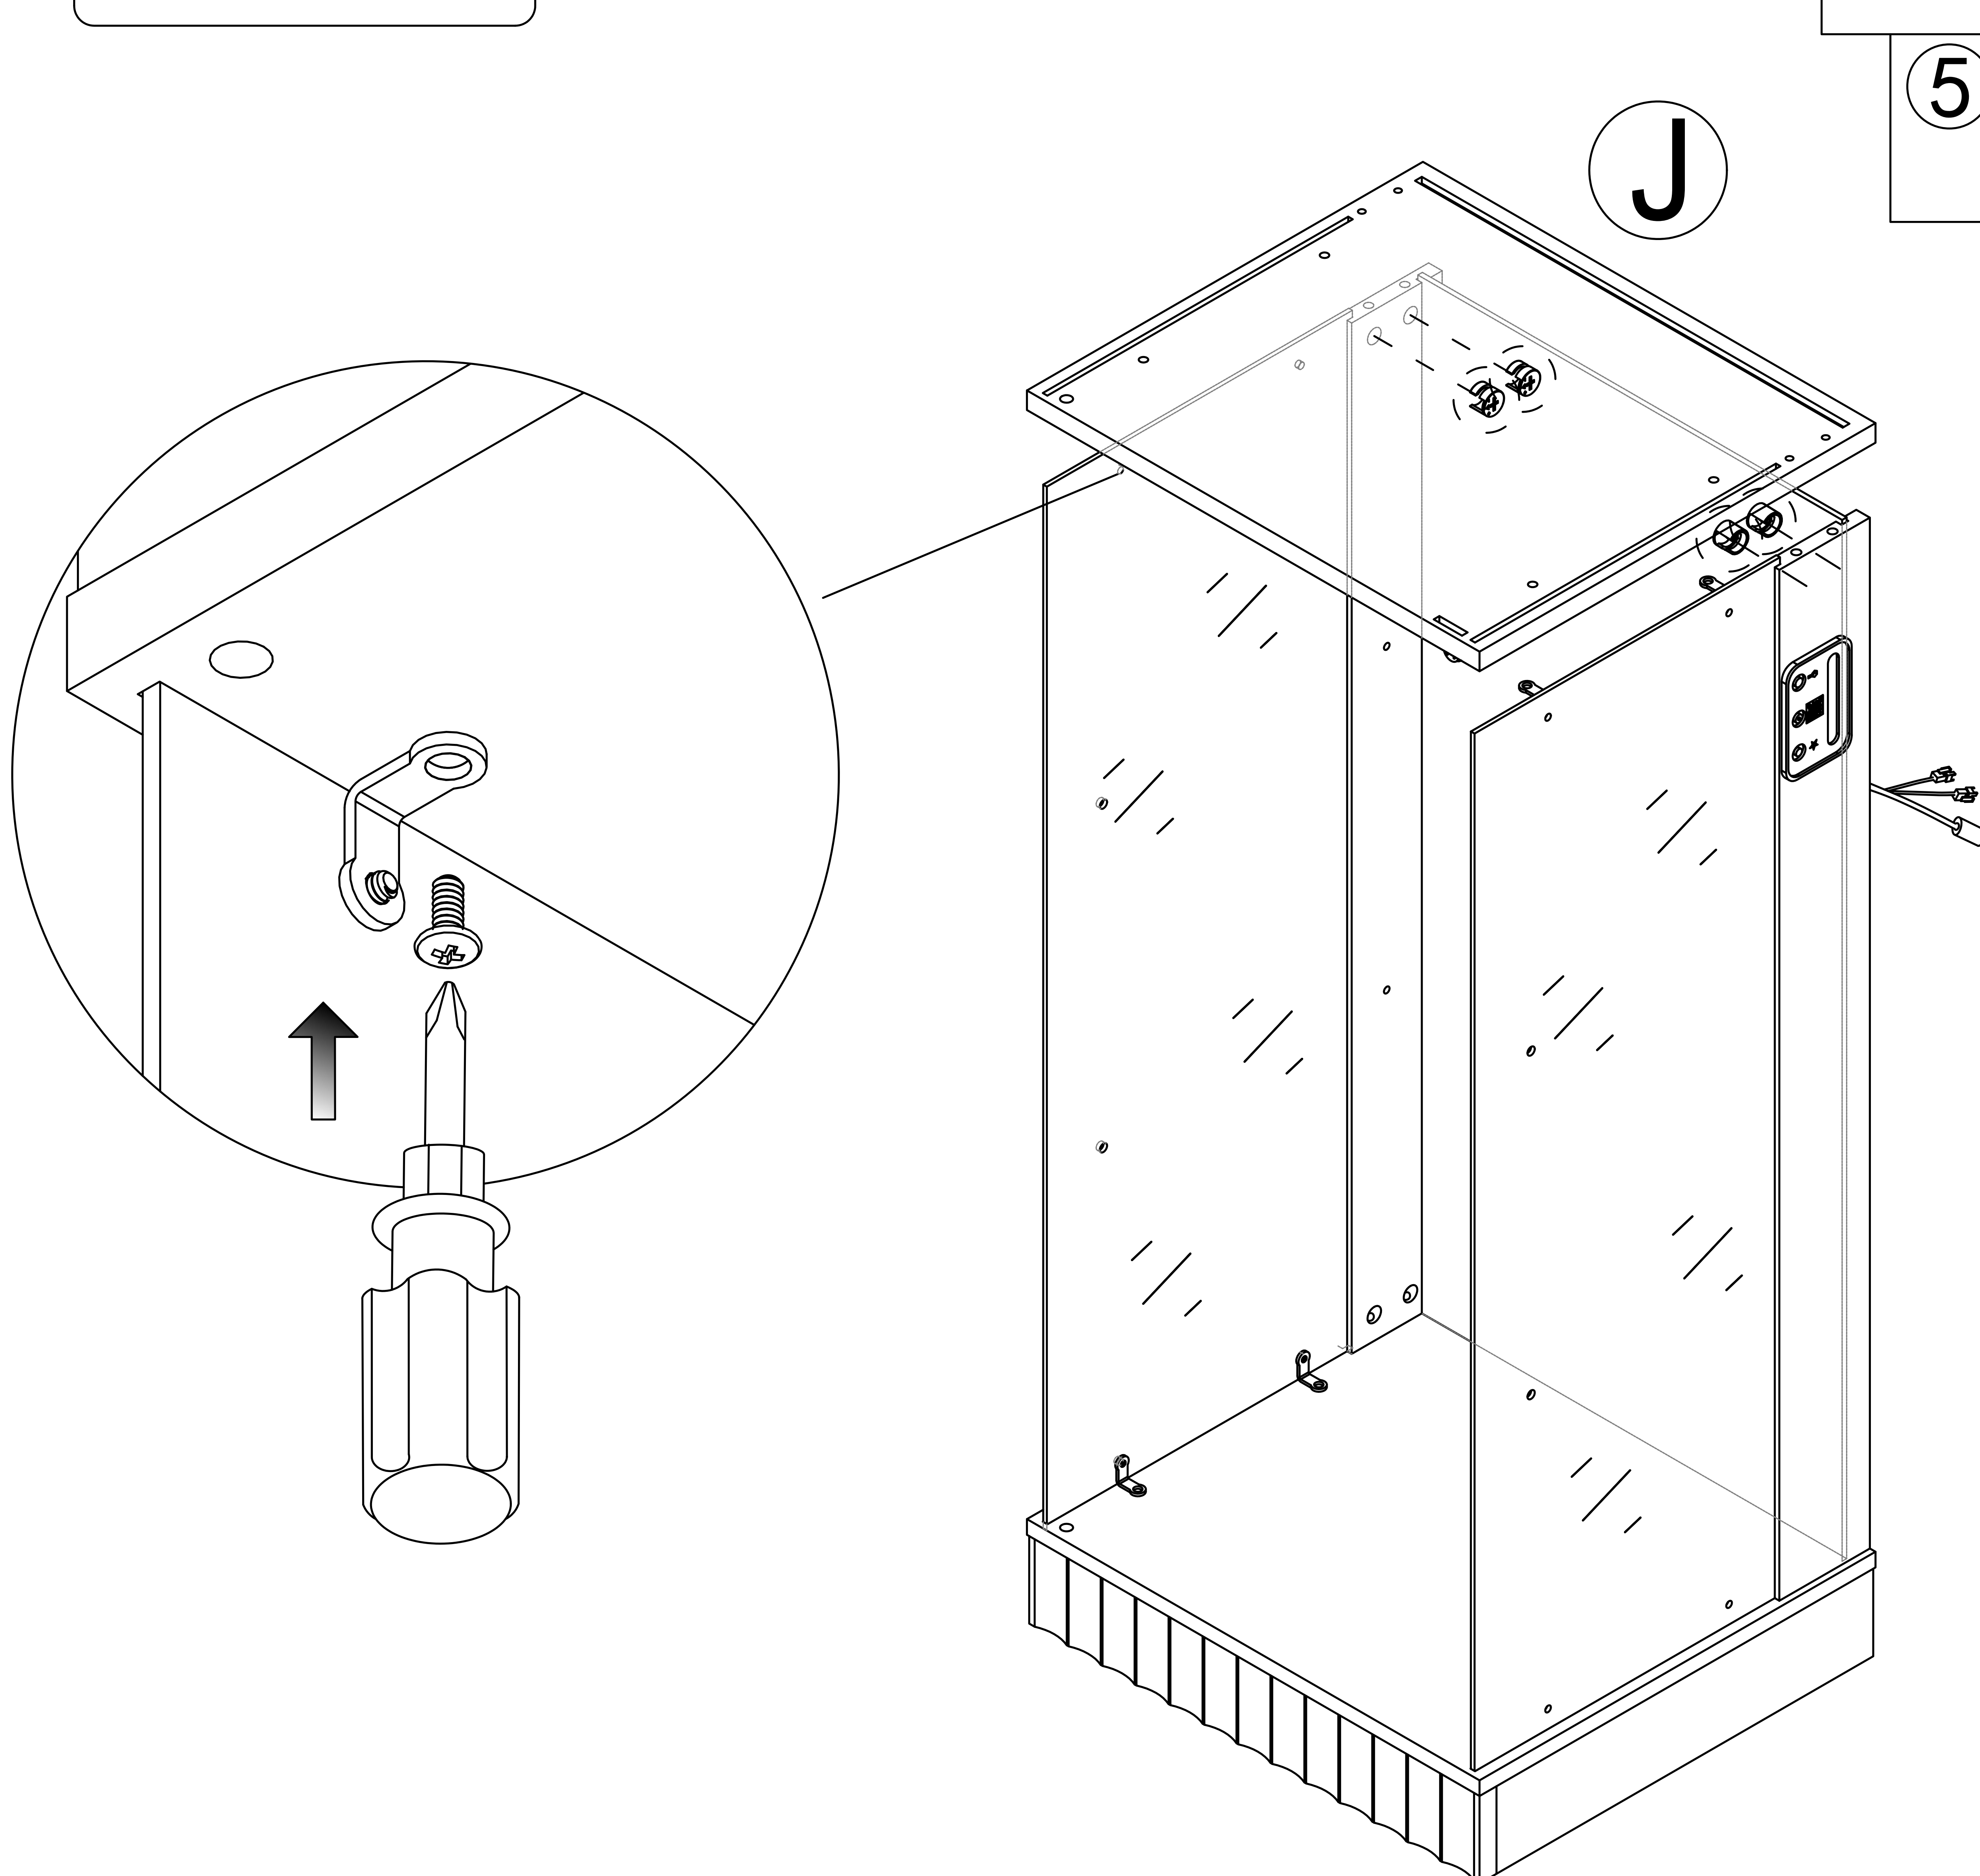

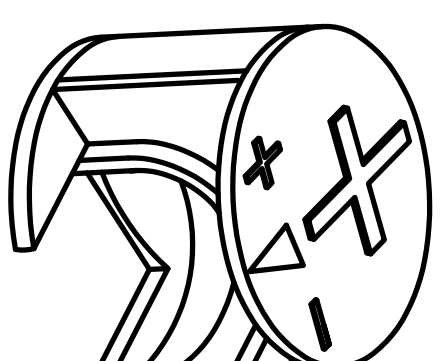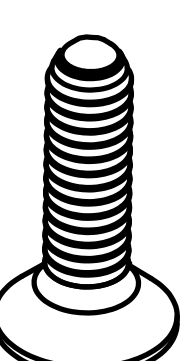
- ②  x4
- ⑤  x4

Step 20

1

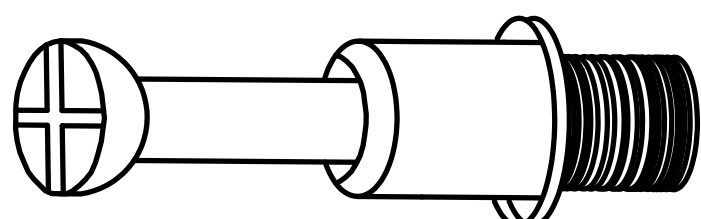


x4

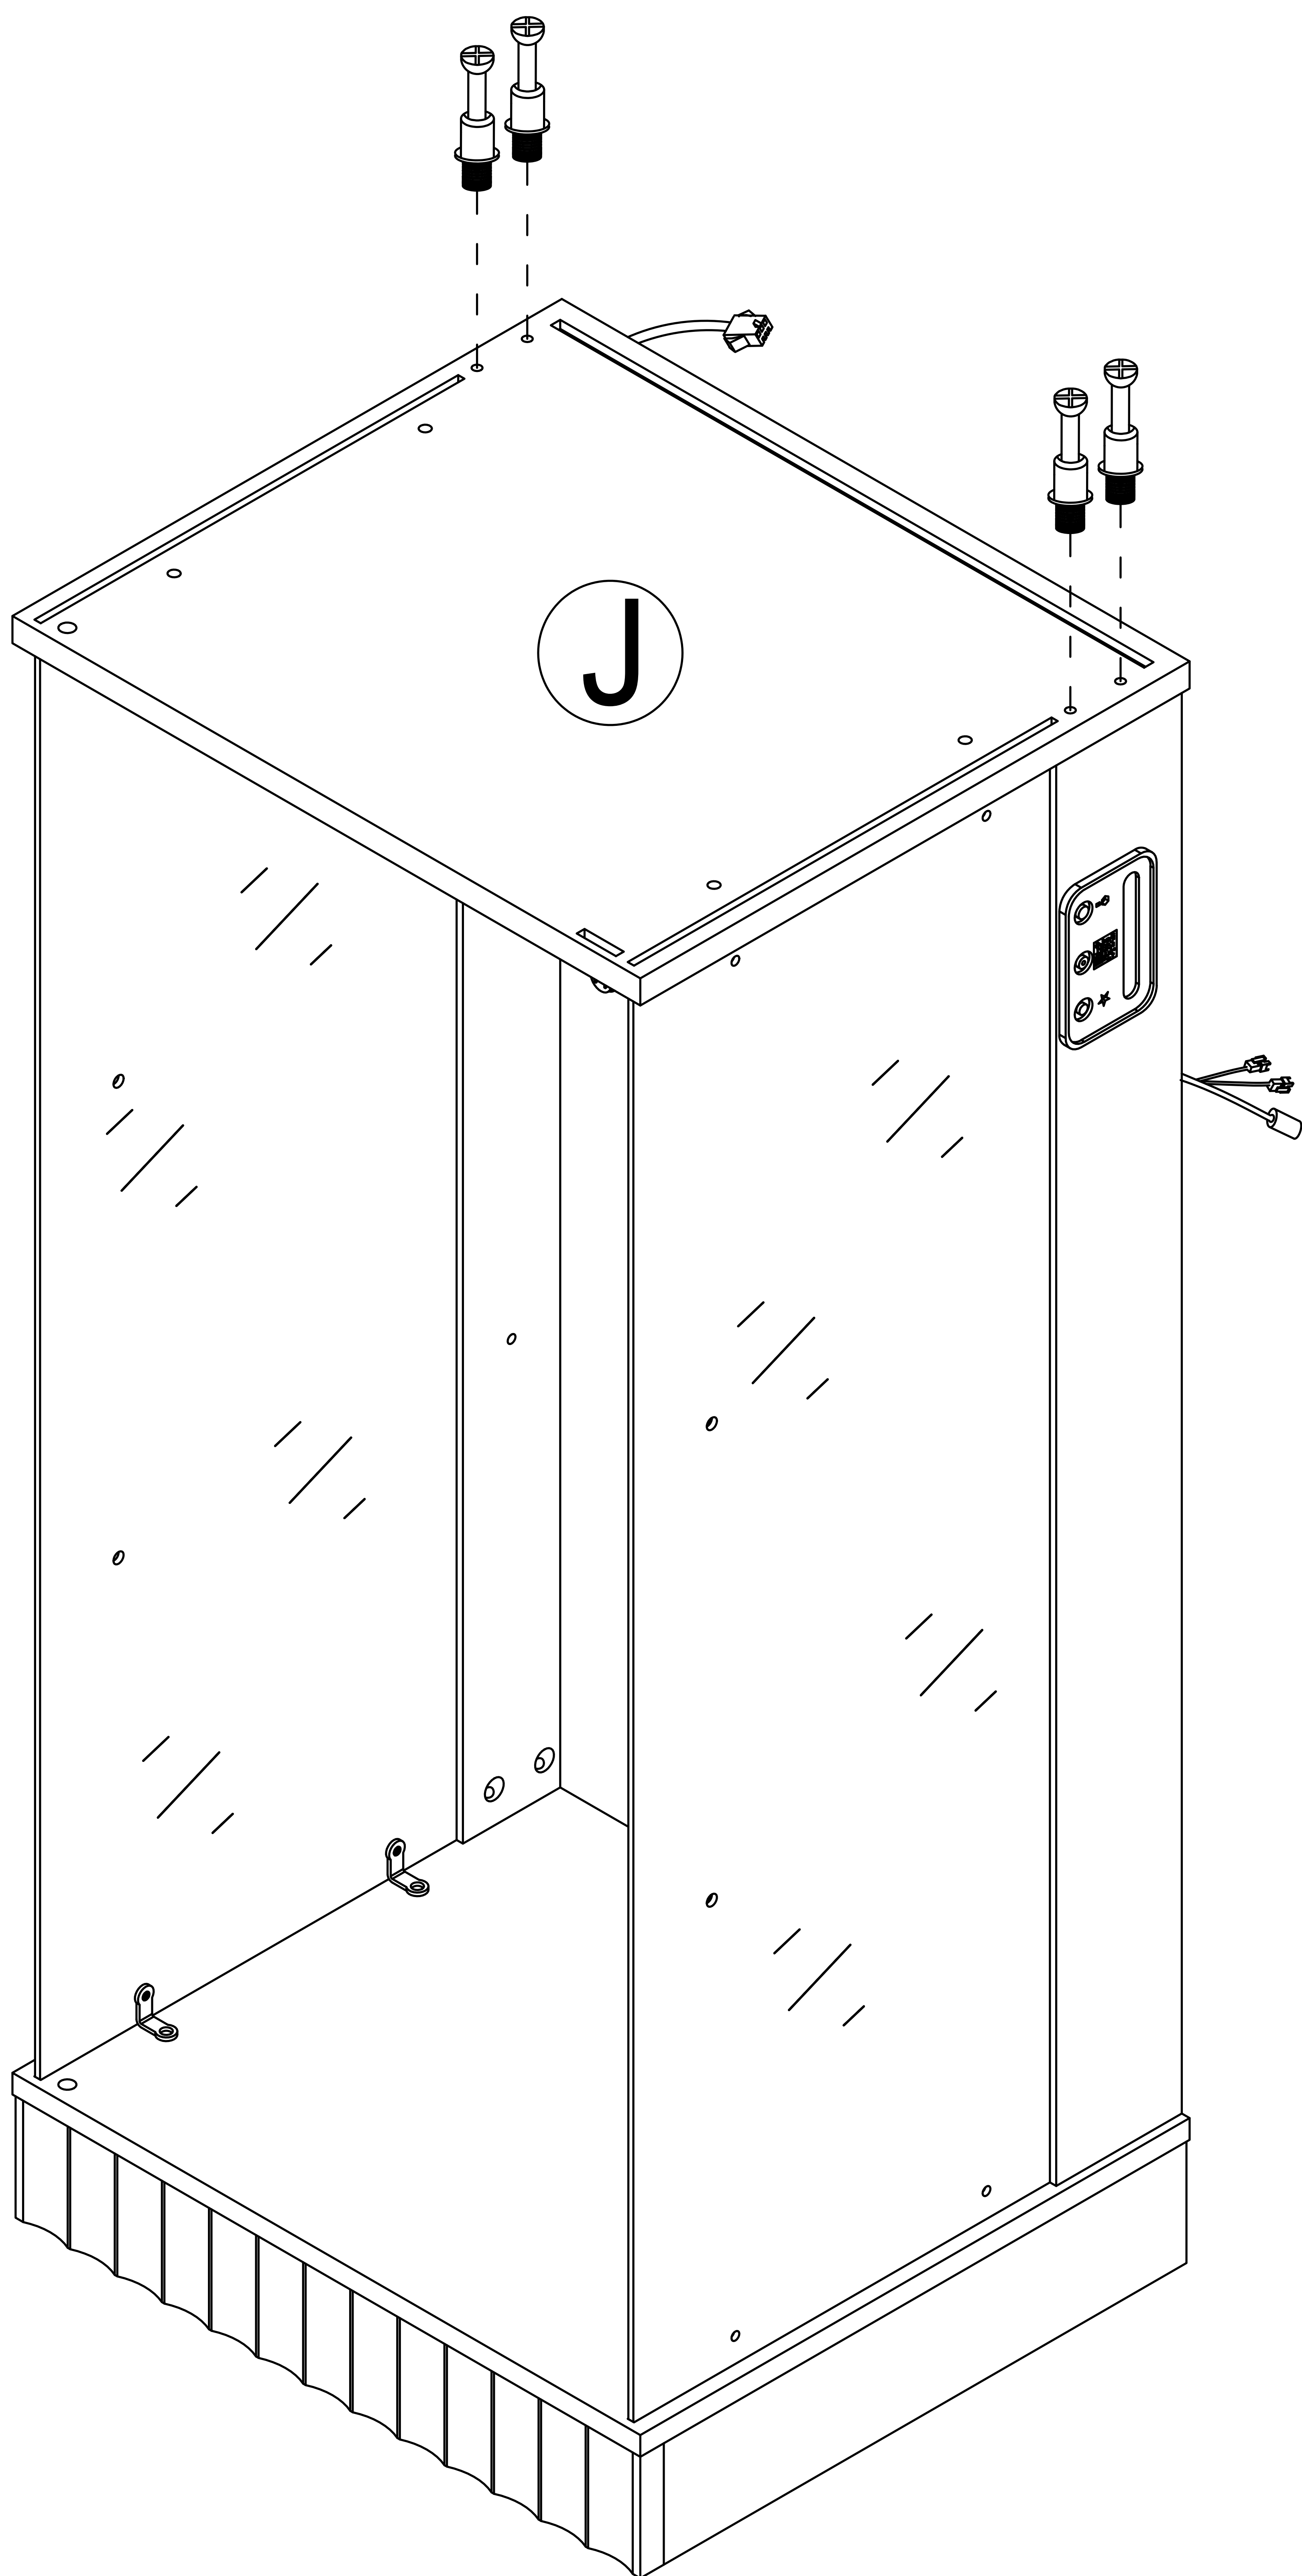


Step 21

1

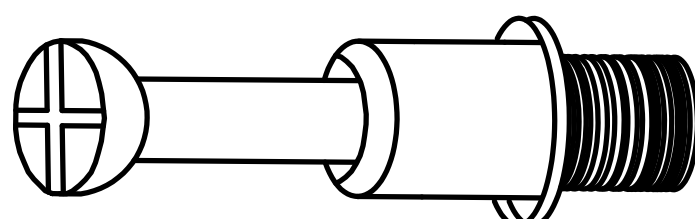


x4

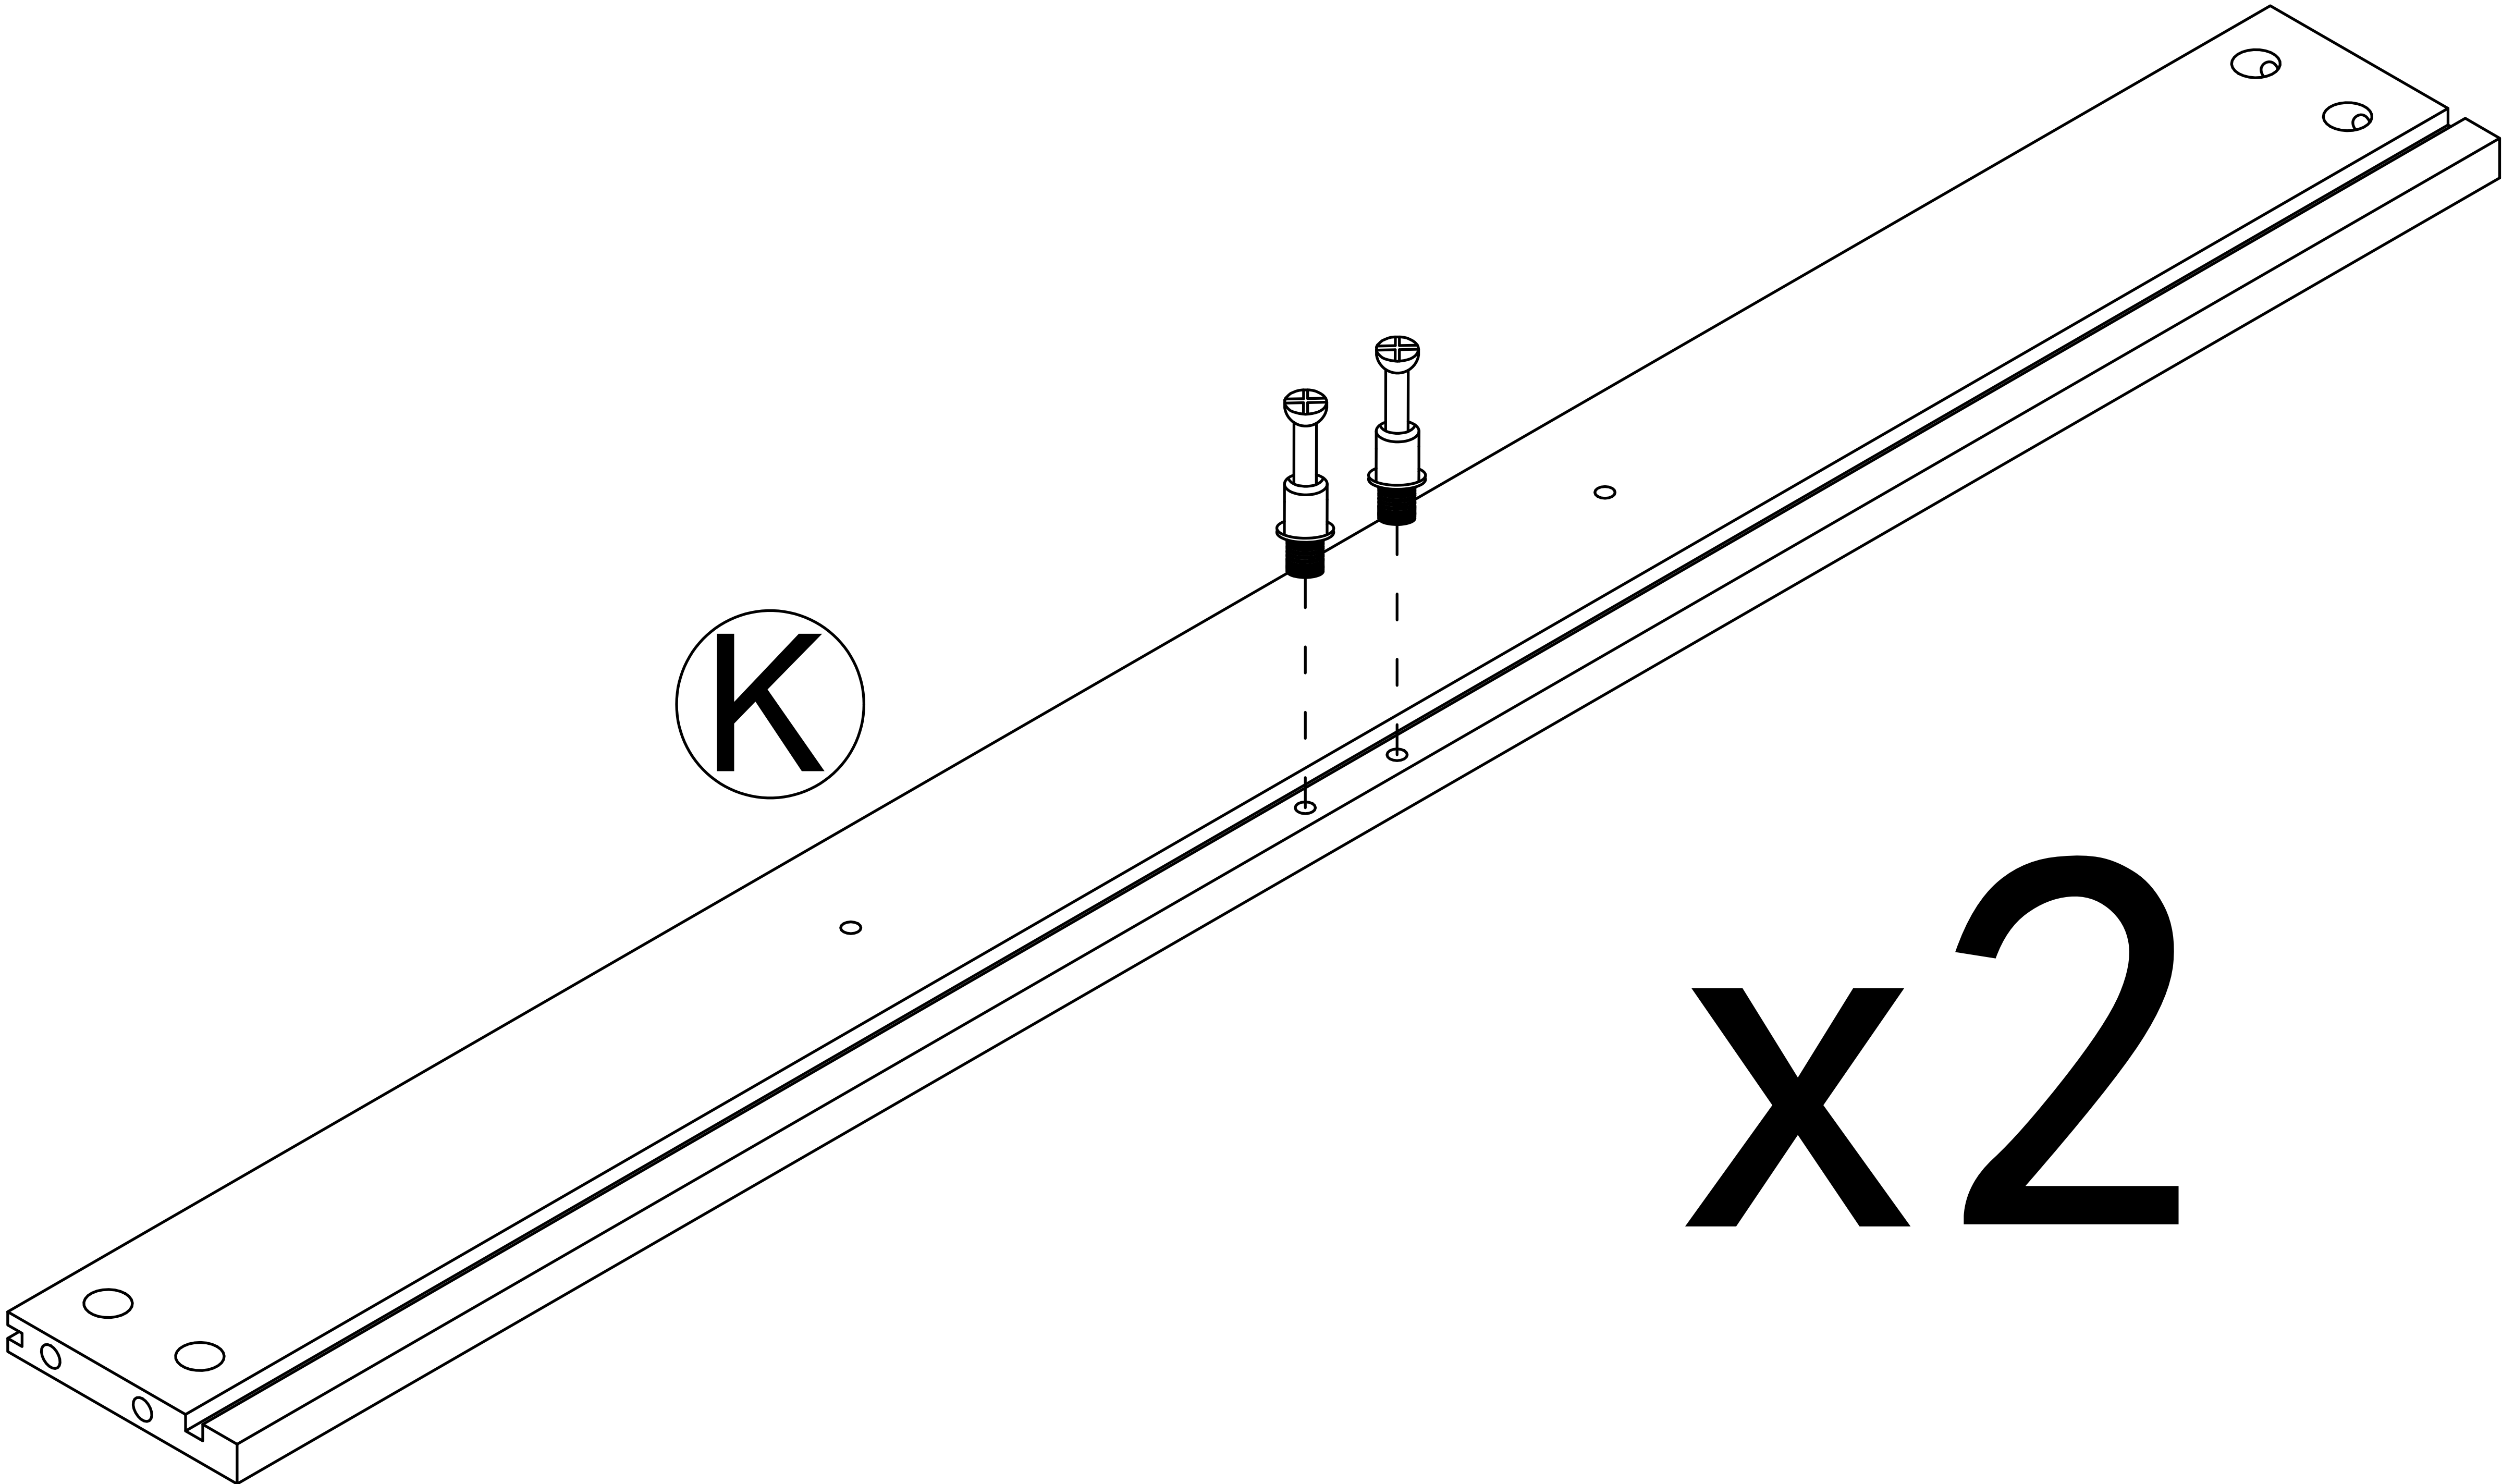


Step 22

2

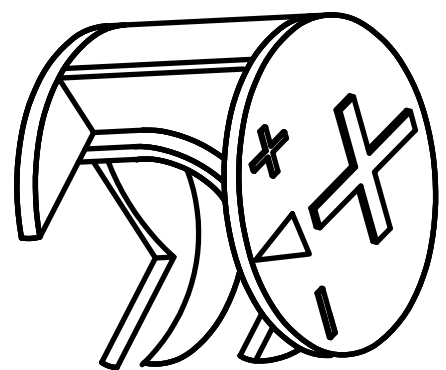



x4

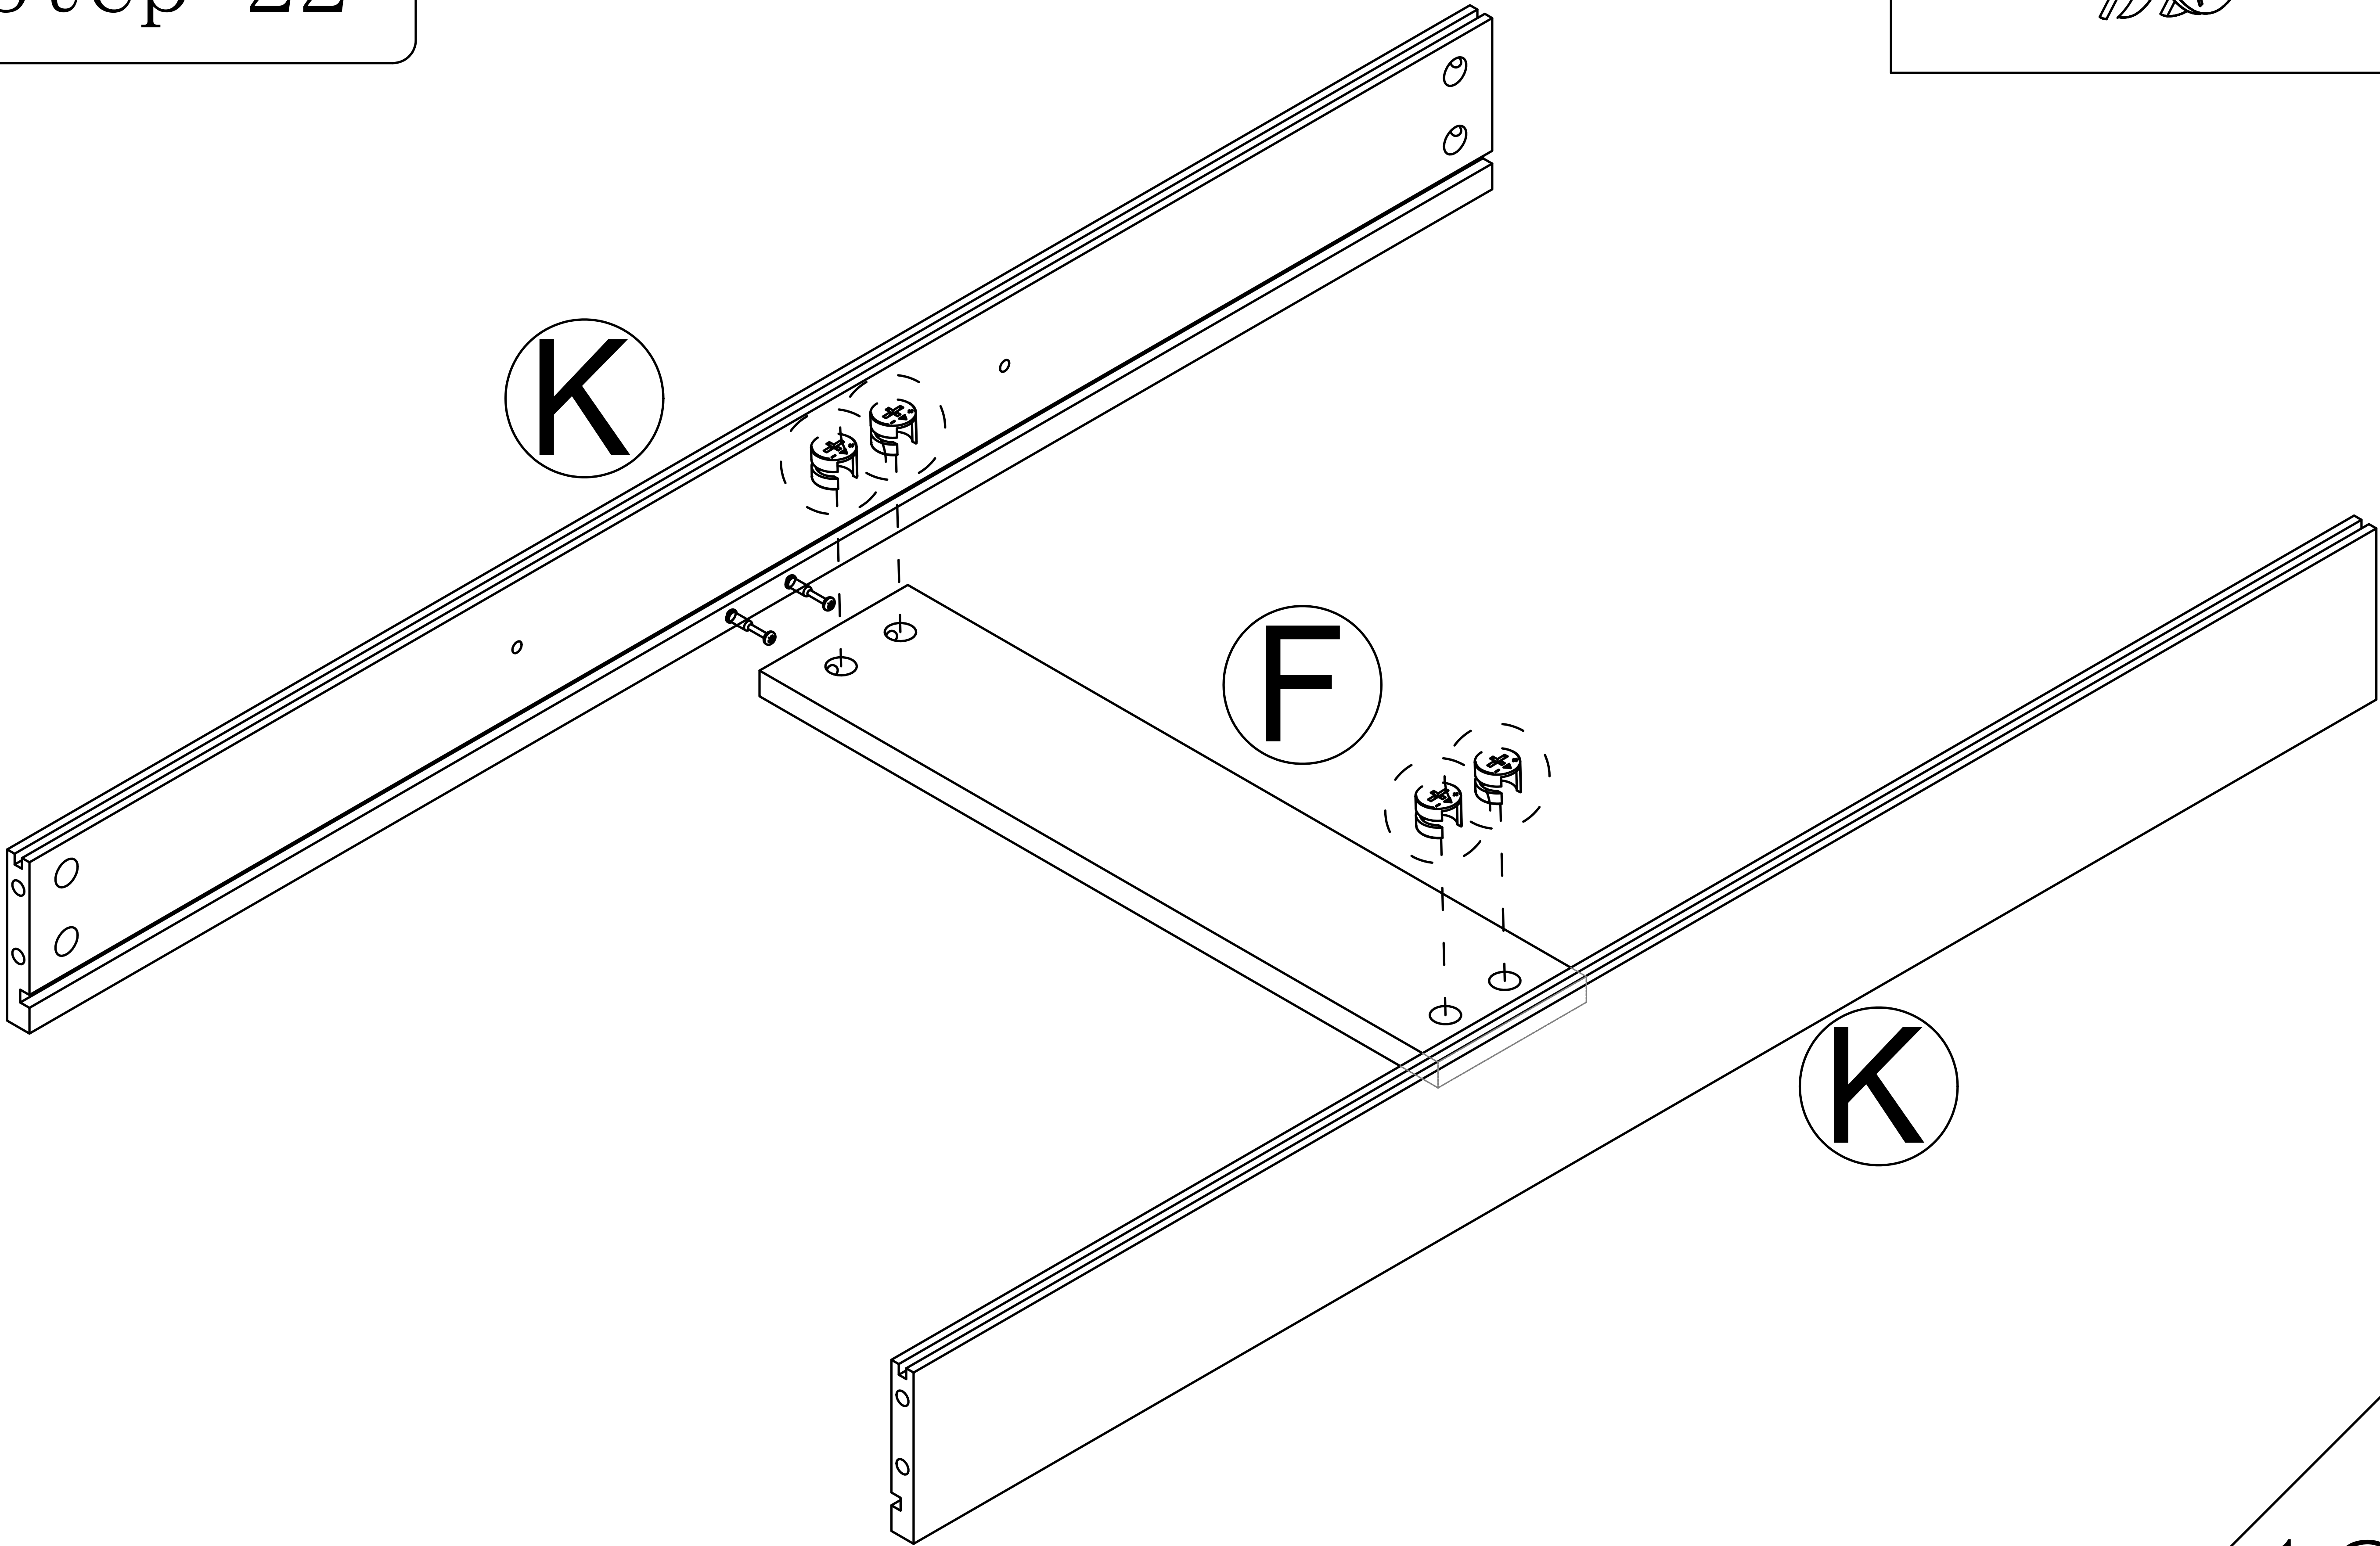


Step 23

2

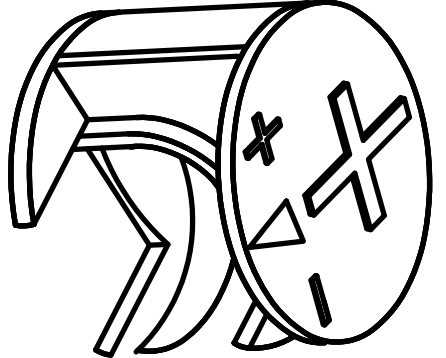 x4

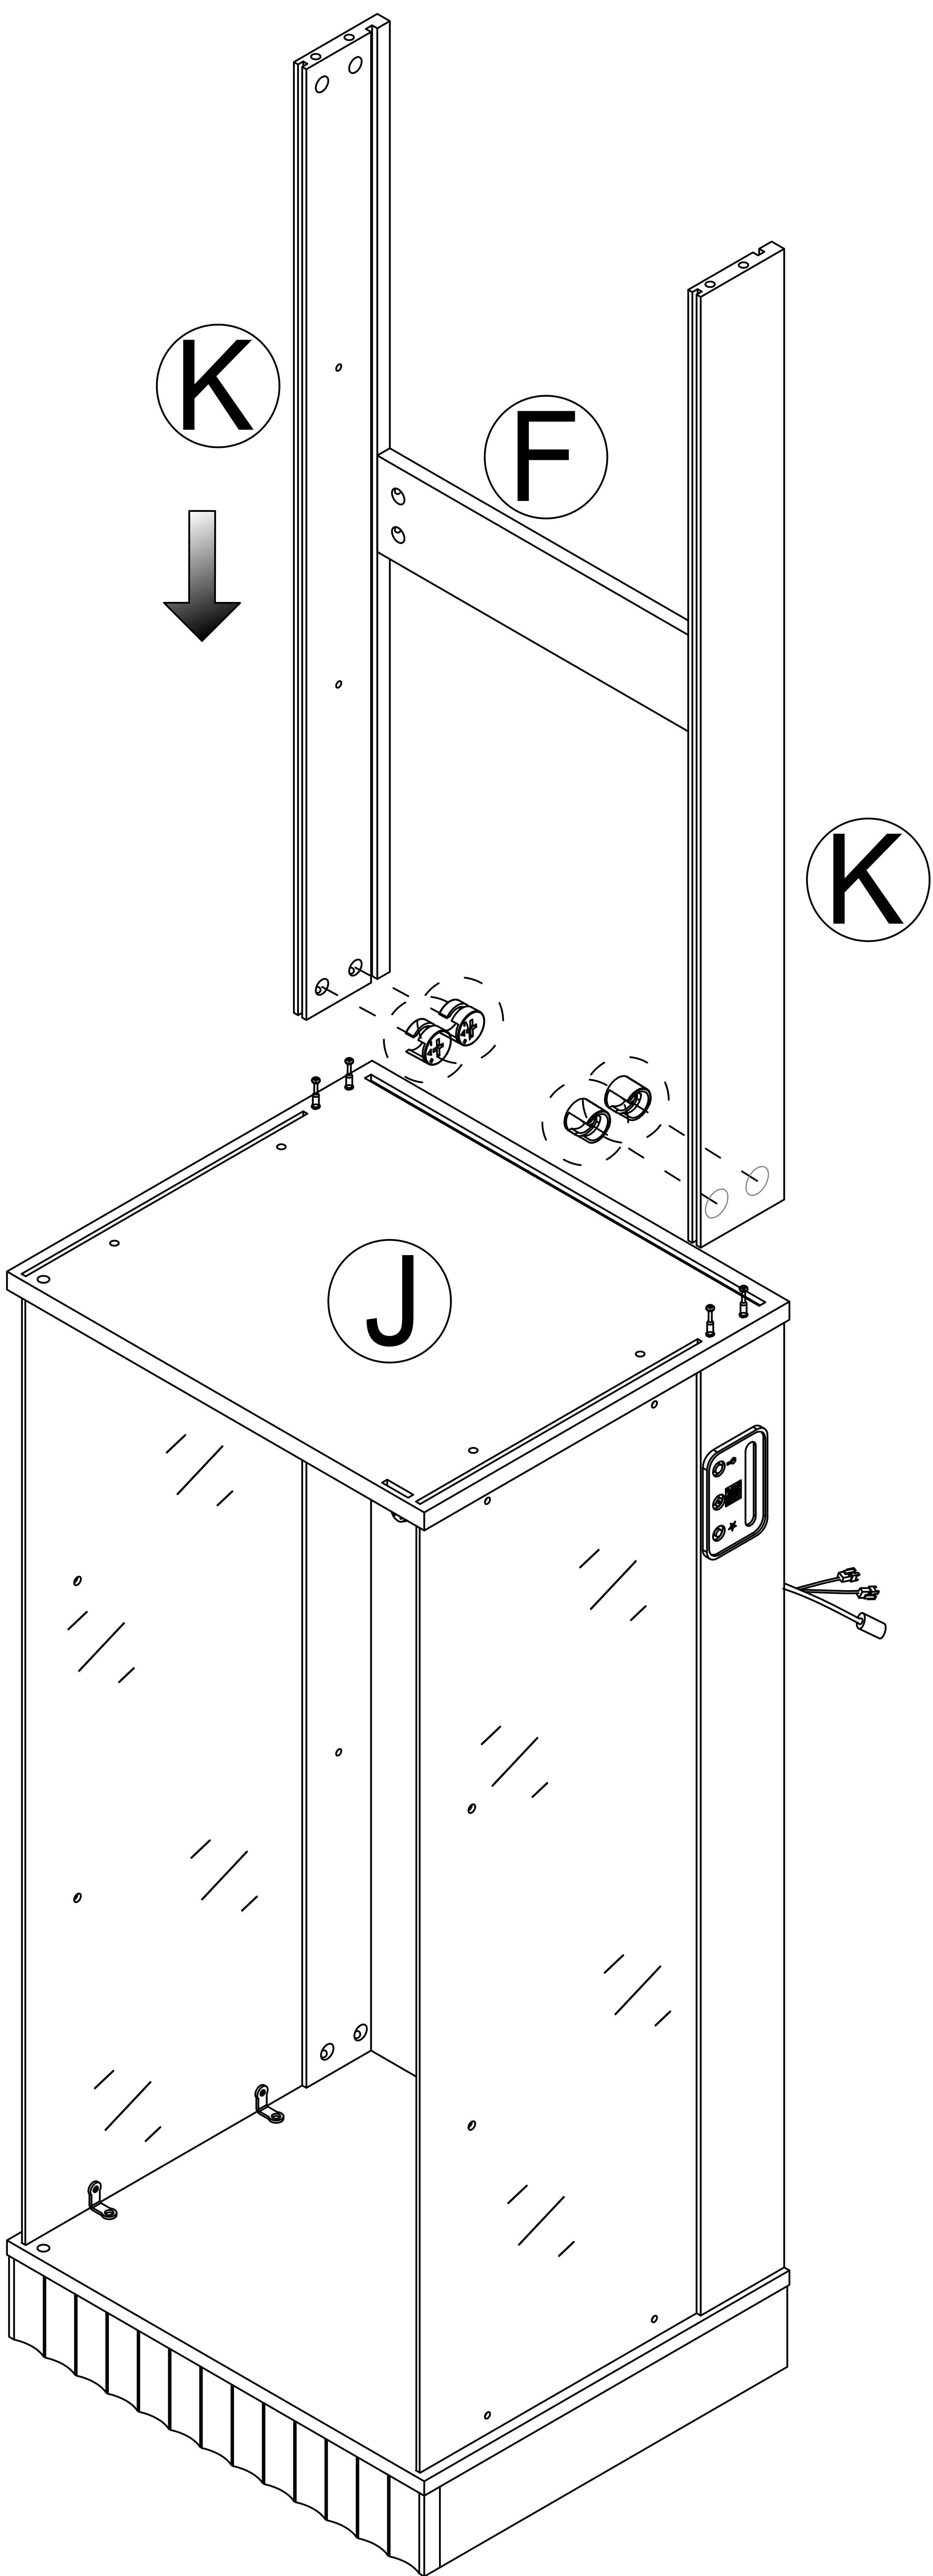


Step 24

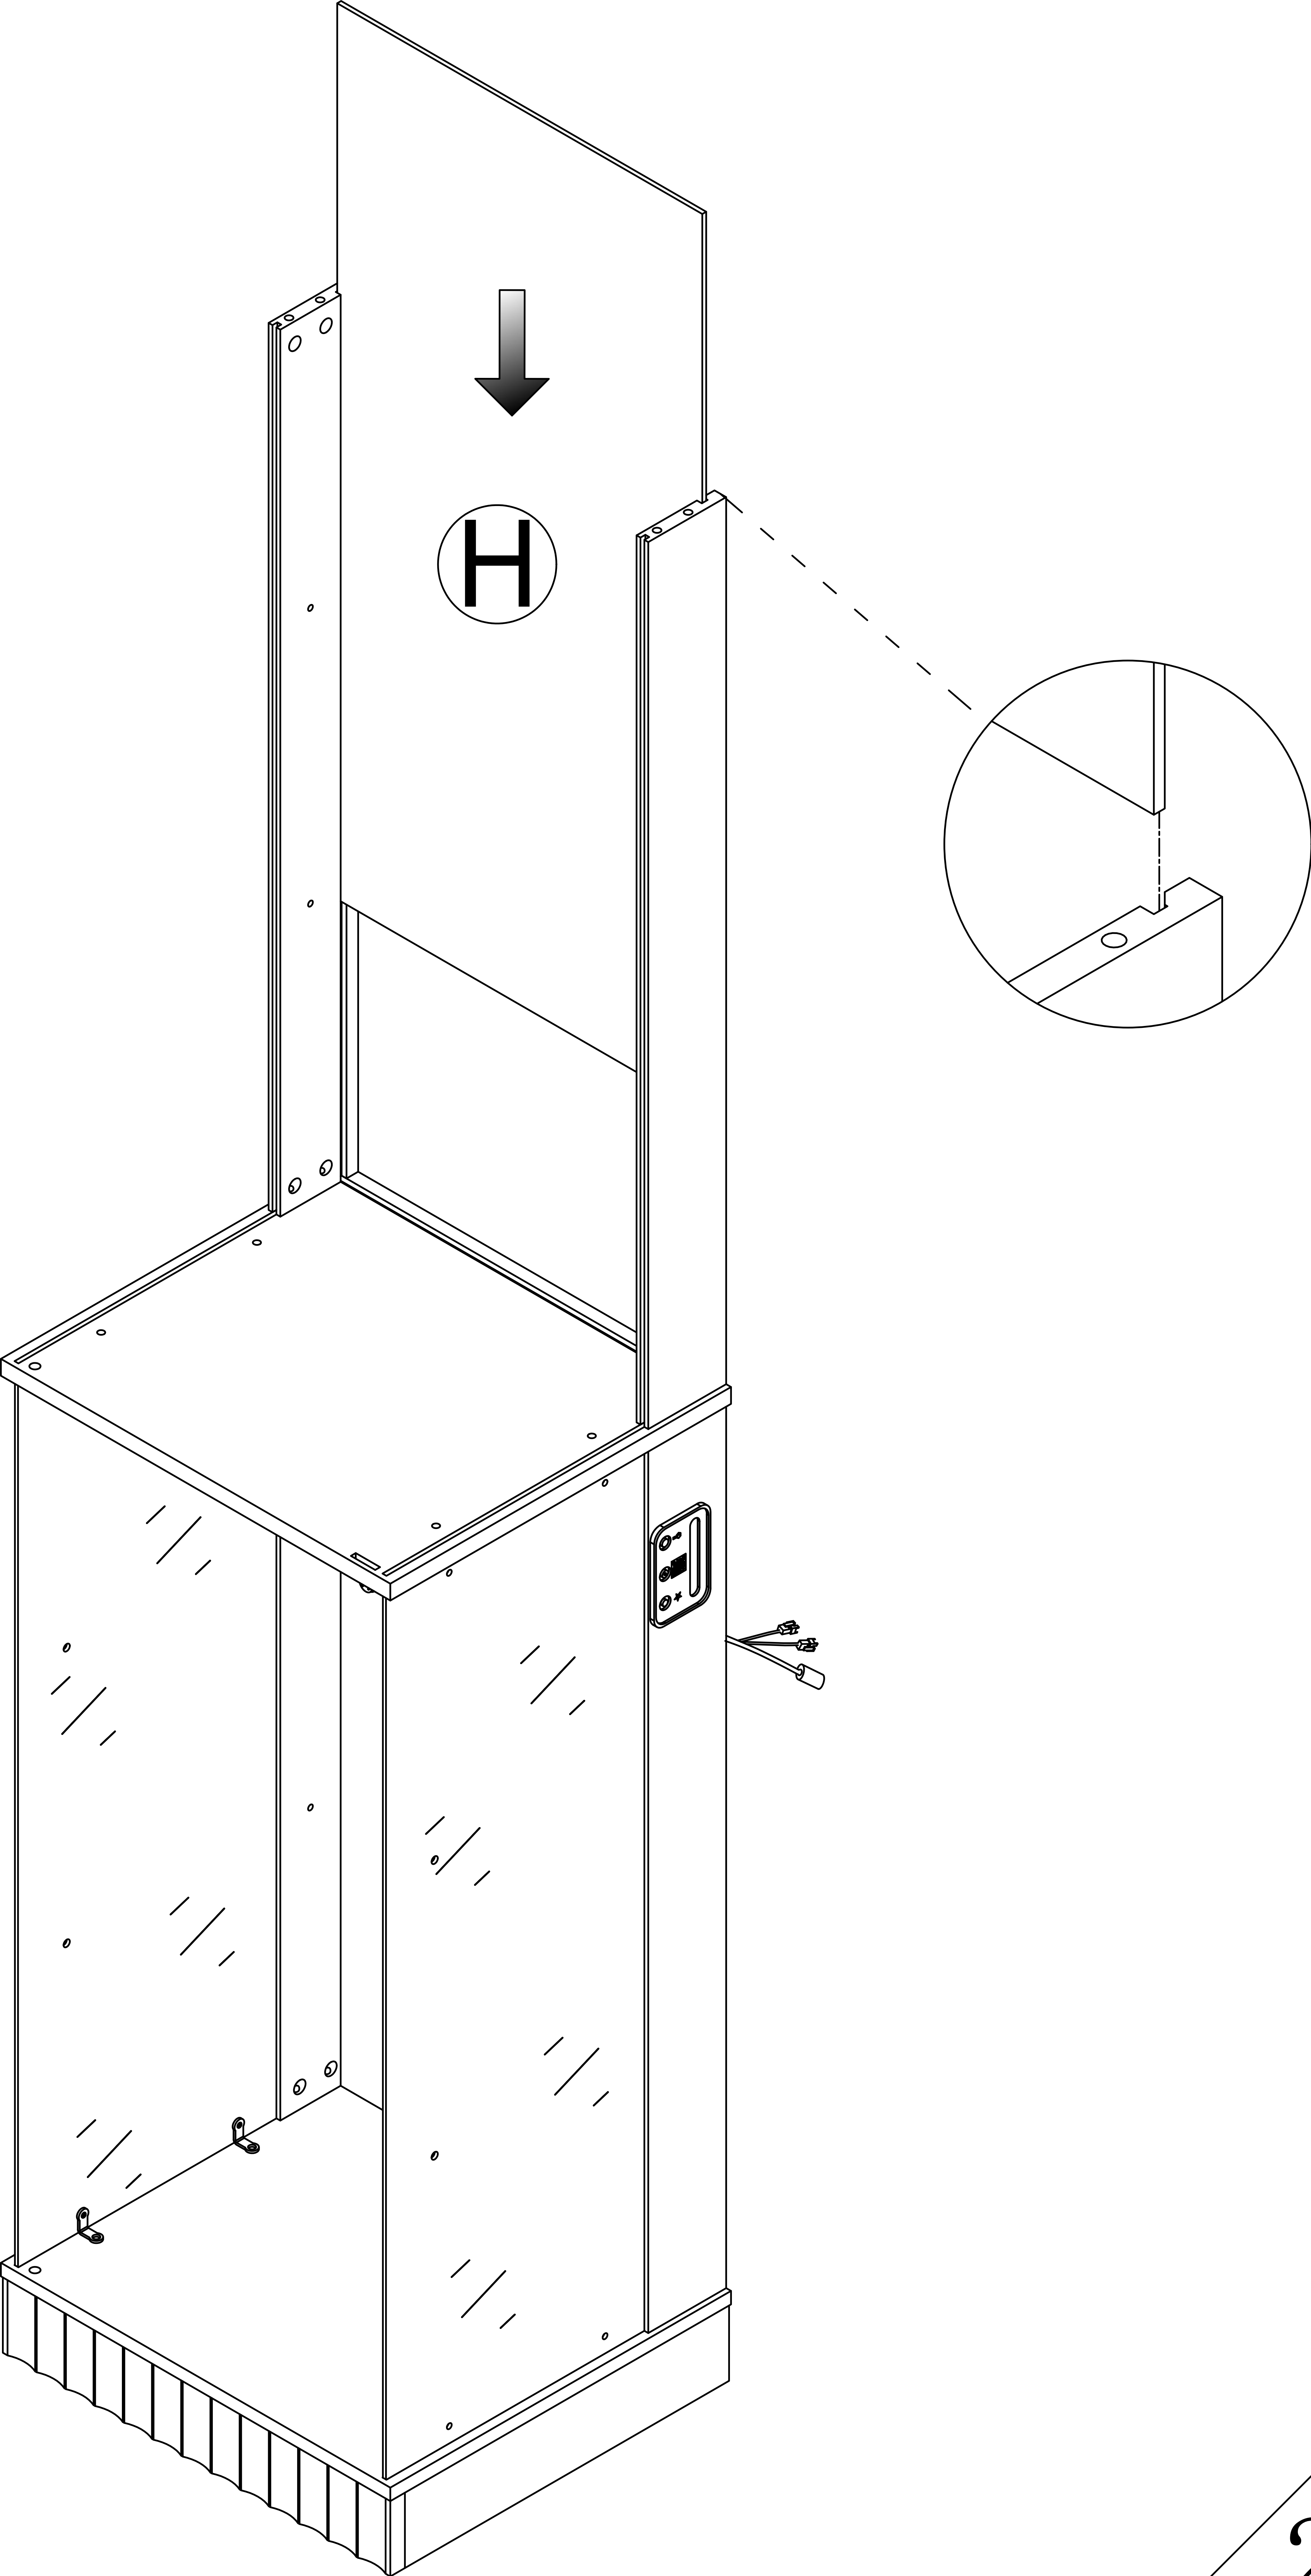


Step 25


4






x4



x8





x4

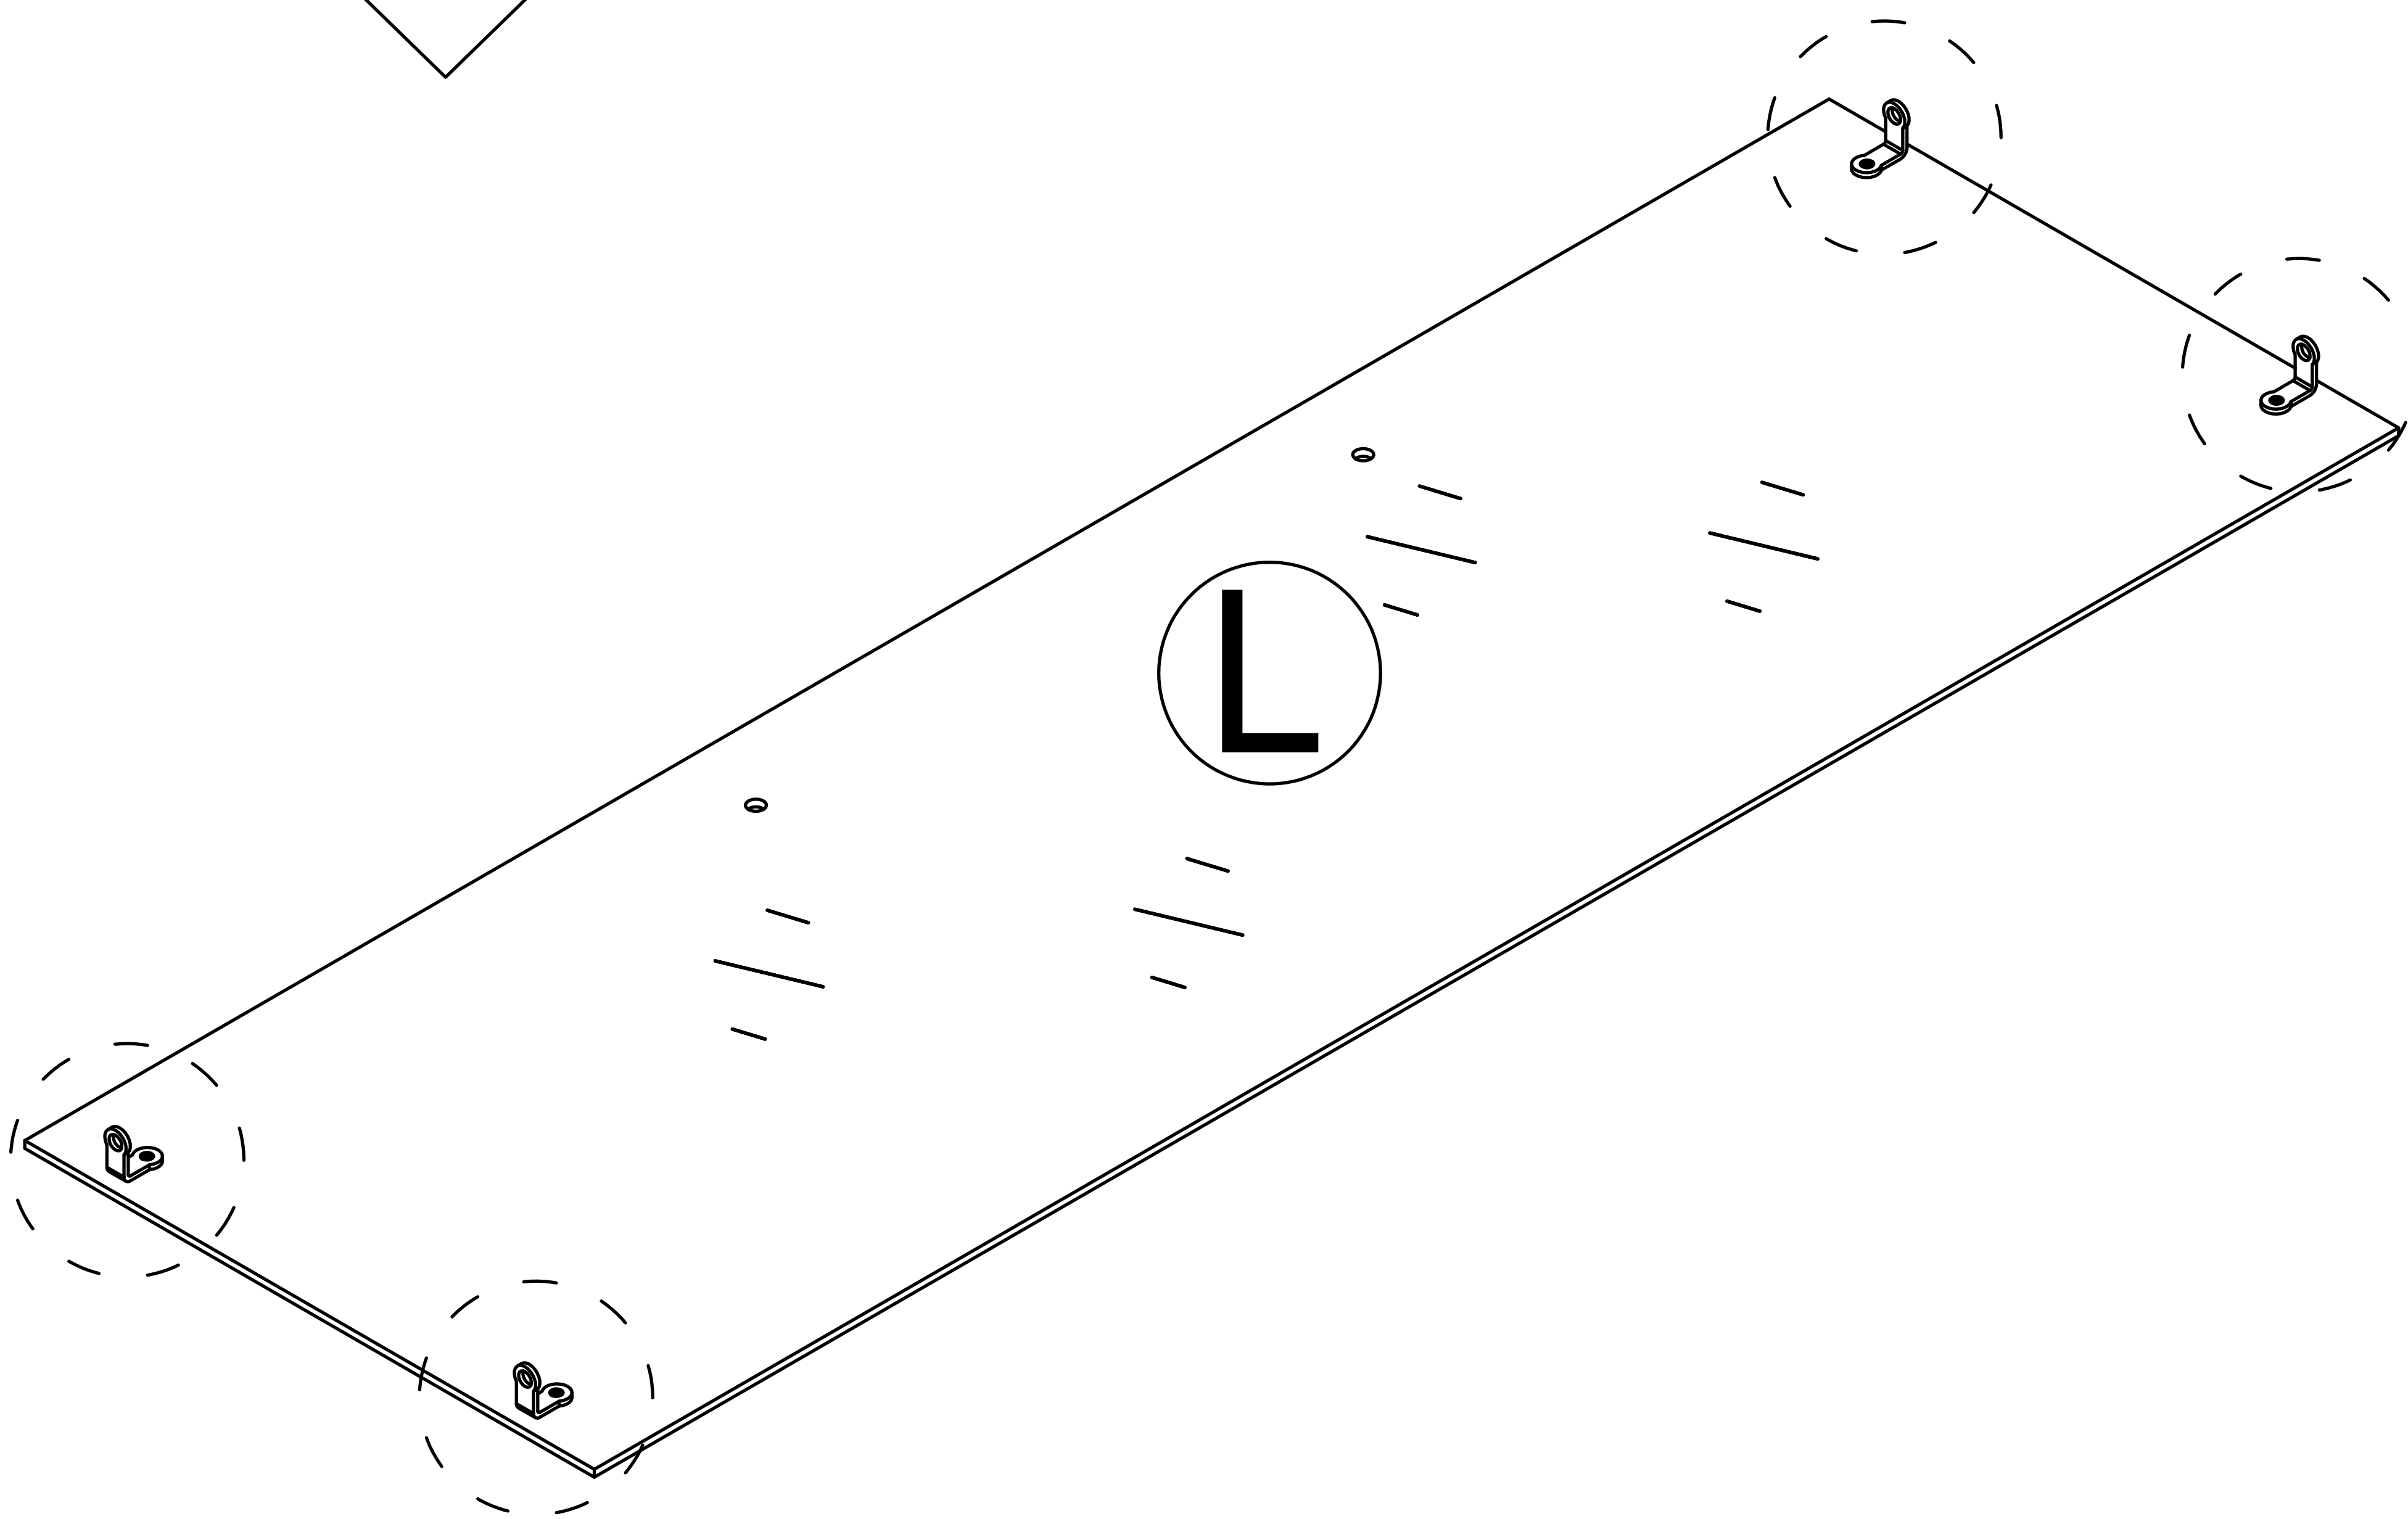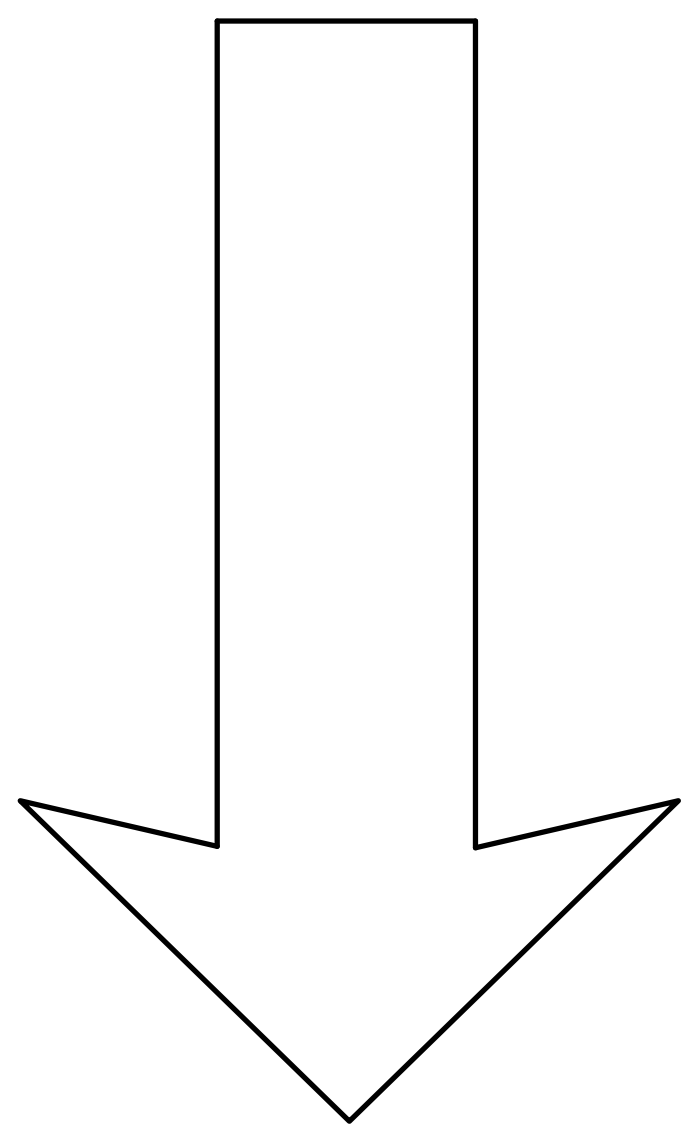
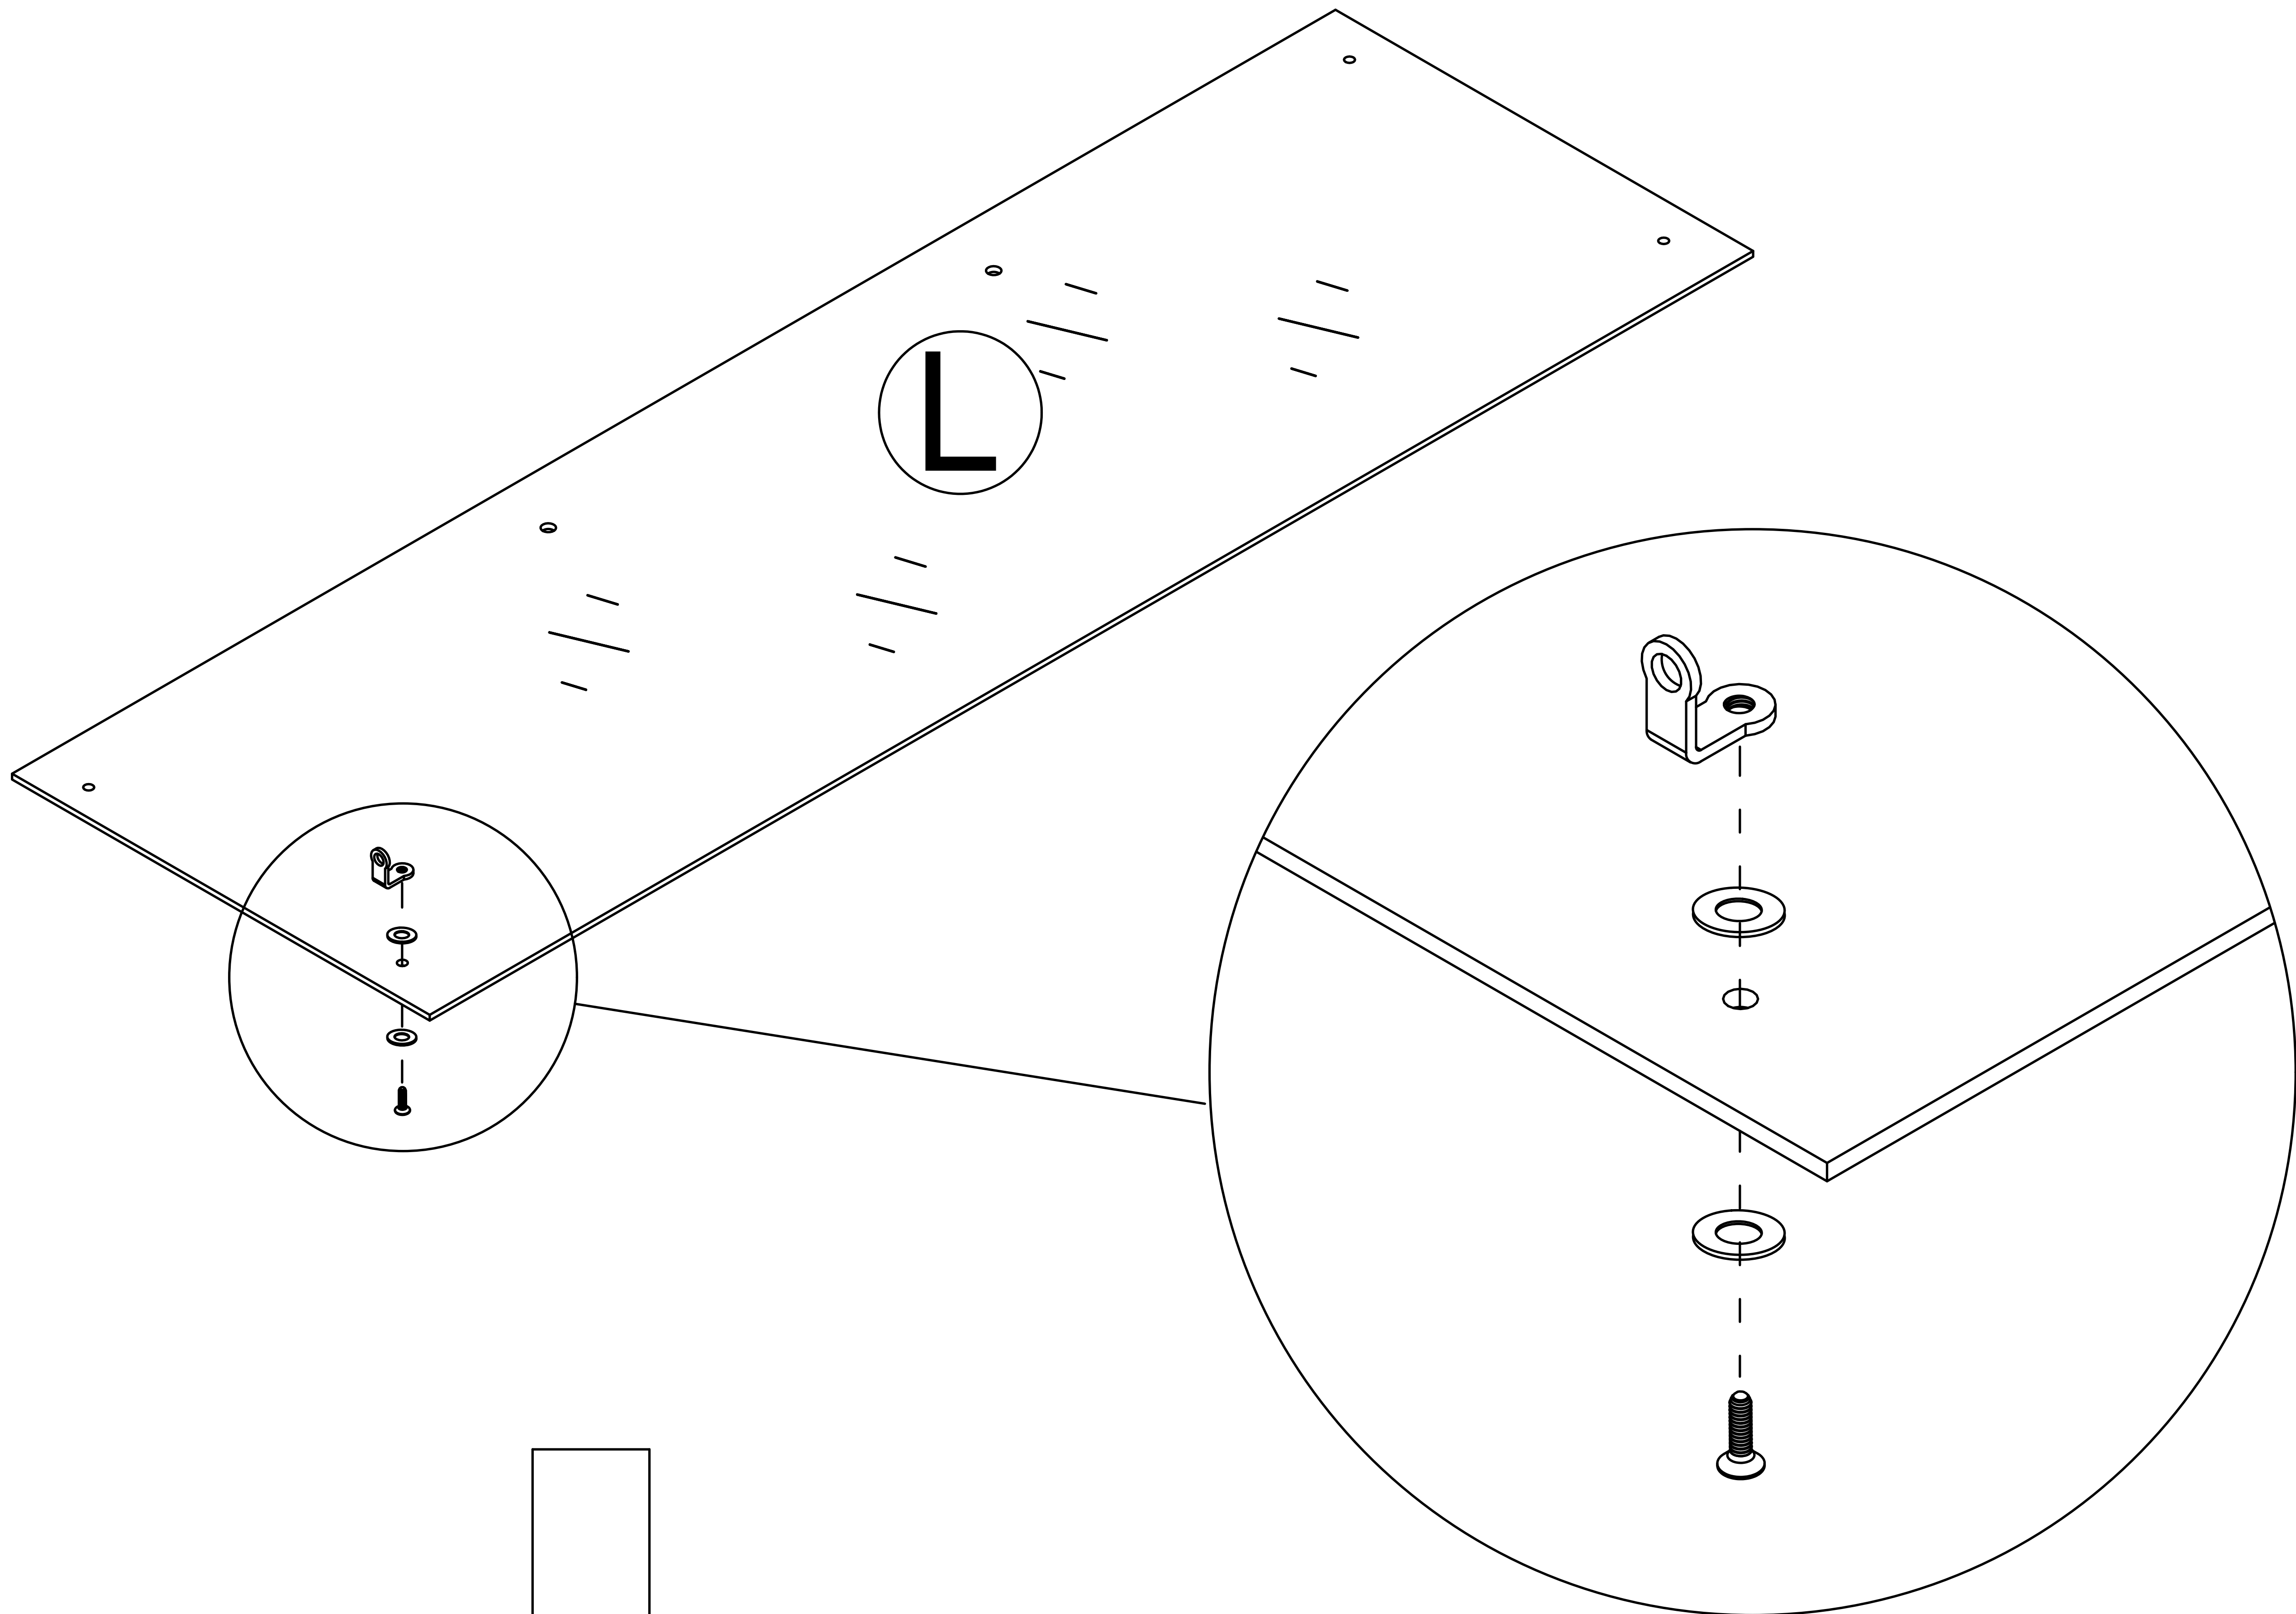


Step 26

5

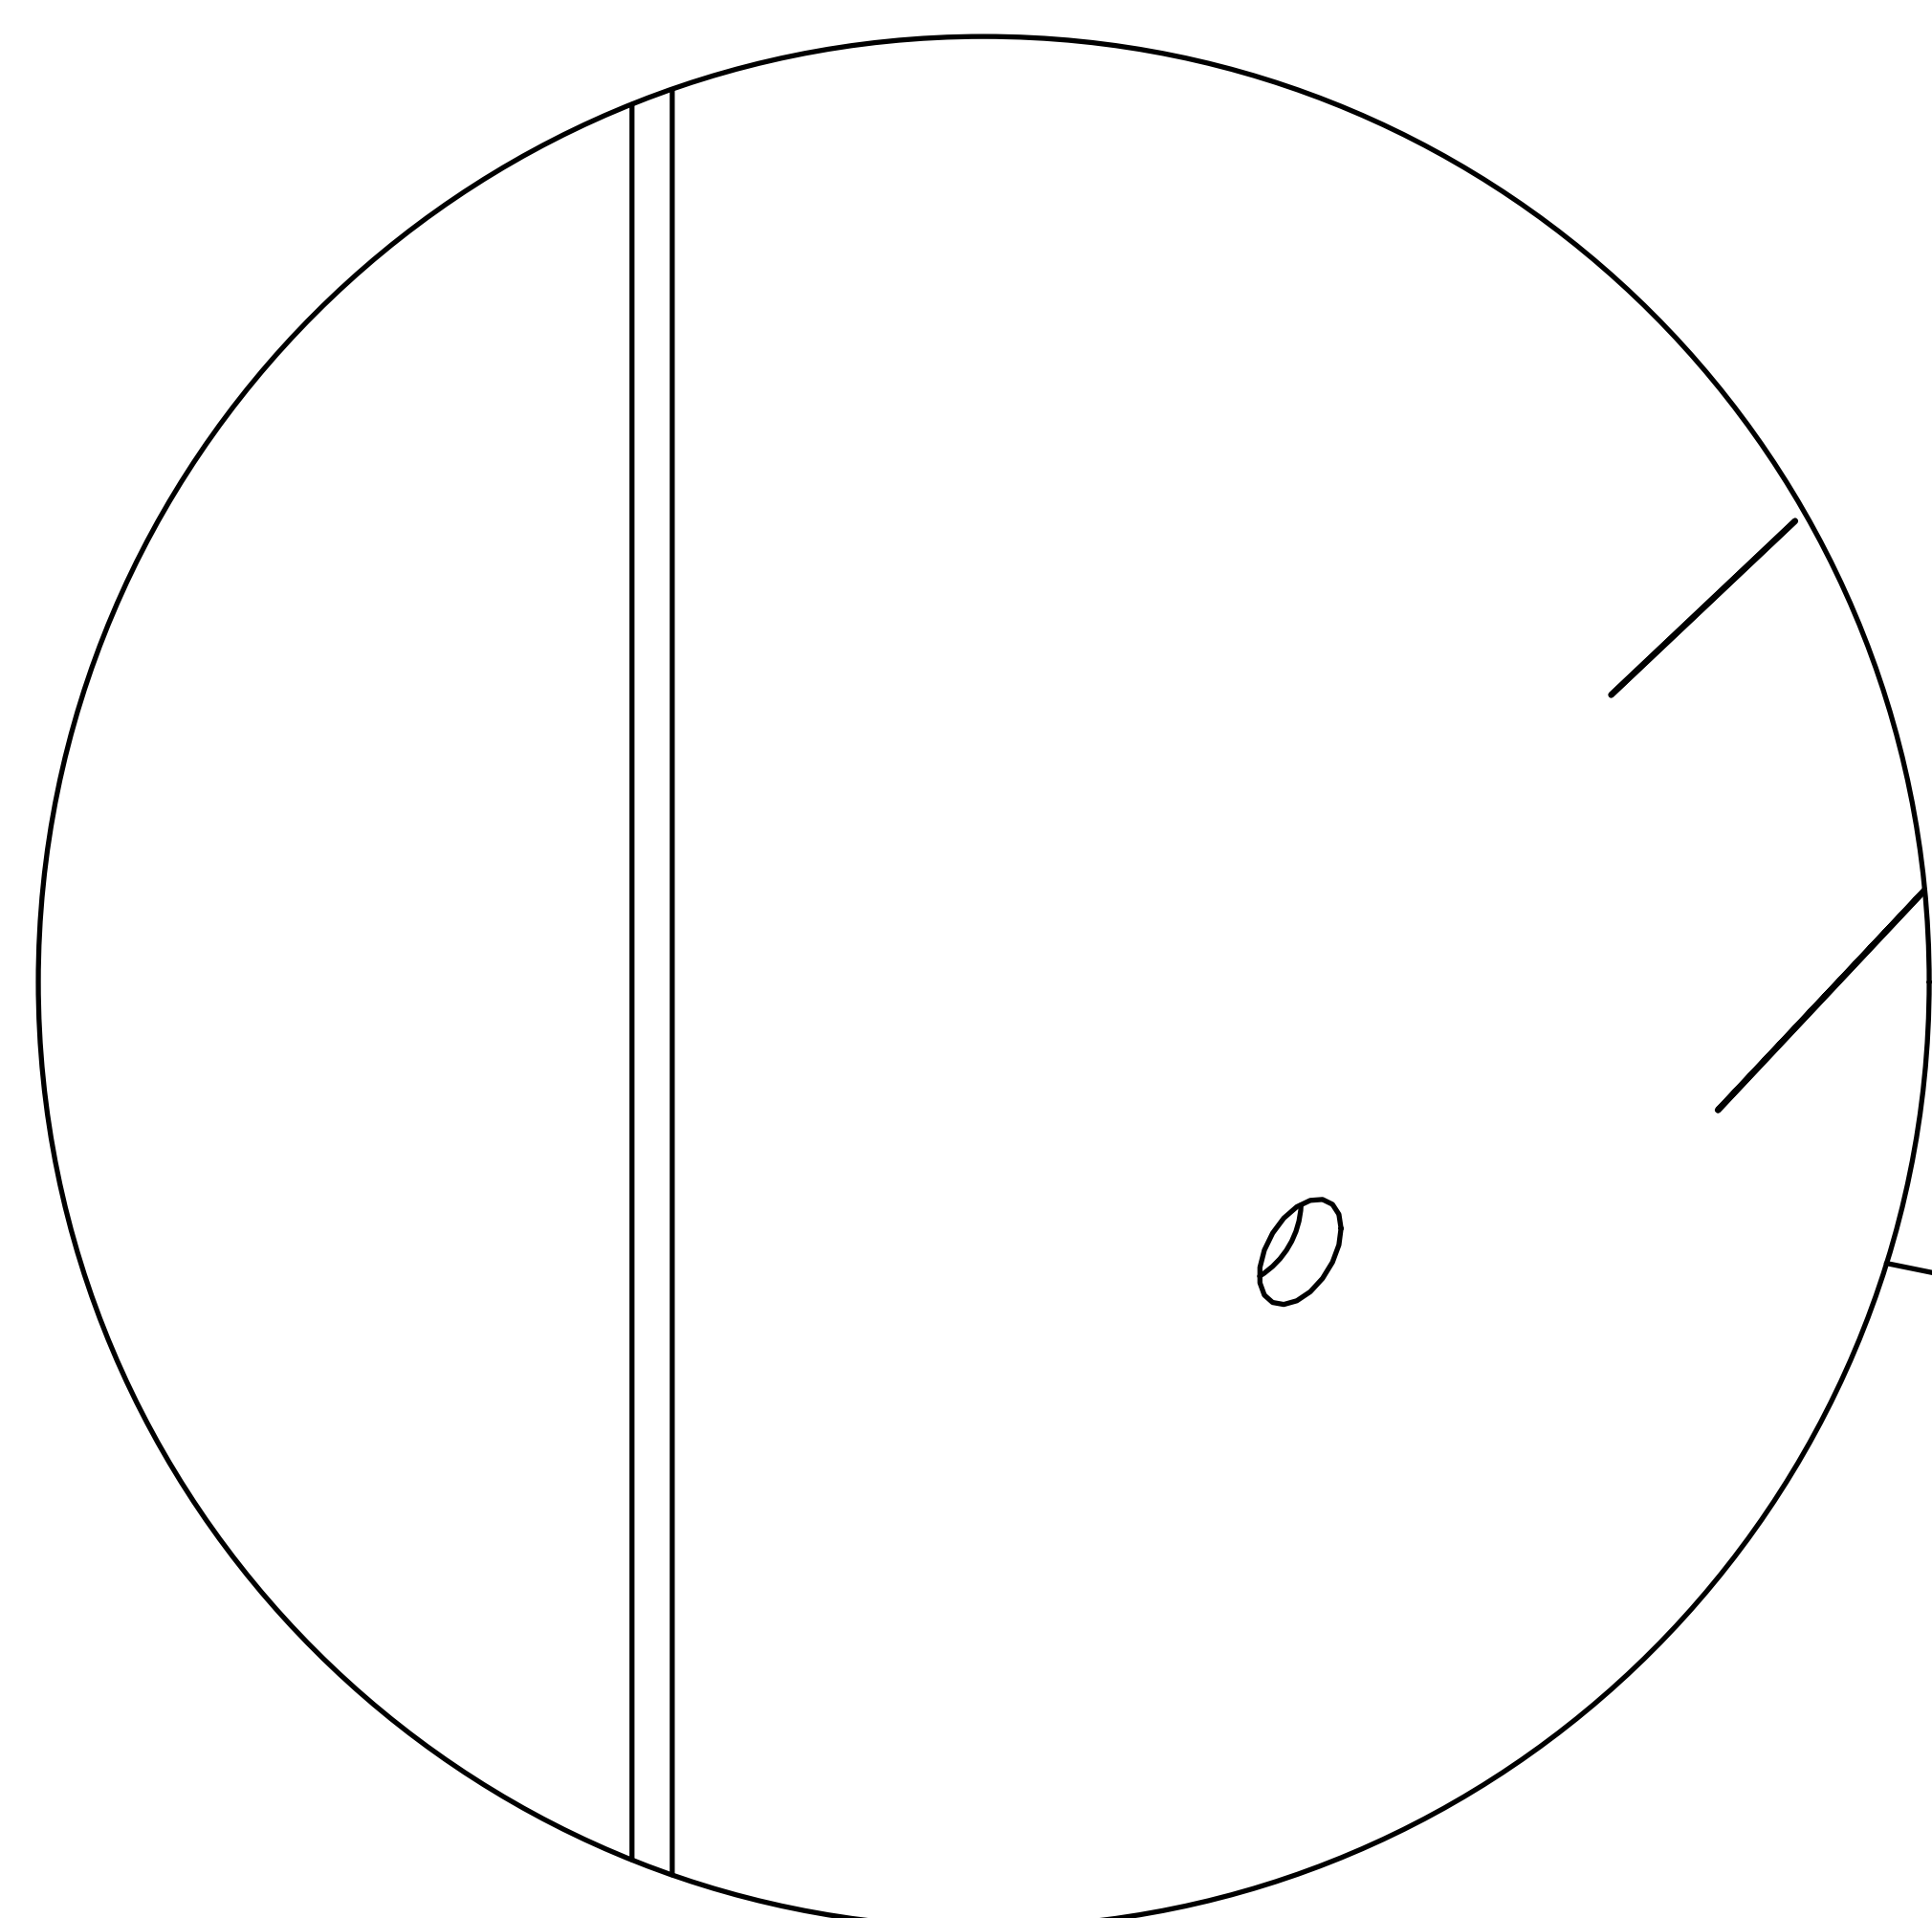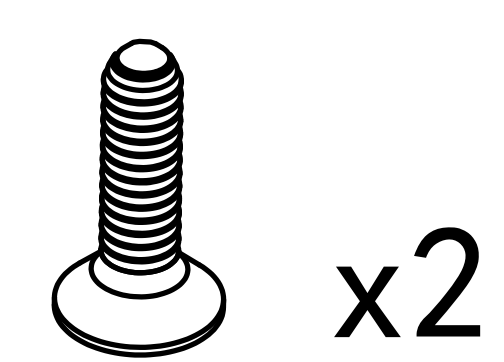


Note hole direction.

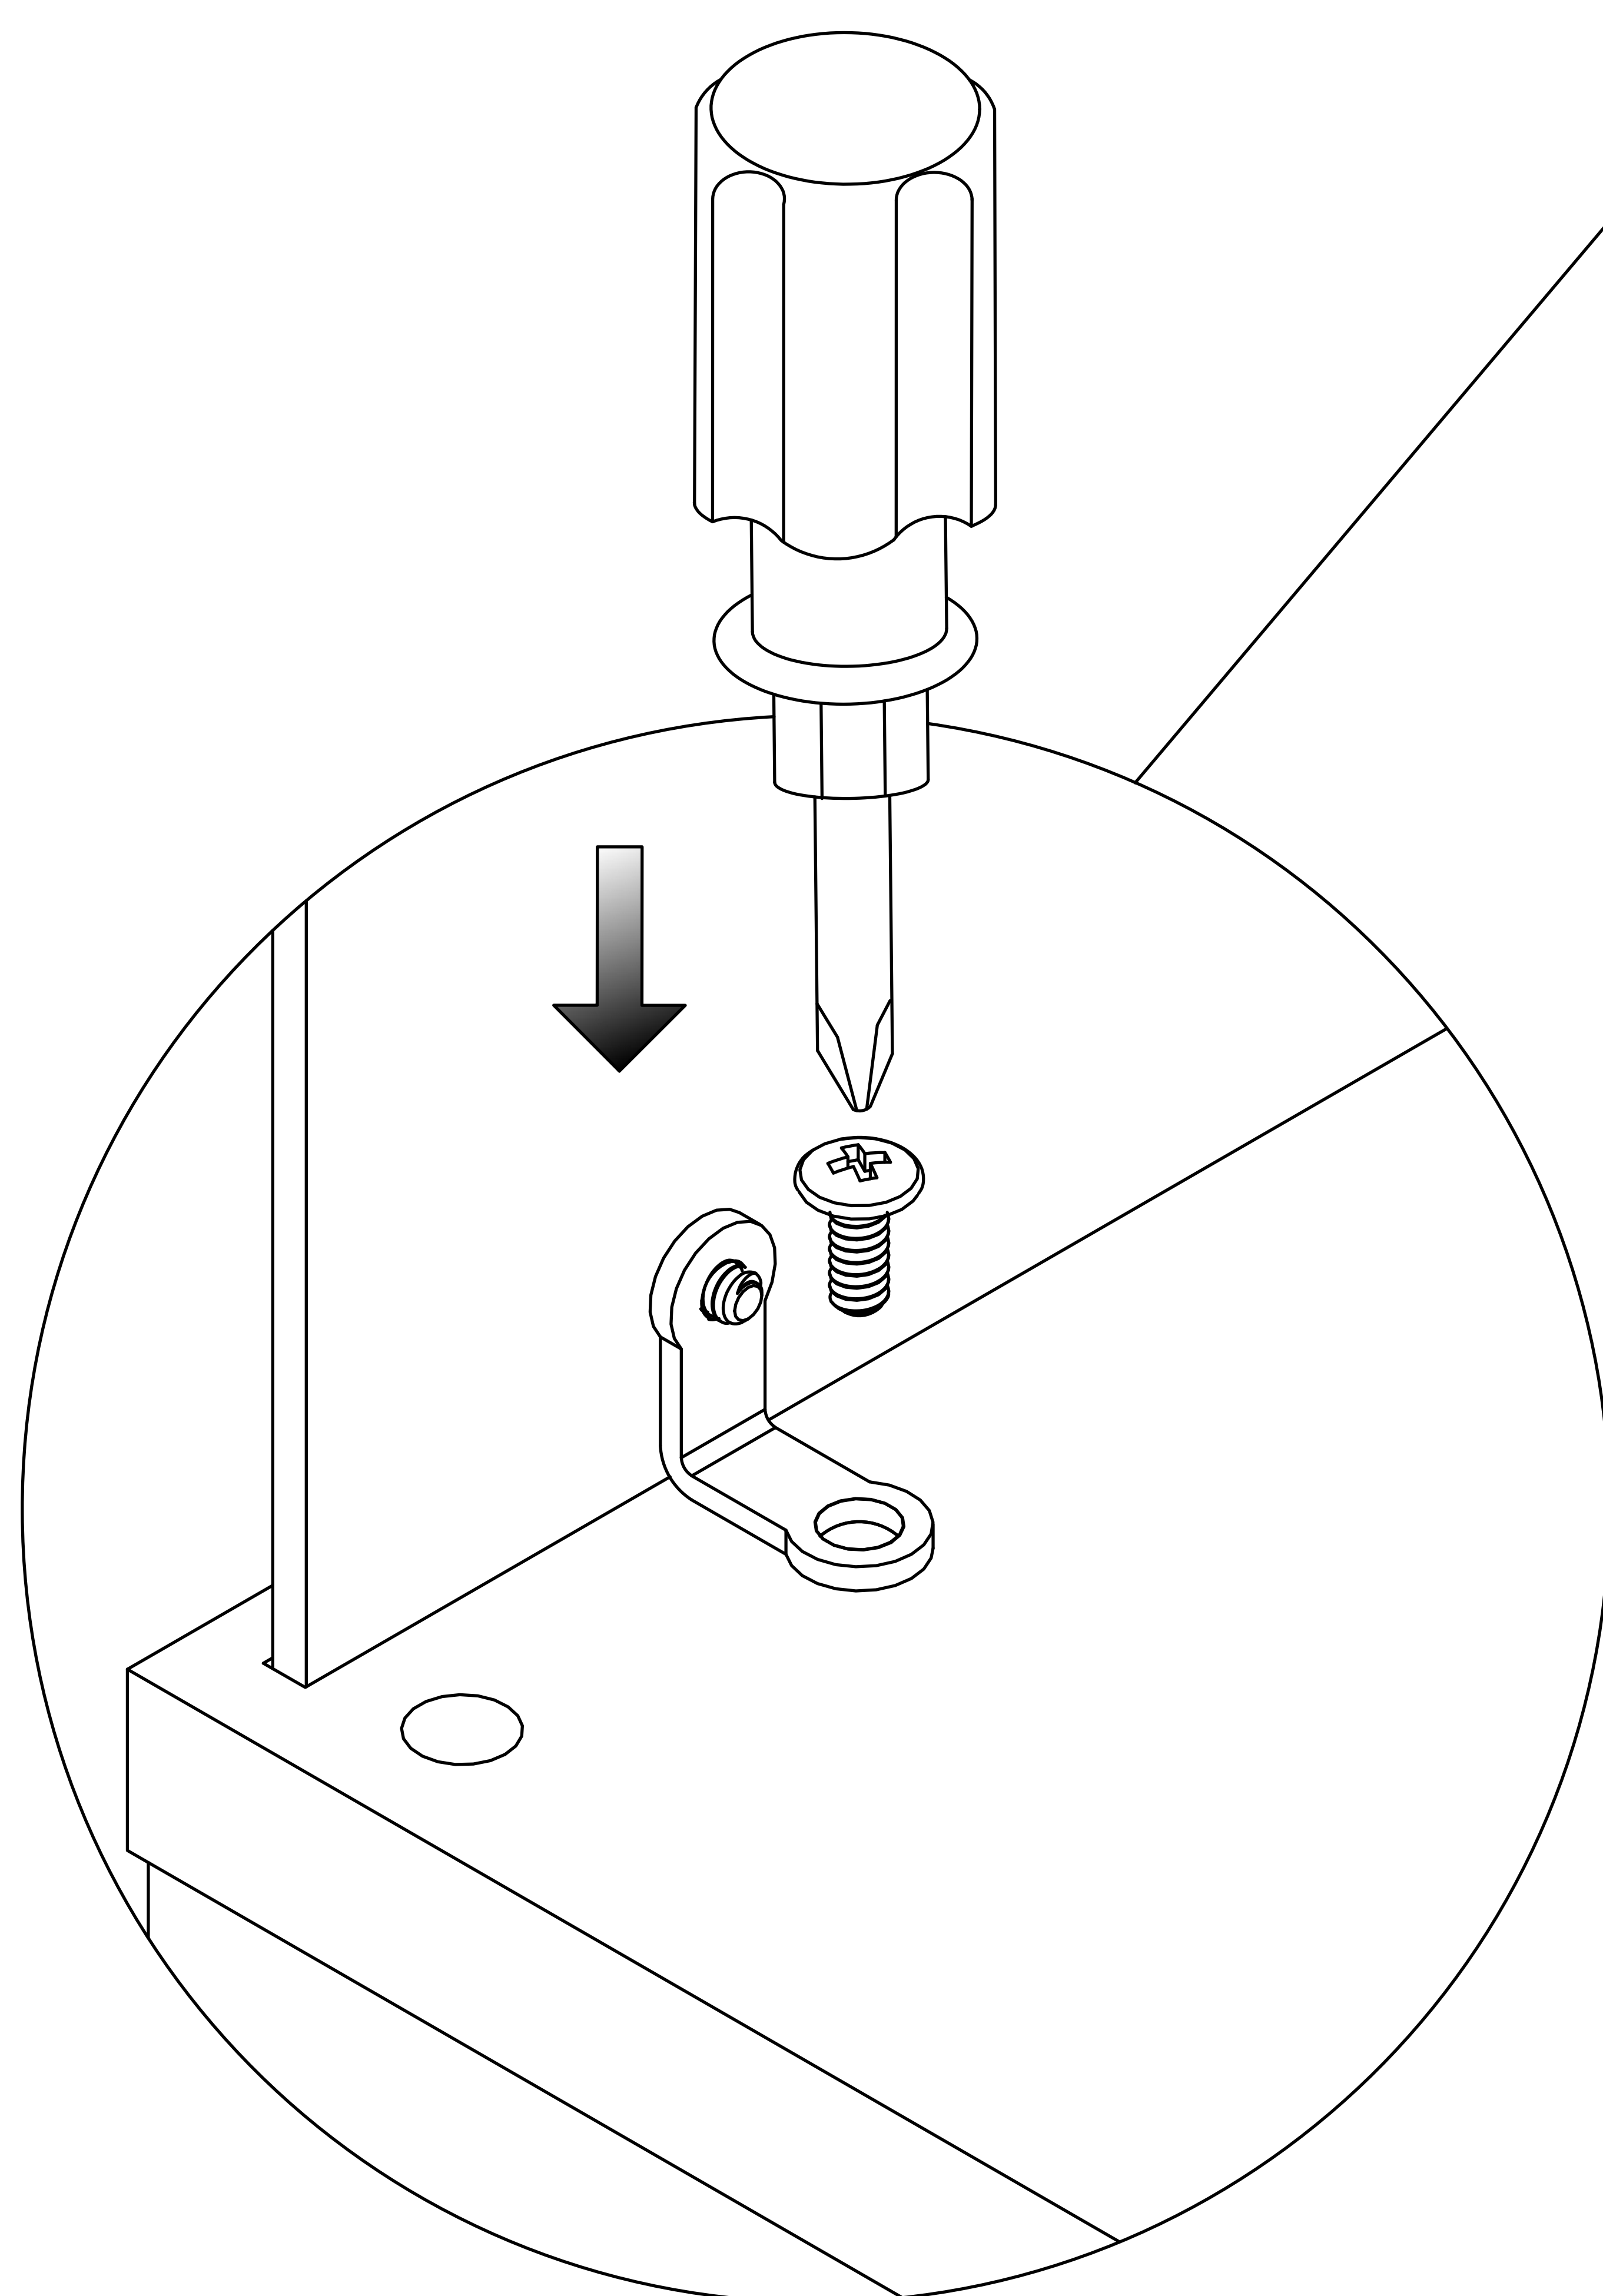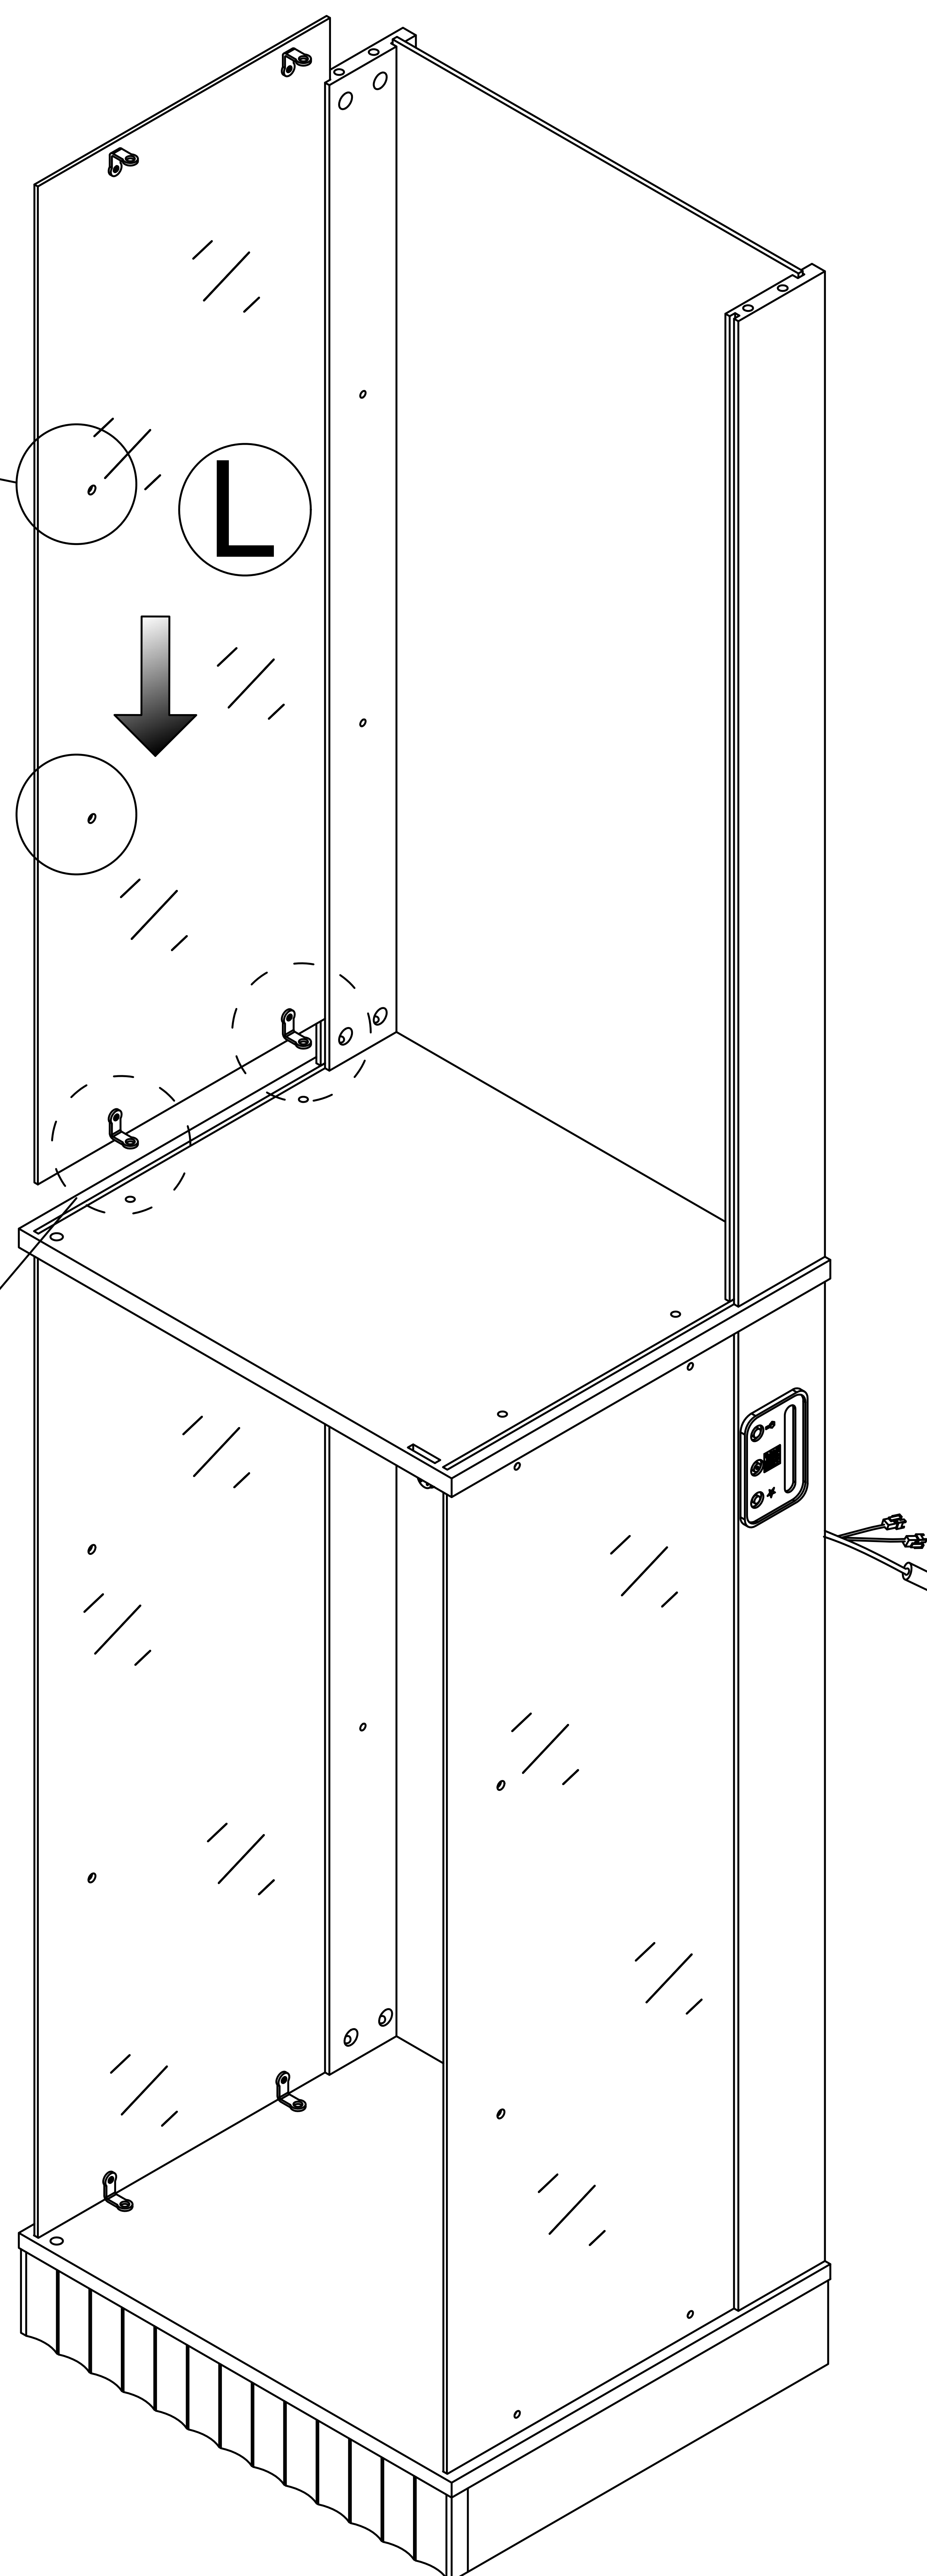


Step 27


4





x4



x8








x4

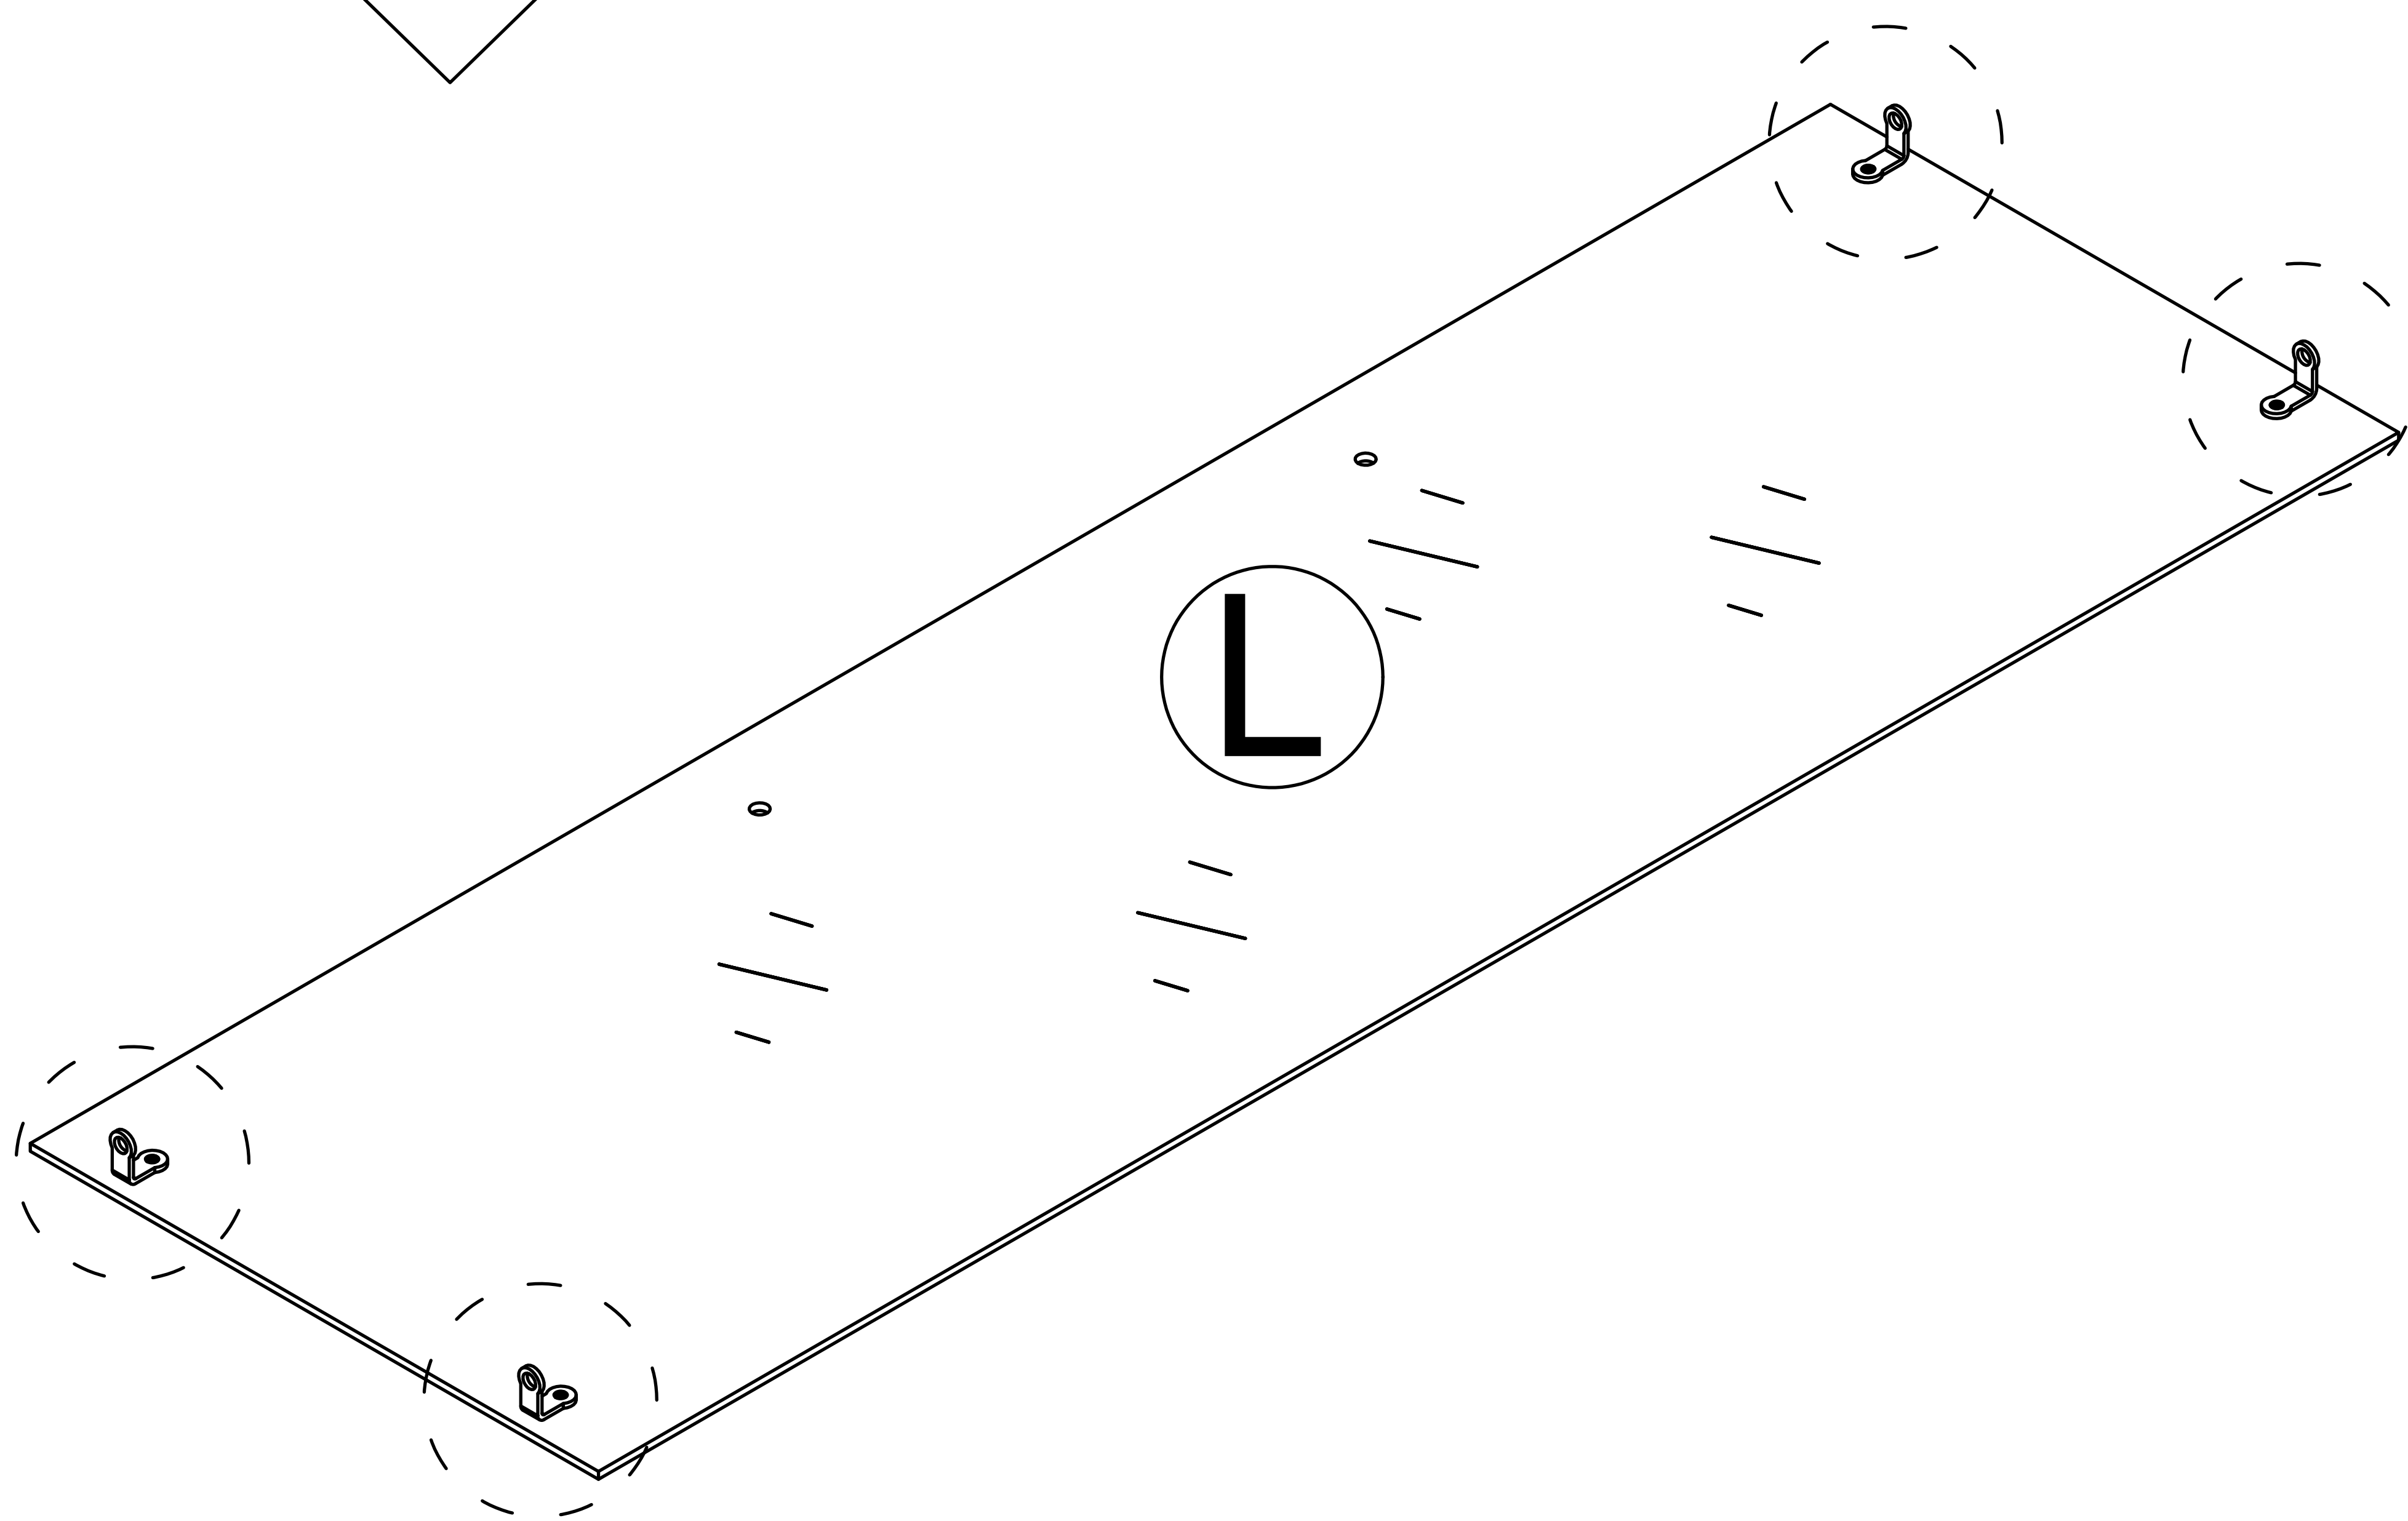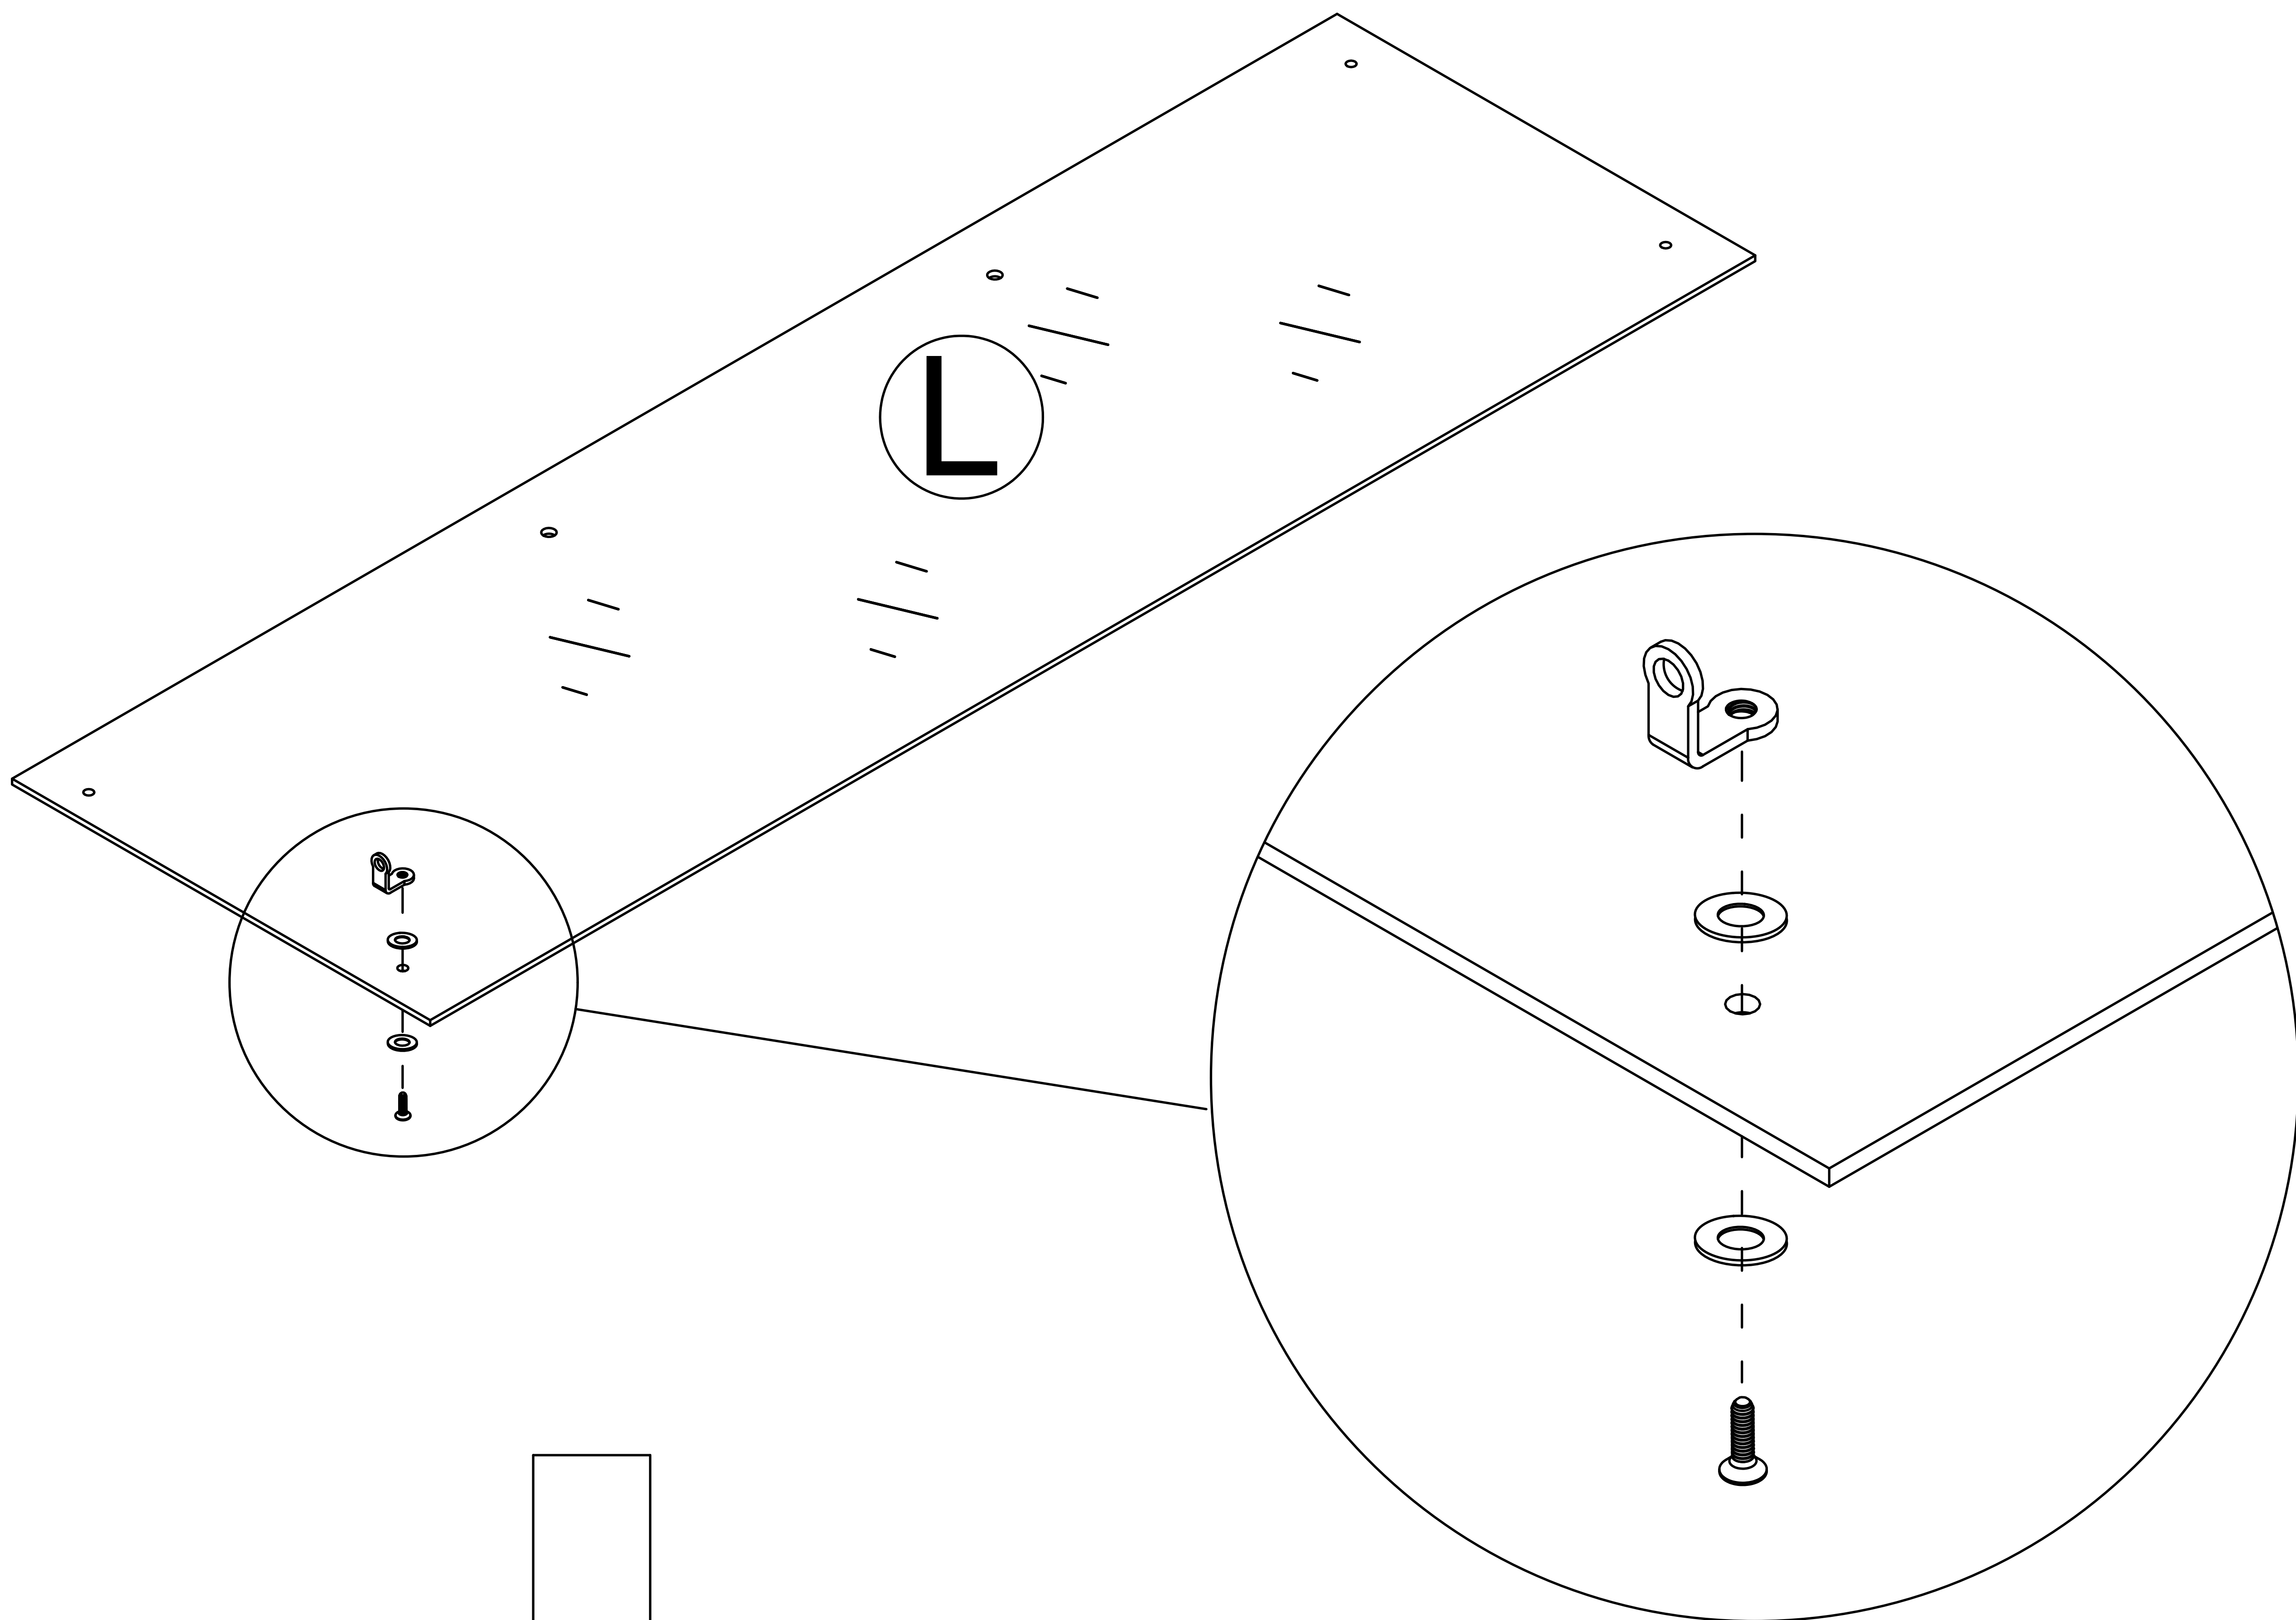


Step 28


5

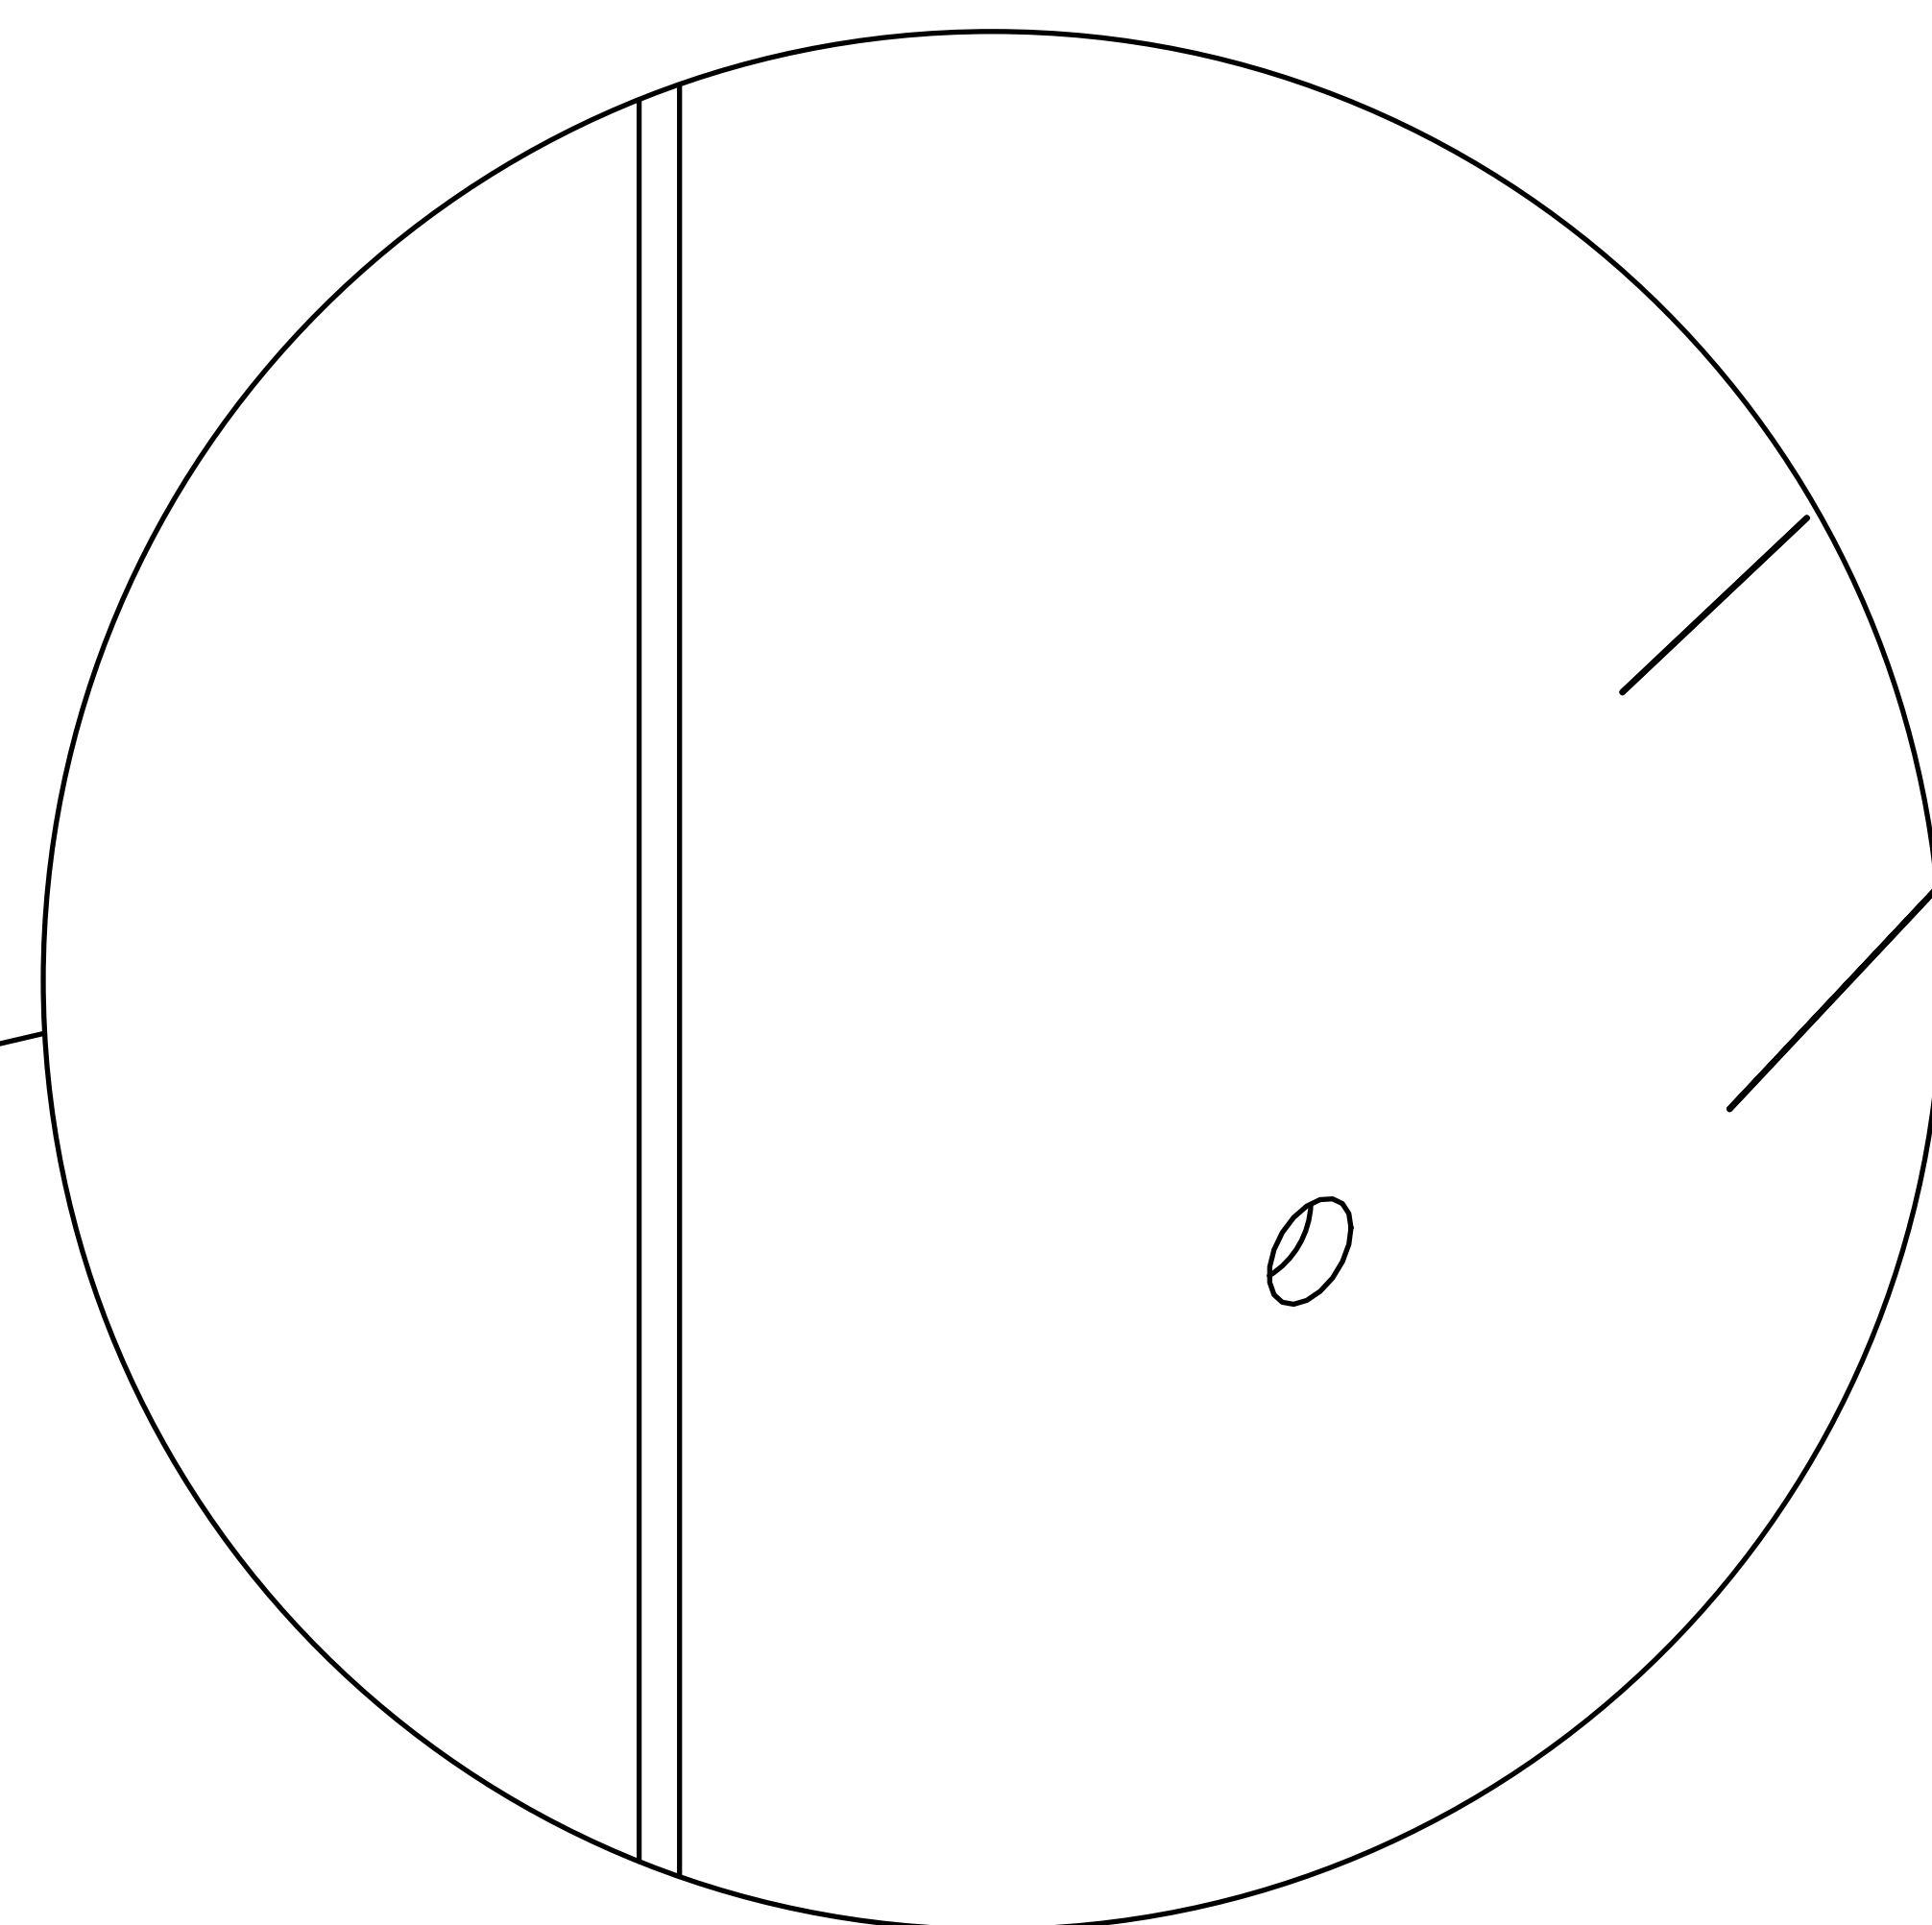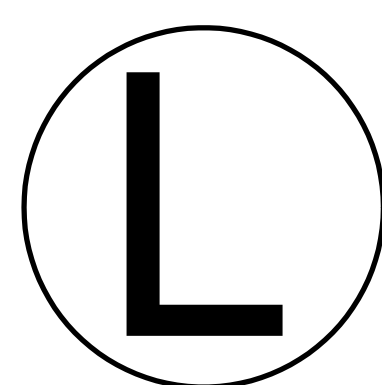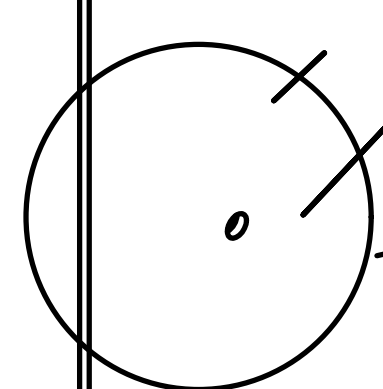
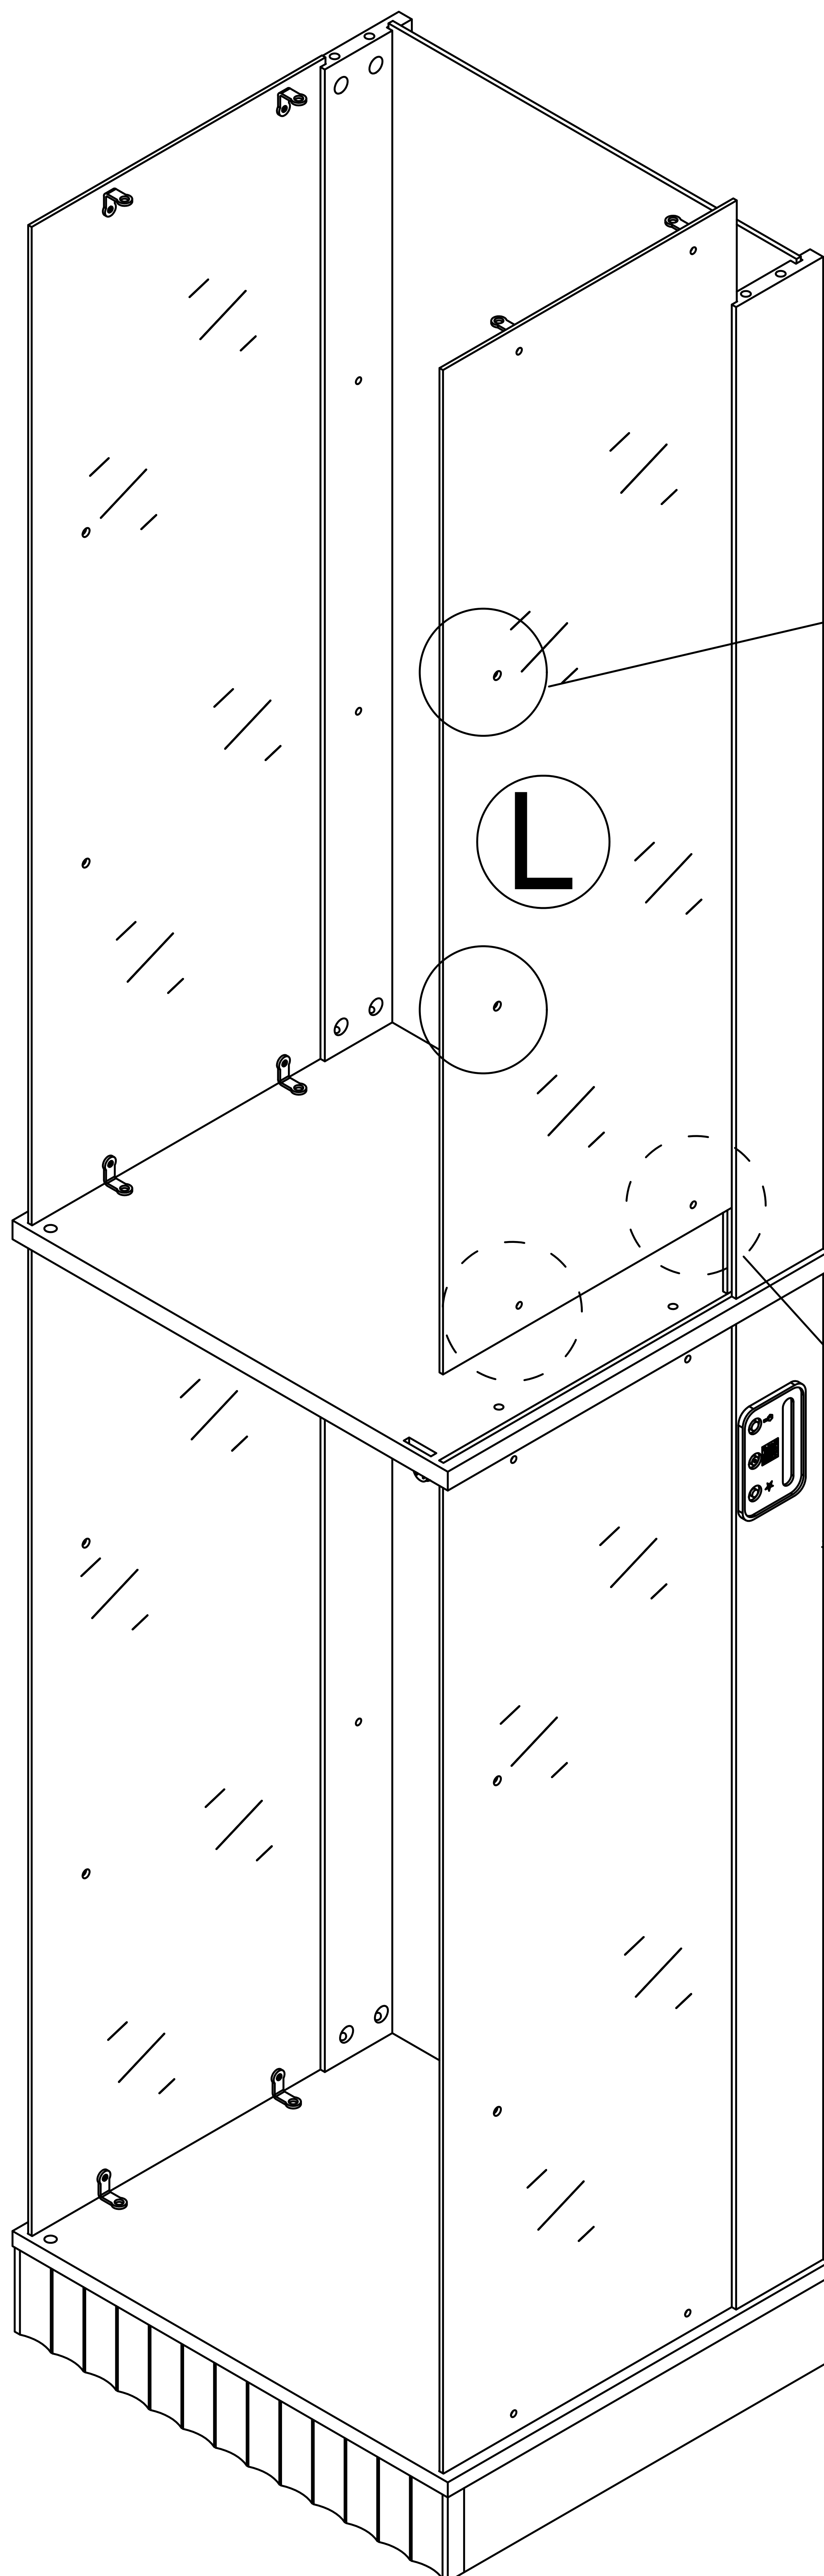
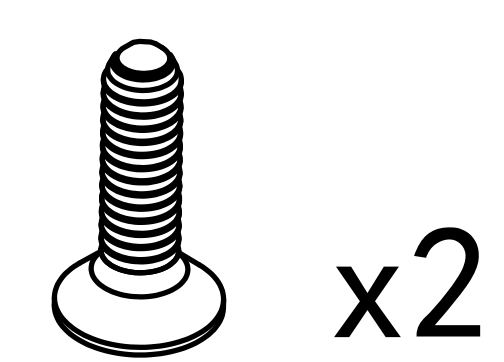


Note hole direction.

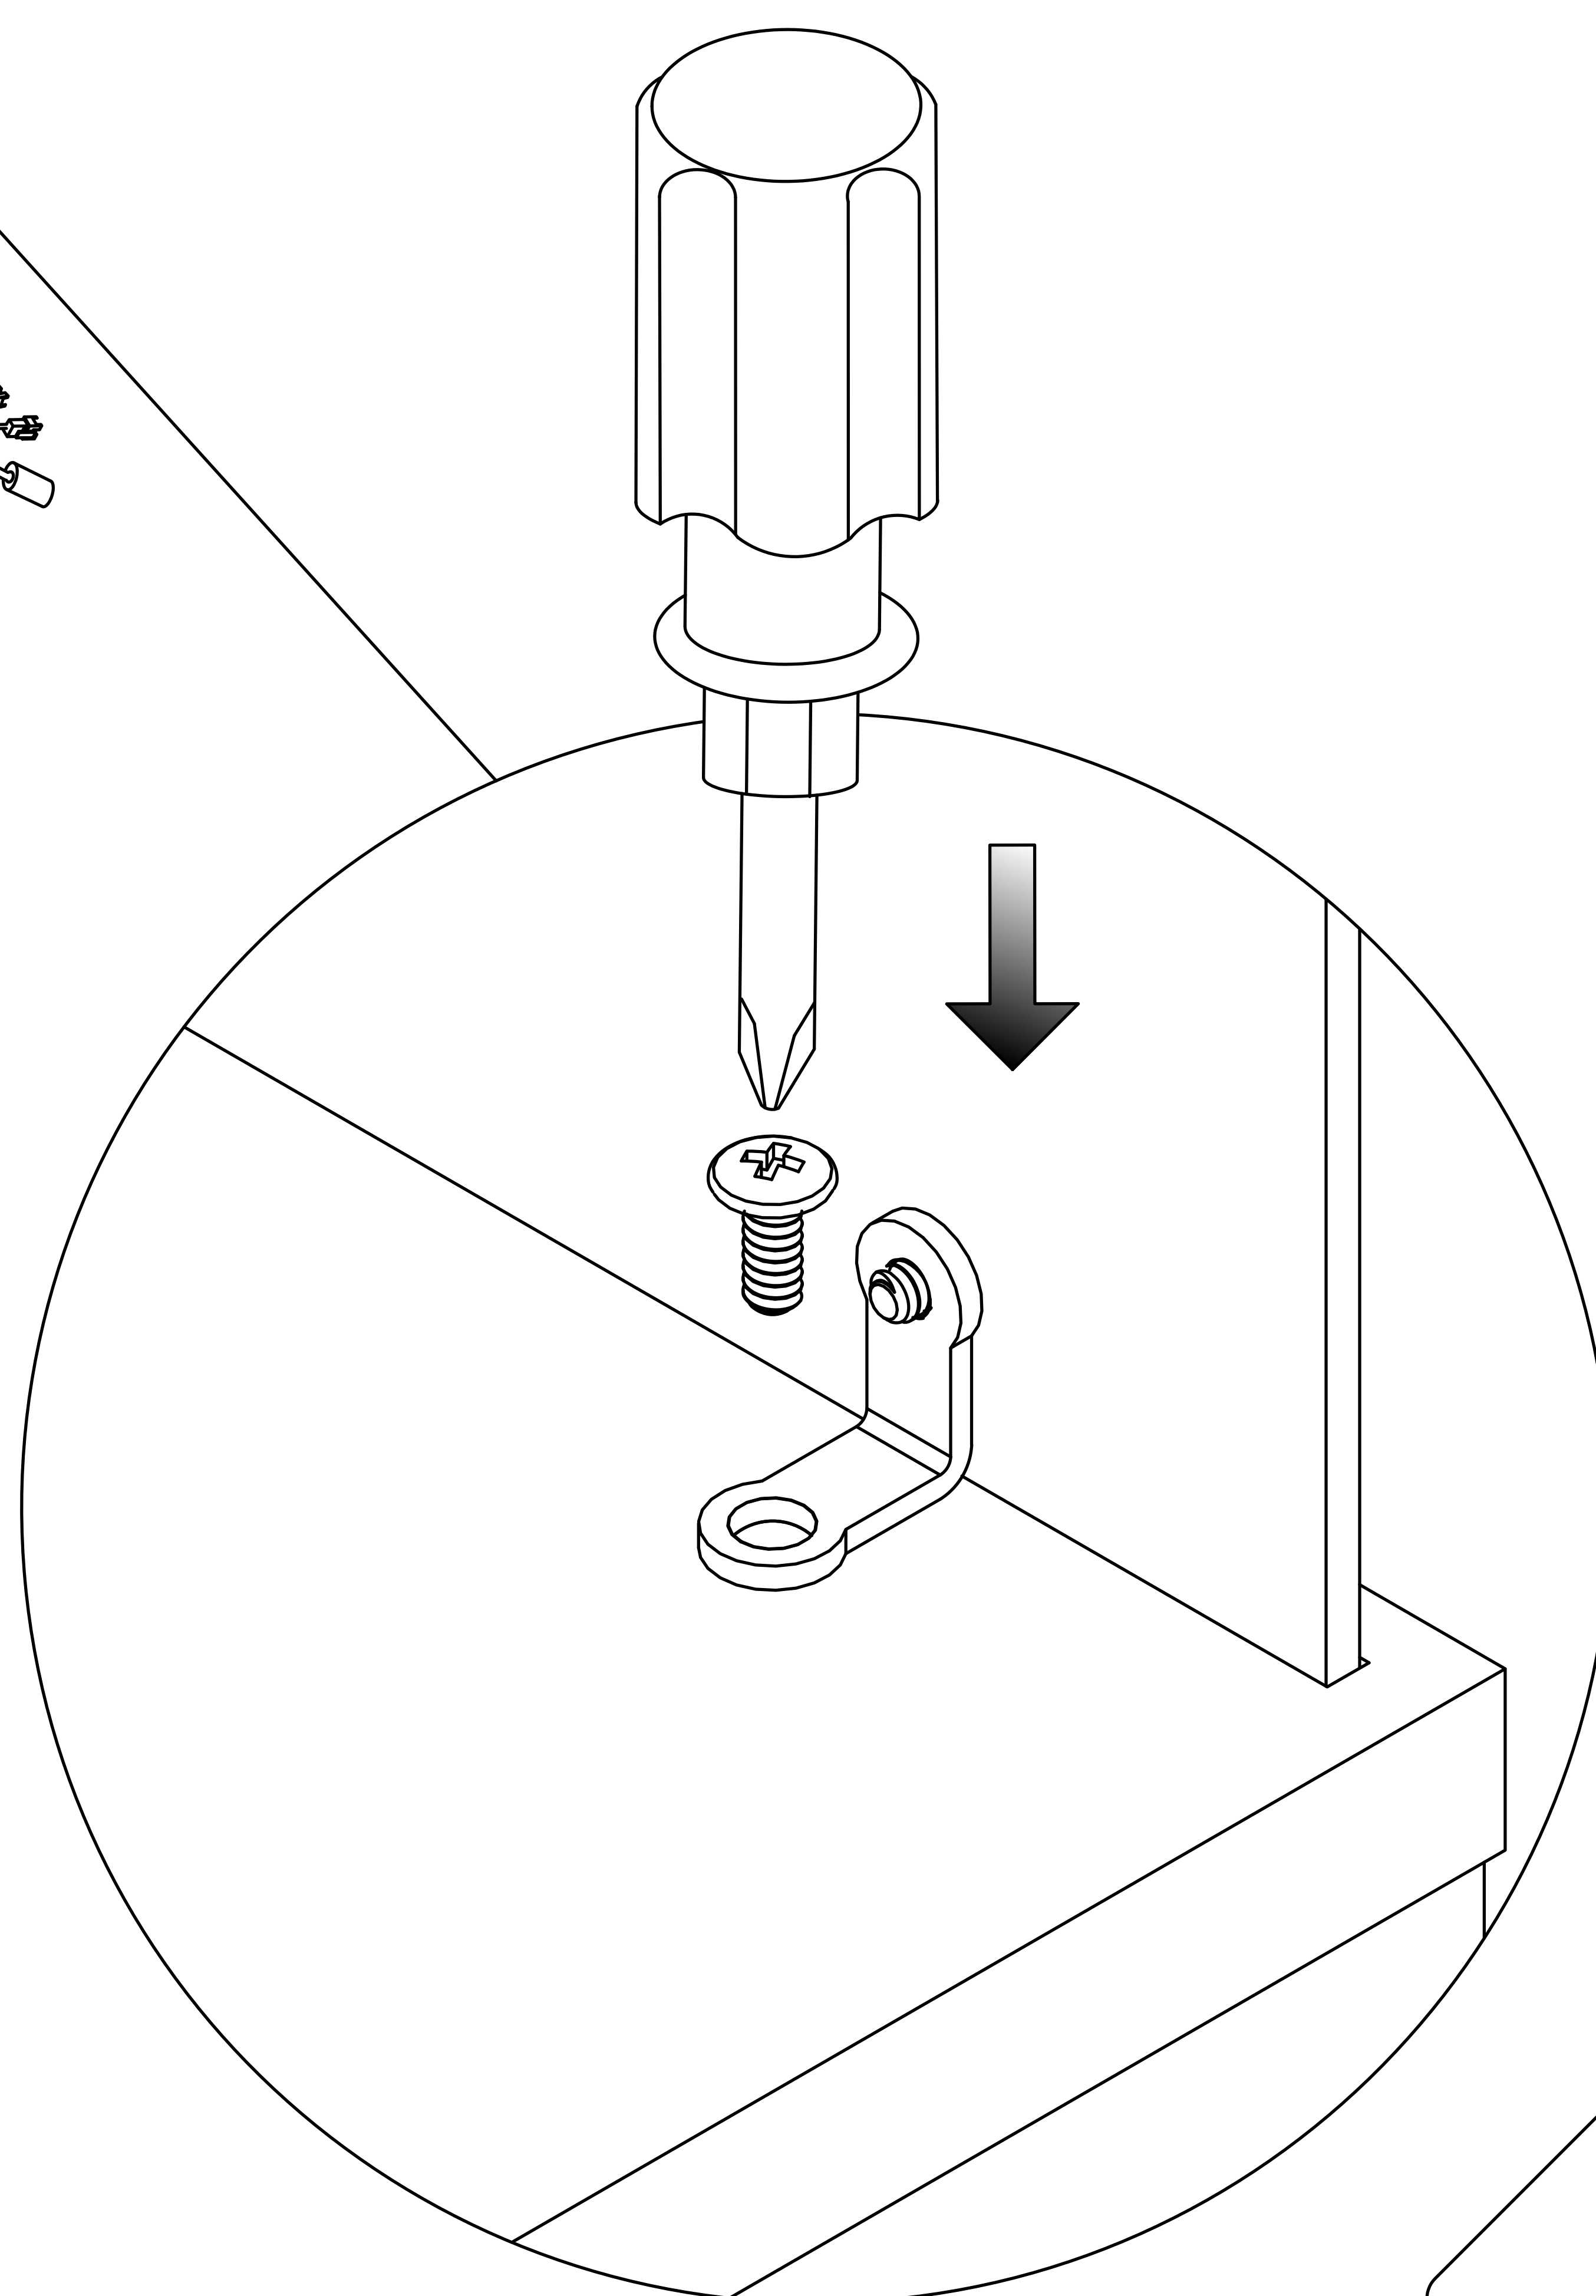




Step 29

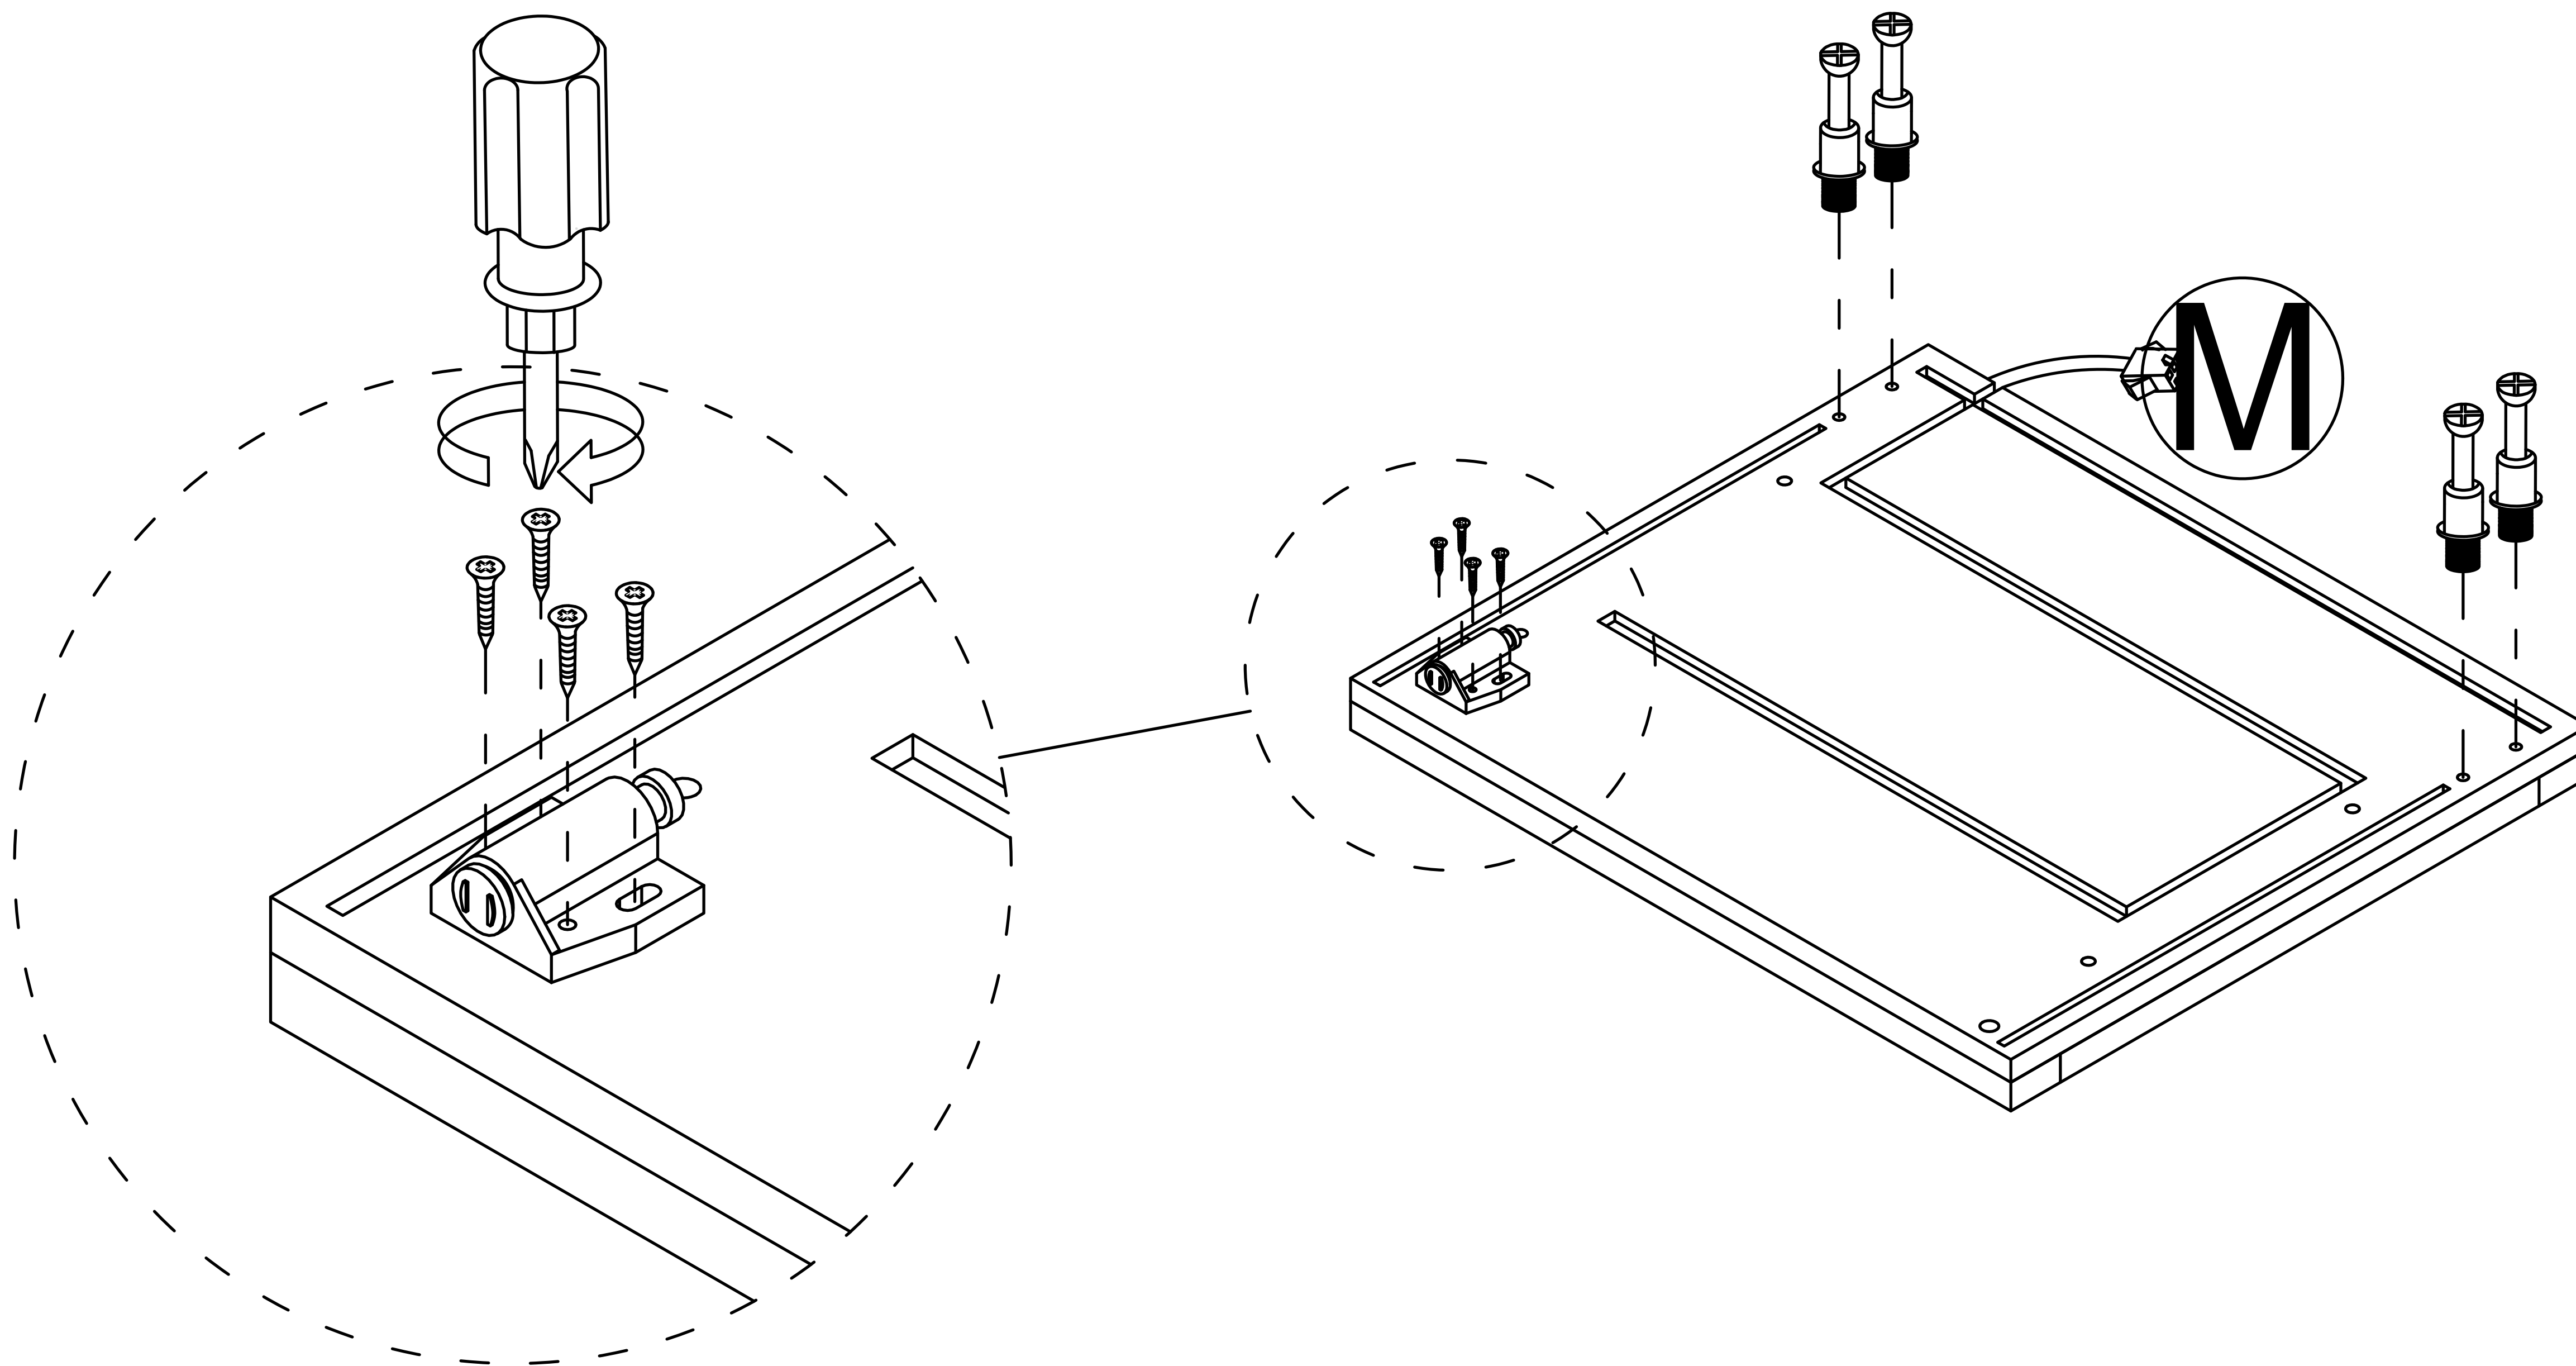

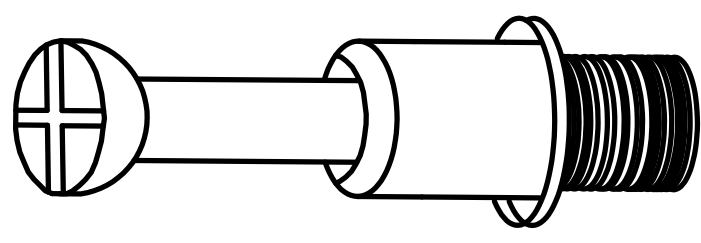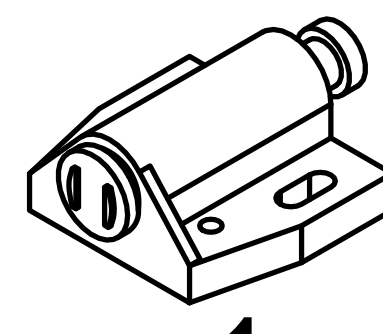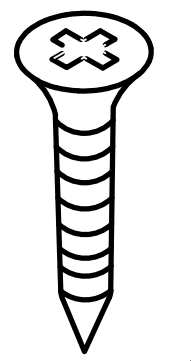- | | | |
|---|---|----|
| 1 |  | x4 |
| 8 |  | x1 |
| |  | x4 |


Step 30

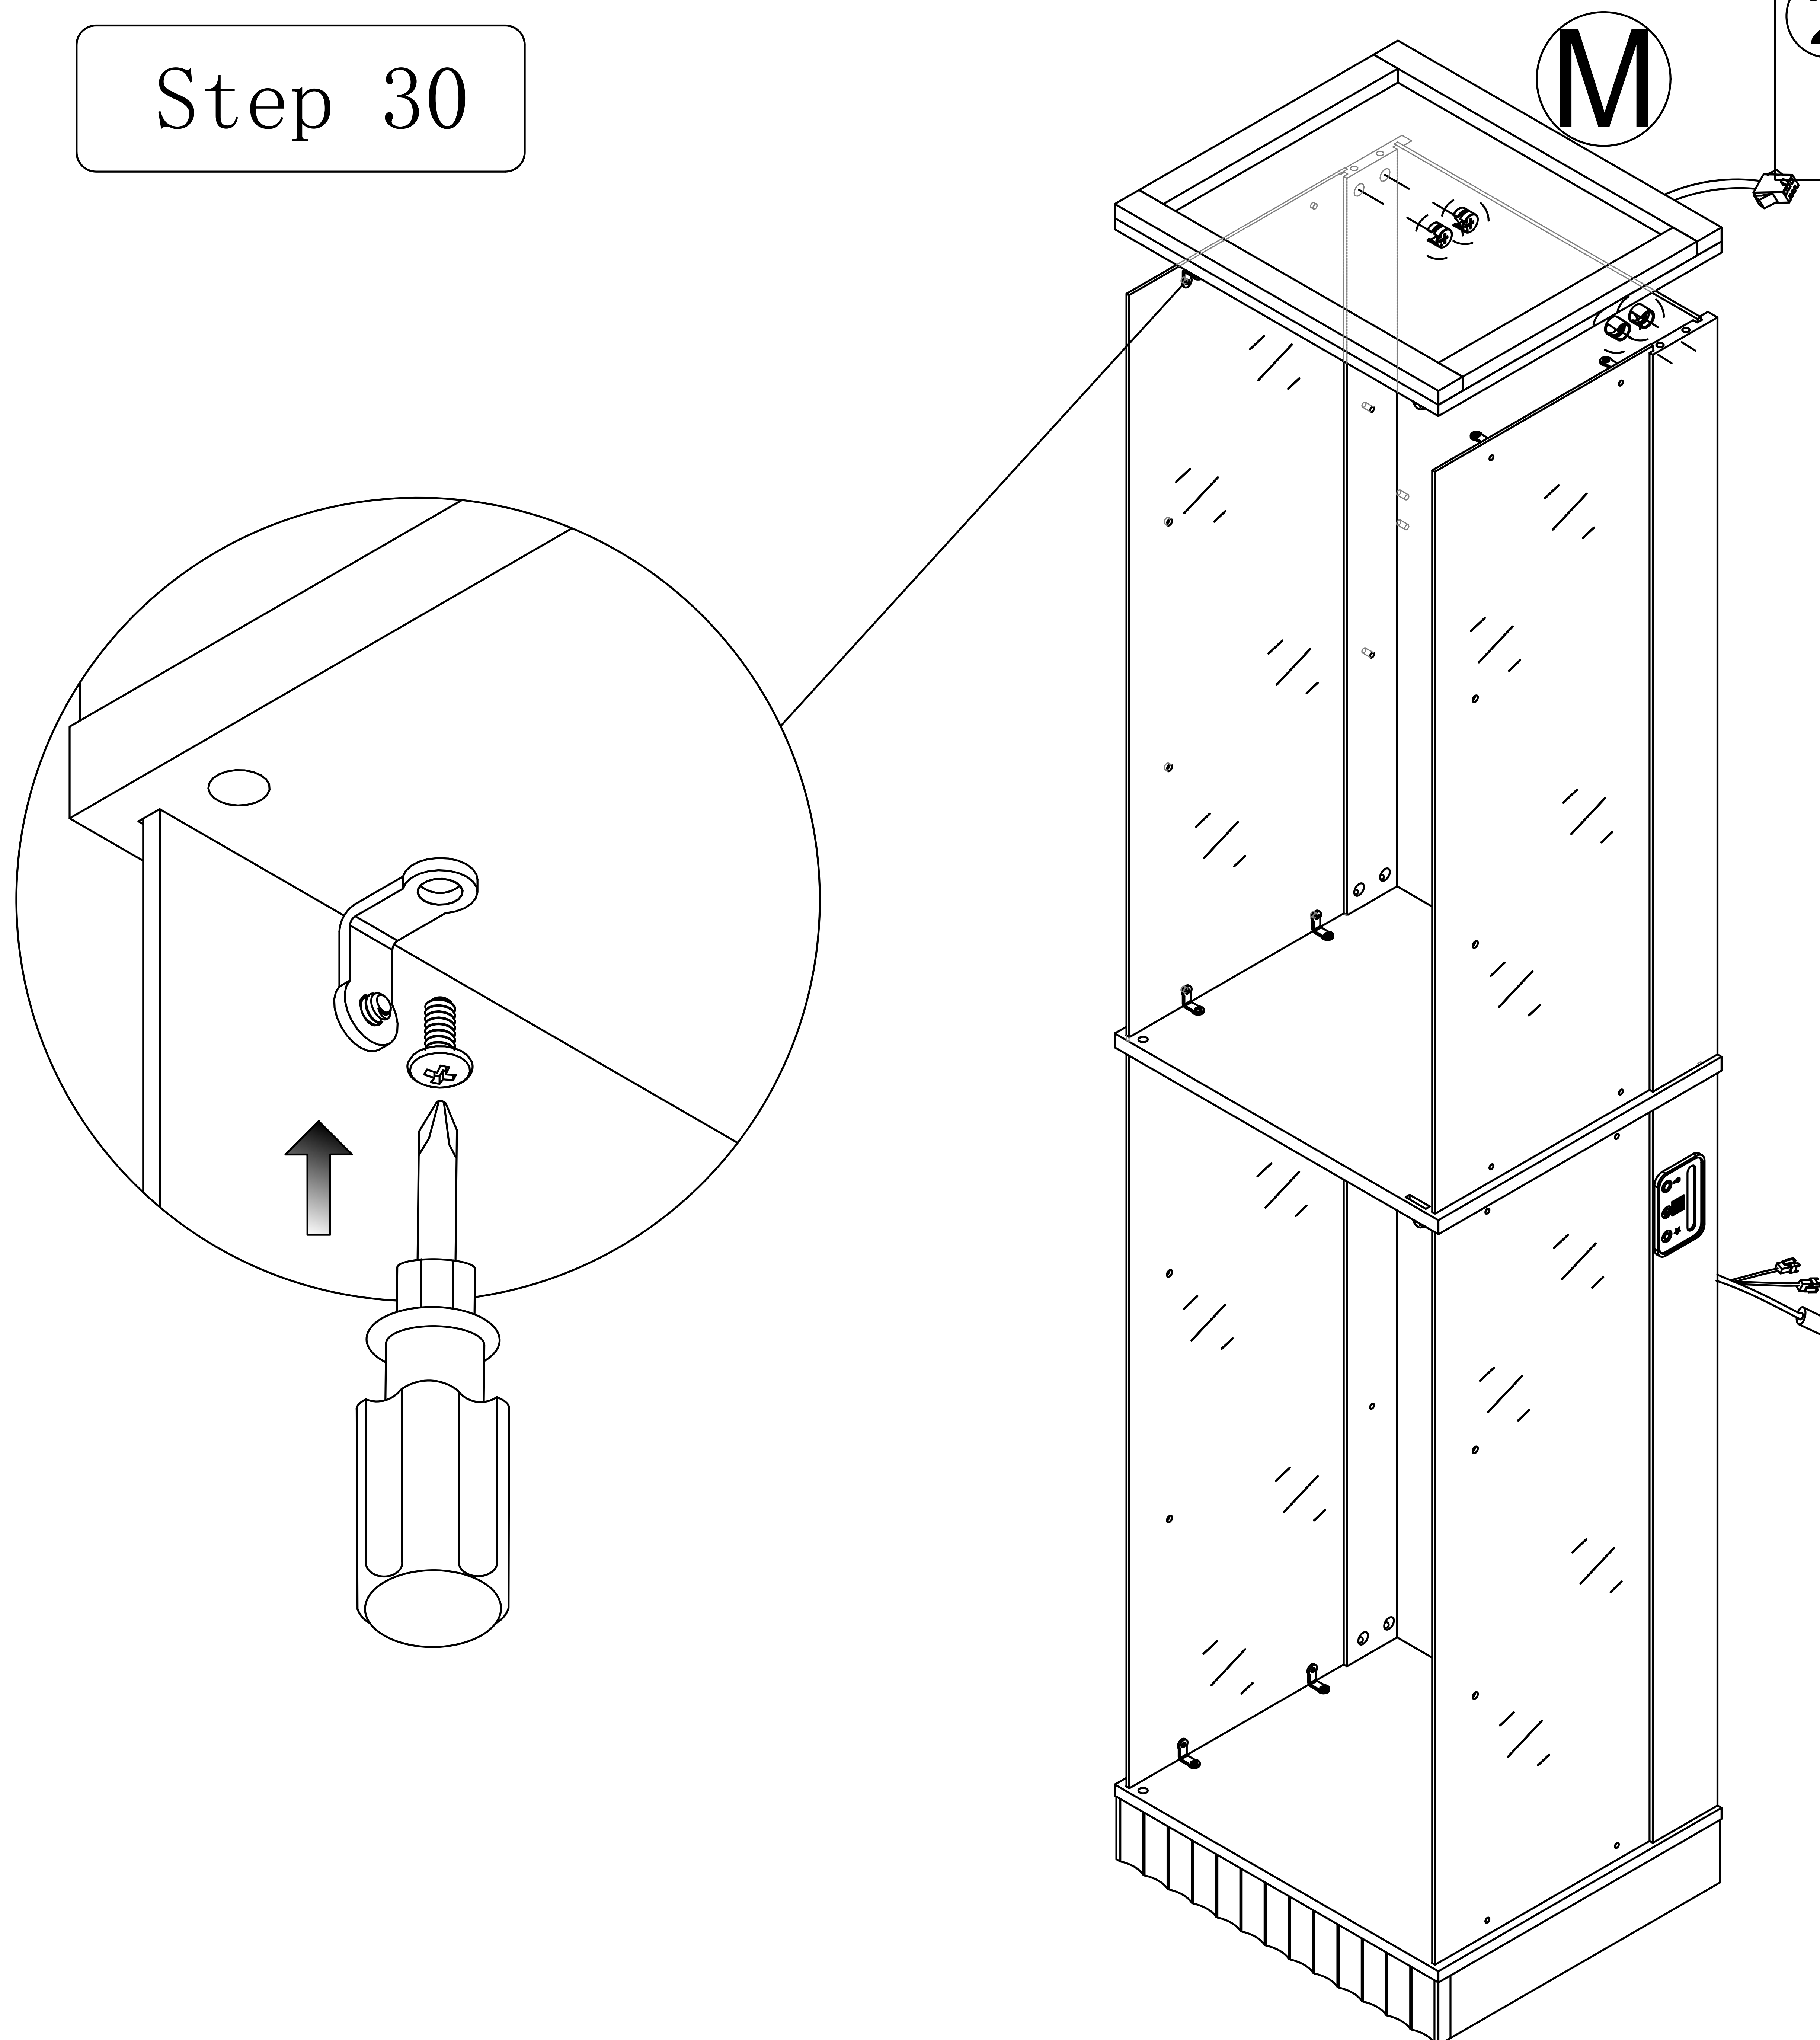

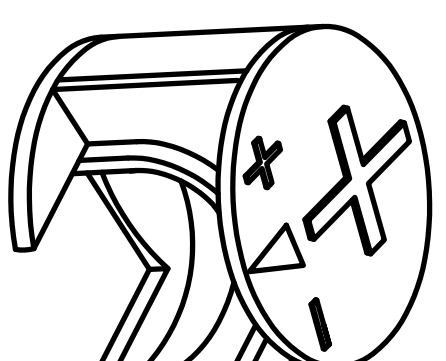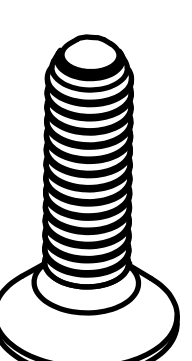
- | | | |
|---|---|----|
| 2 |  | x4 |
| 5 |  | x4 |

Step 31

6




x8

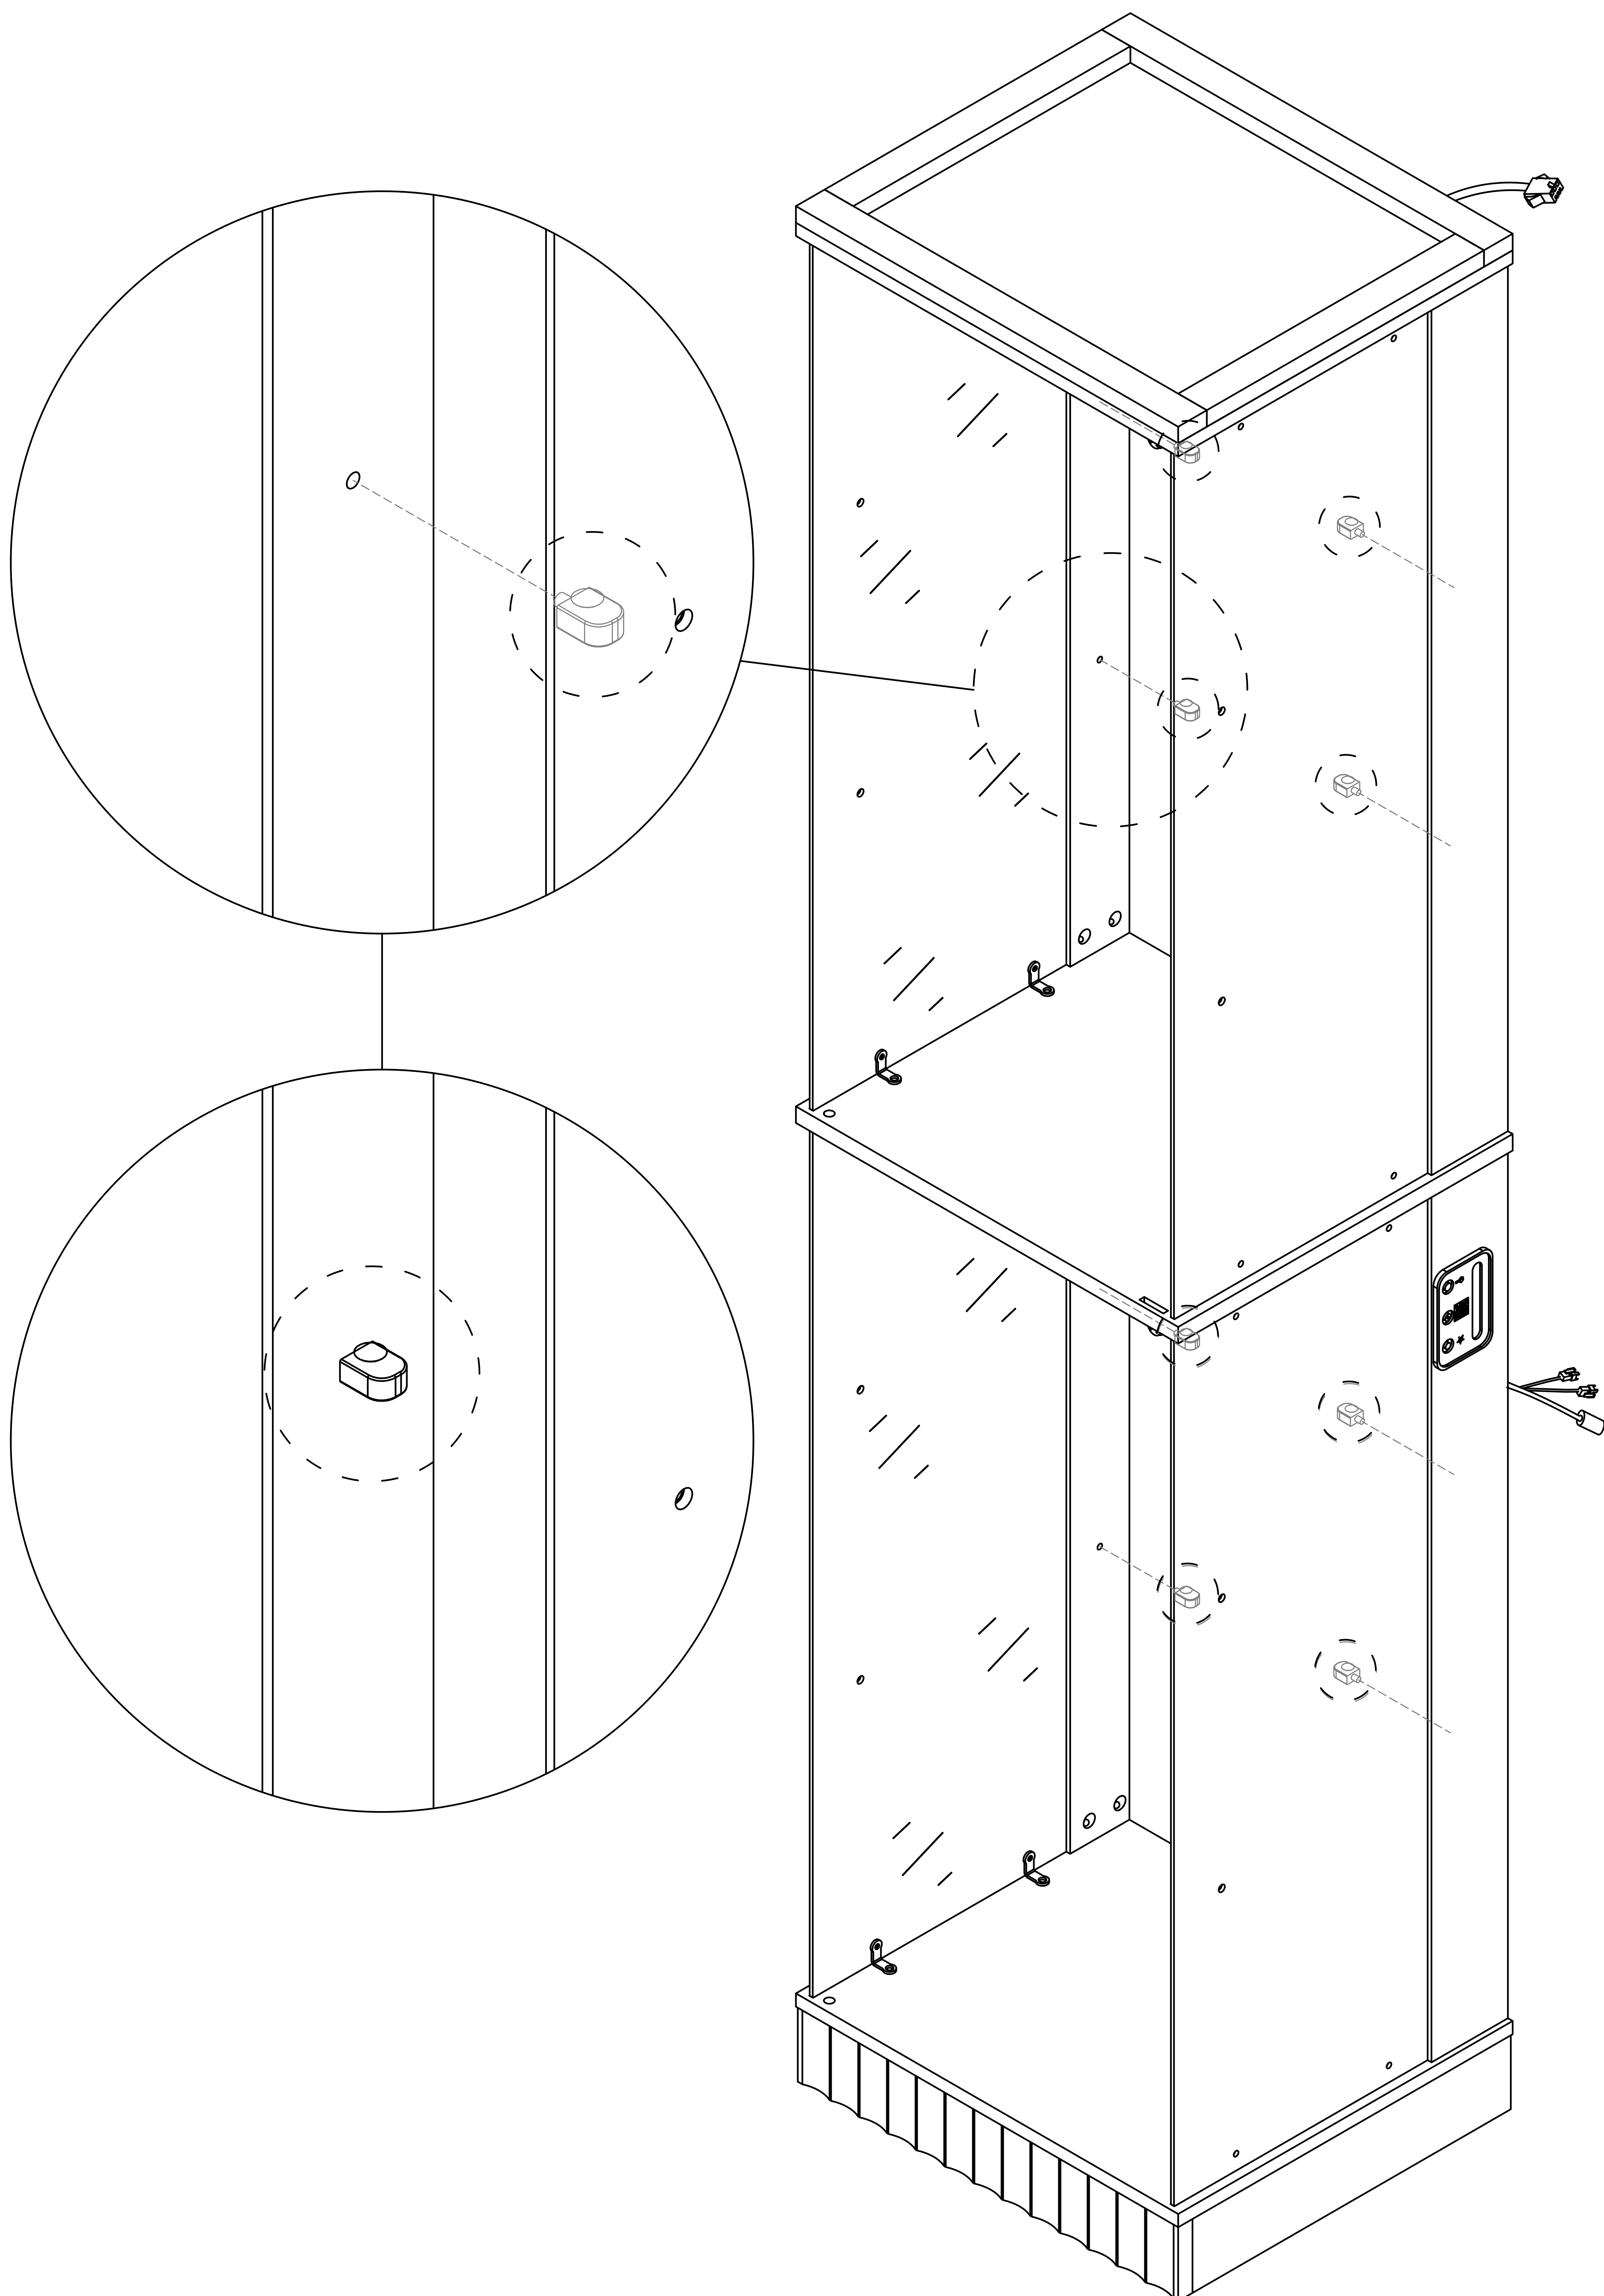


Step 32


7




x8




x16



x8

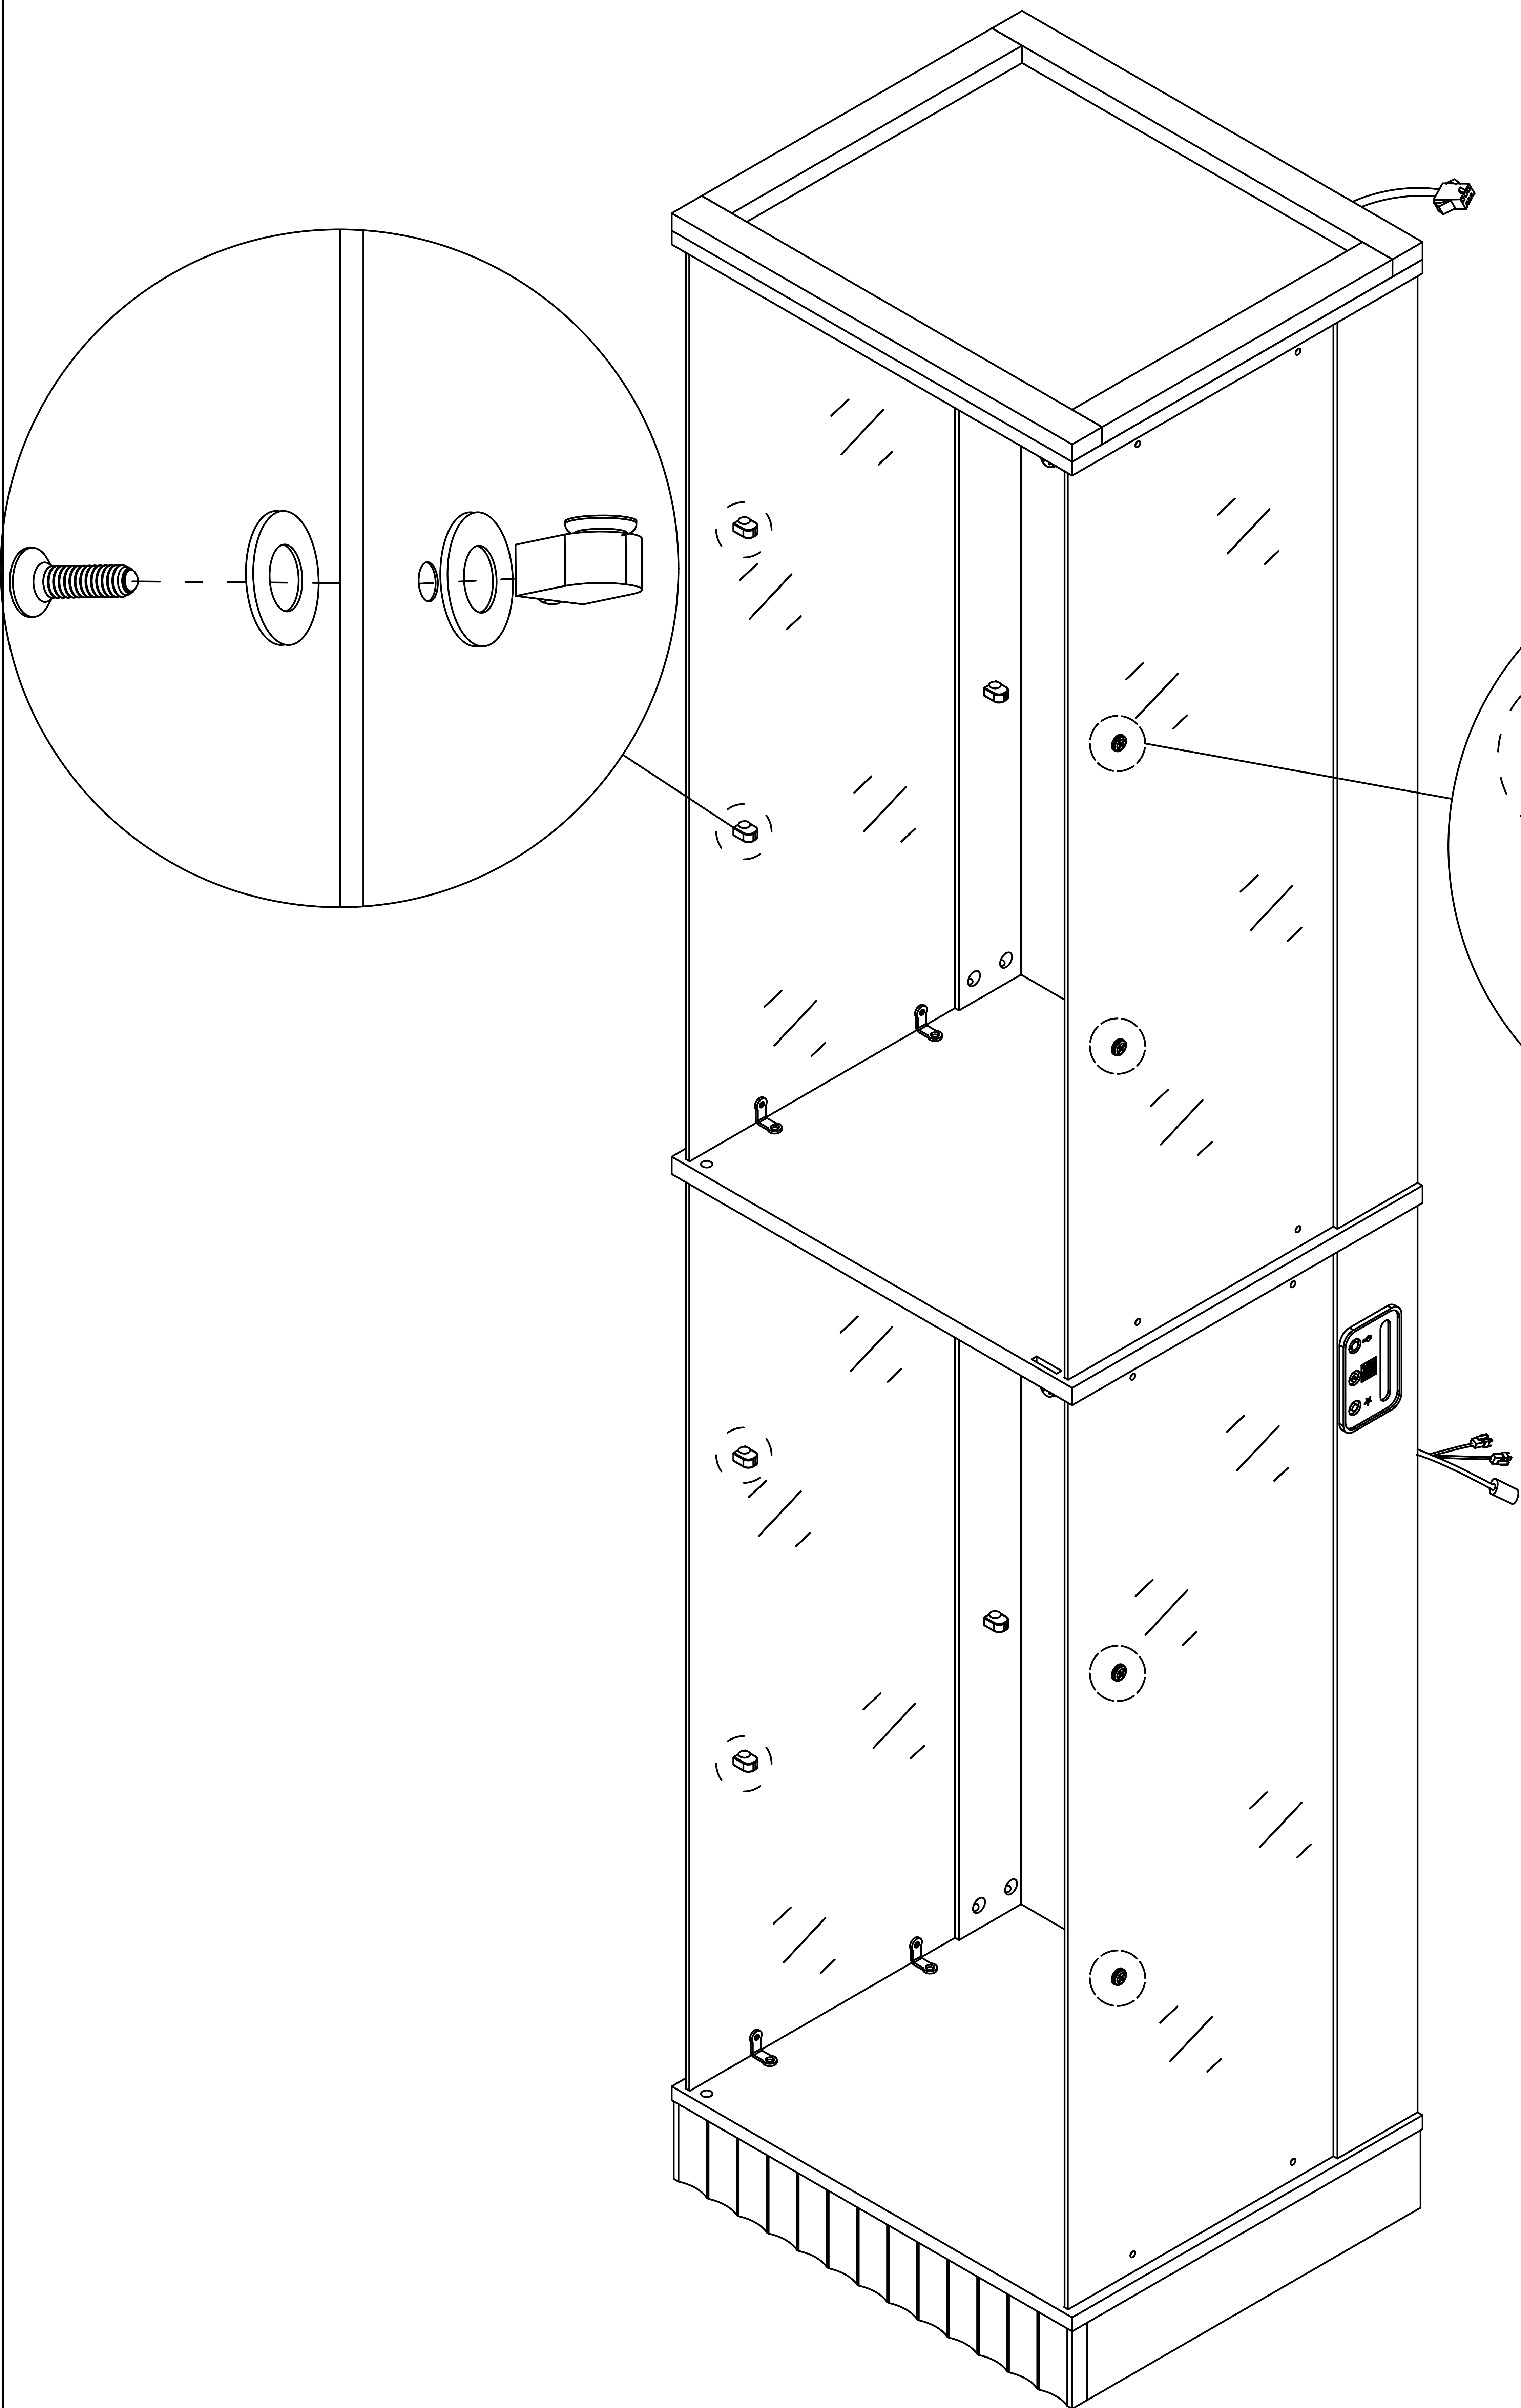


Step 33

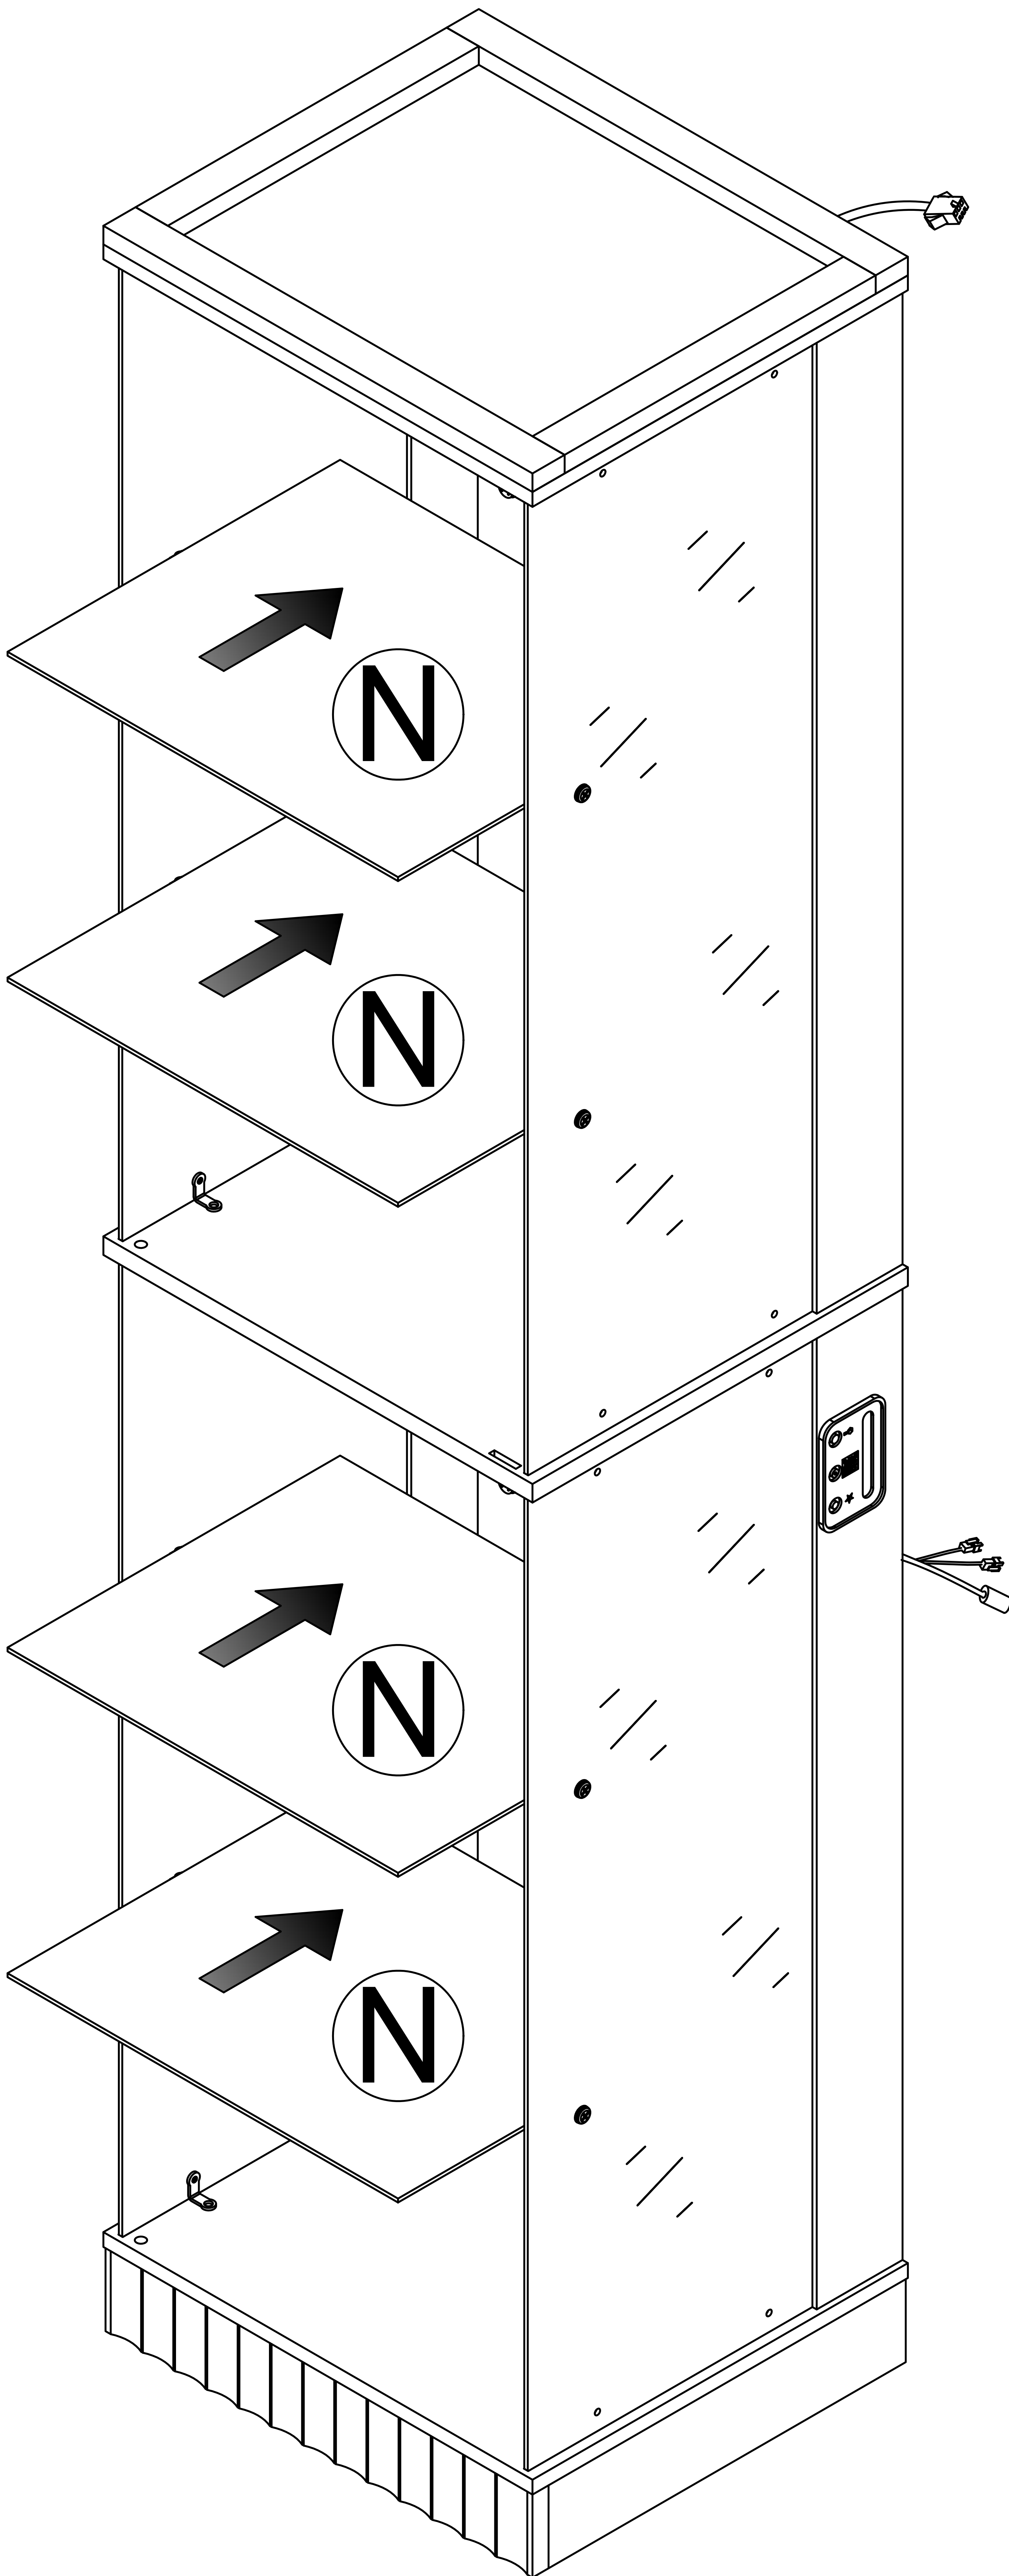


Step 34

8





x2

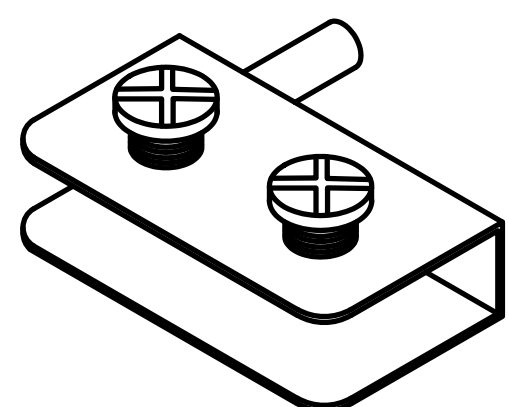


x2

First, loosen the screws.

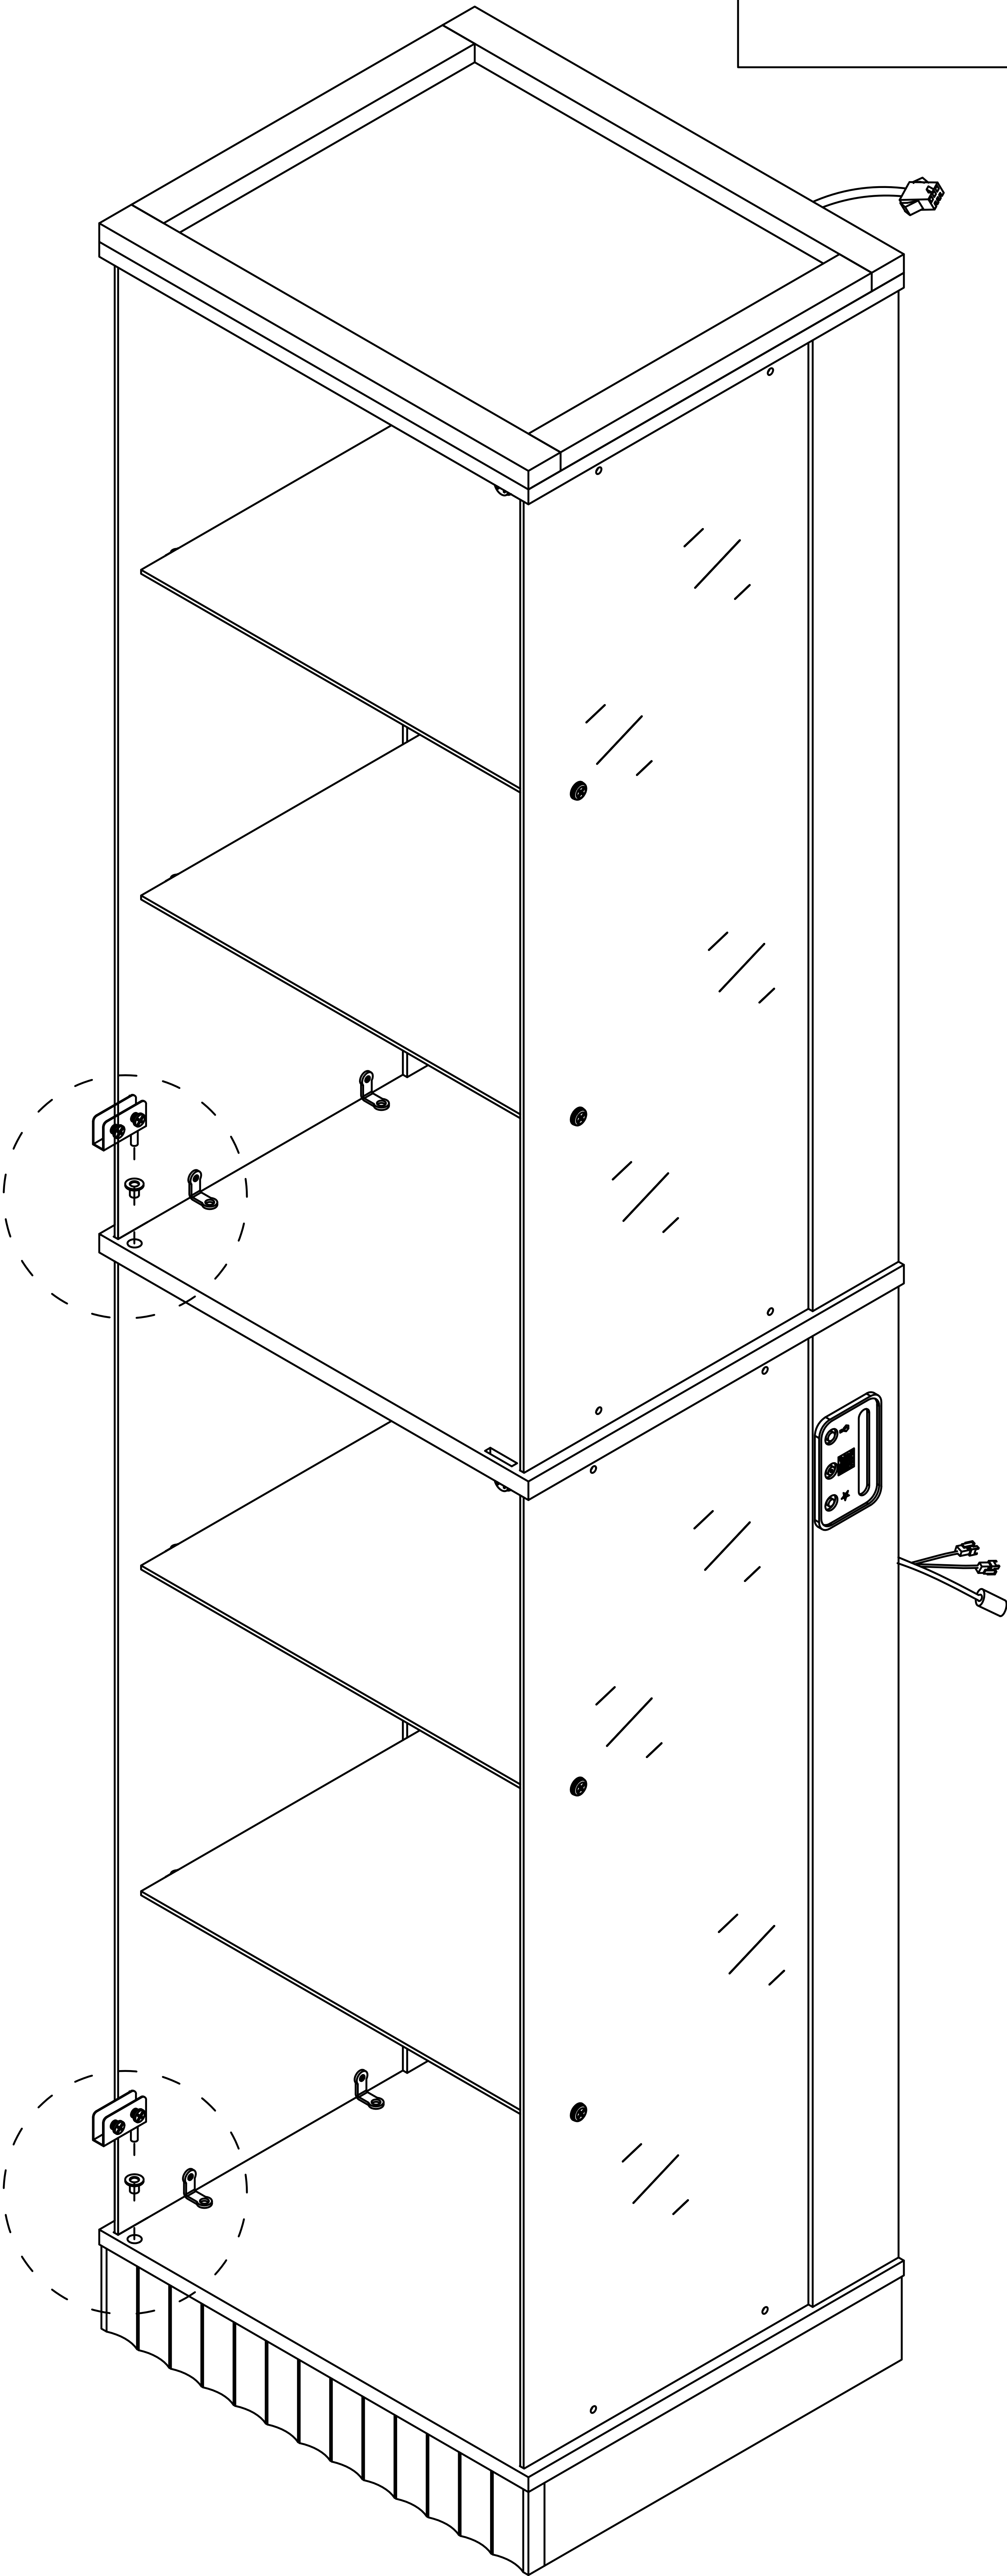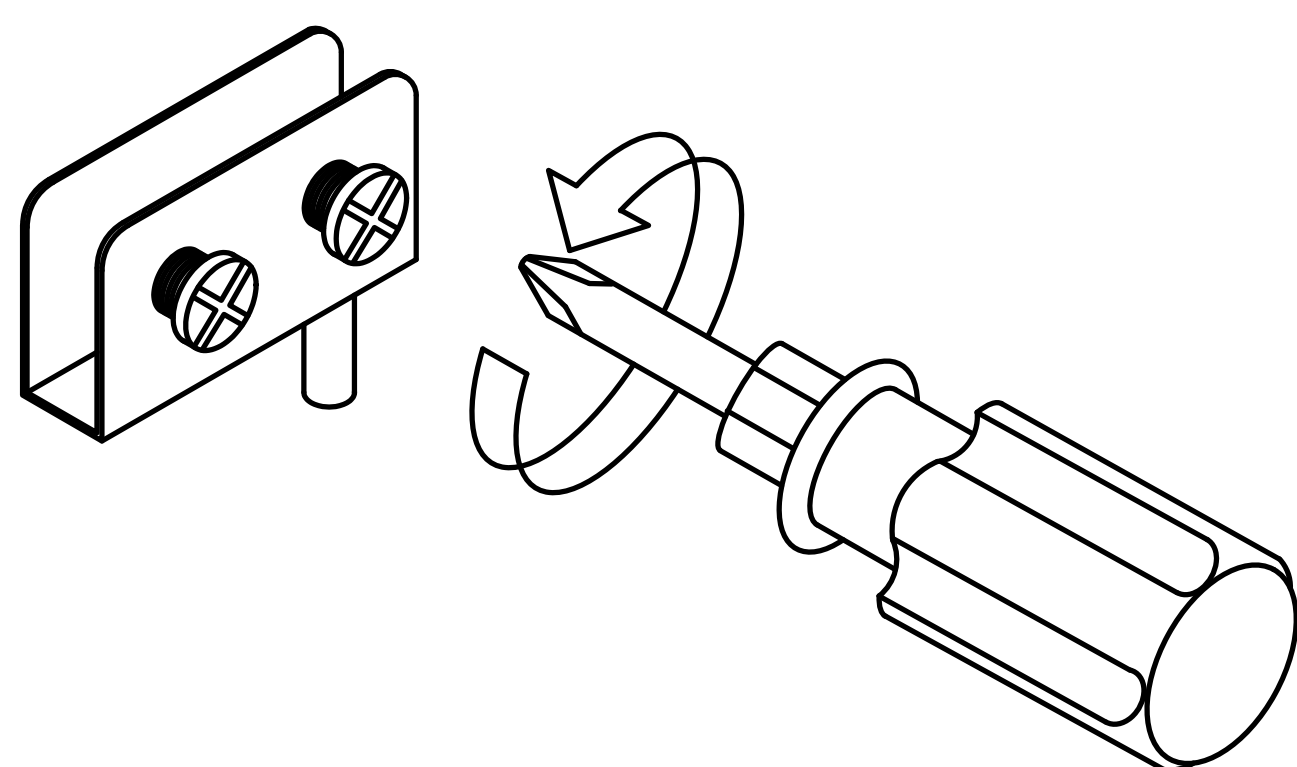


Step 35


First, loosen the screws.

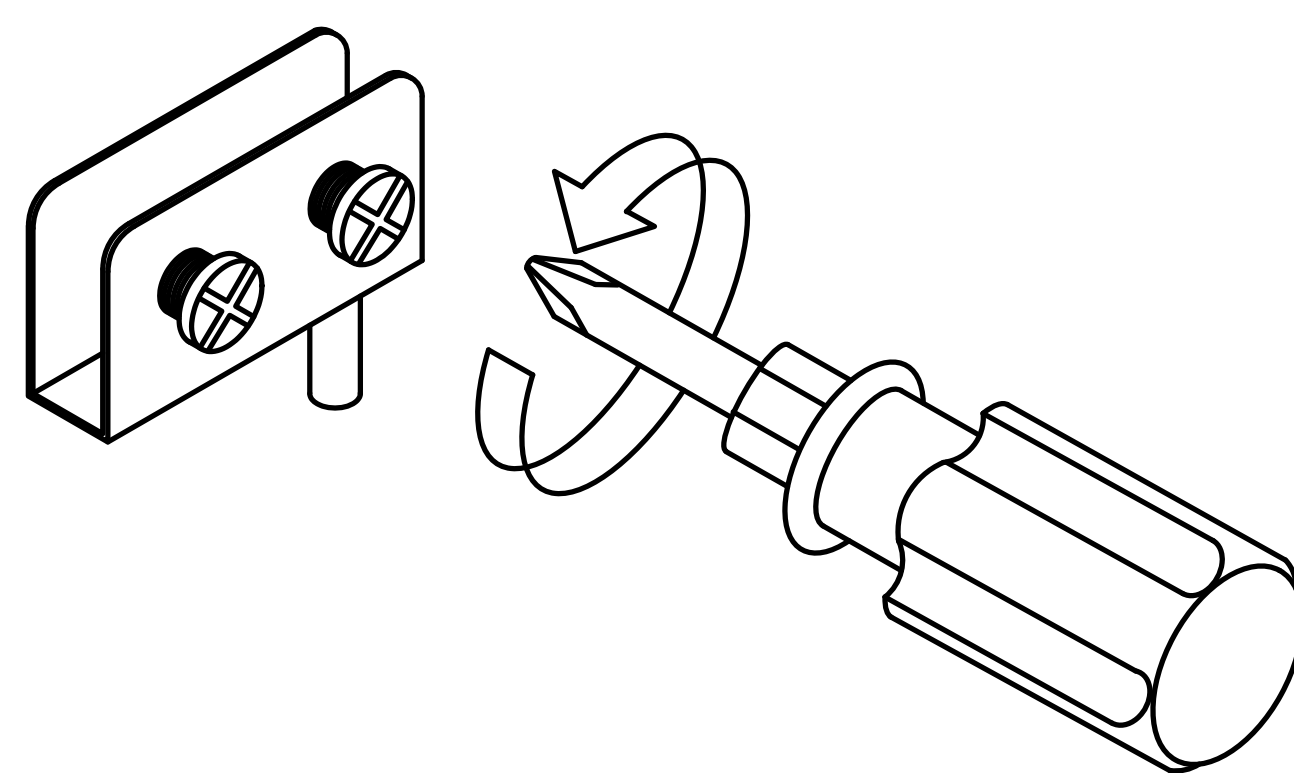

8

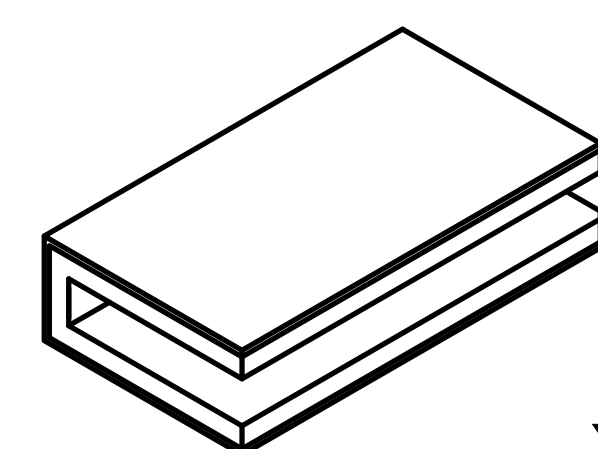


x2


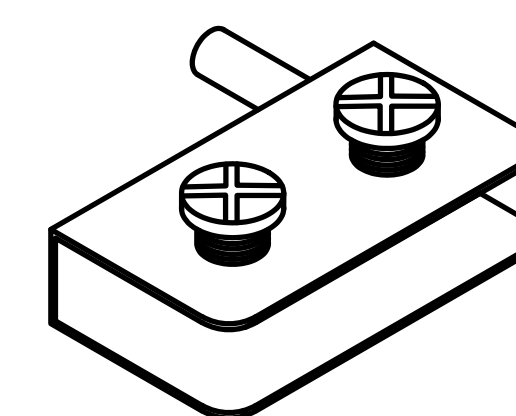


x2

1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

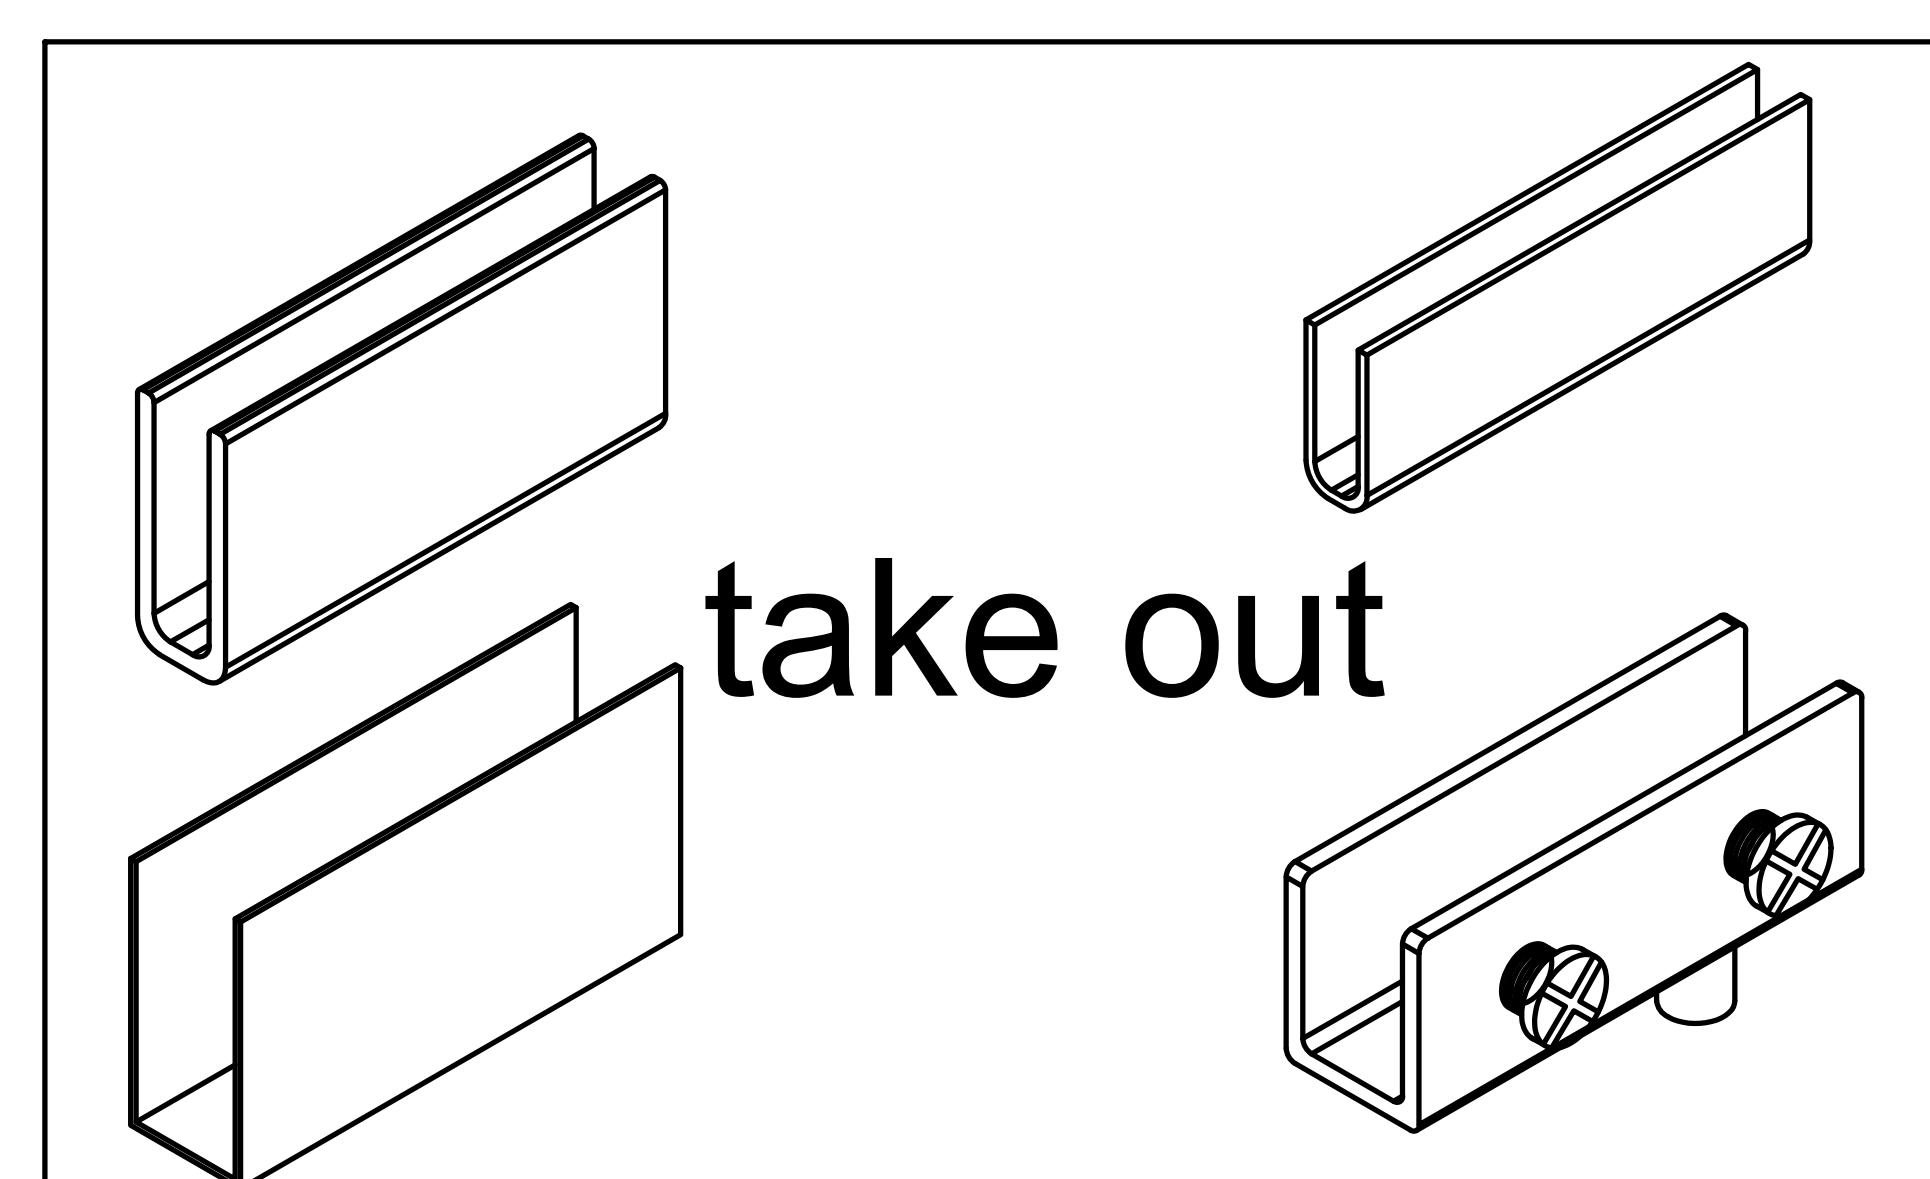


take out

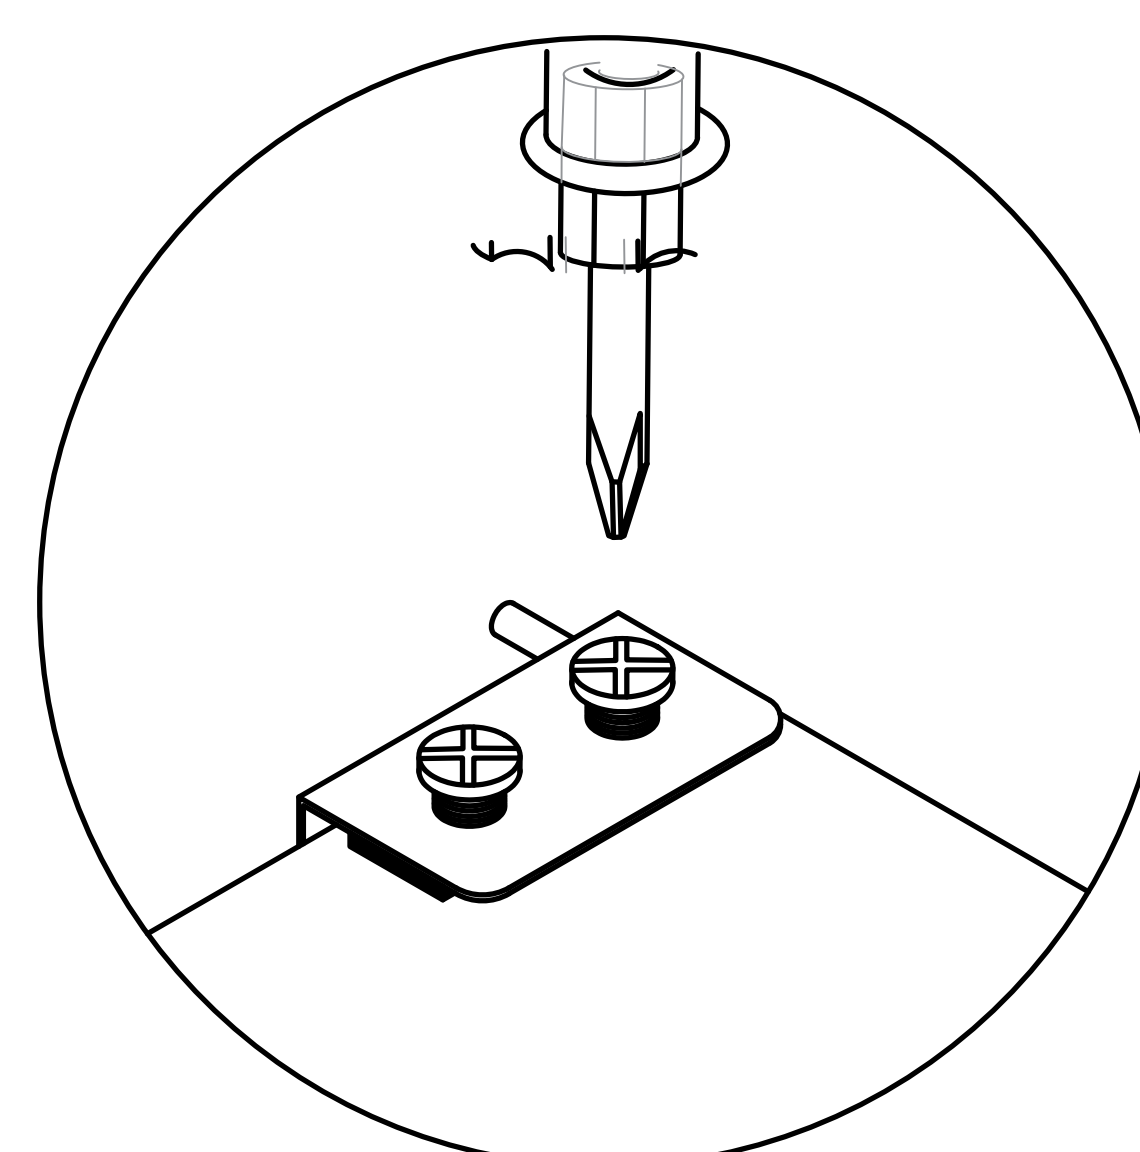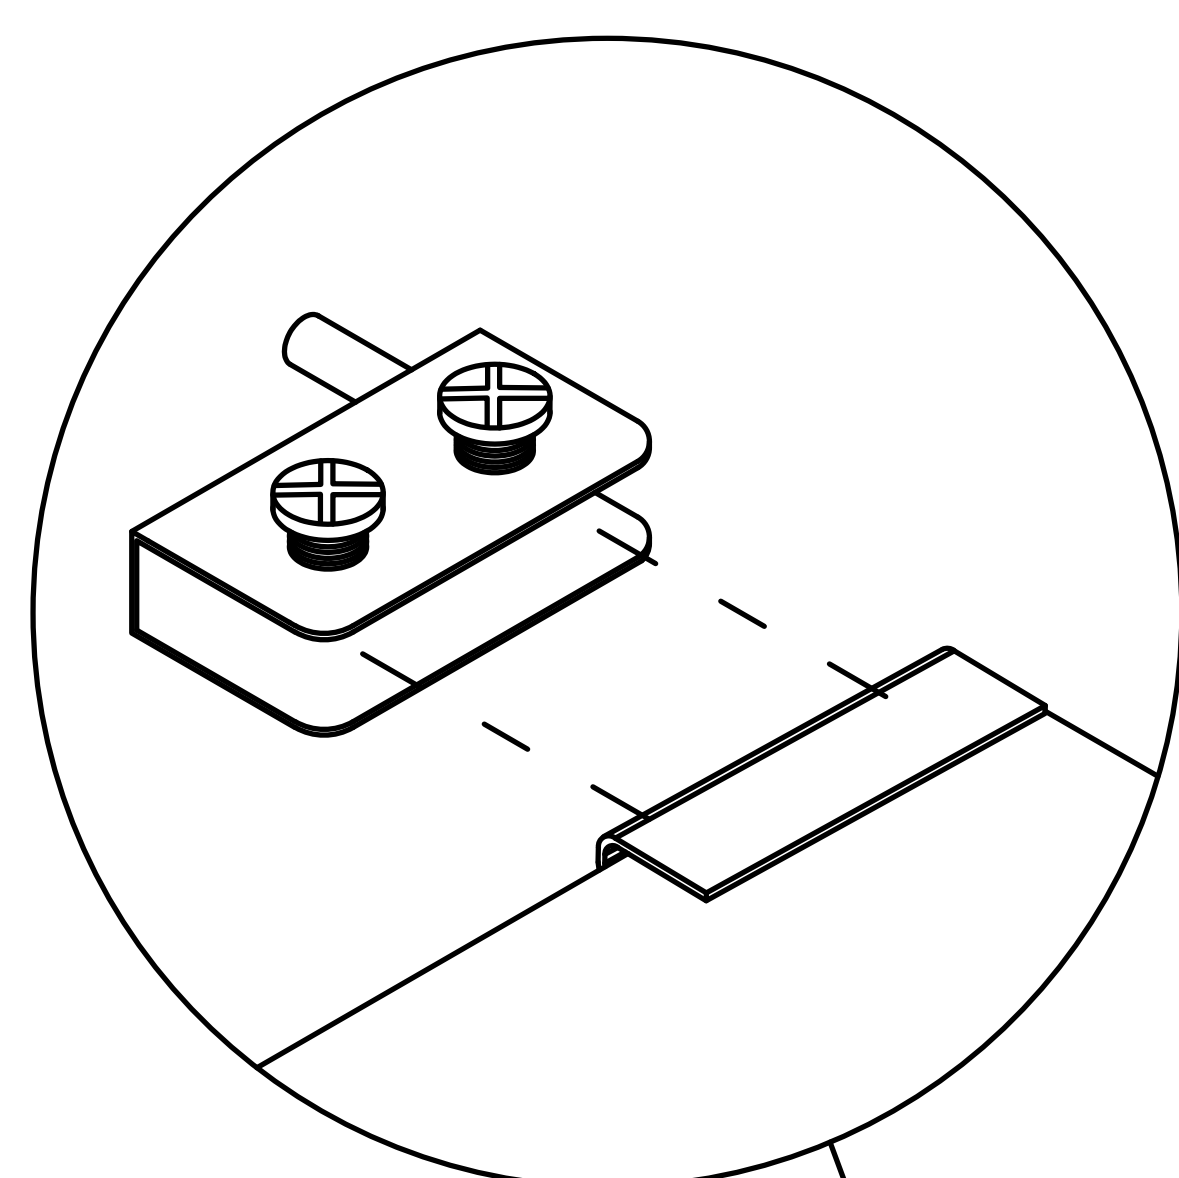

Locking screw

x2

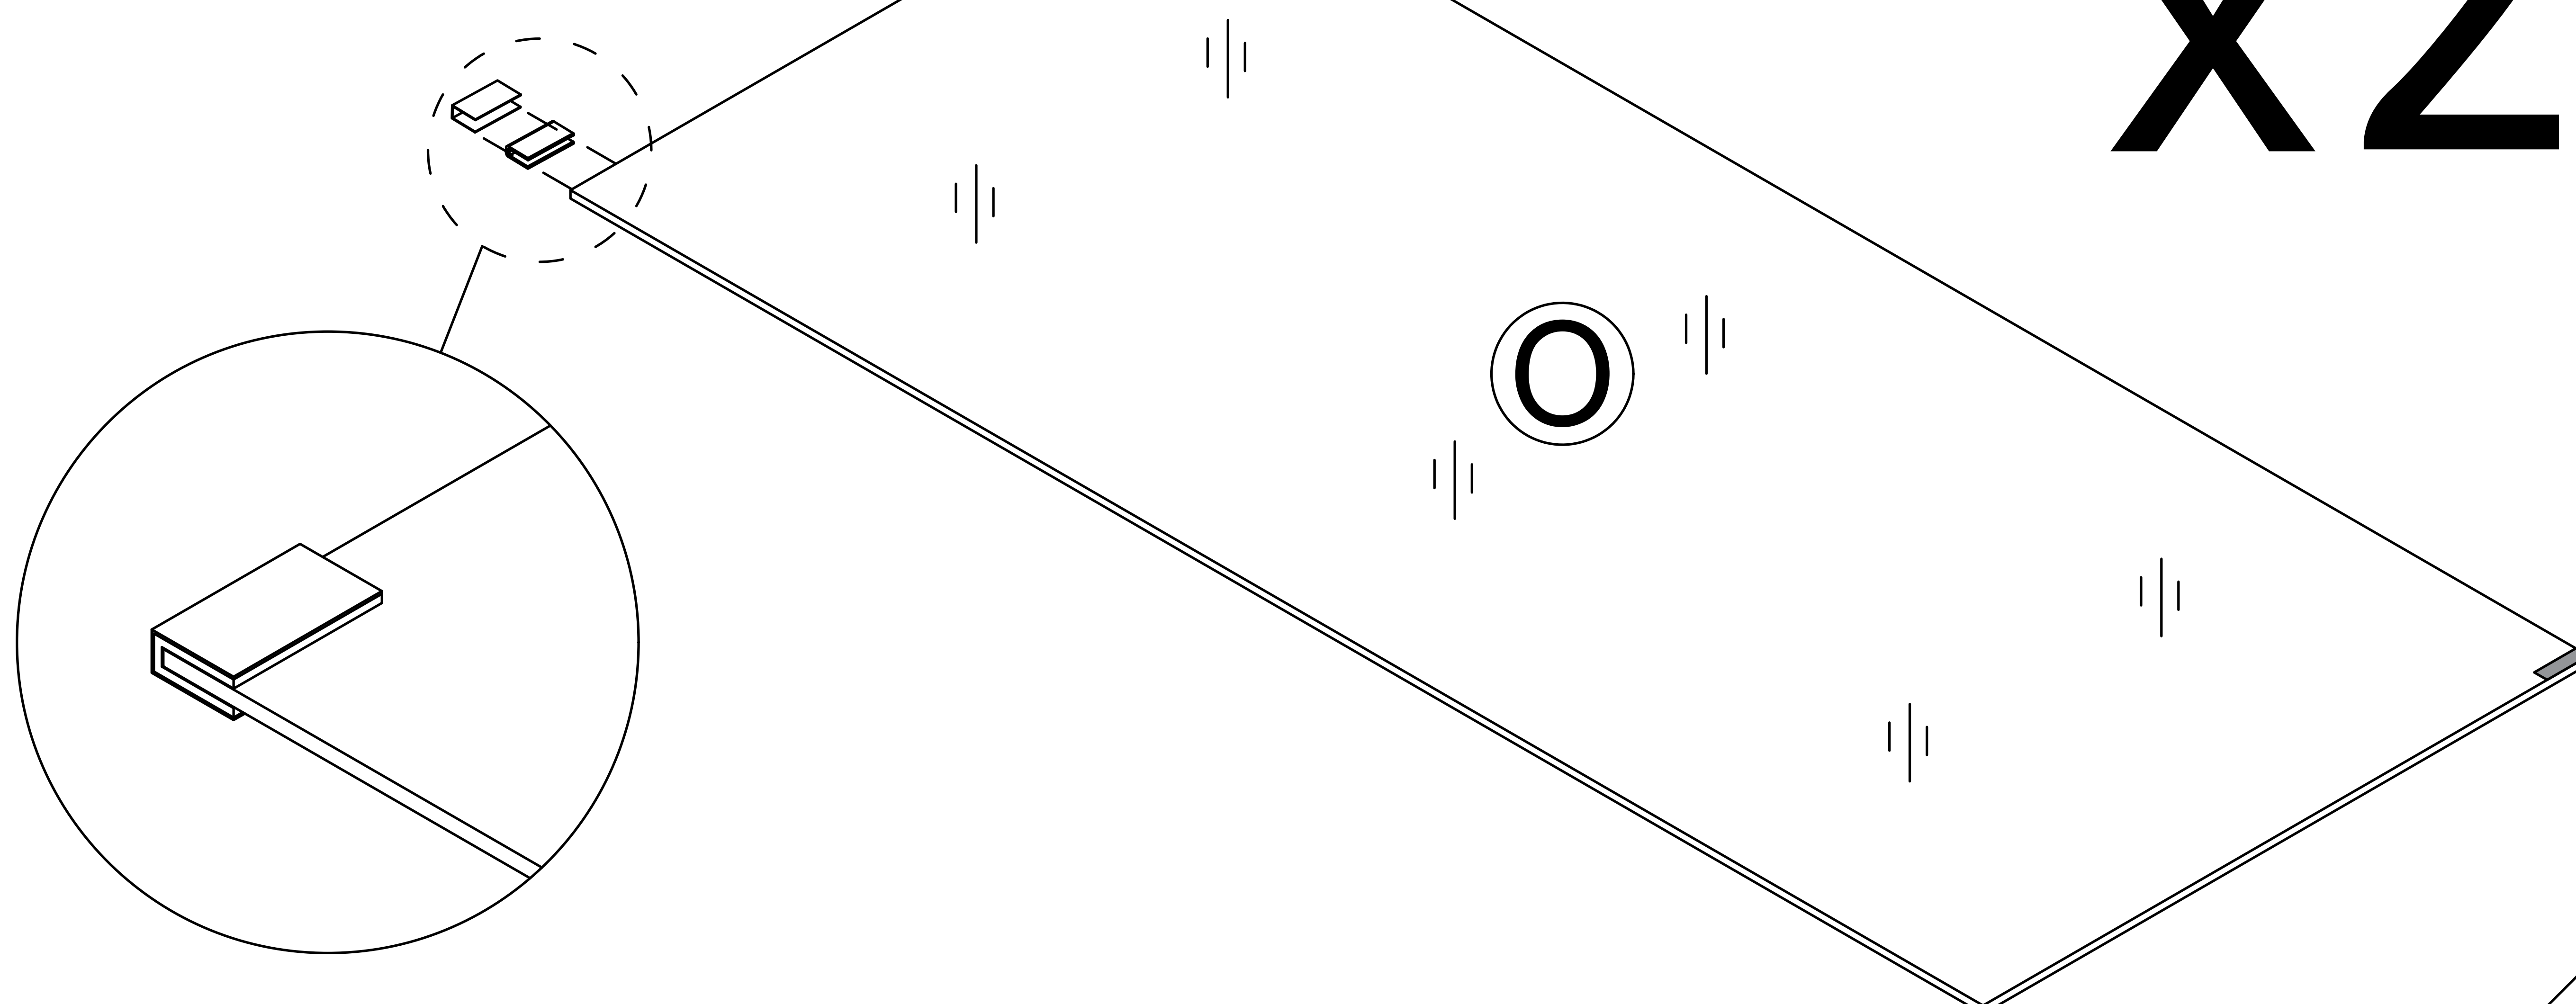


30

Step 36


Pay attention to the direction of
the door hinge during installation

8





x1

When installing a glass door, it is recommended to
have two people install it to avoid the glass door
colliding or hitting oneself.

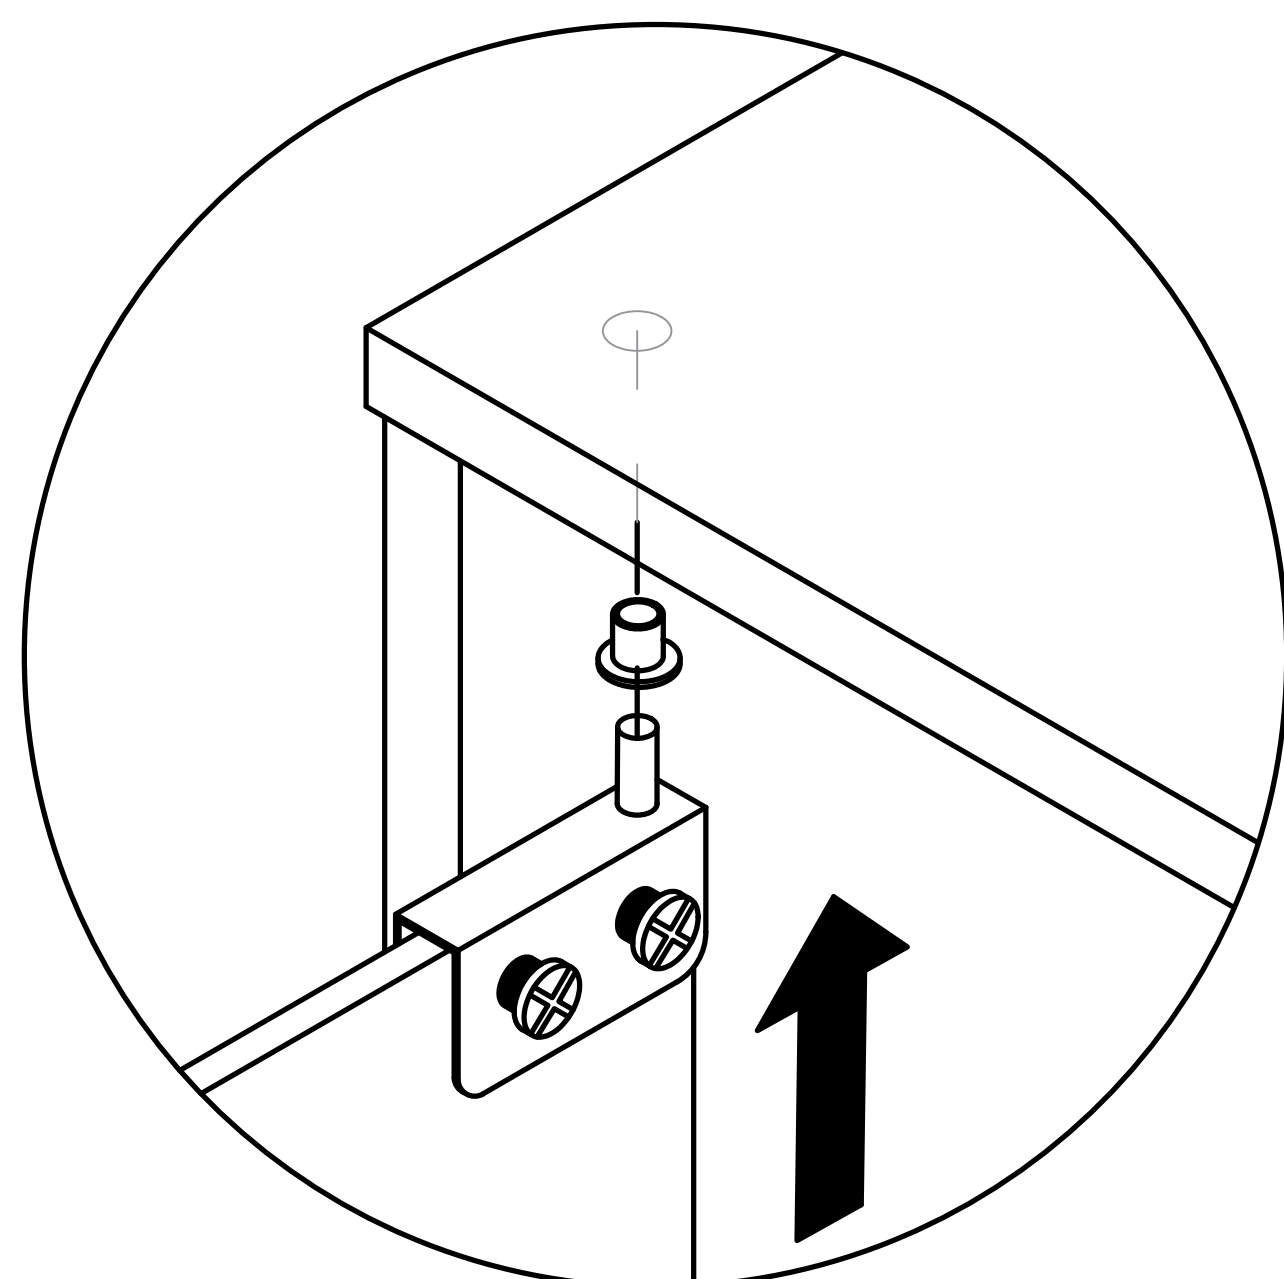


first

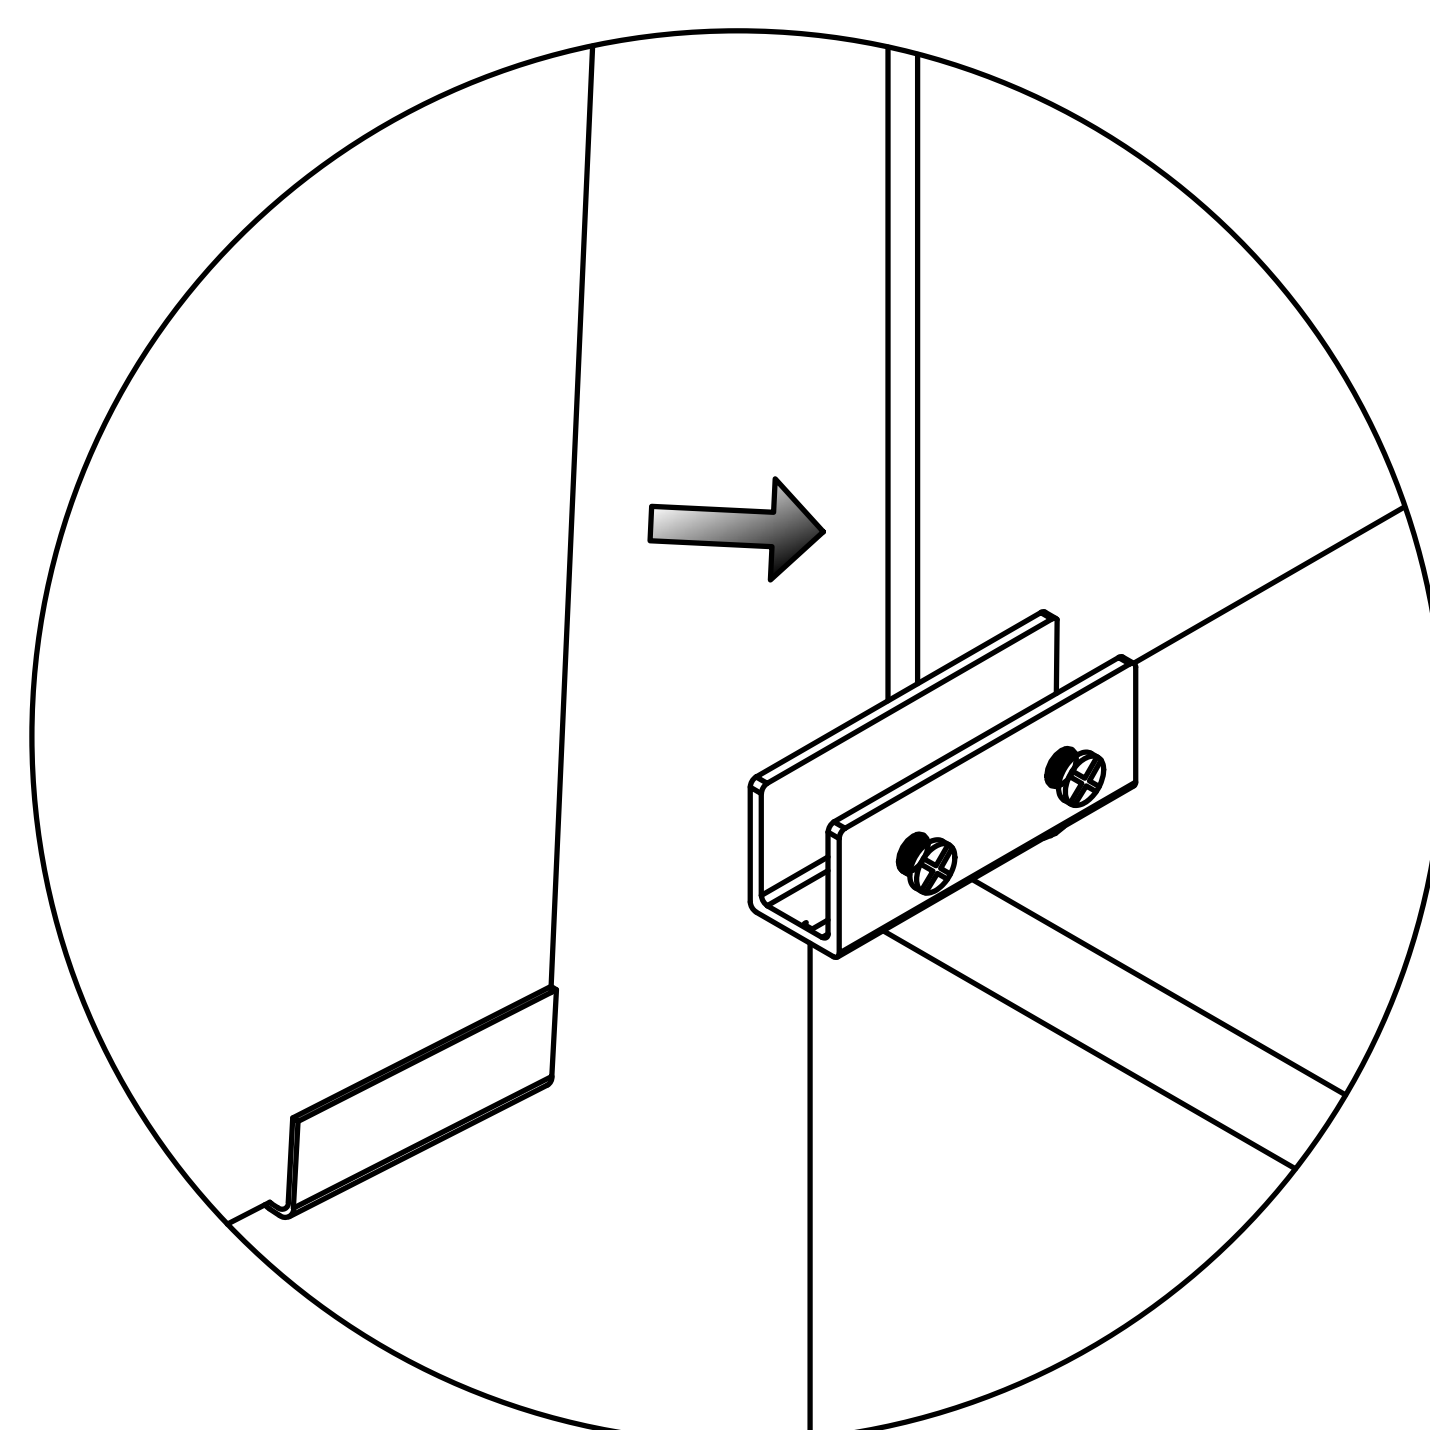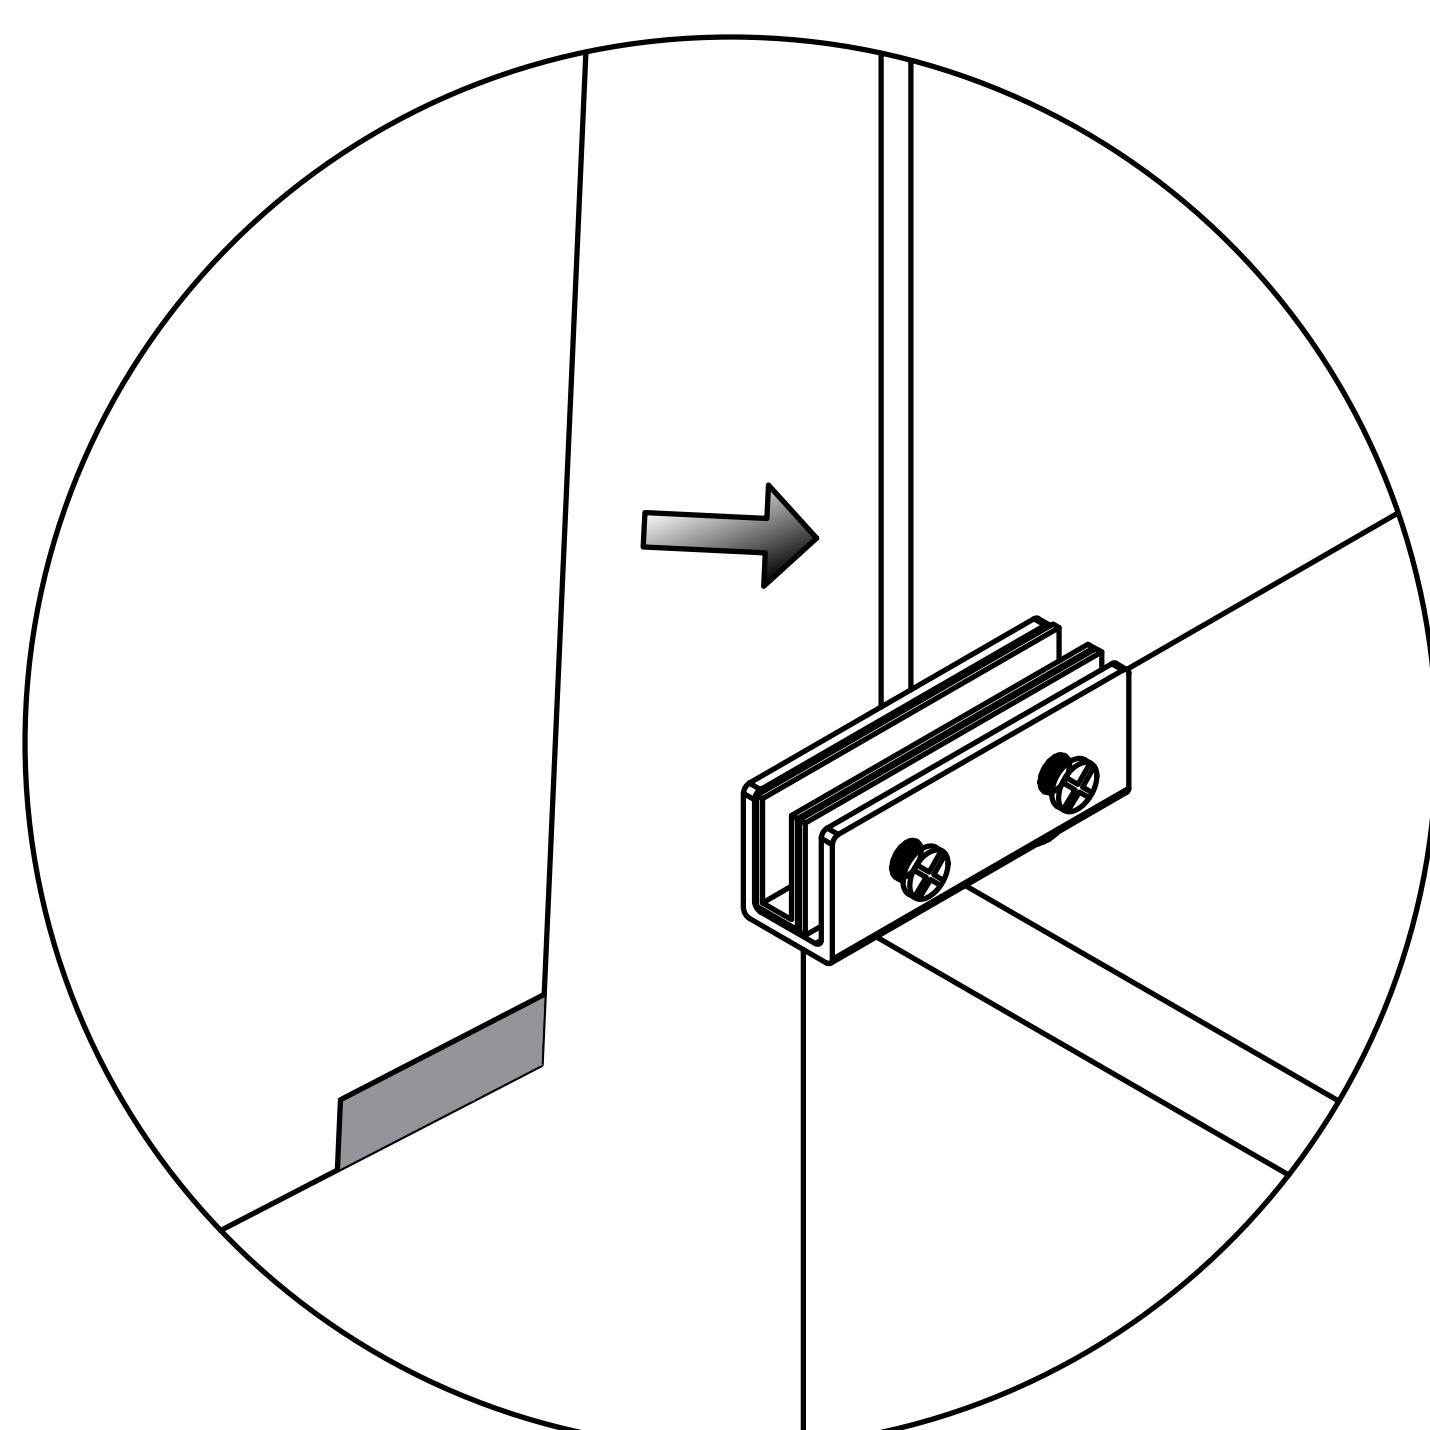


second

Insert the glass into
the door hinge's slot.

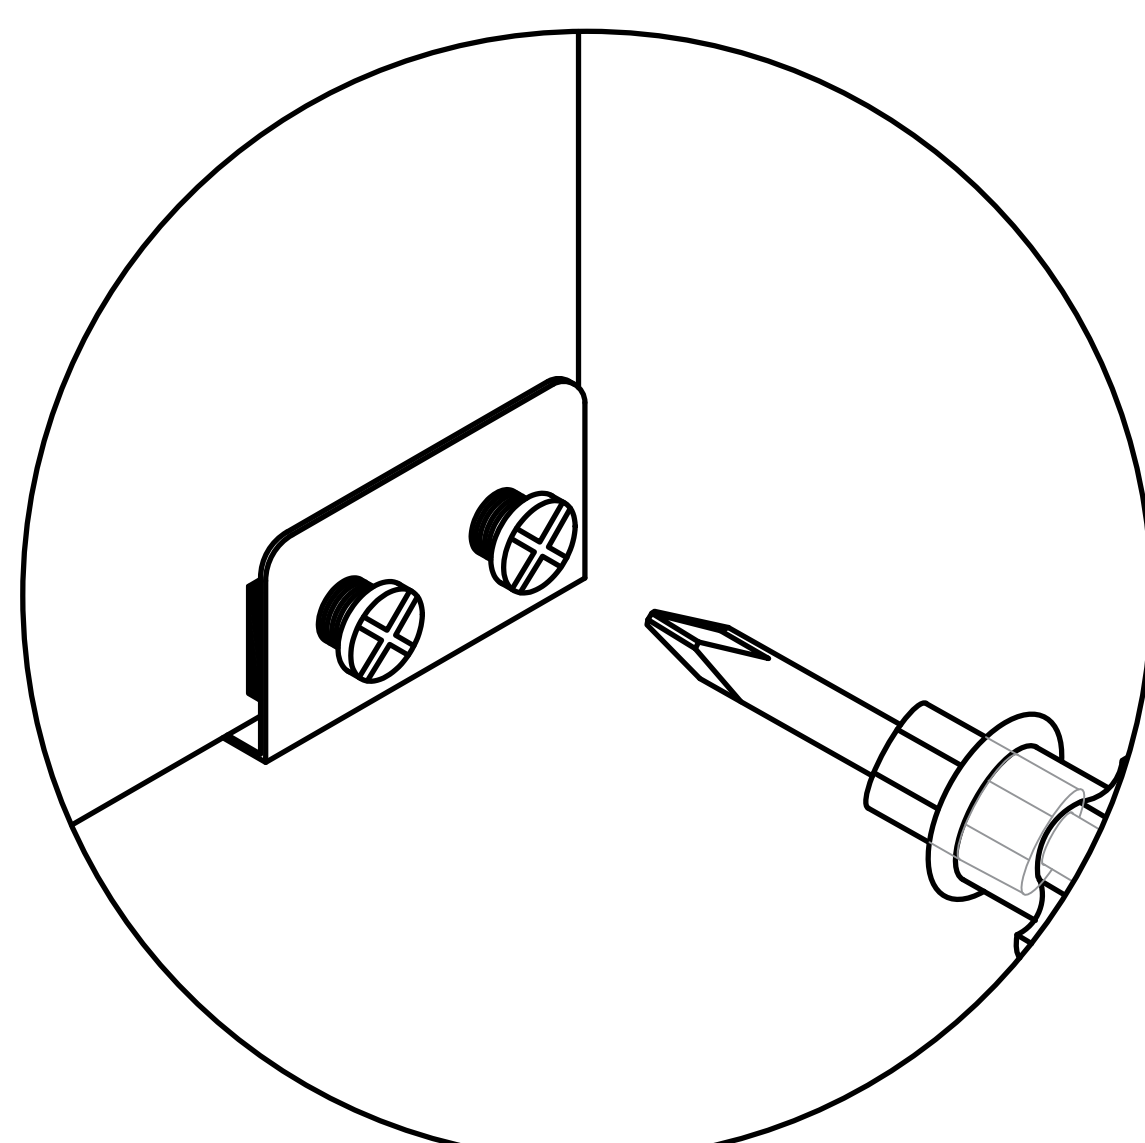

third


Locking screw

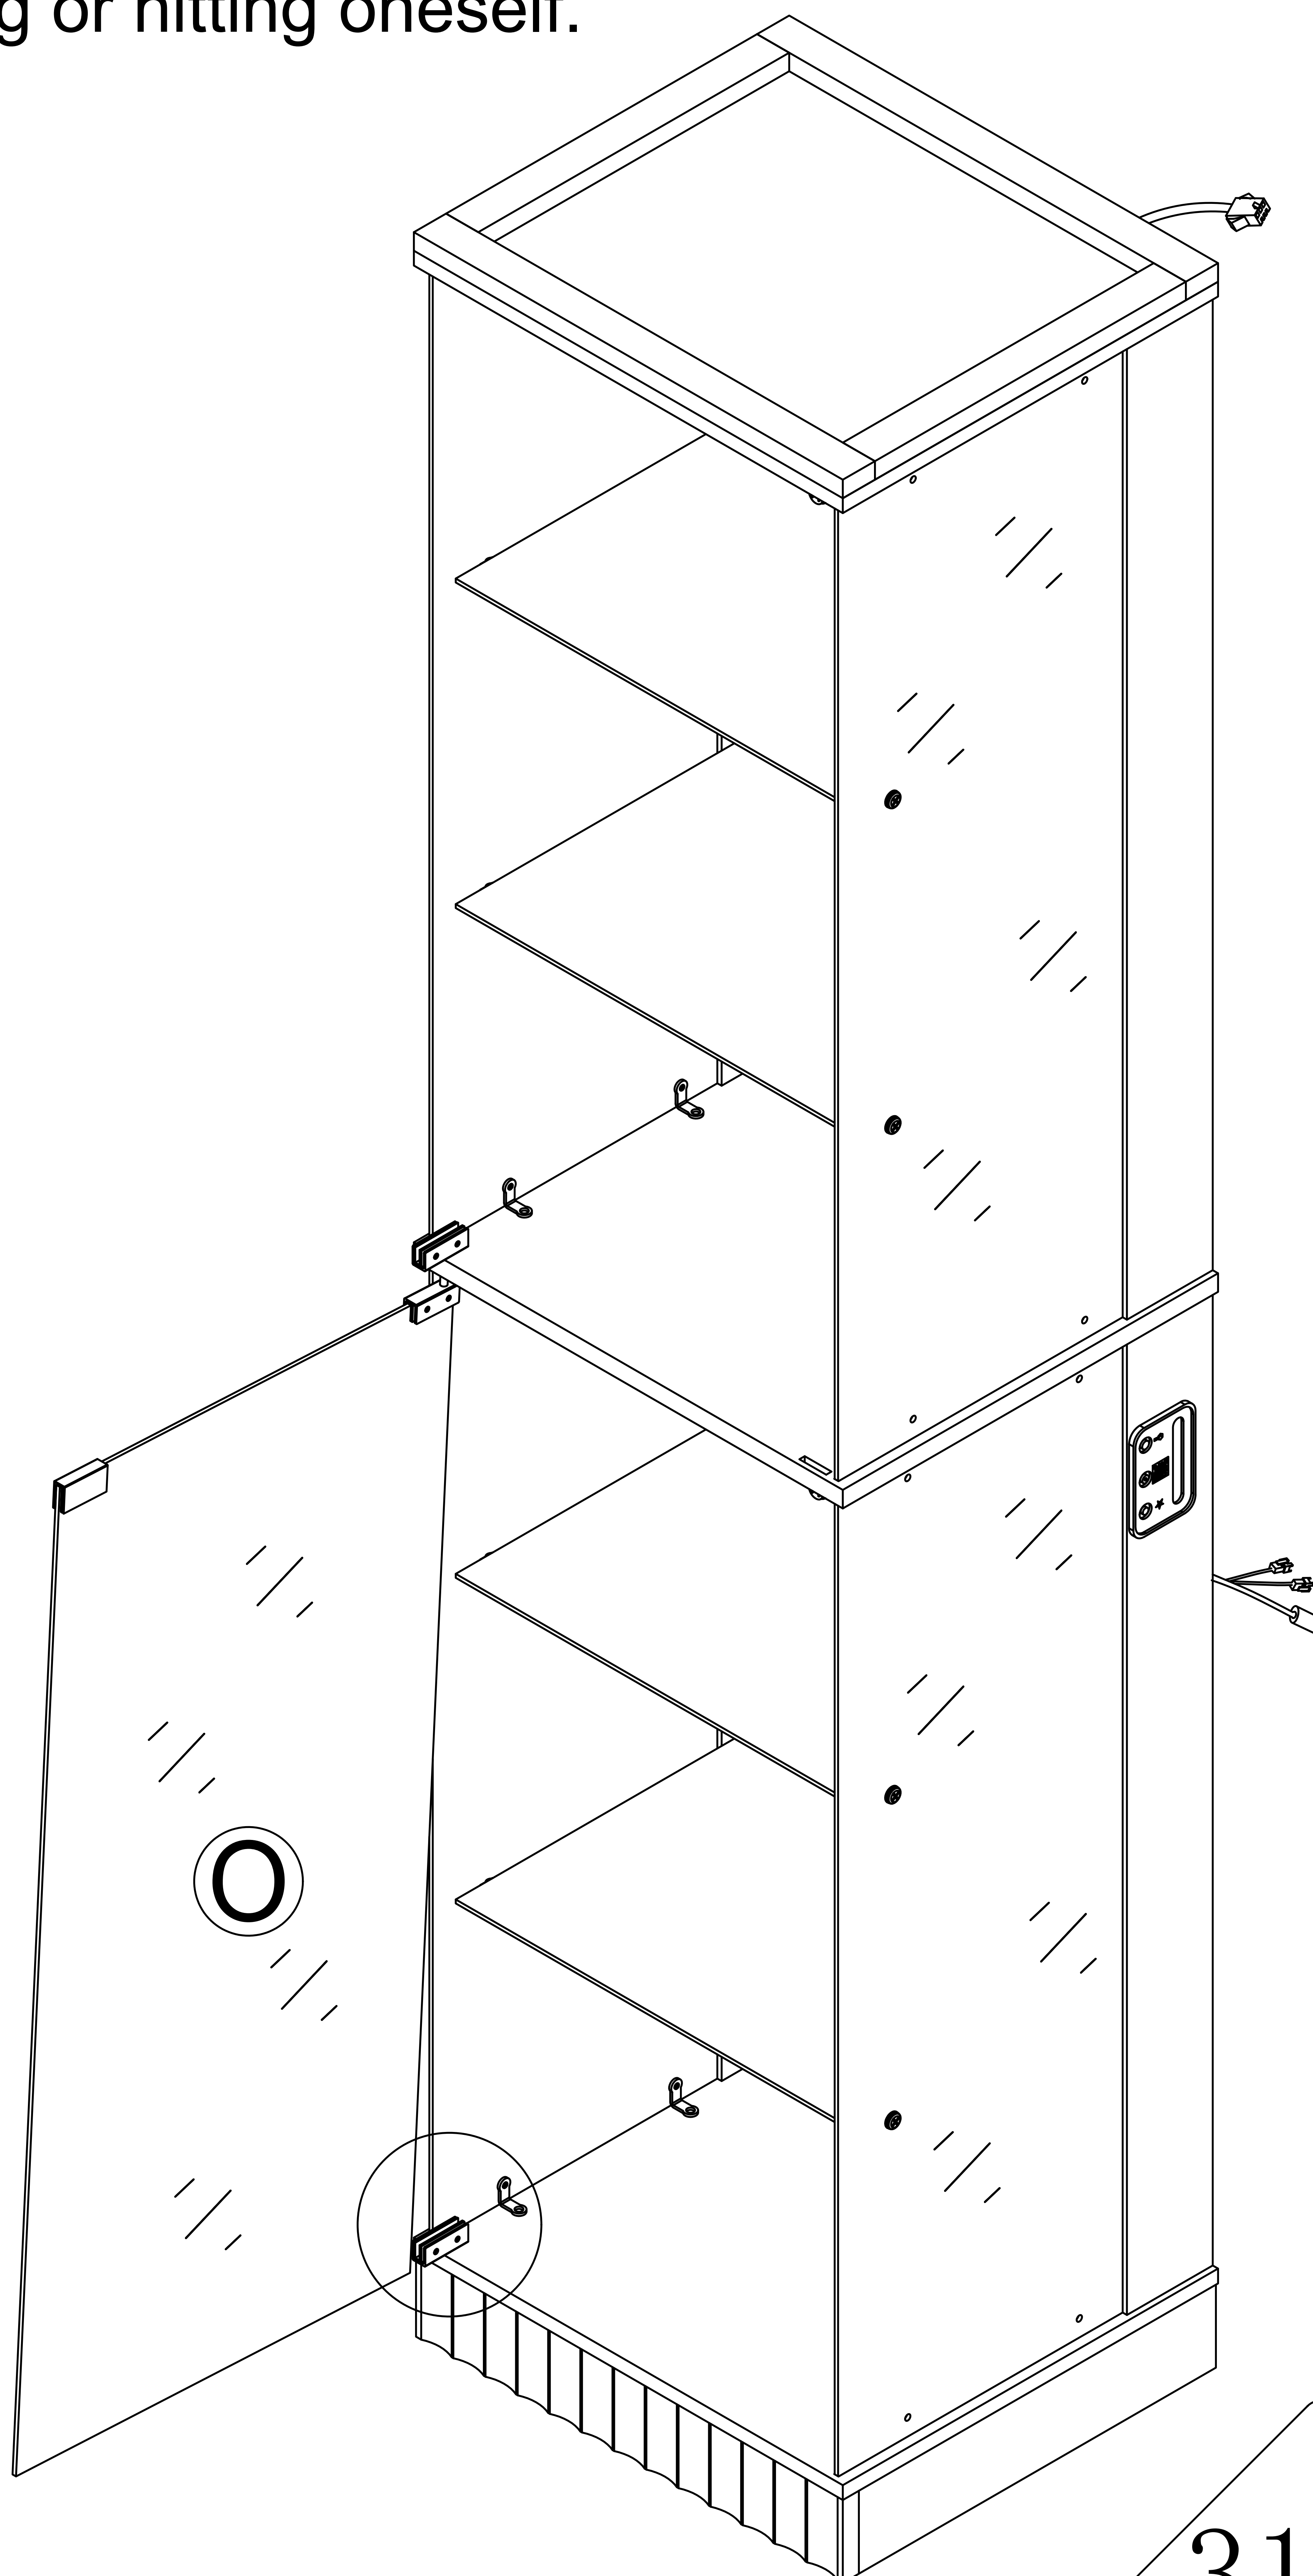

Step 37


Pay attention to the direction of
the door hinge during installation

8





x1

When installing a glass door, it is recommended to
have two people install it to avoid the glass door
colliding or hitting oneself.

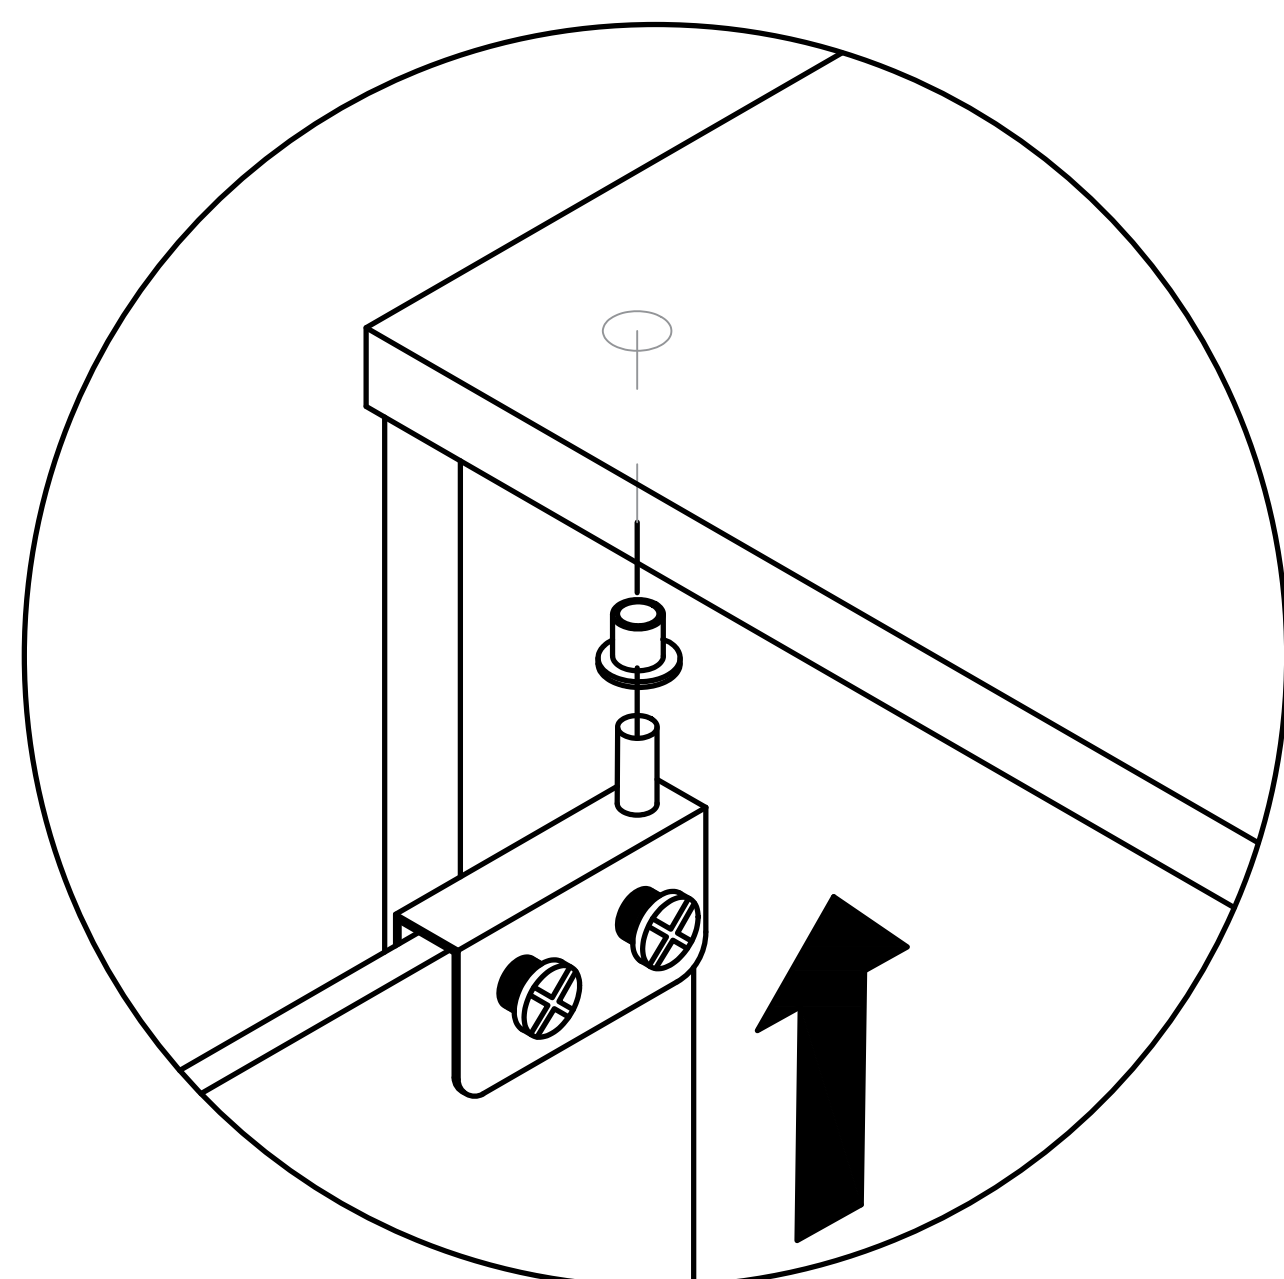


first

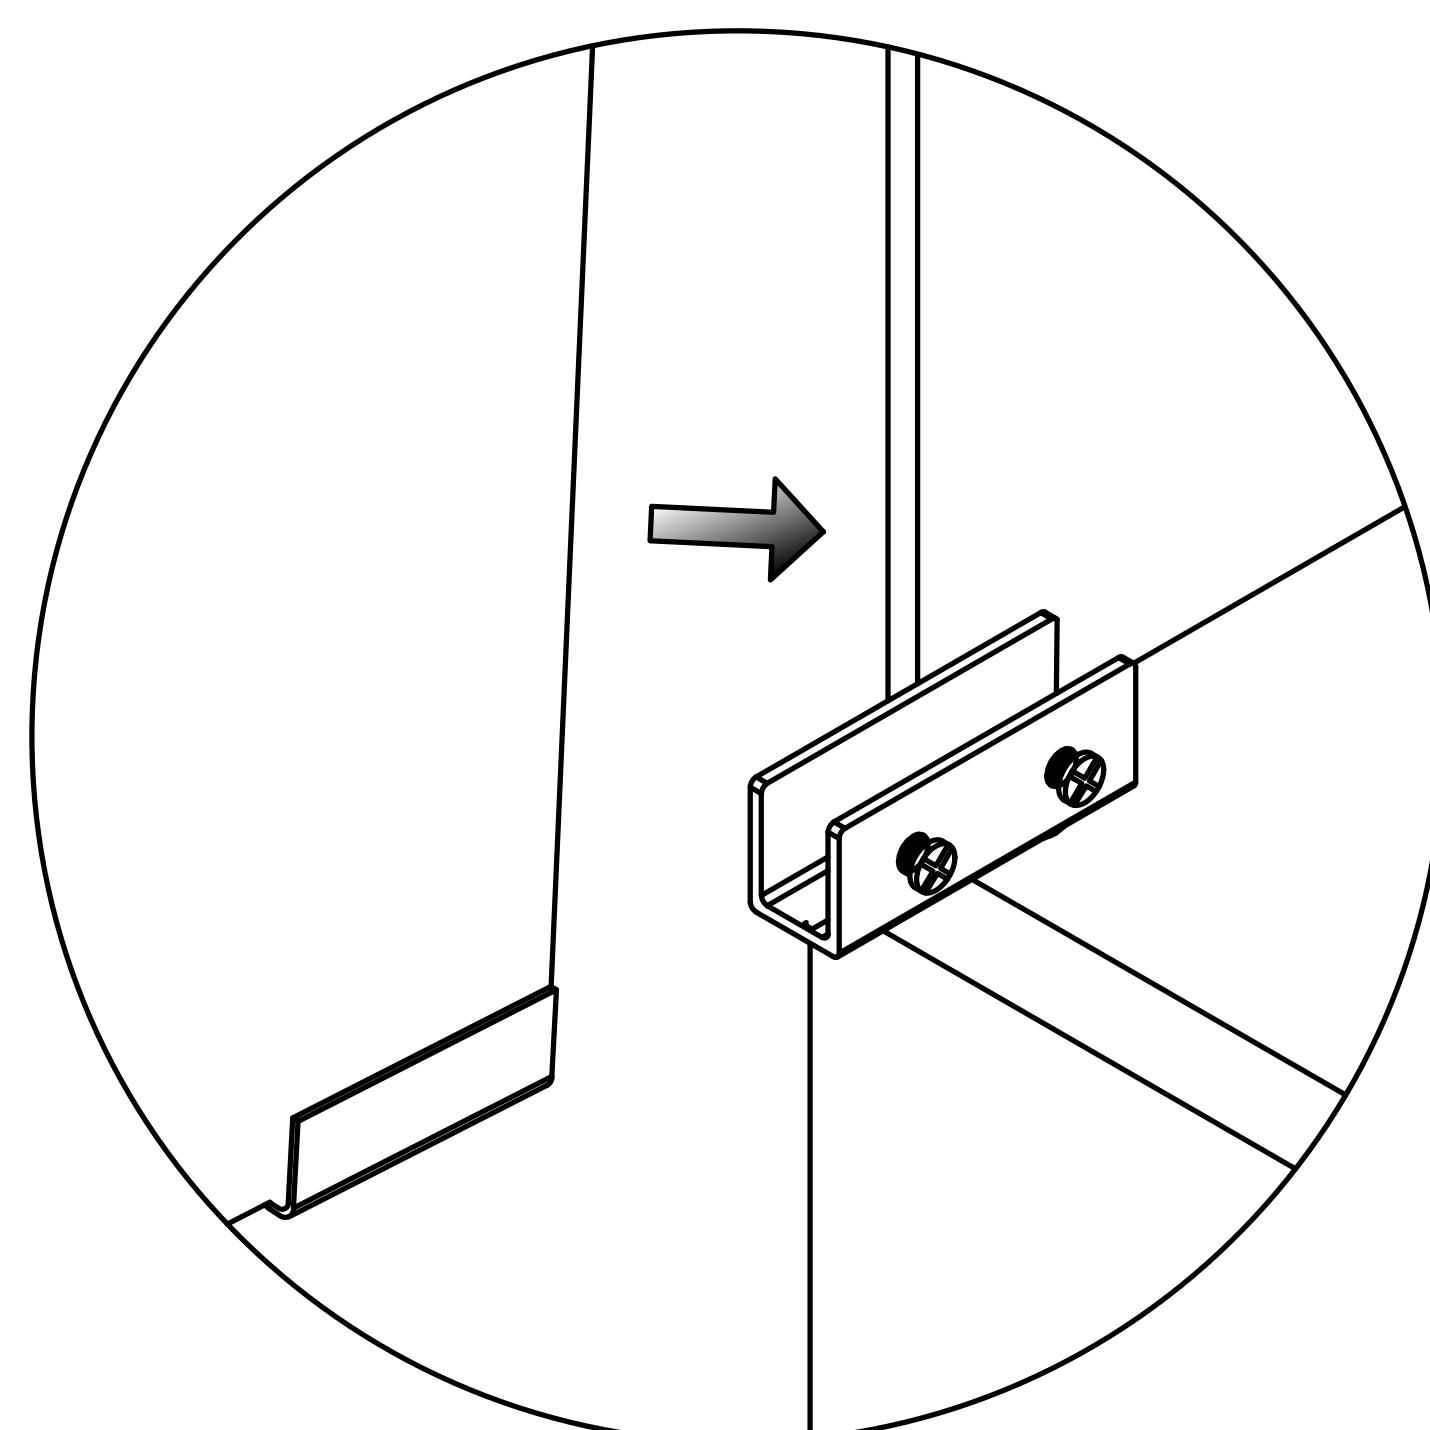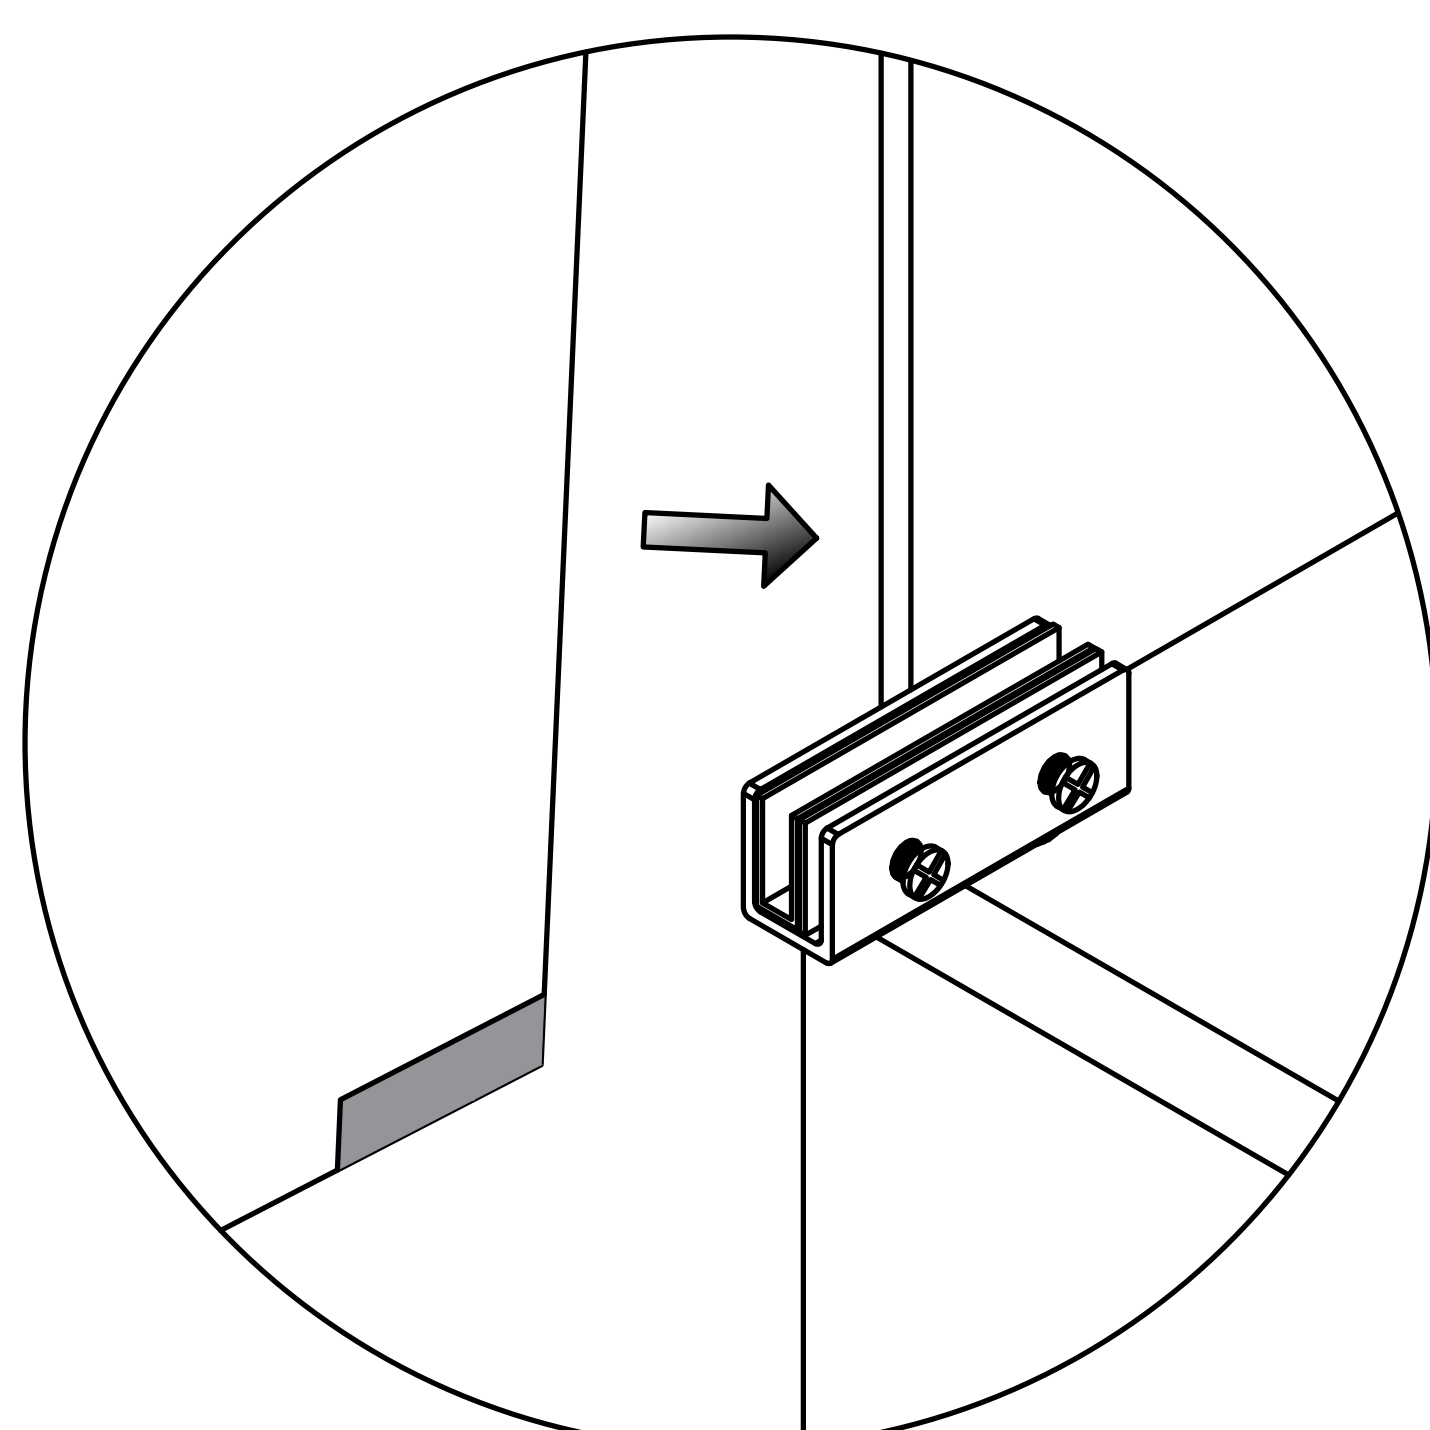


second

Insert the glass into
the door hinge's slot.

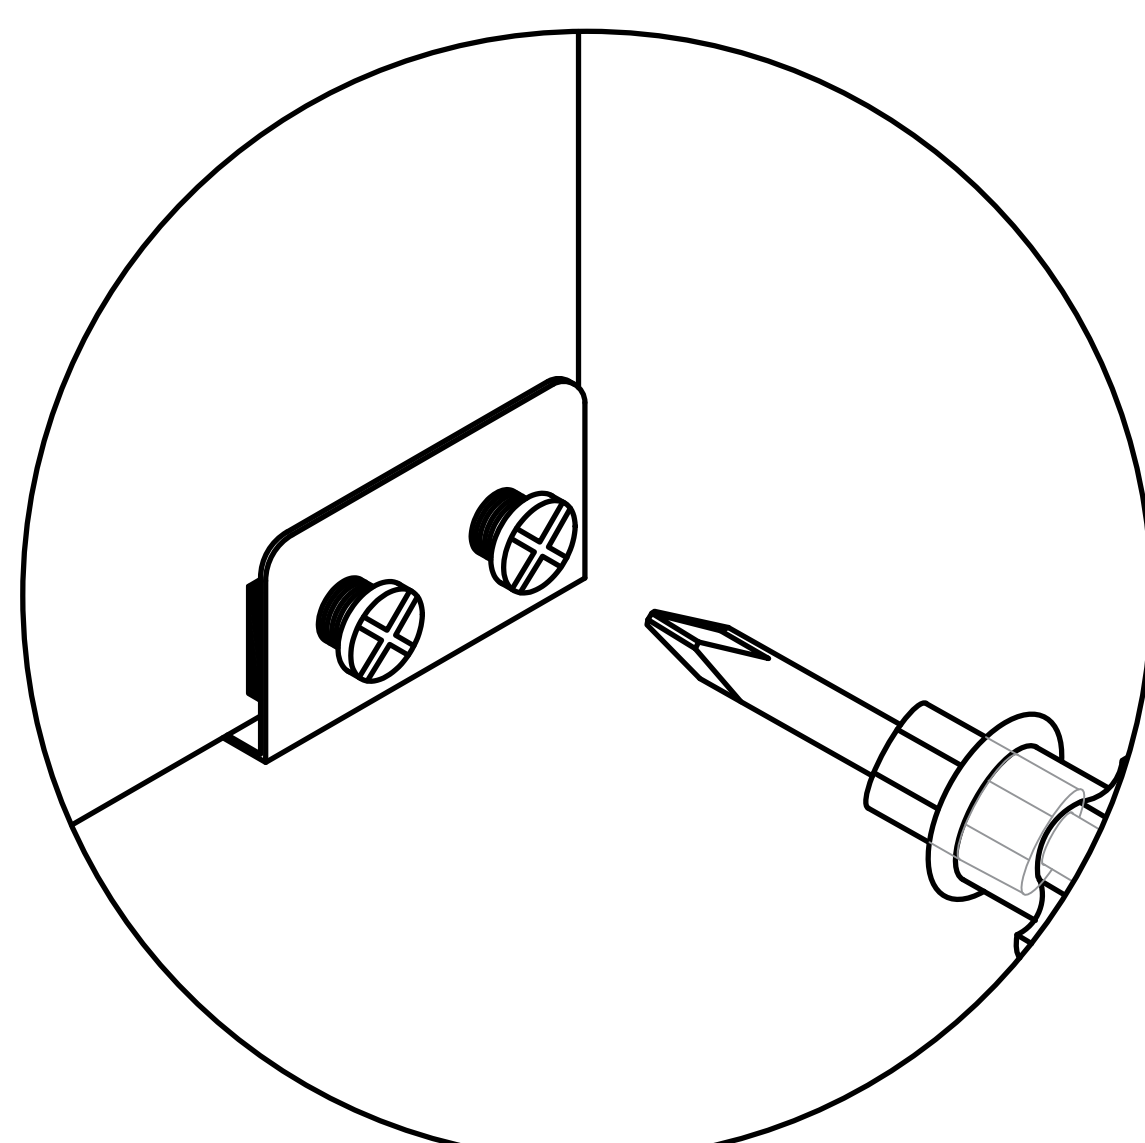


third


Locking screw

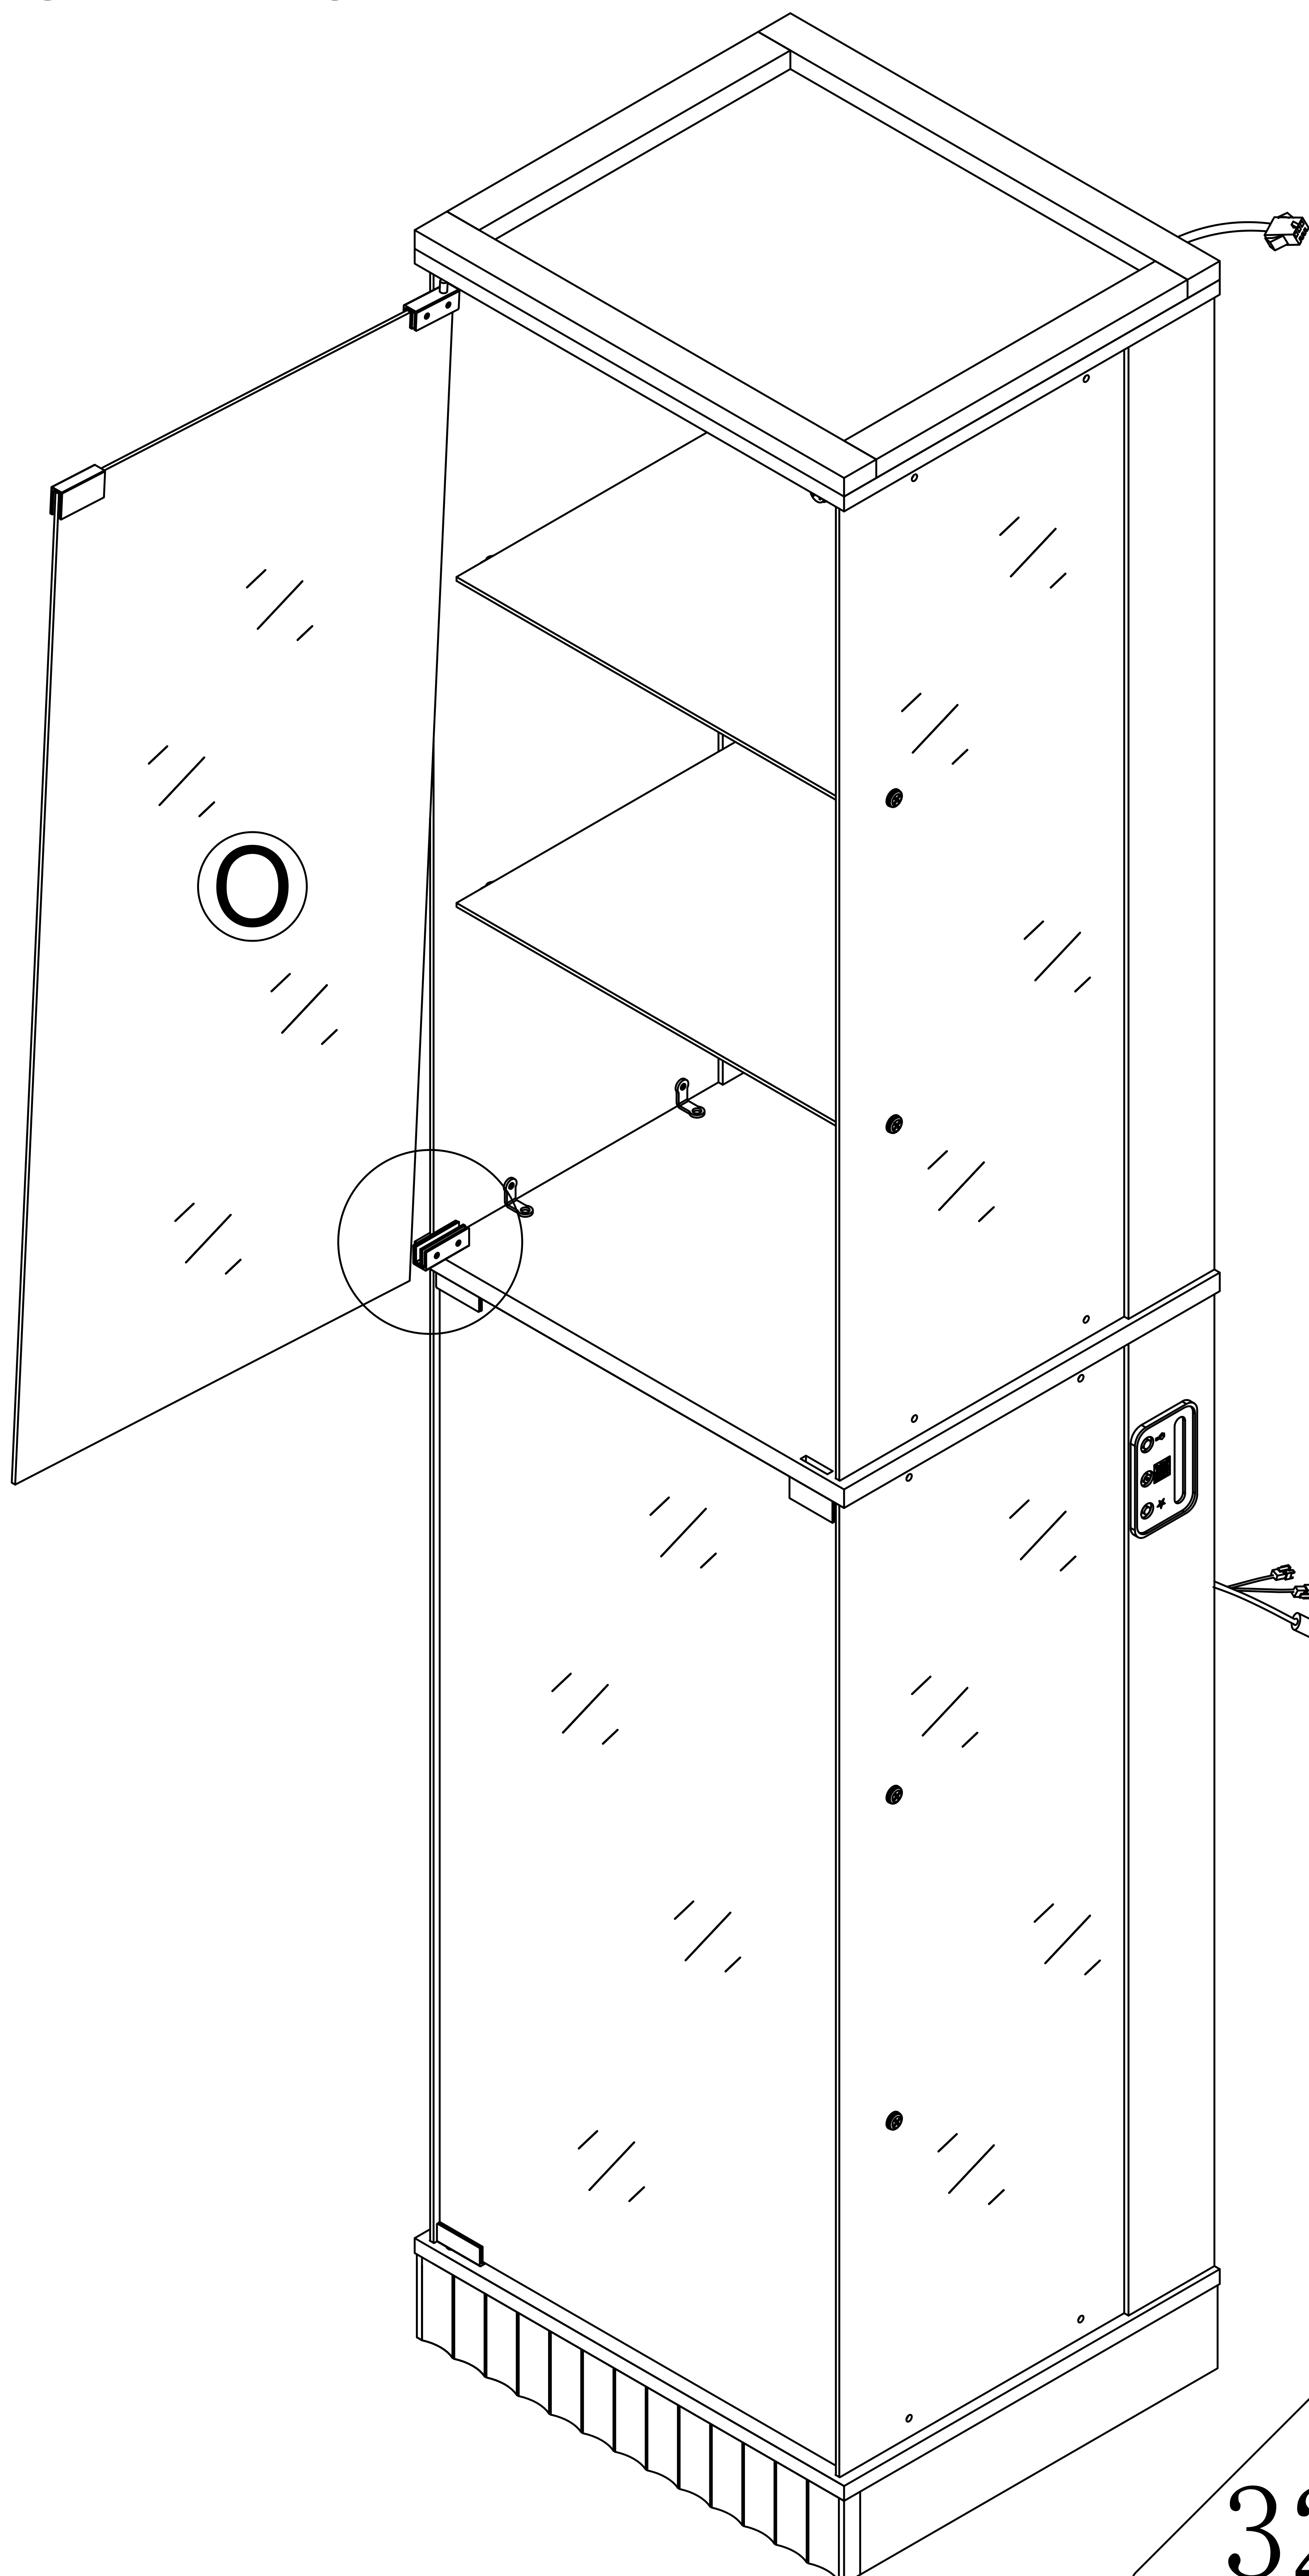

Tip: Turning the door lock to the right will close it

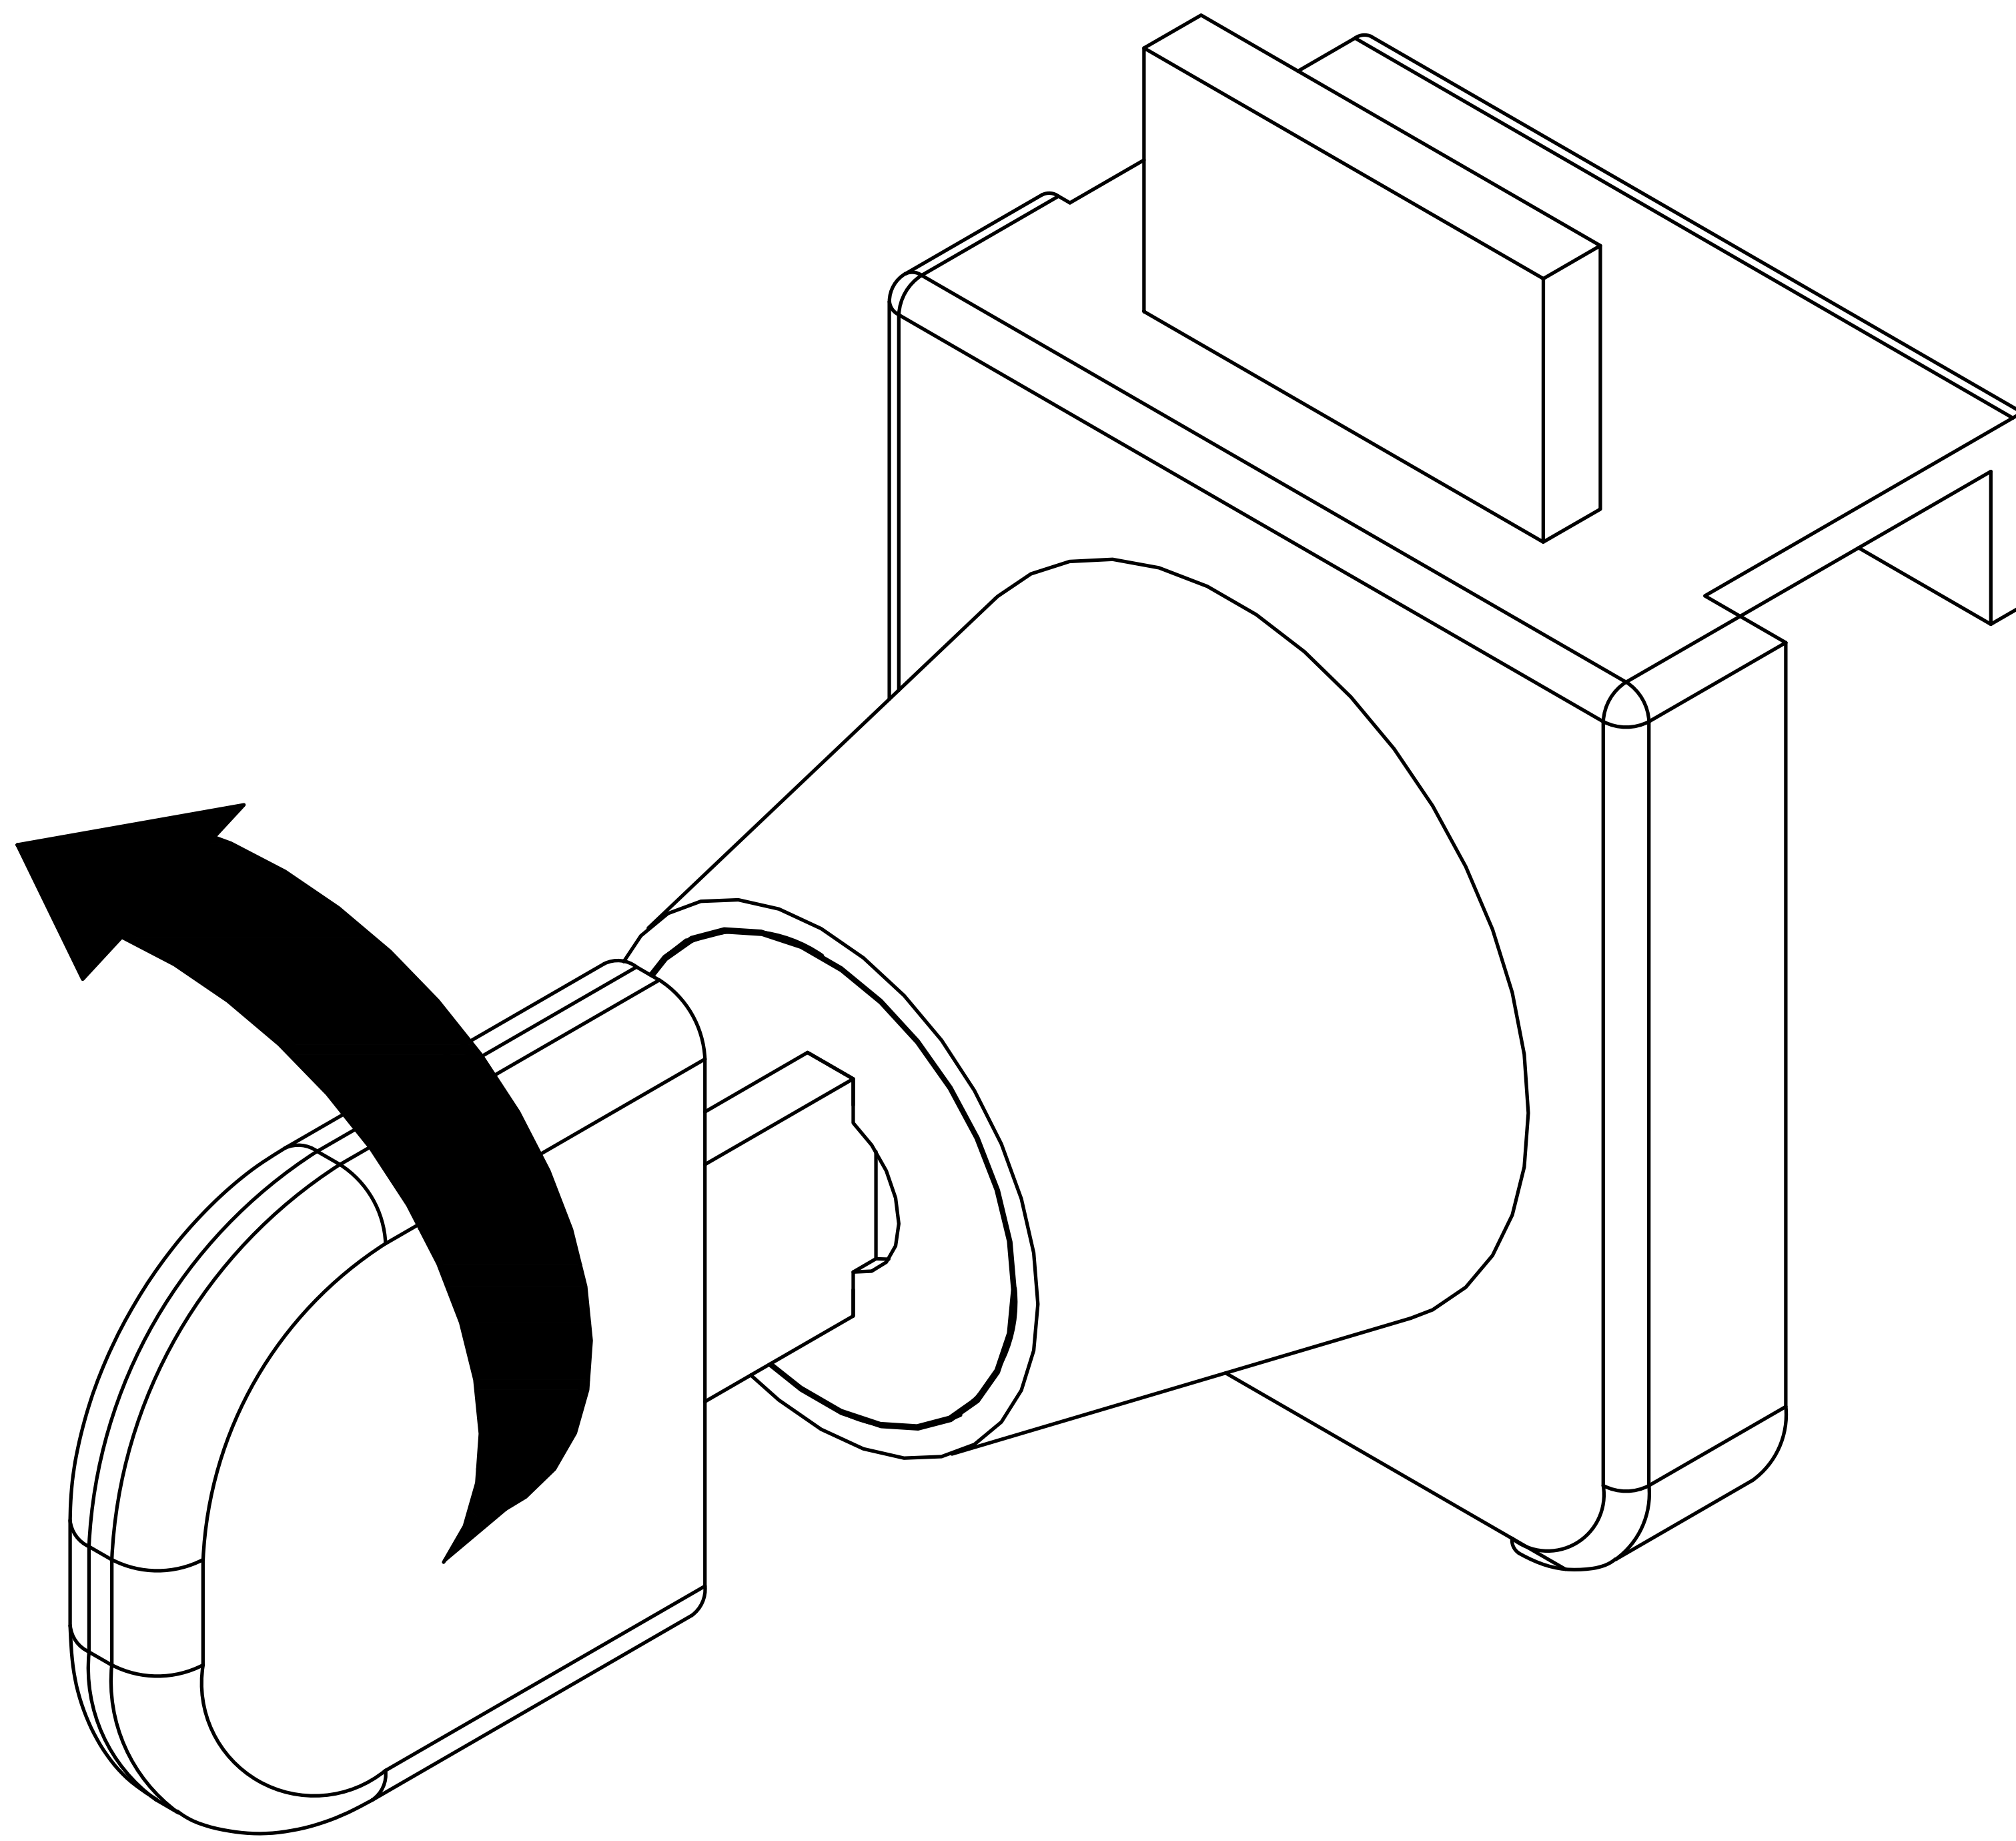


Tip: Turning the door lock to the left opens it

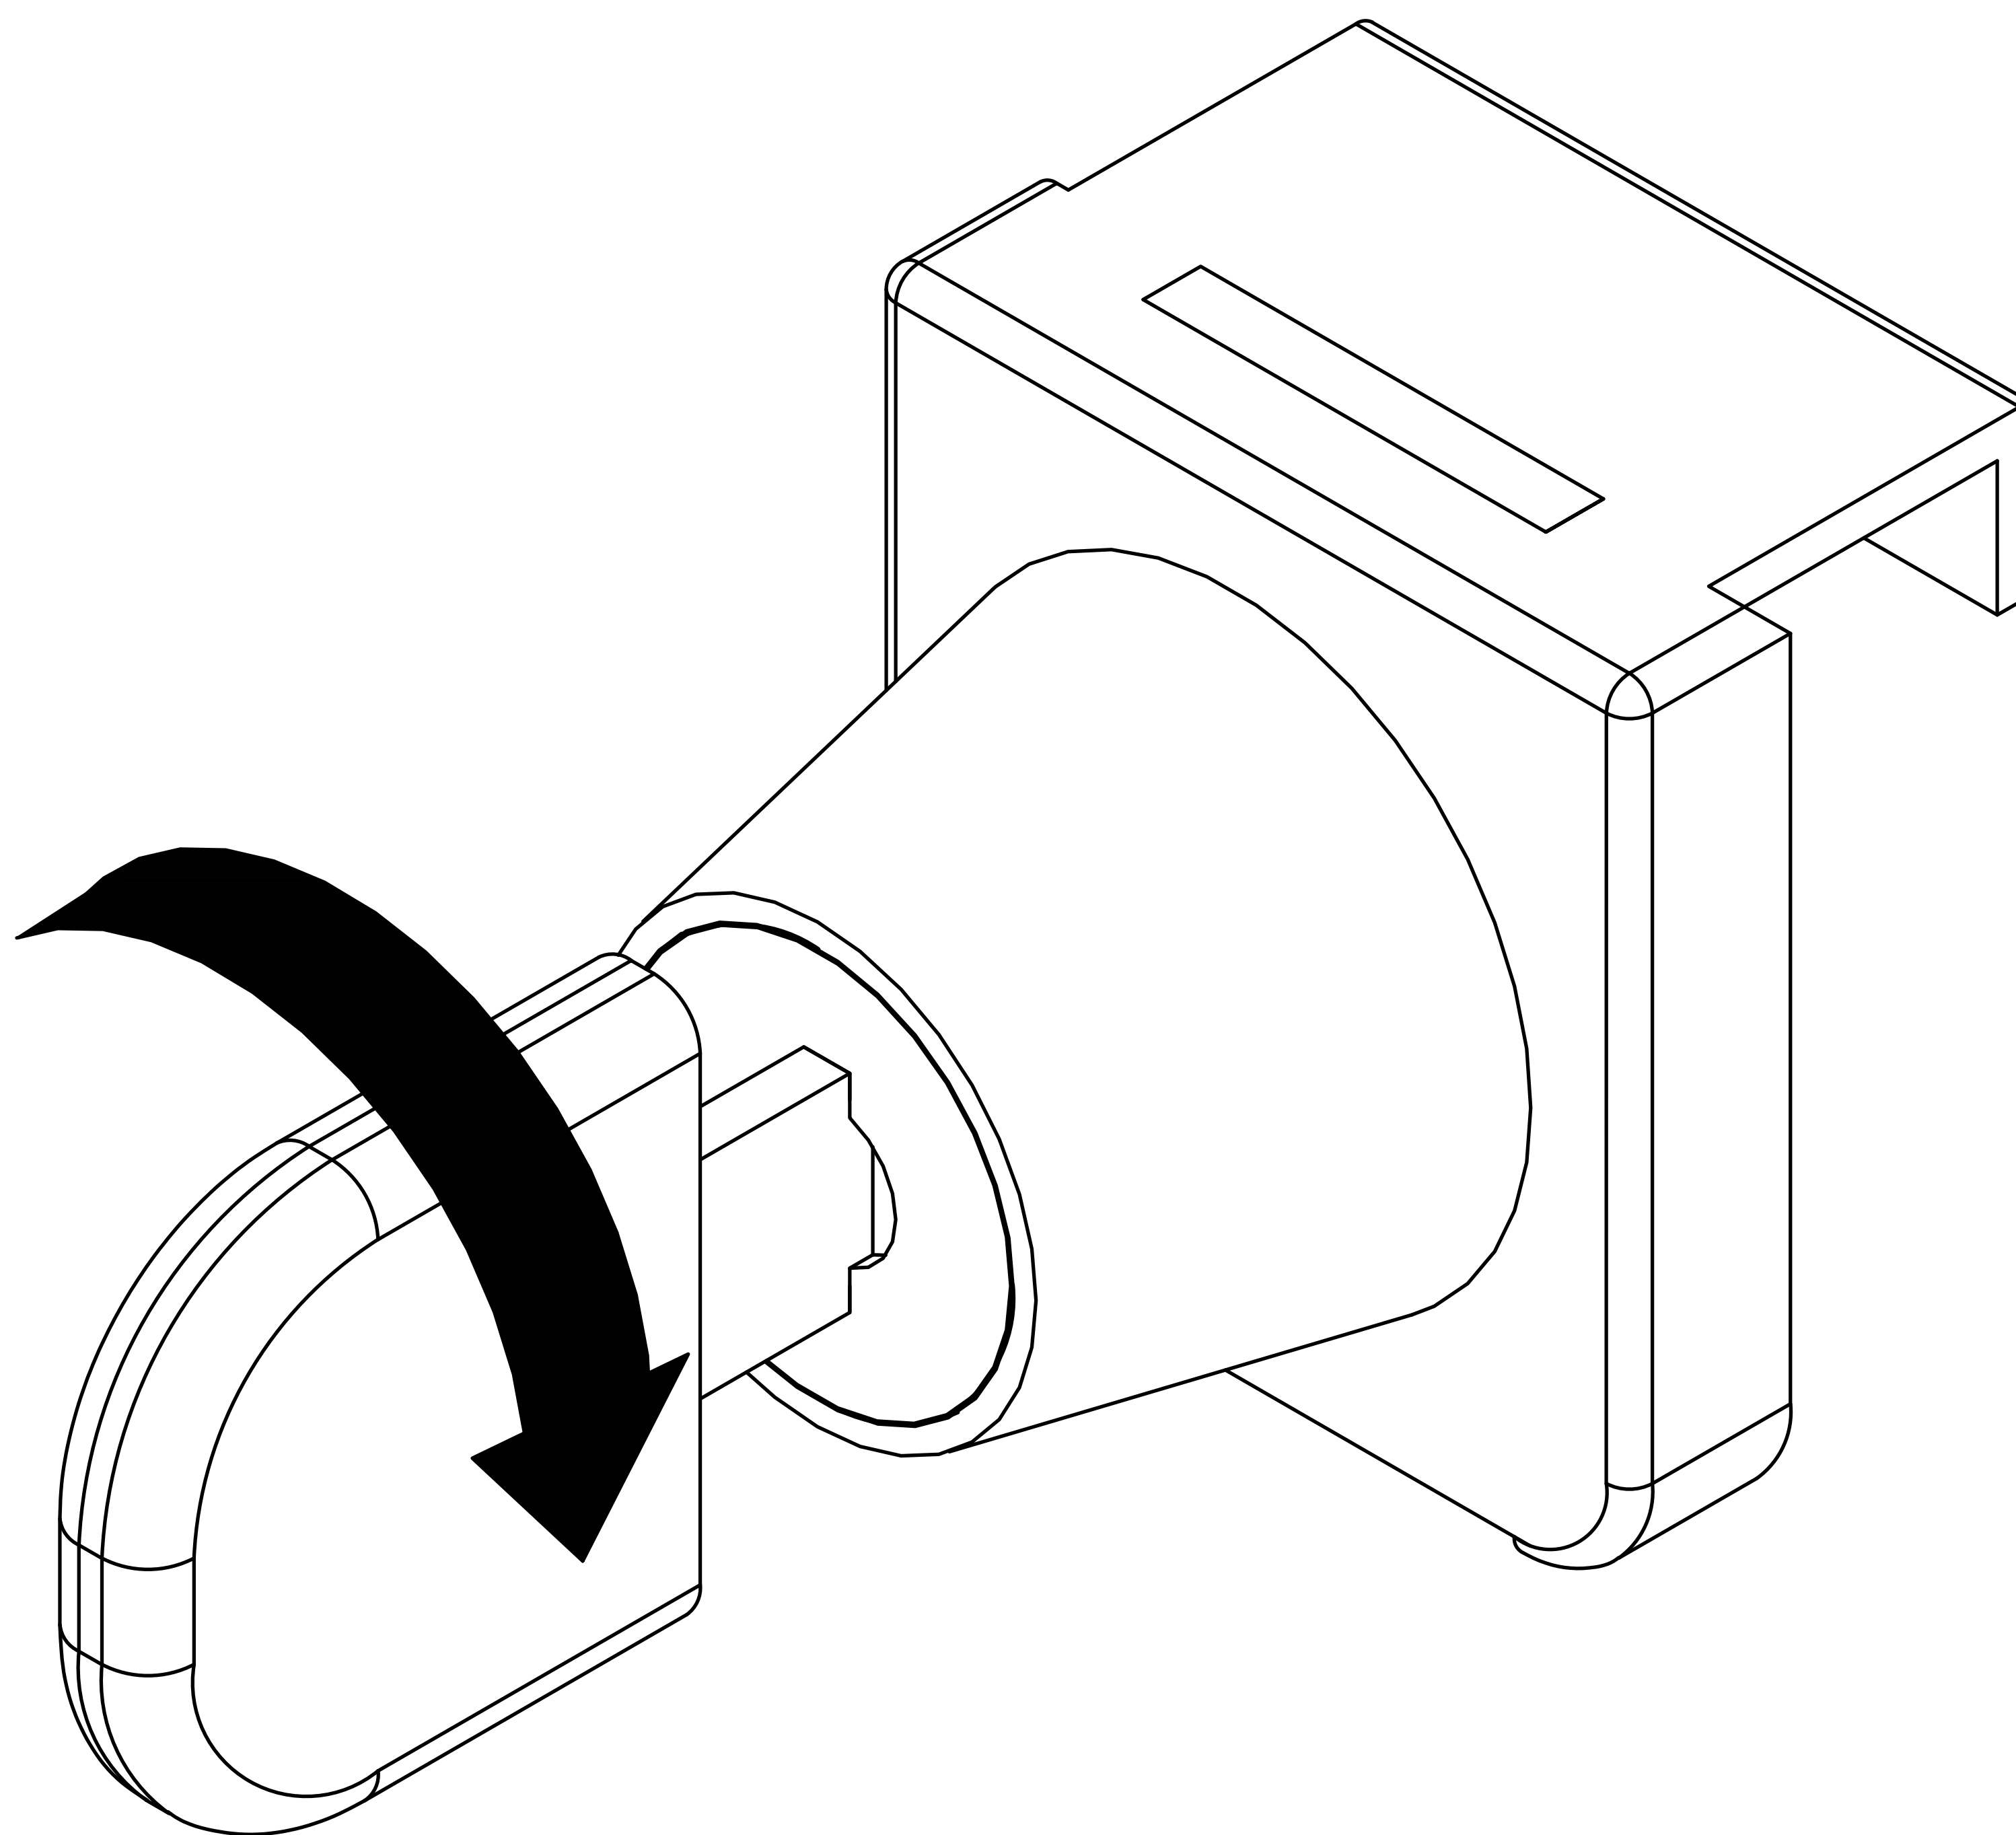


Step 38

9


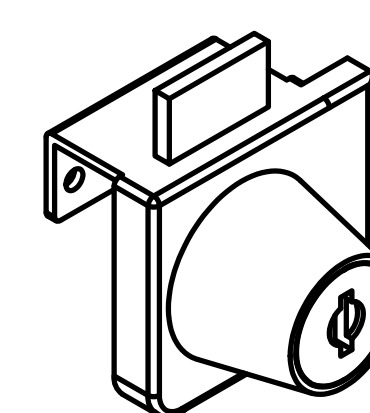


x1

first

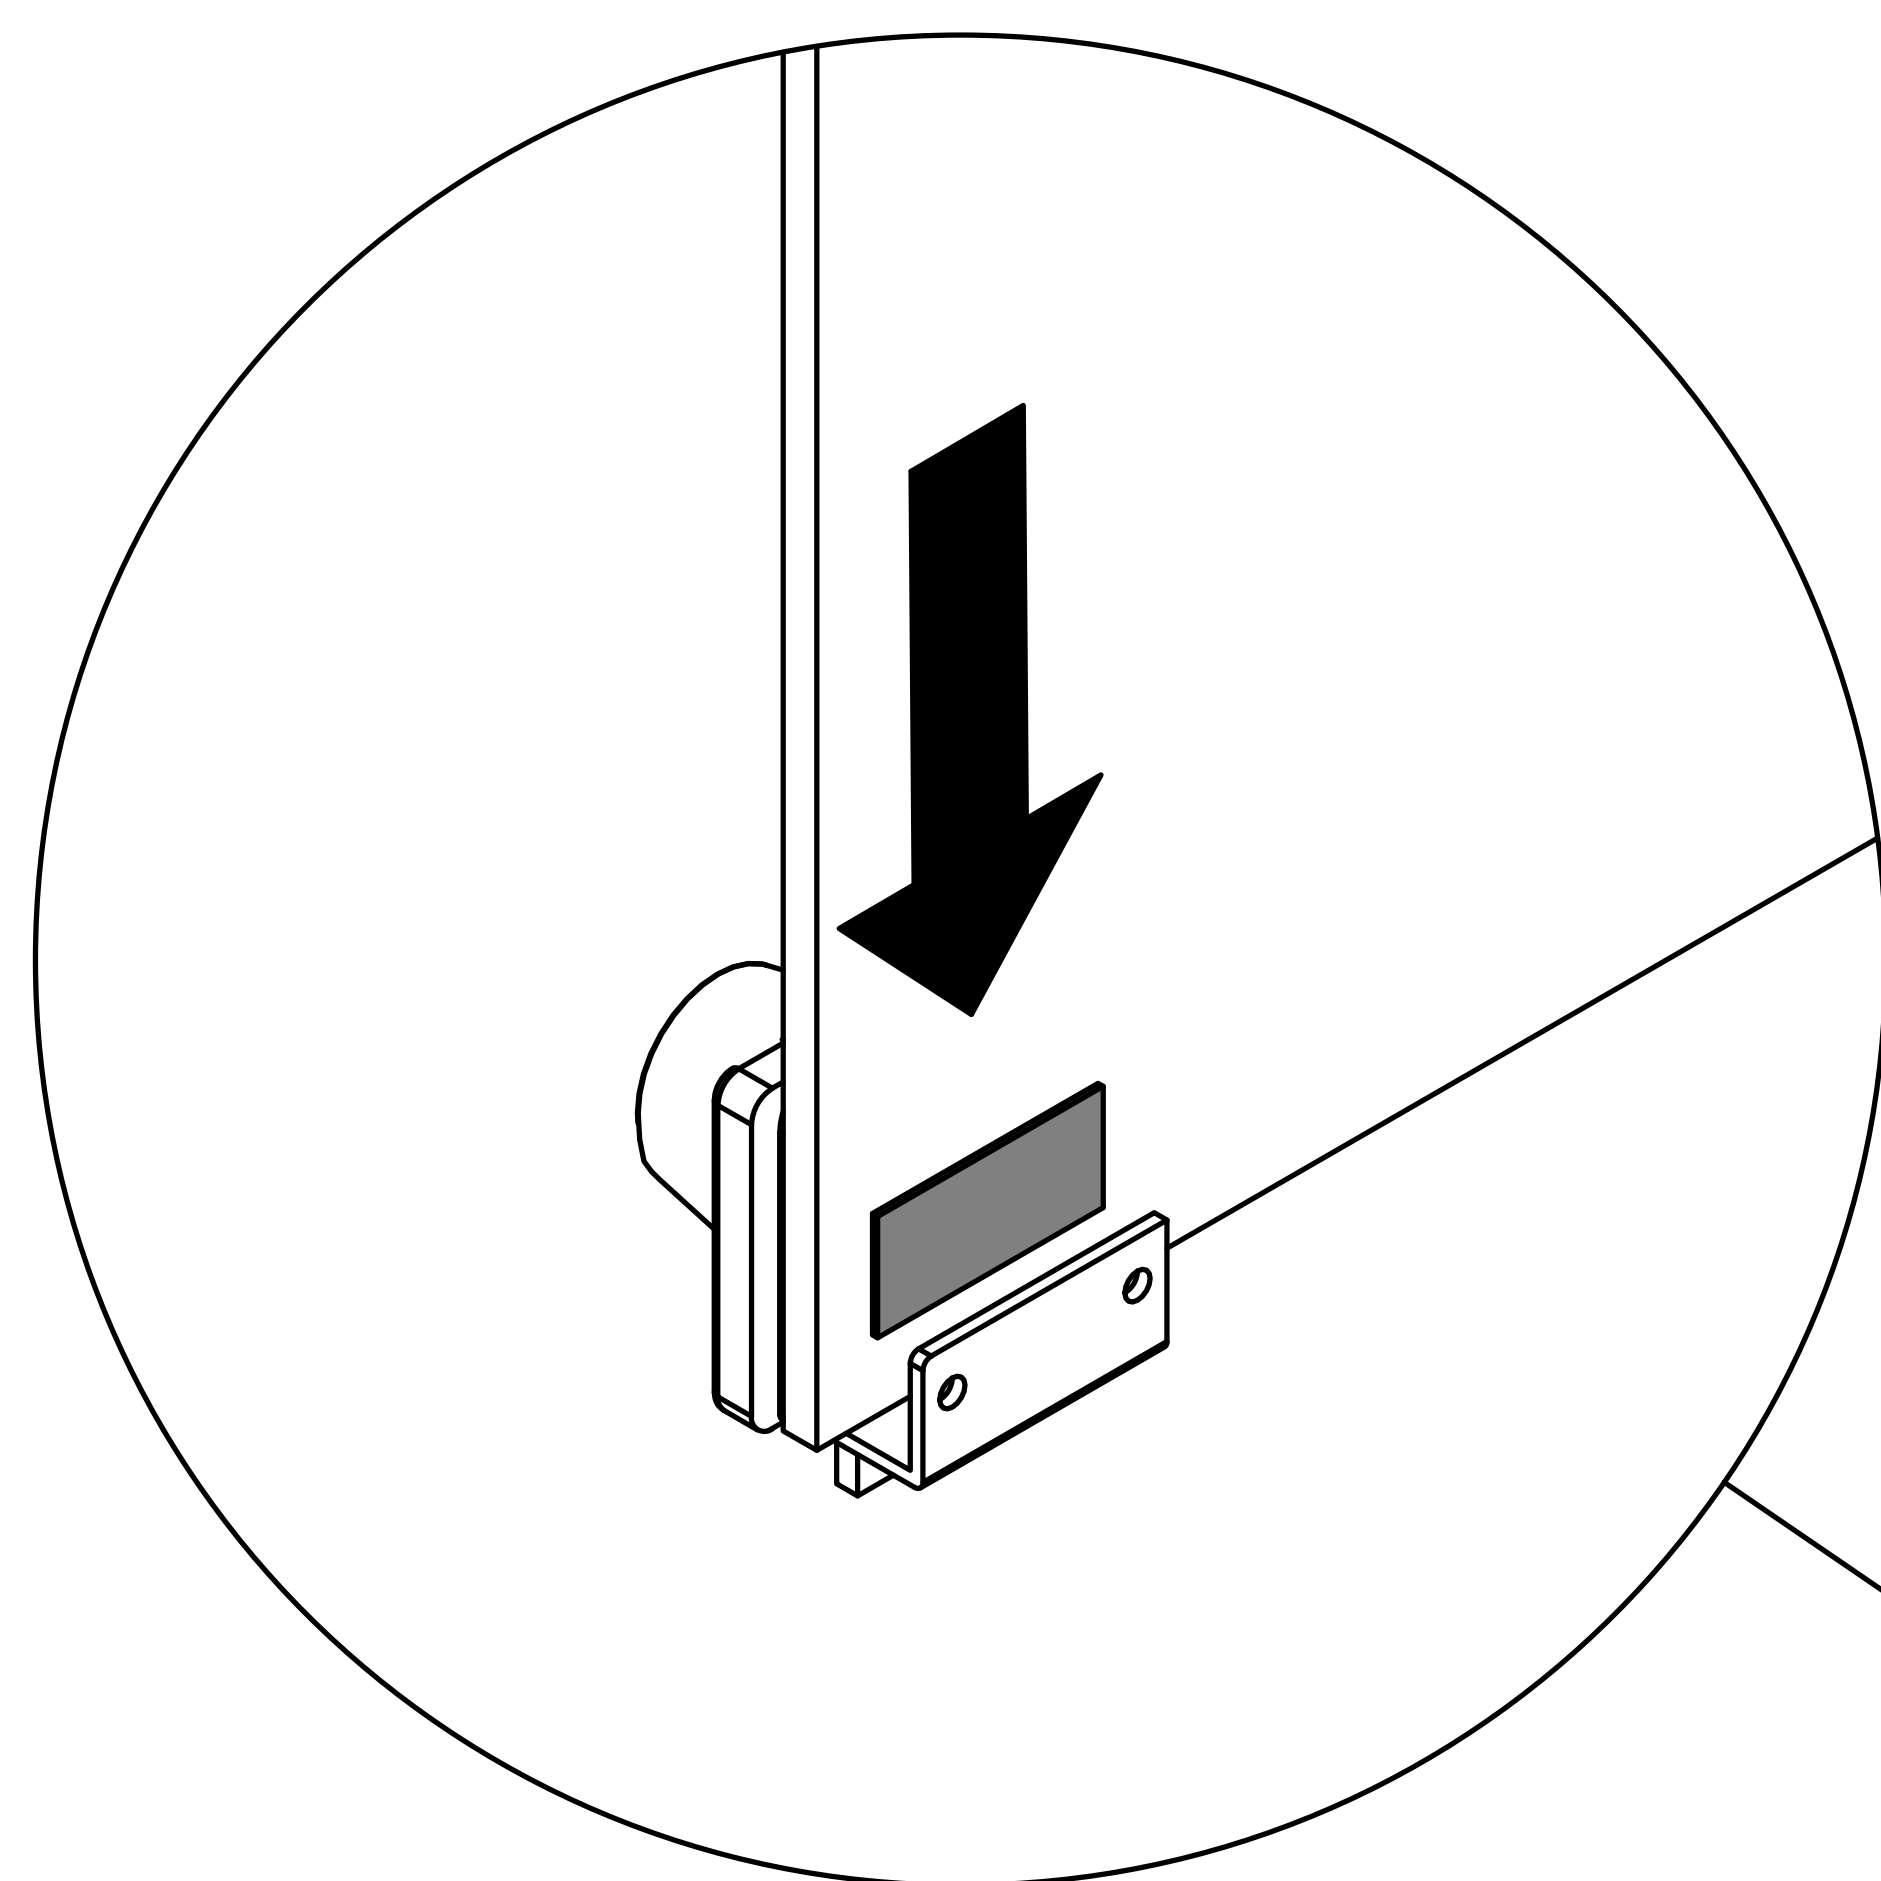


second

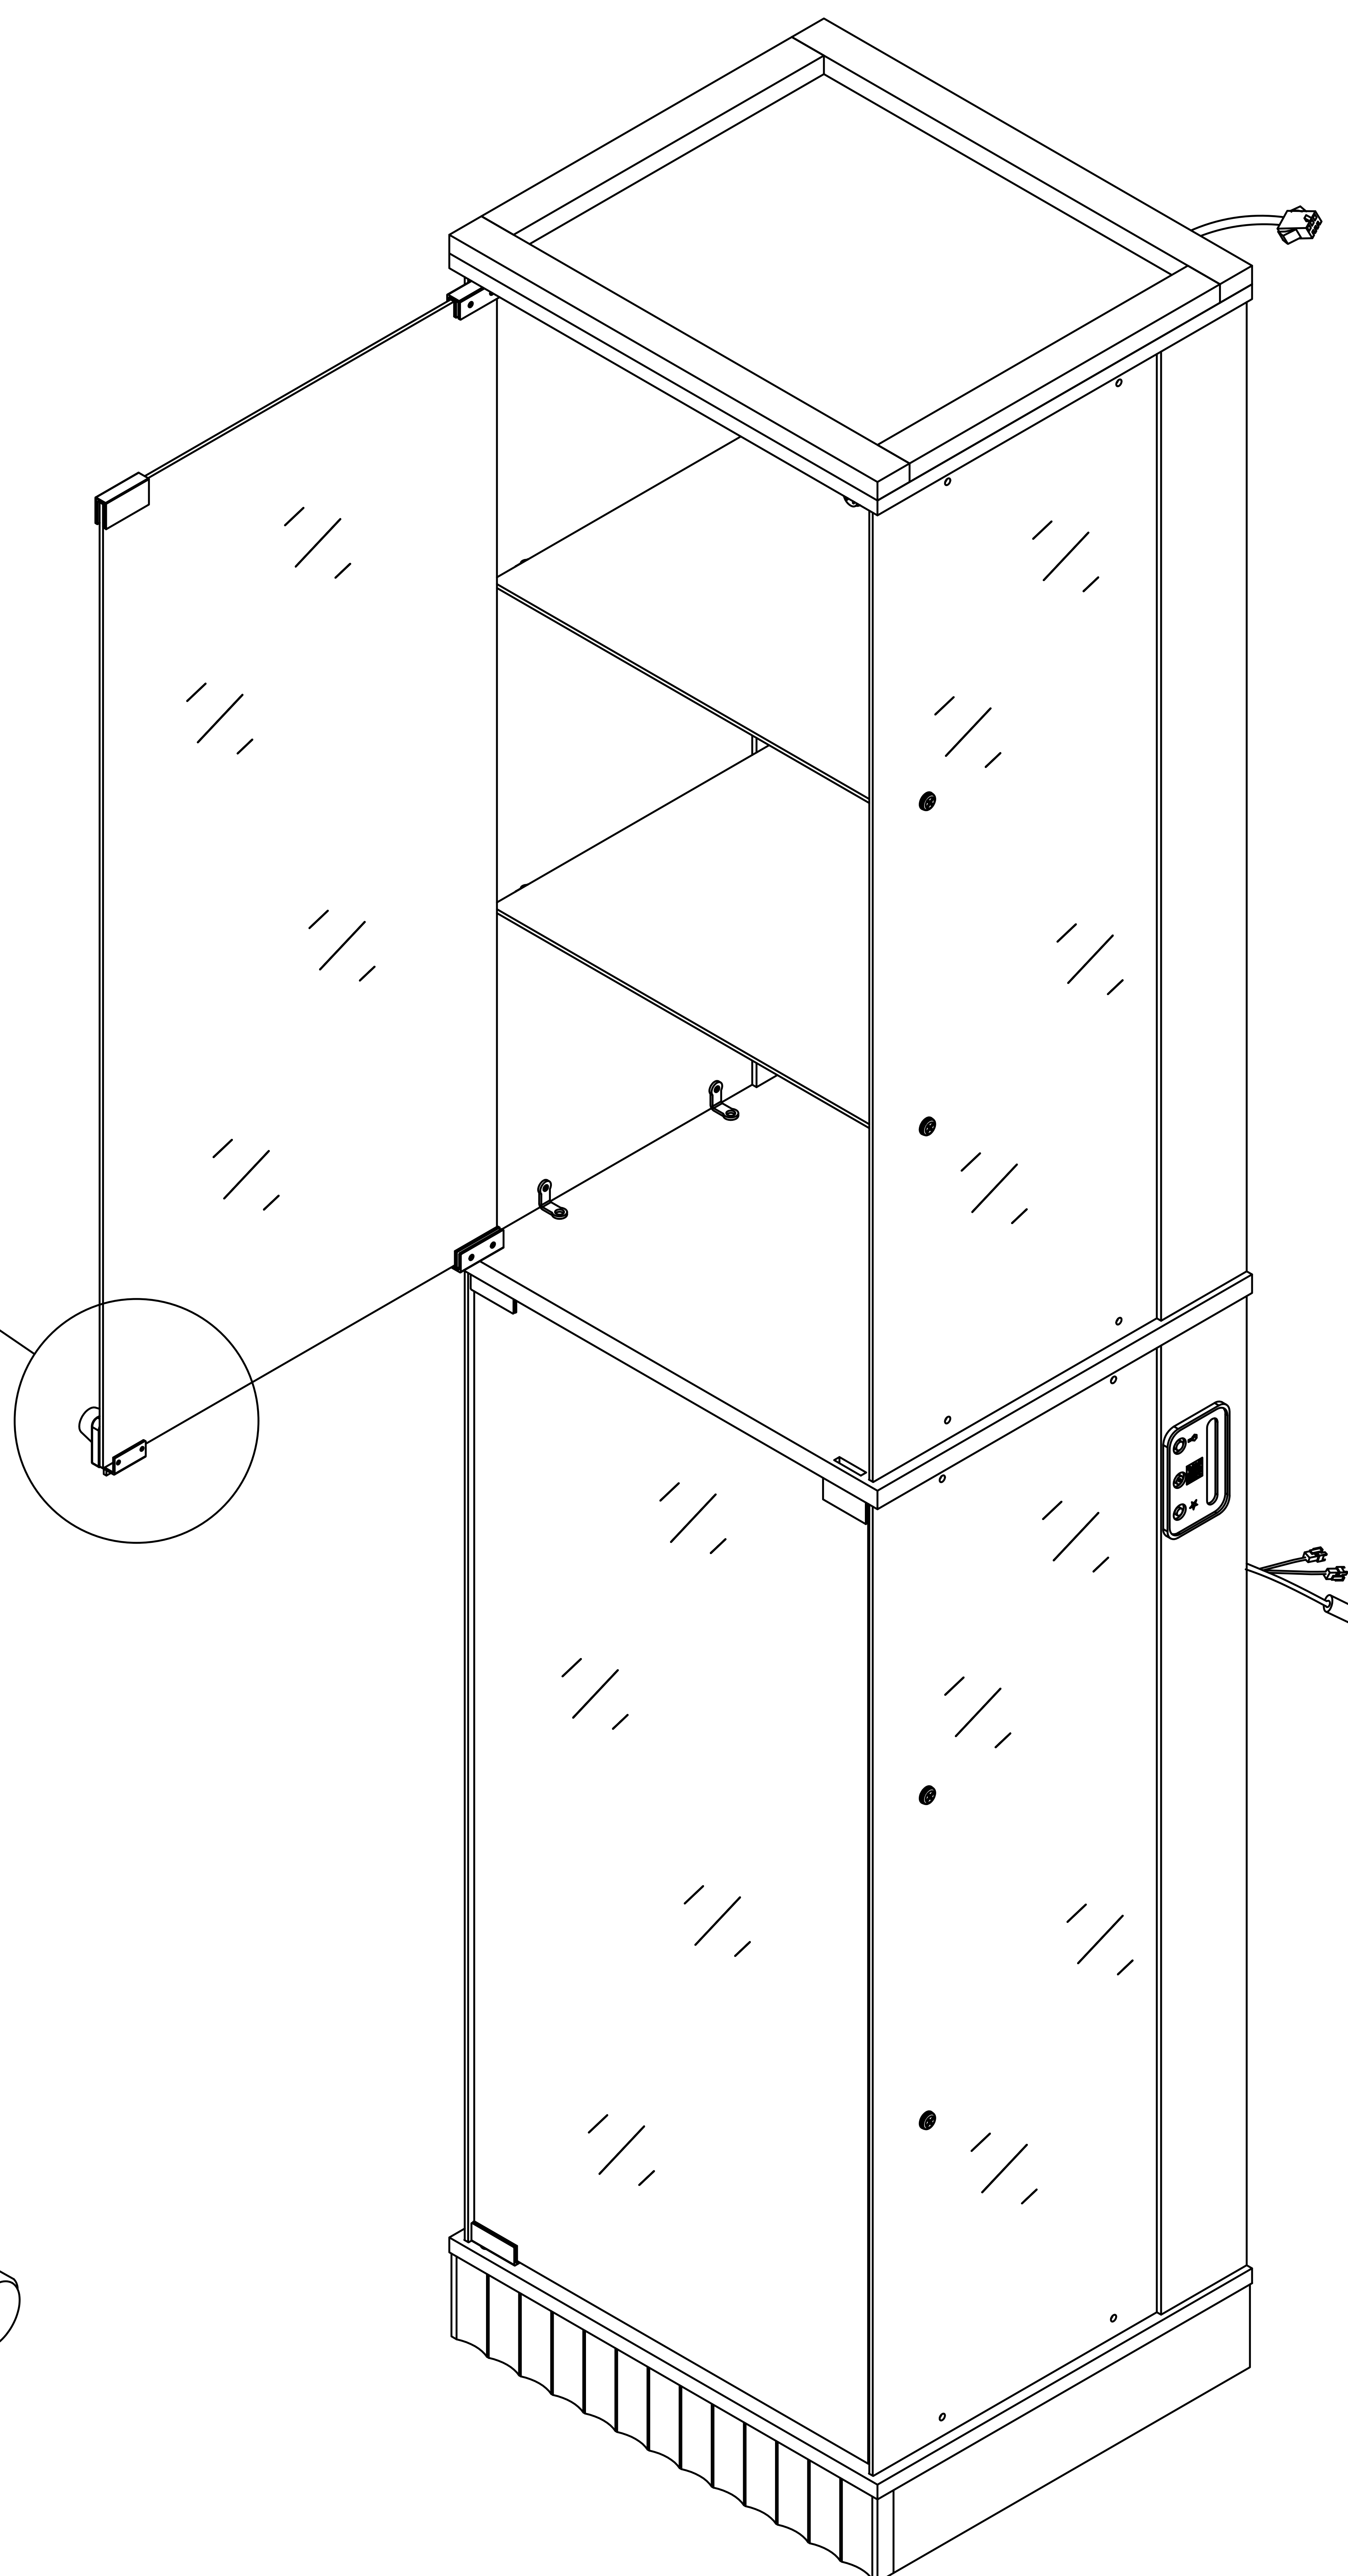
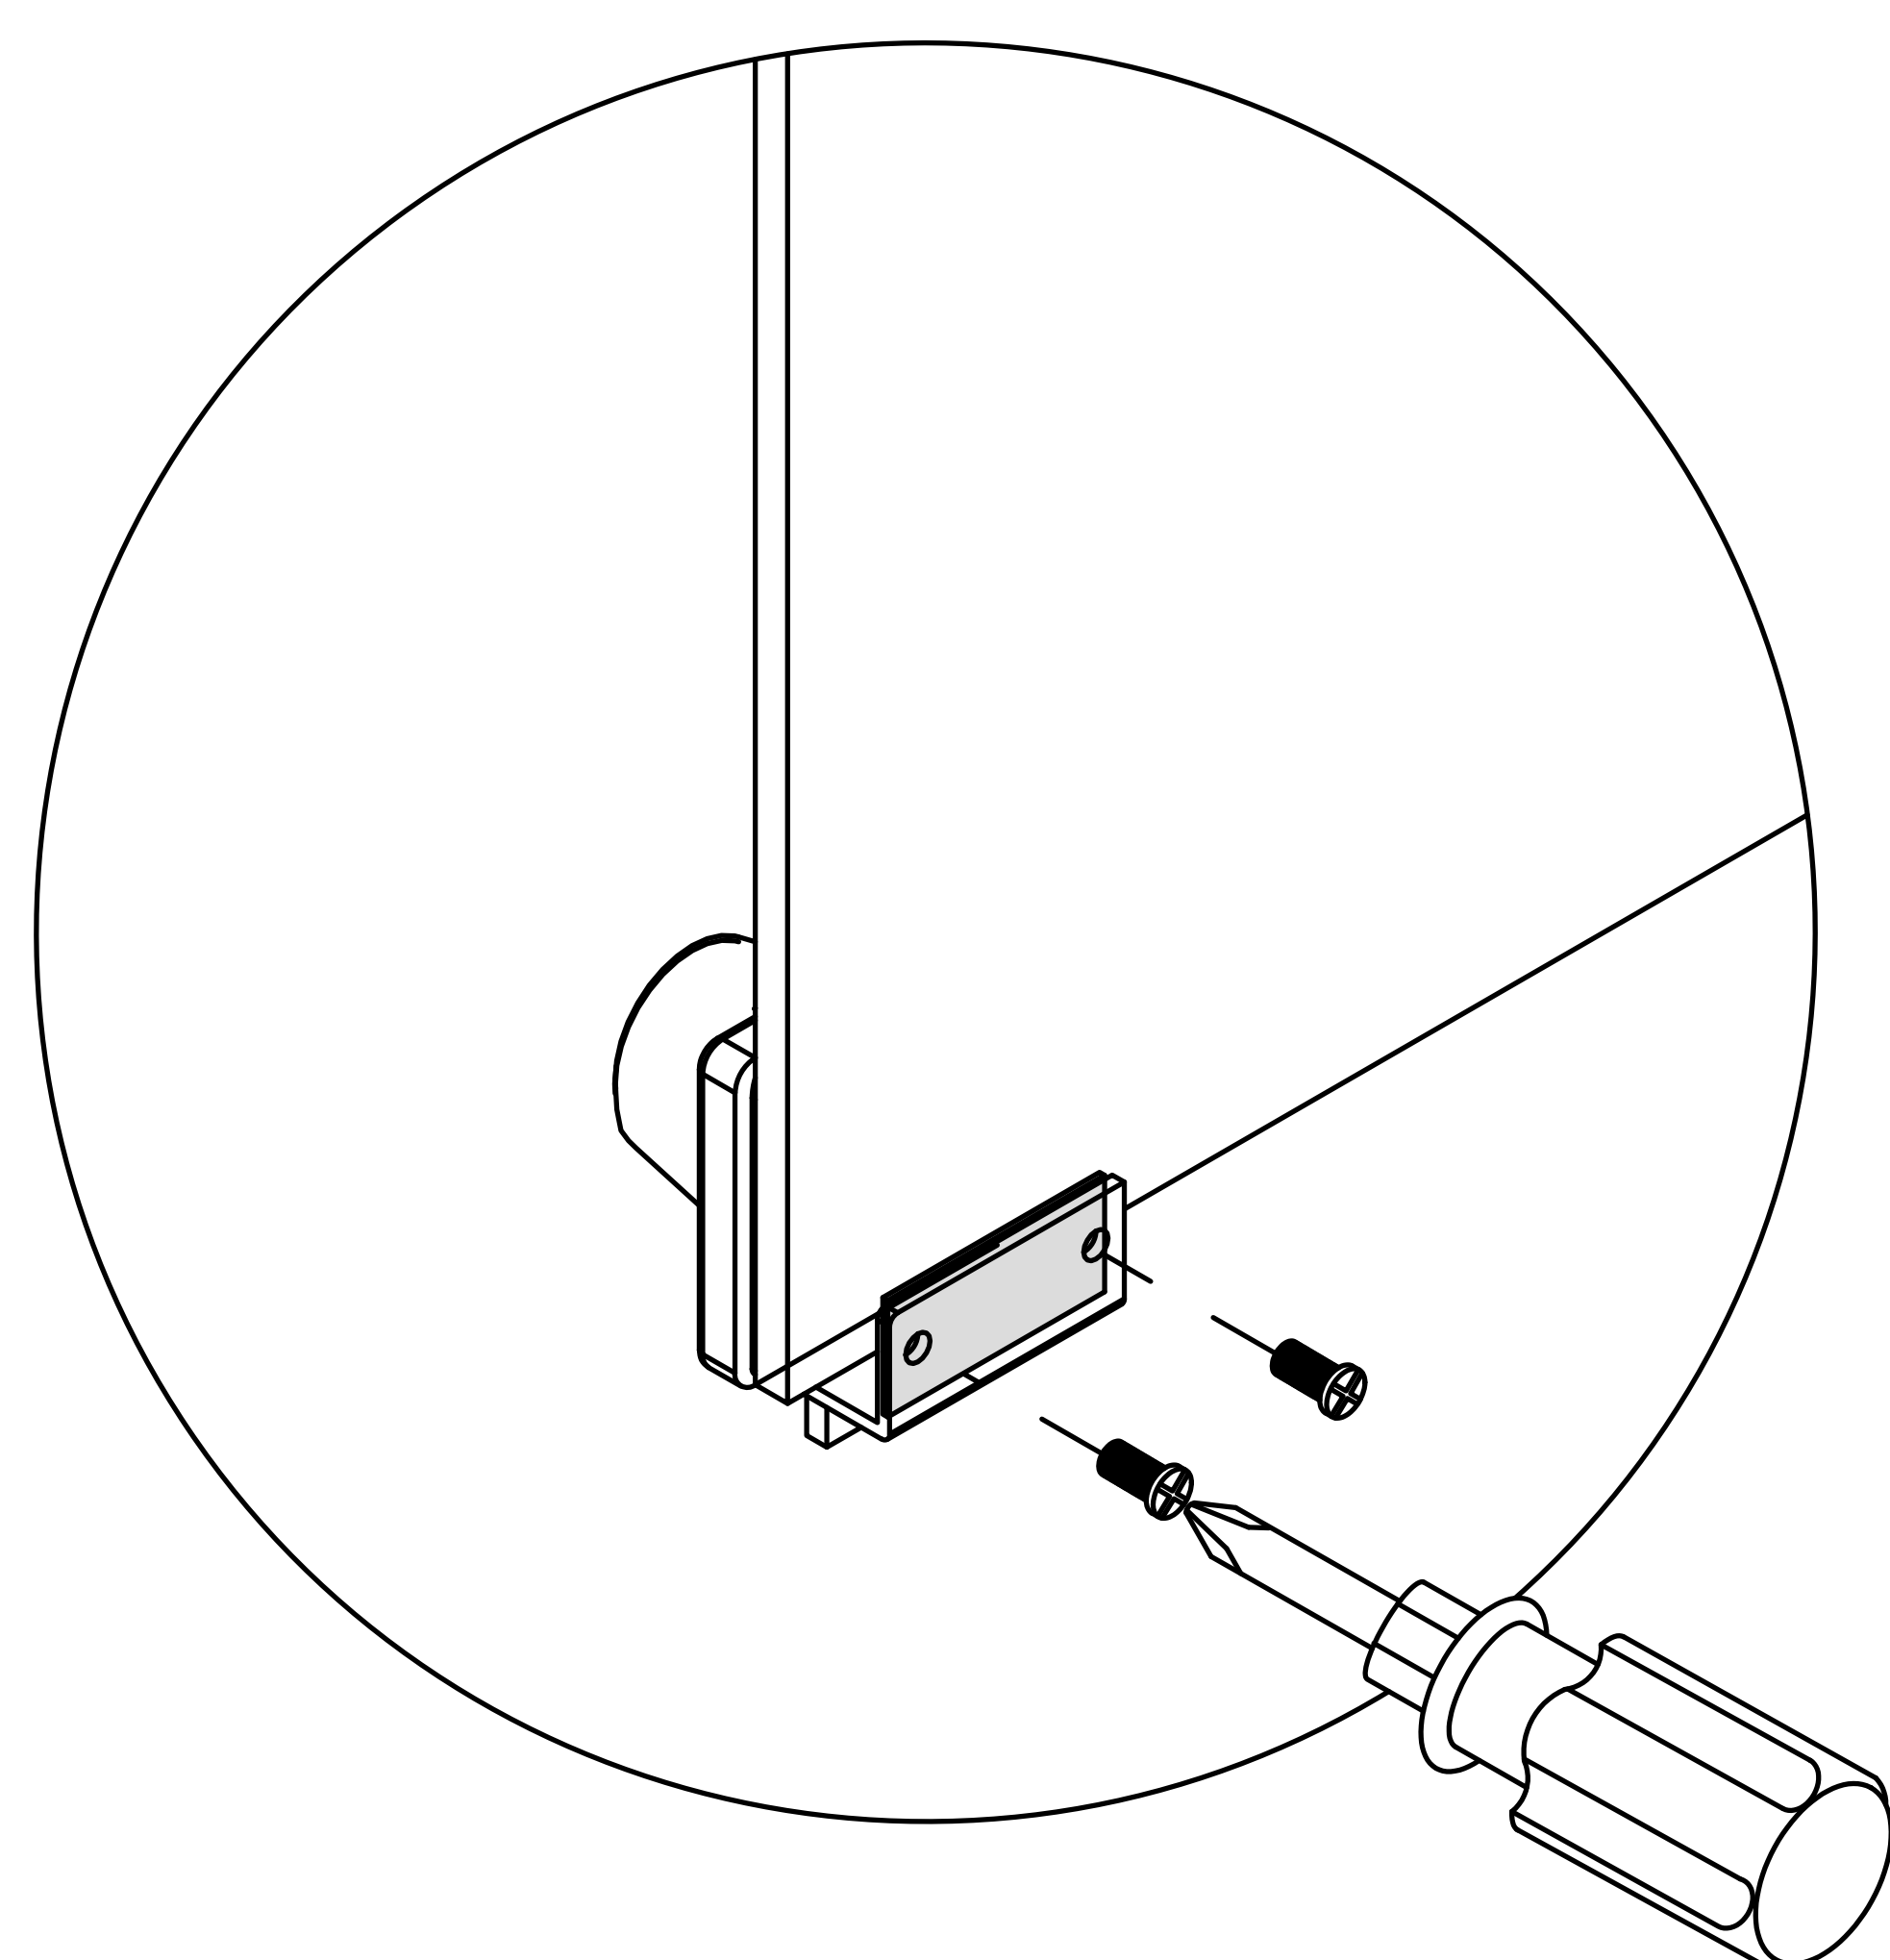


Step 39

Open the glass door



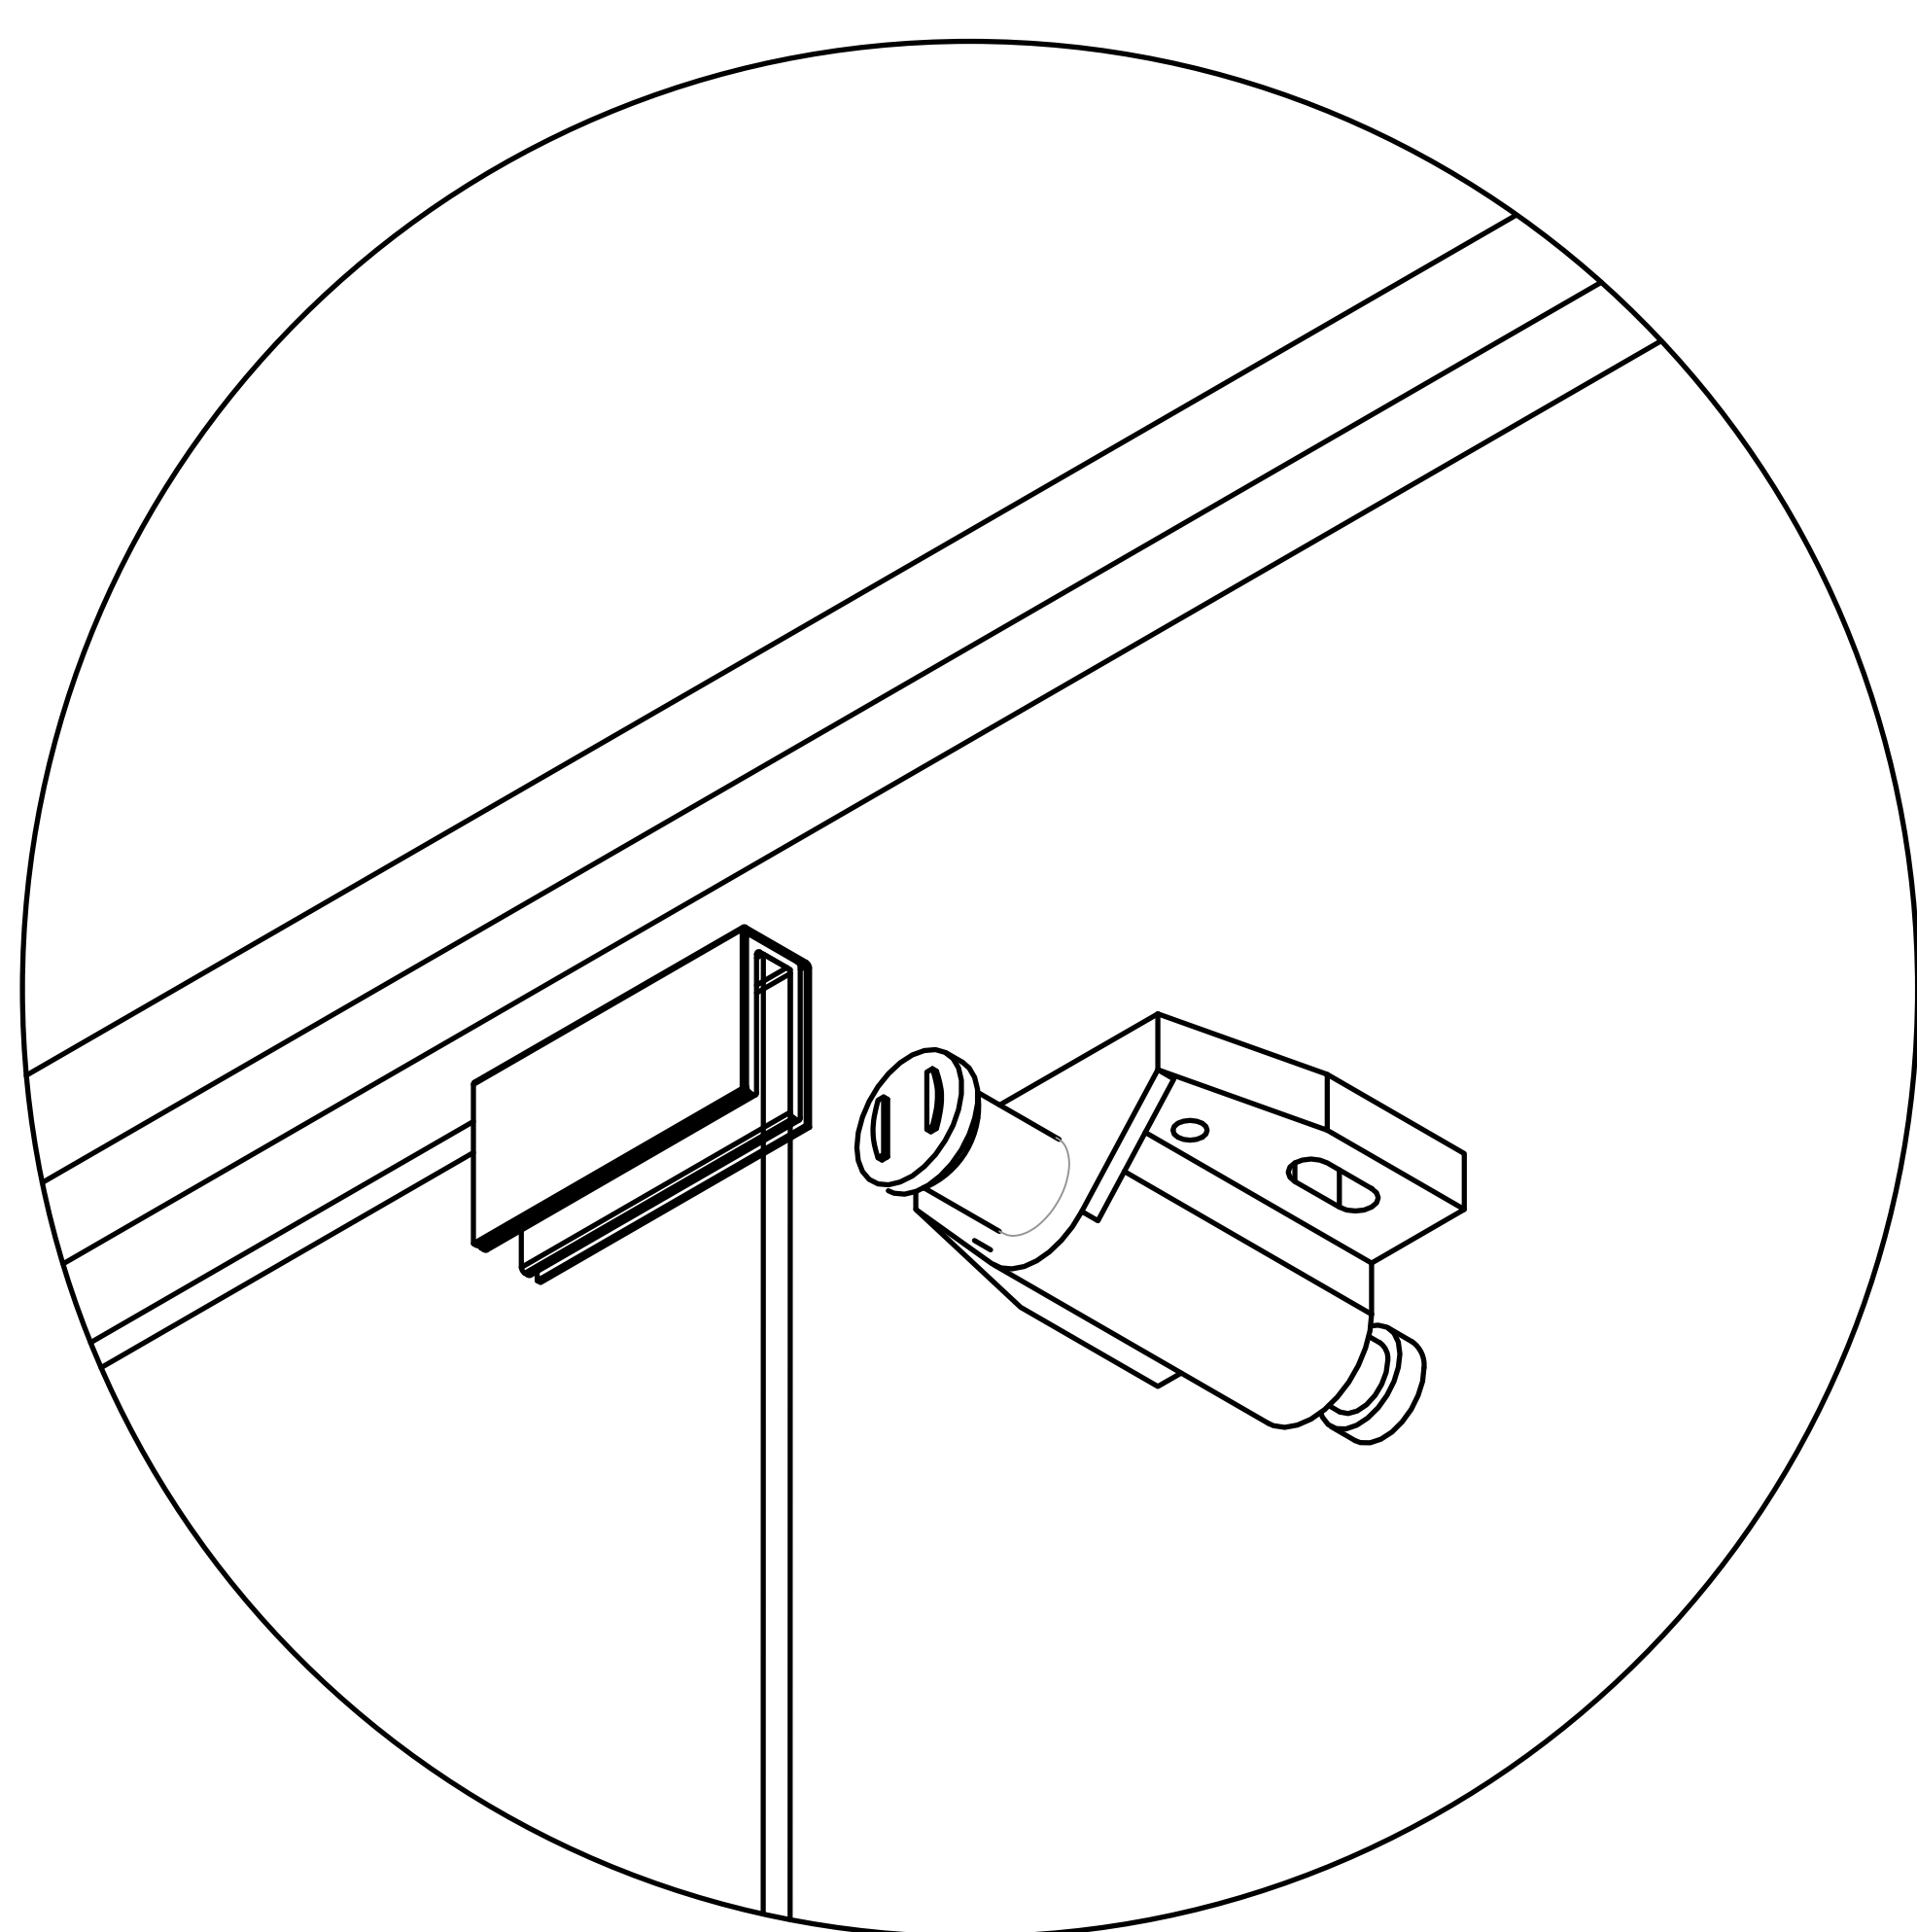


Close the glass door

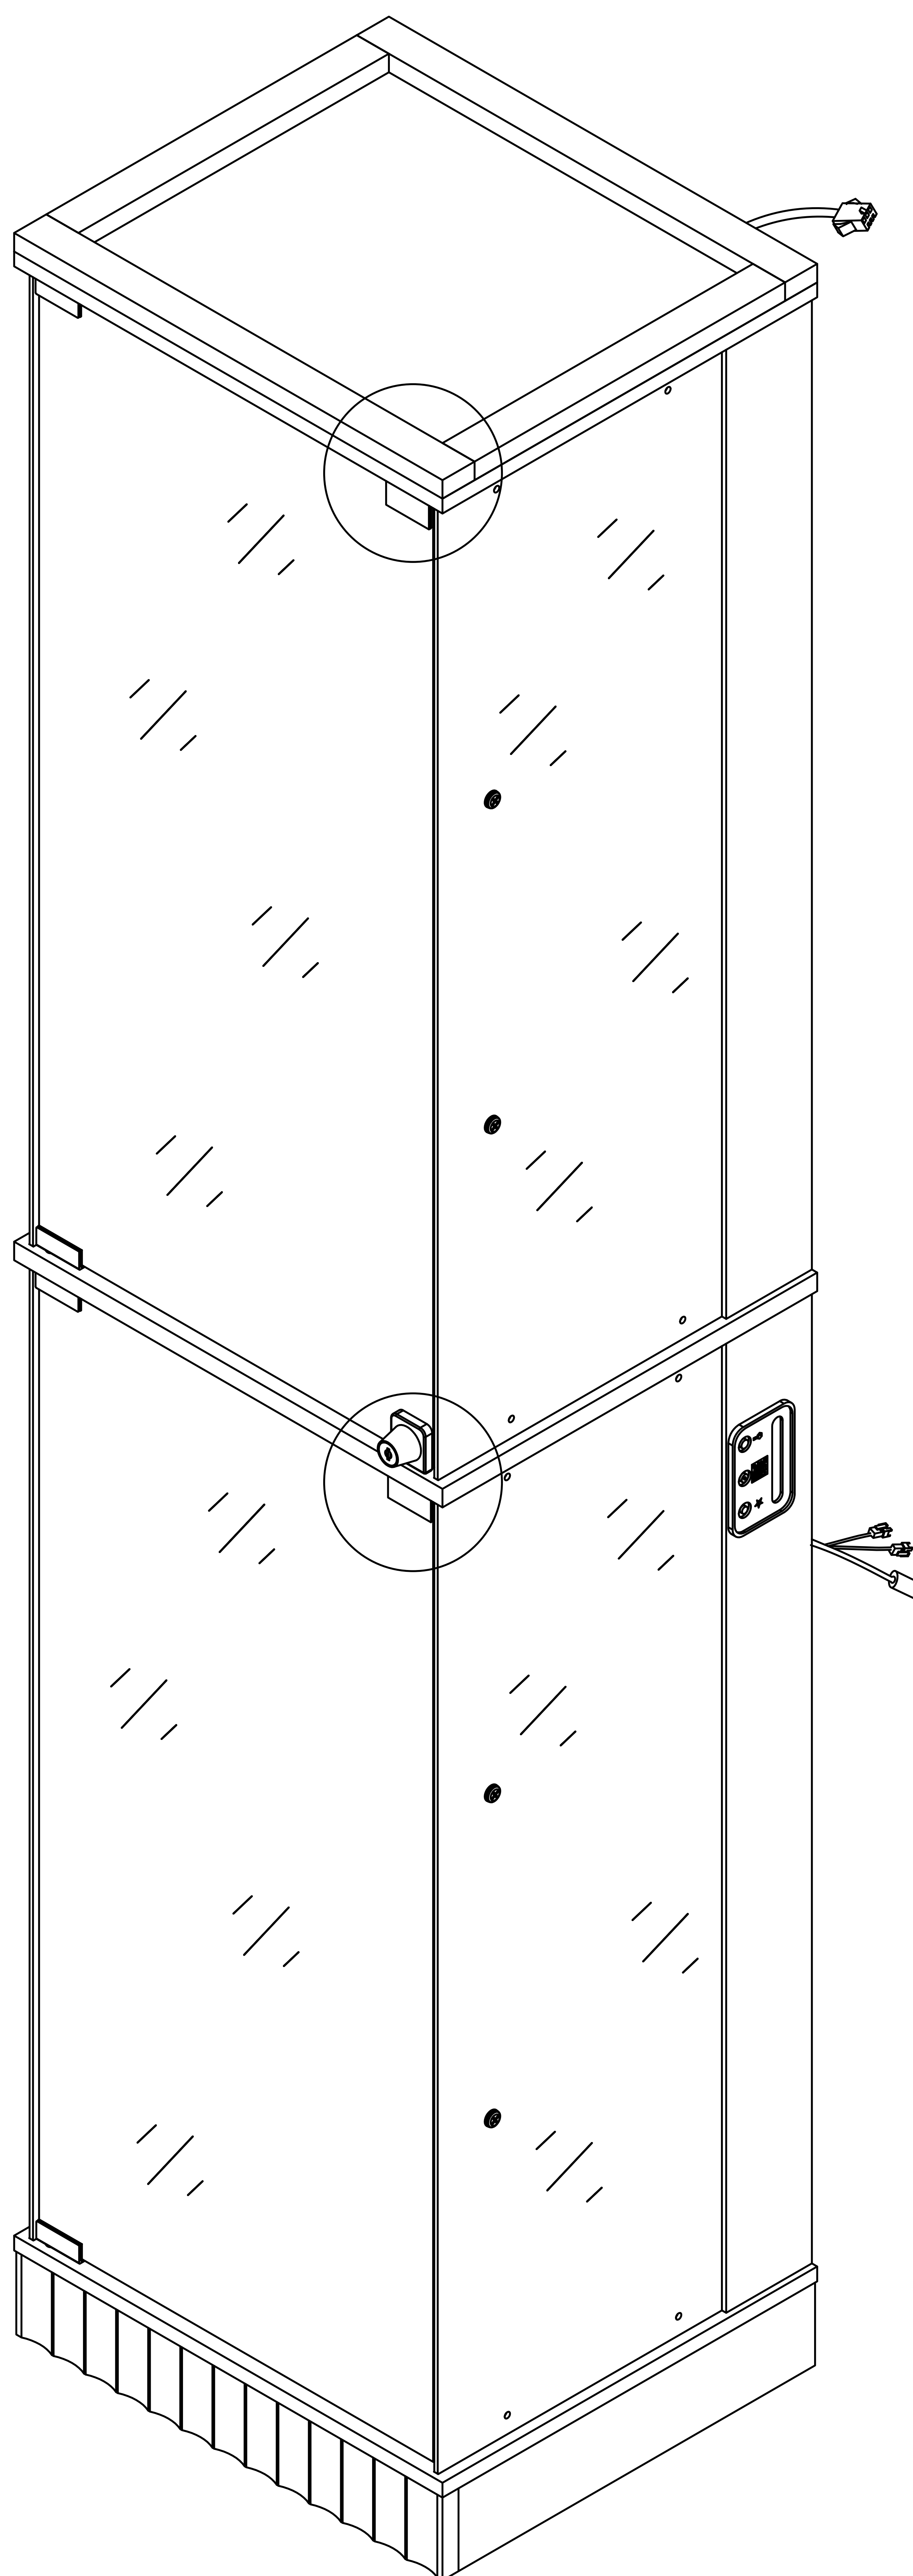
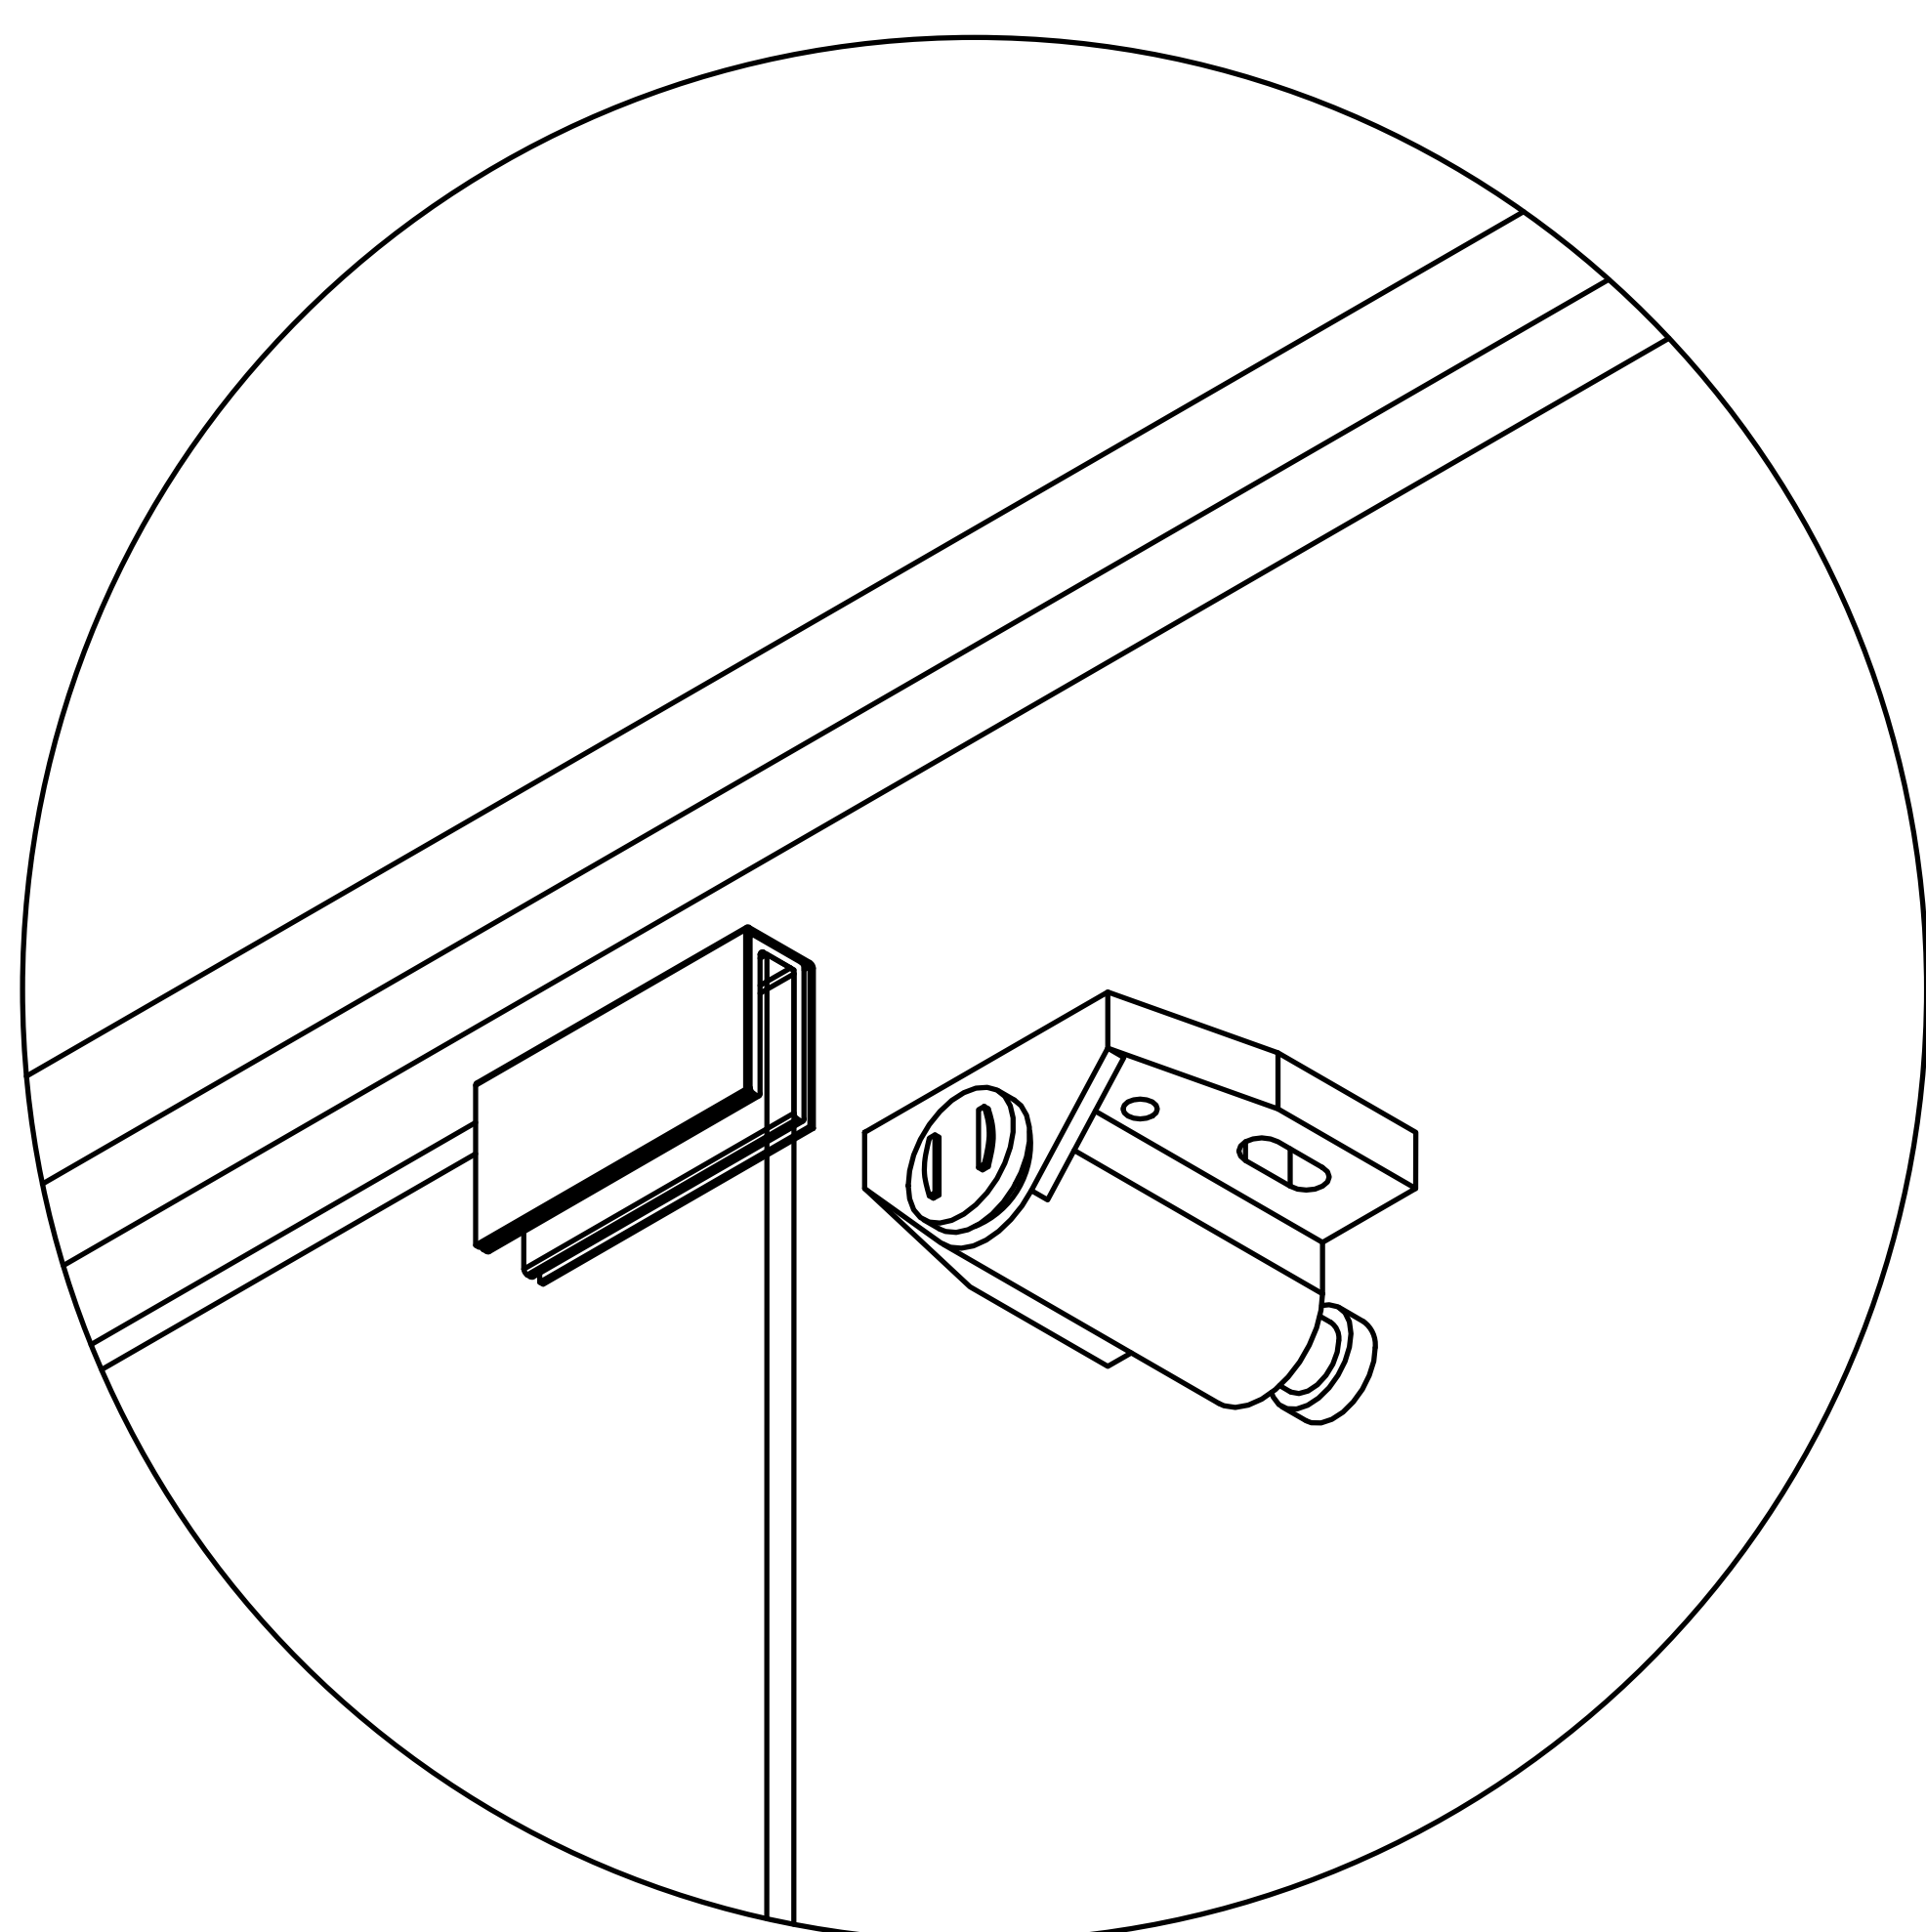


Step 40


10

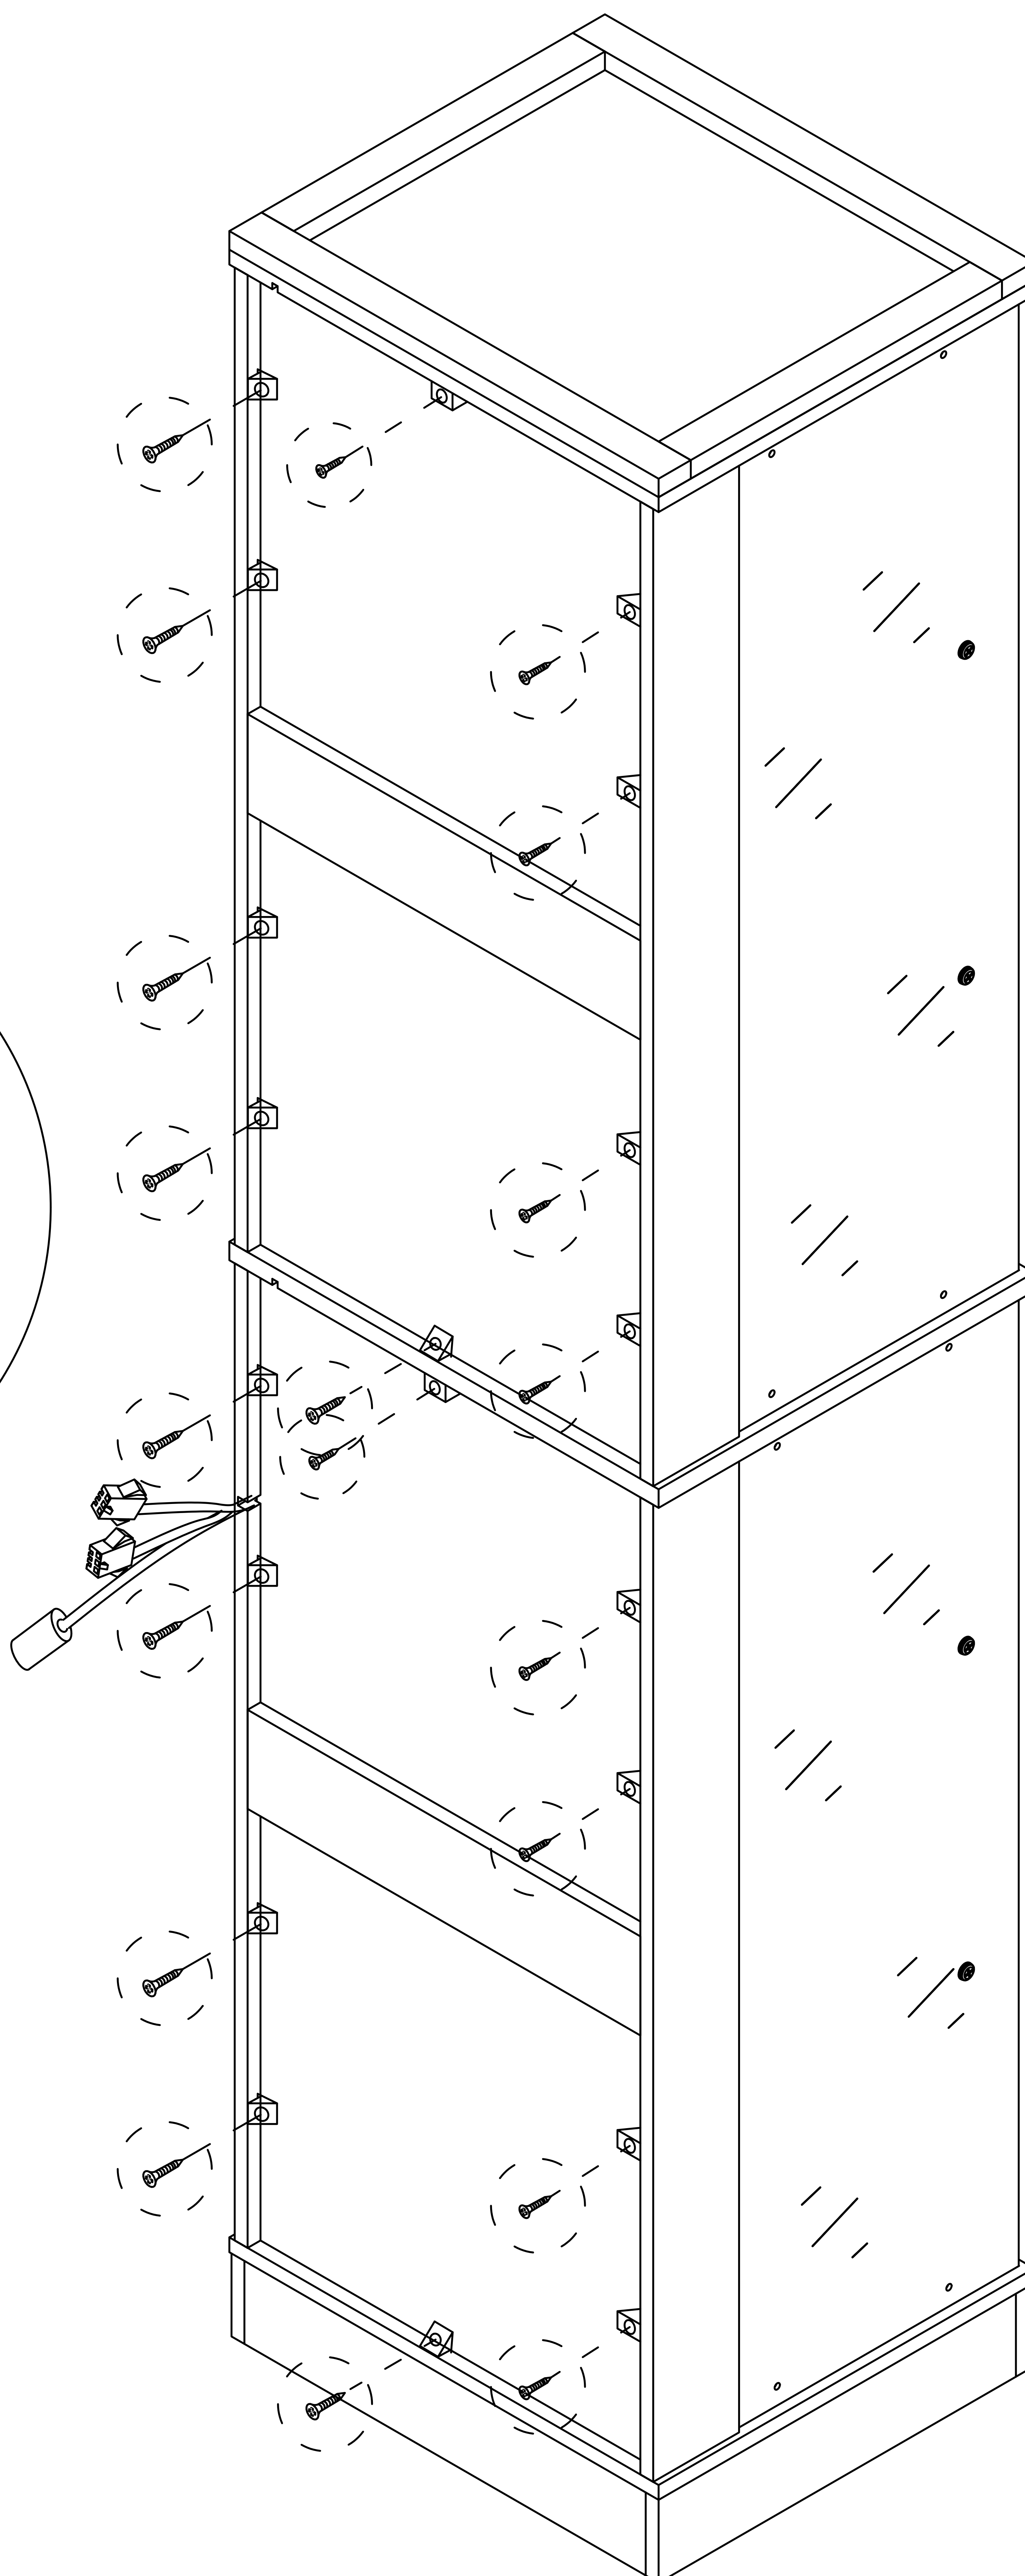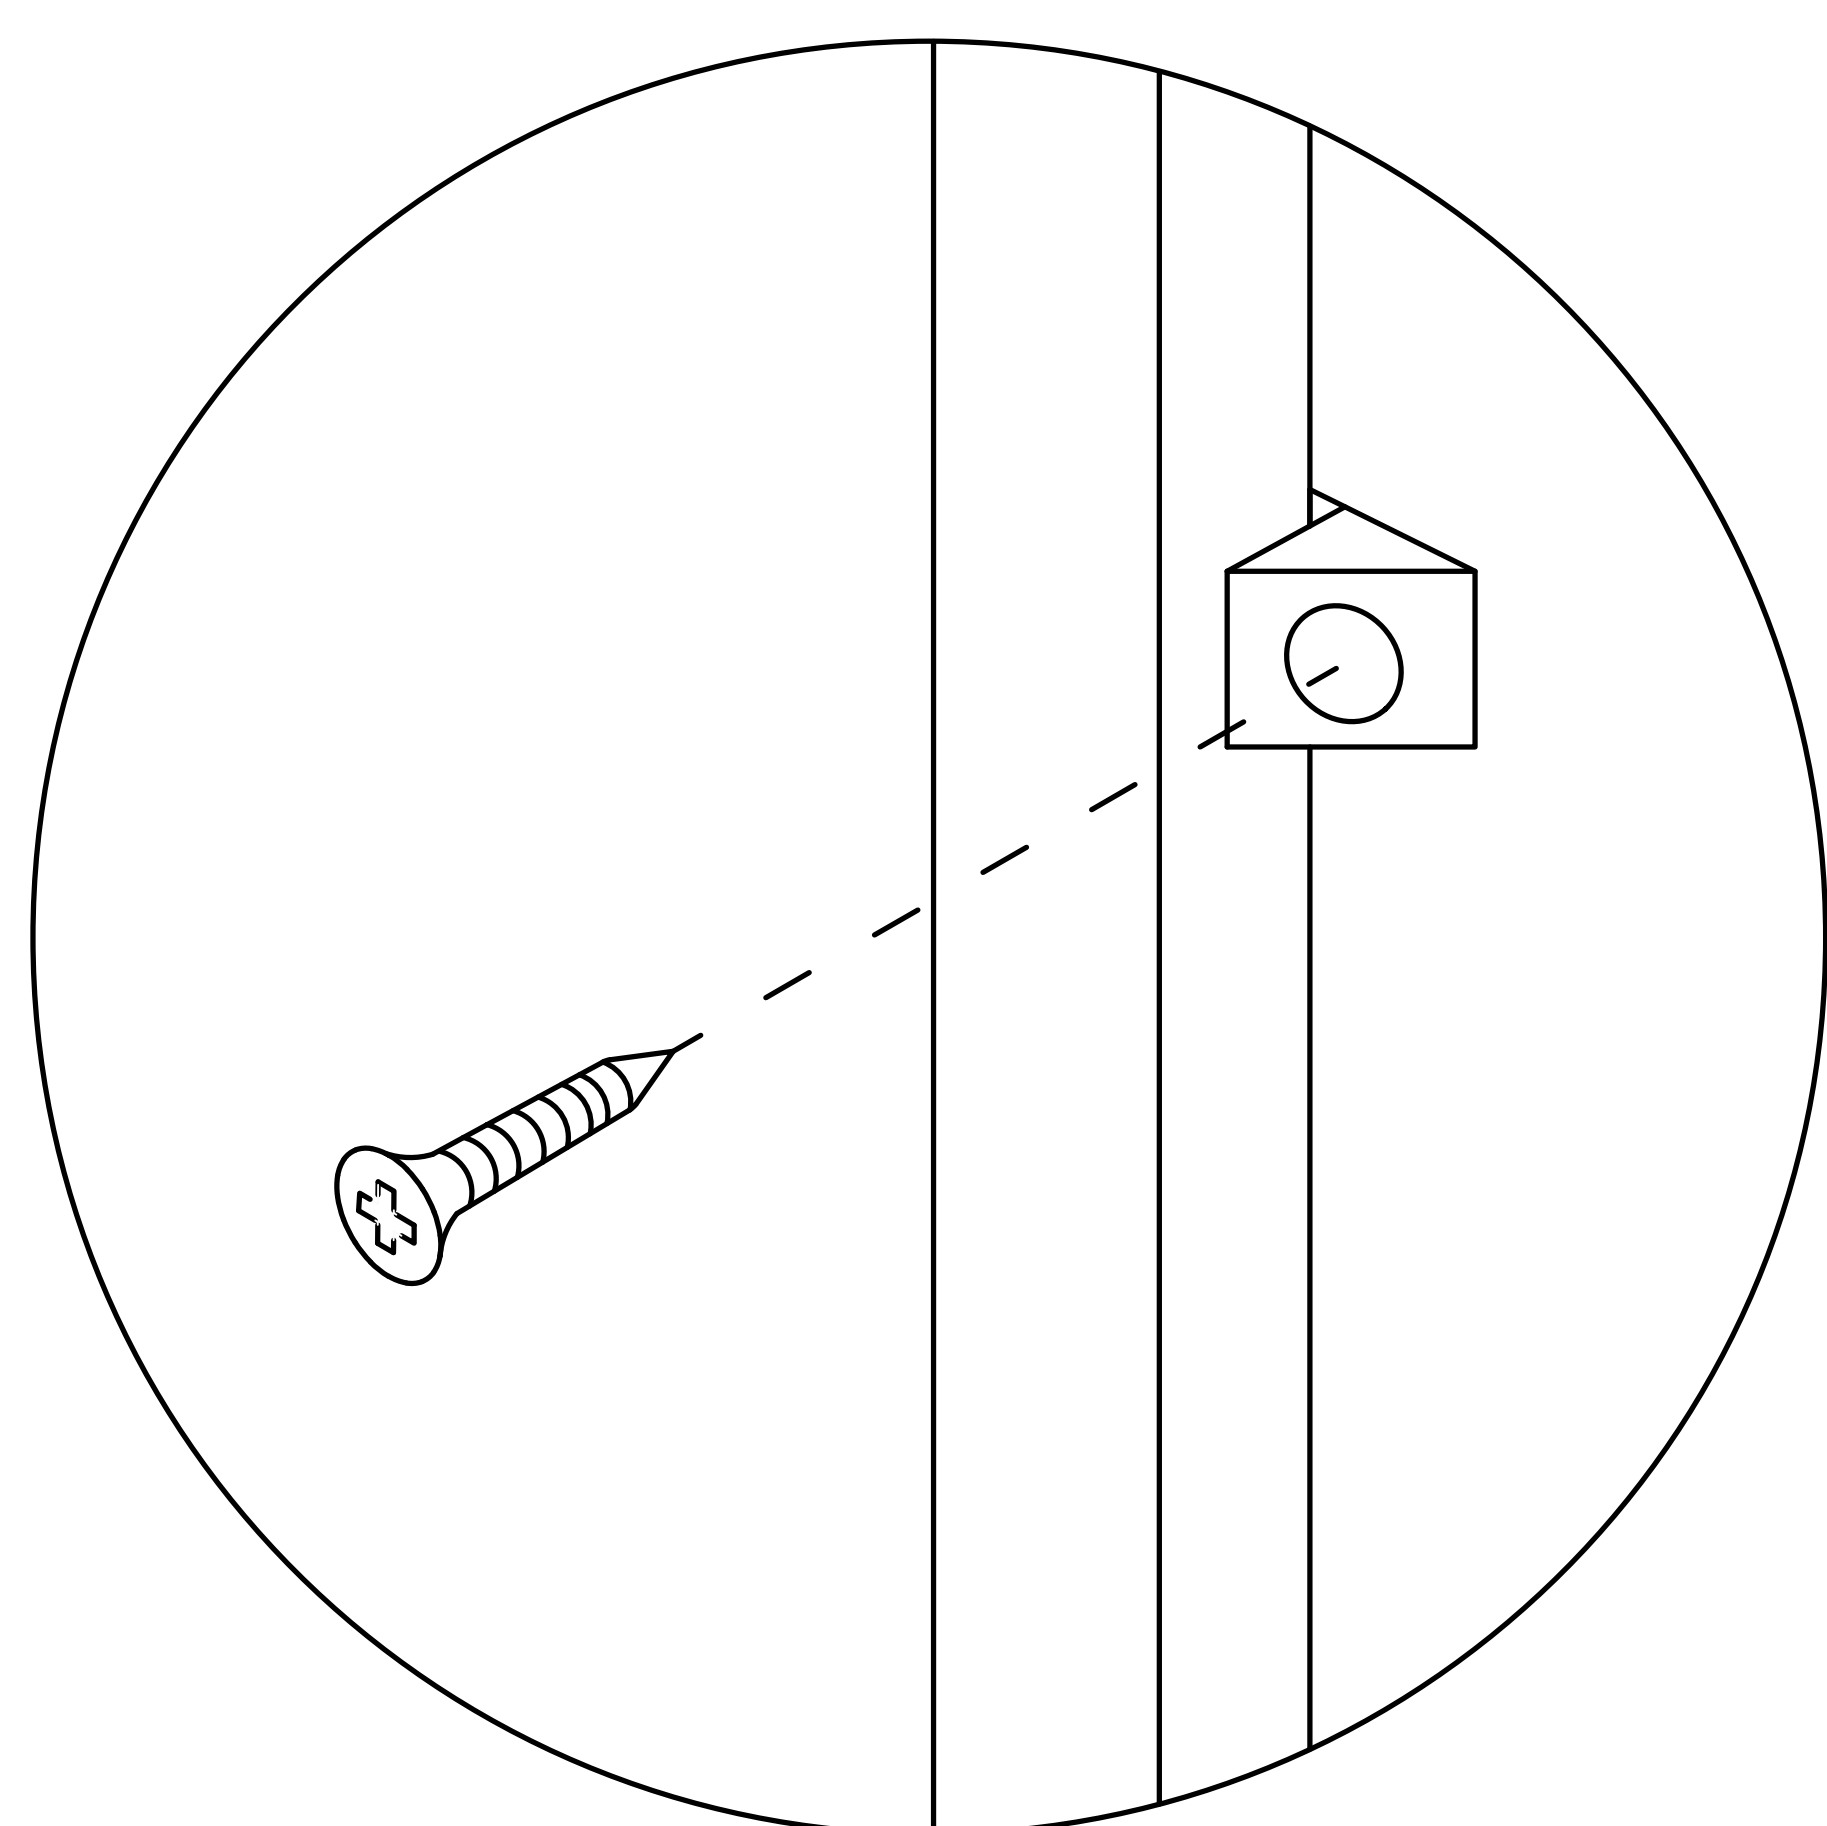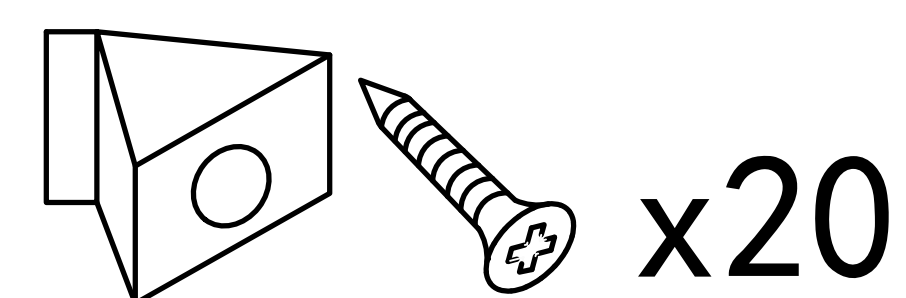



Step 41

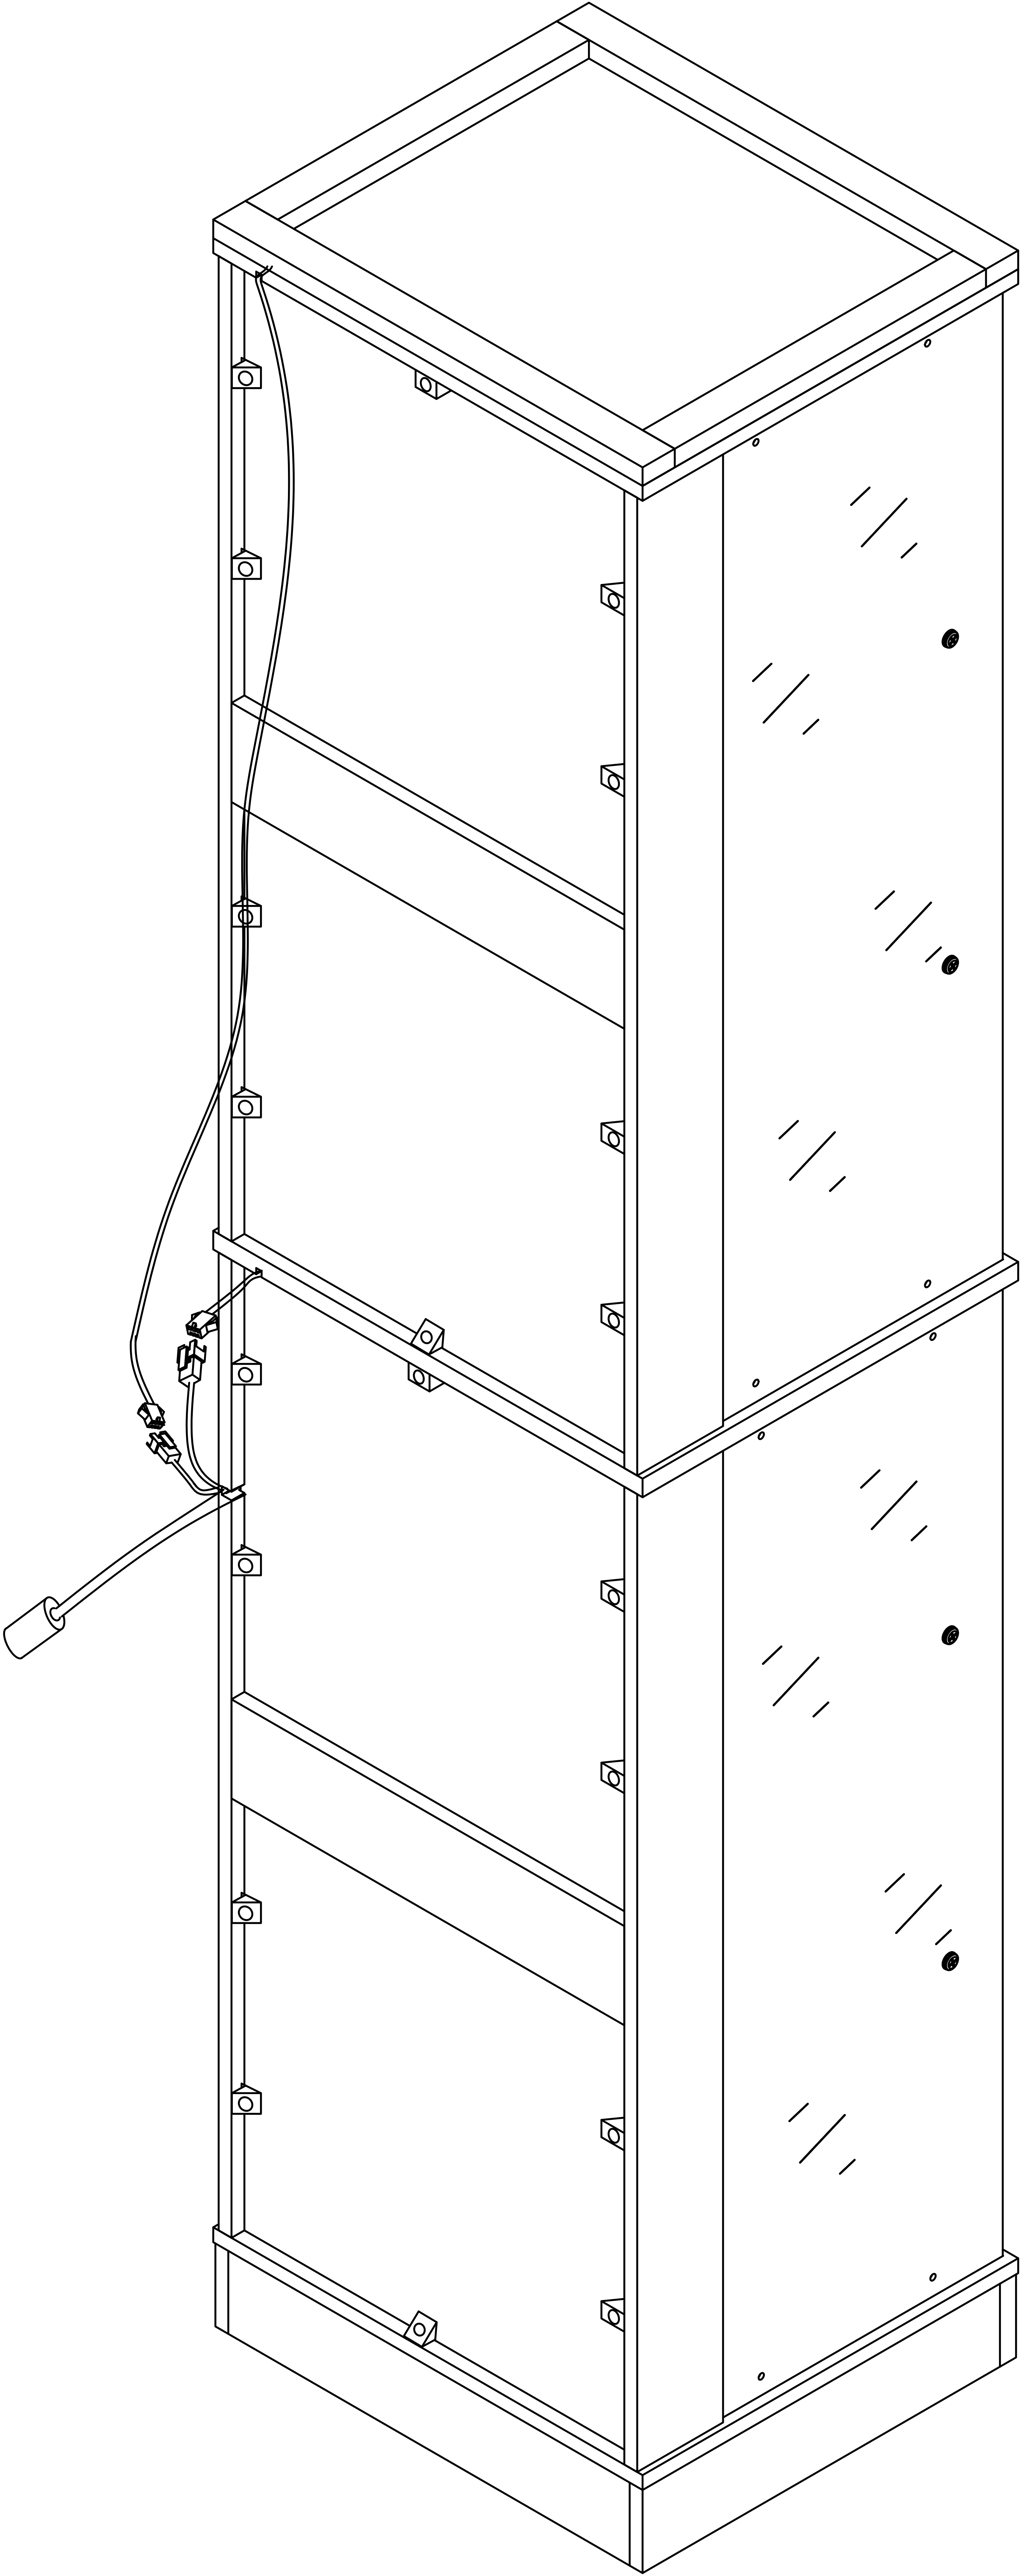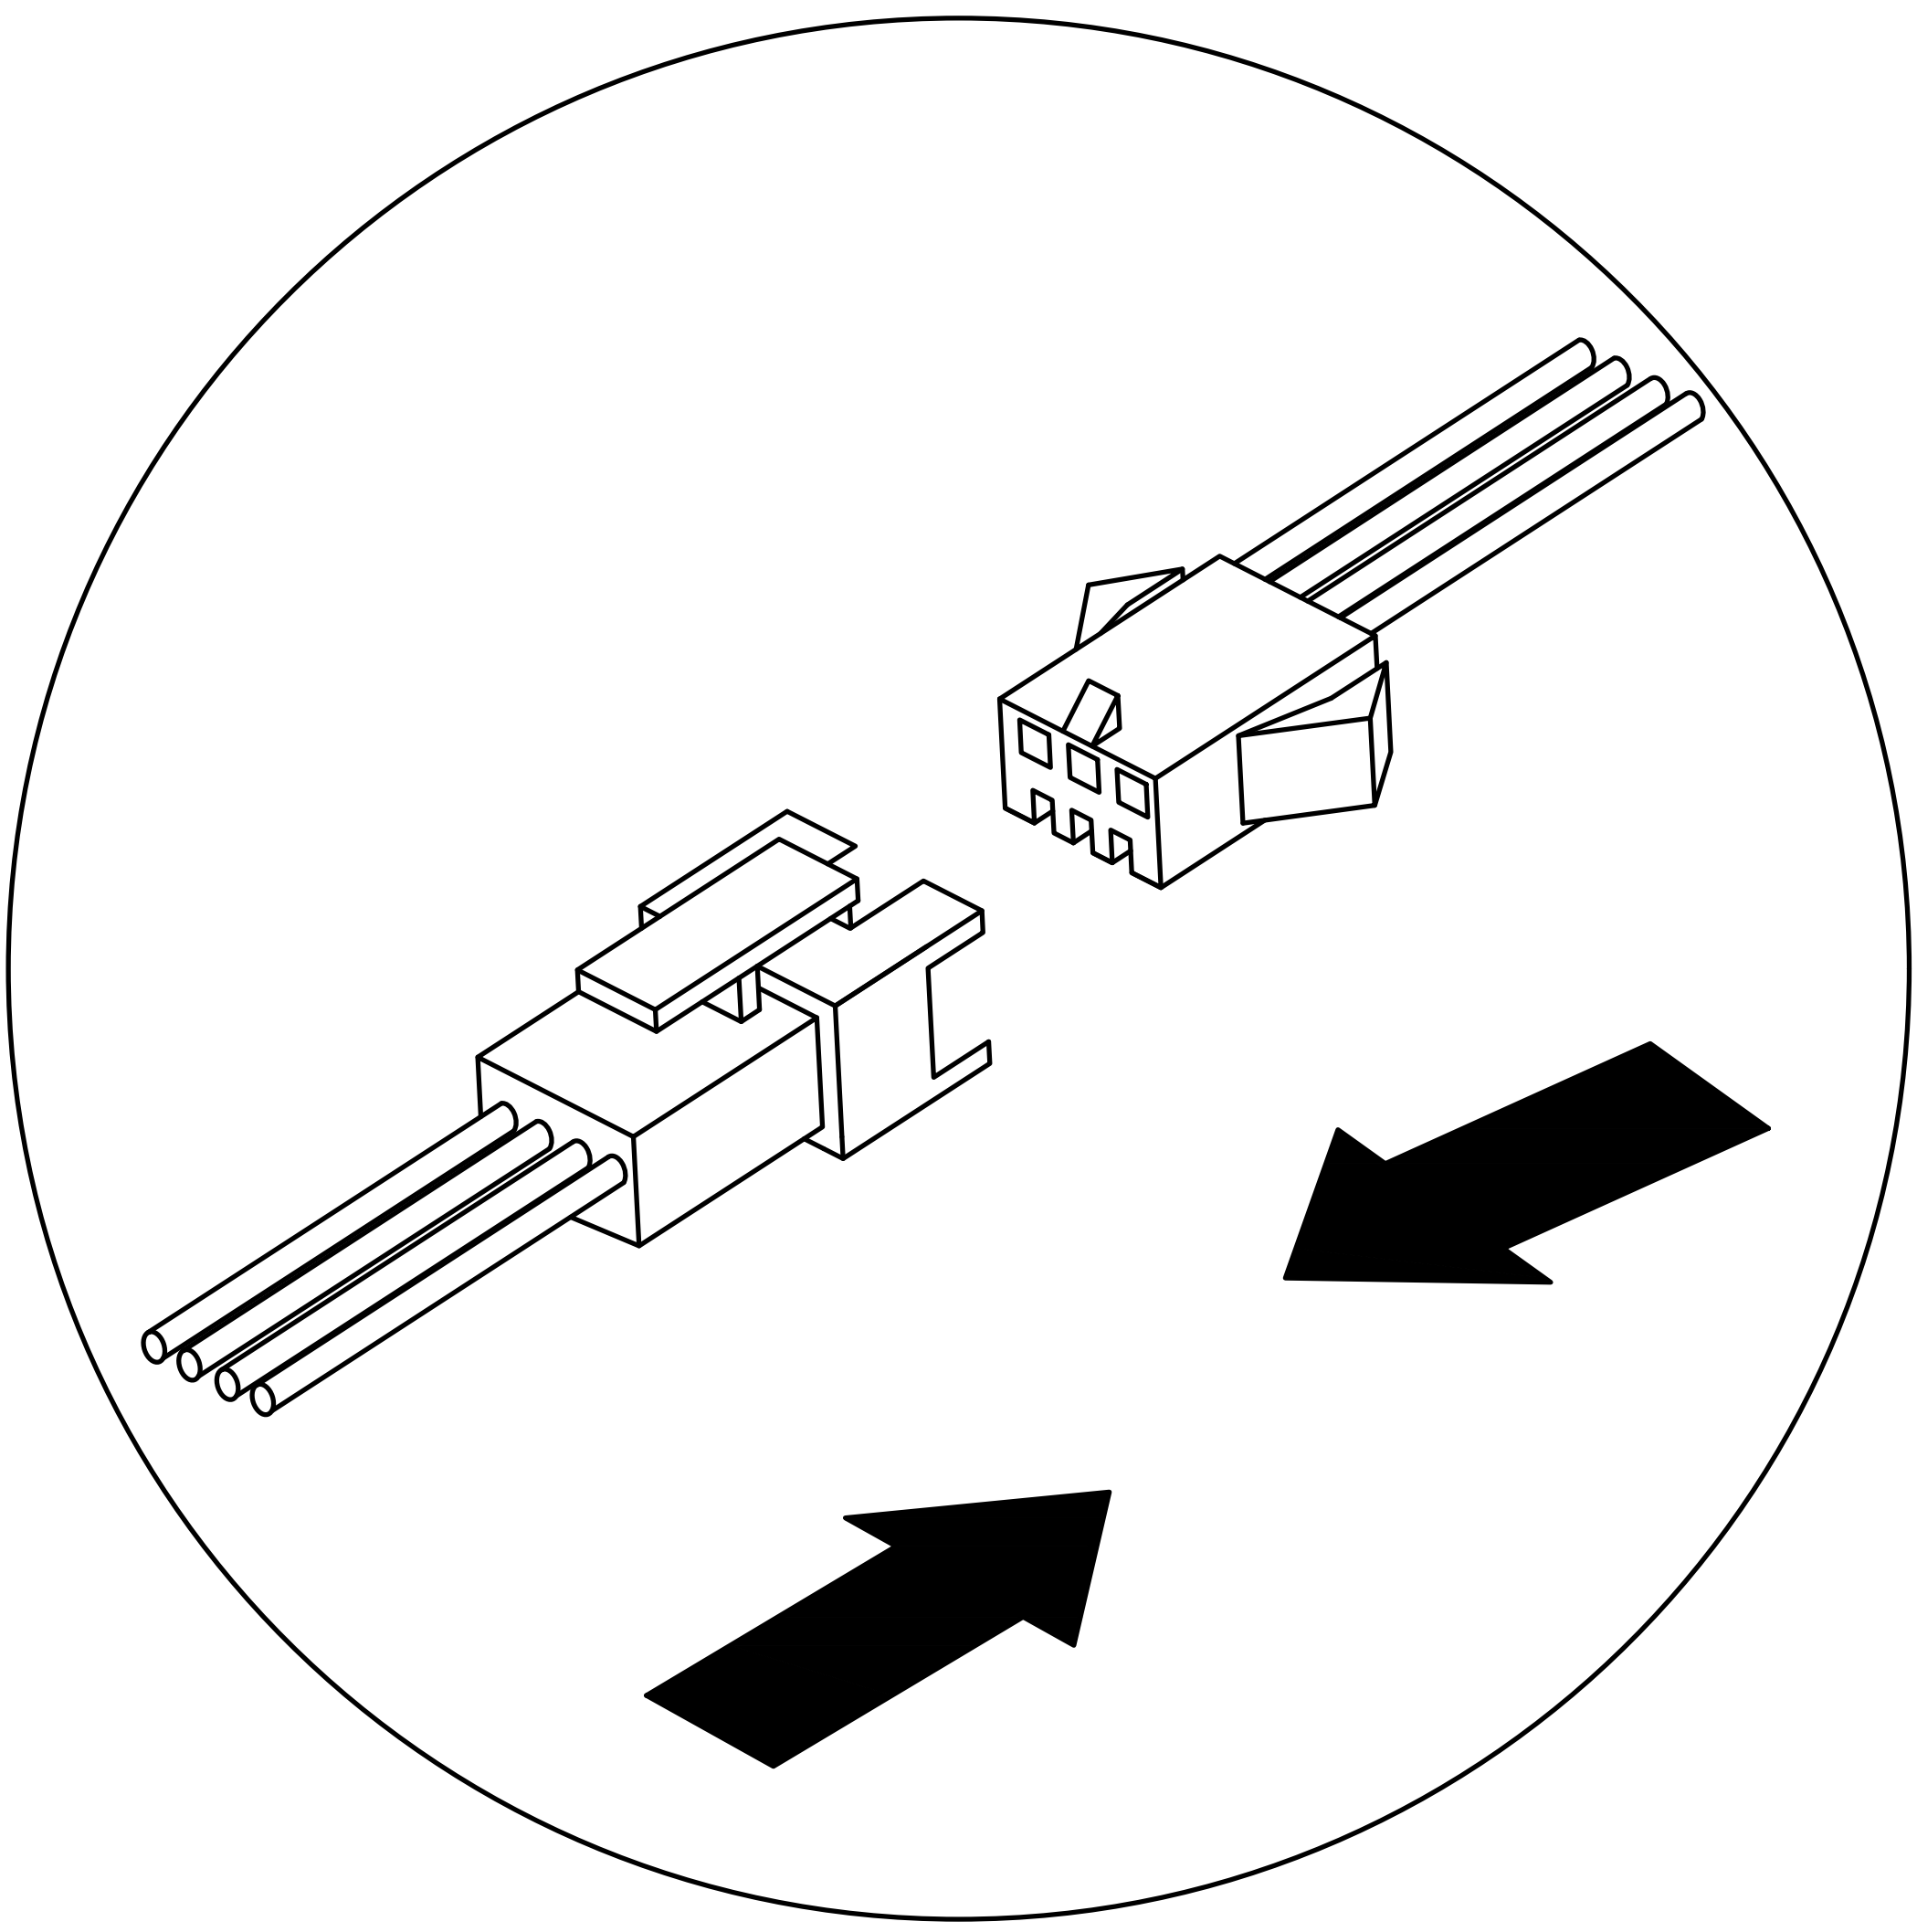

Step 42

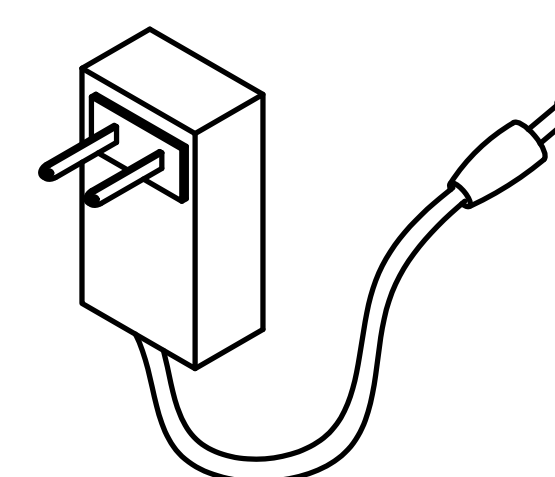


x1

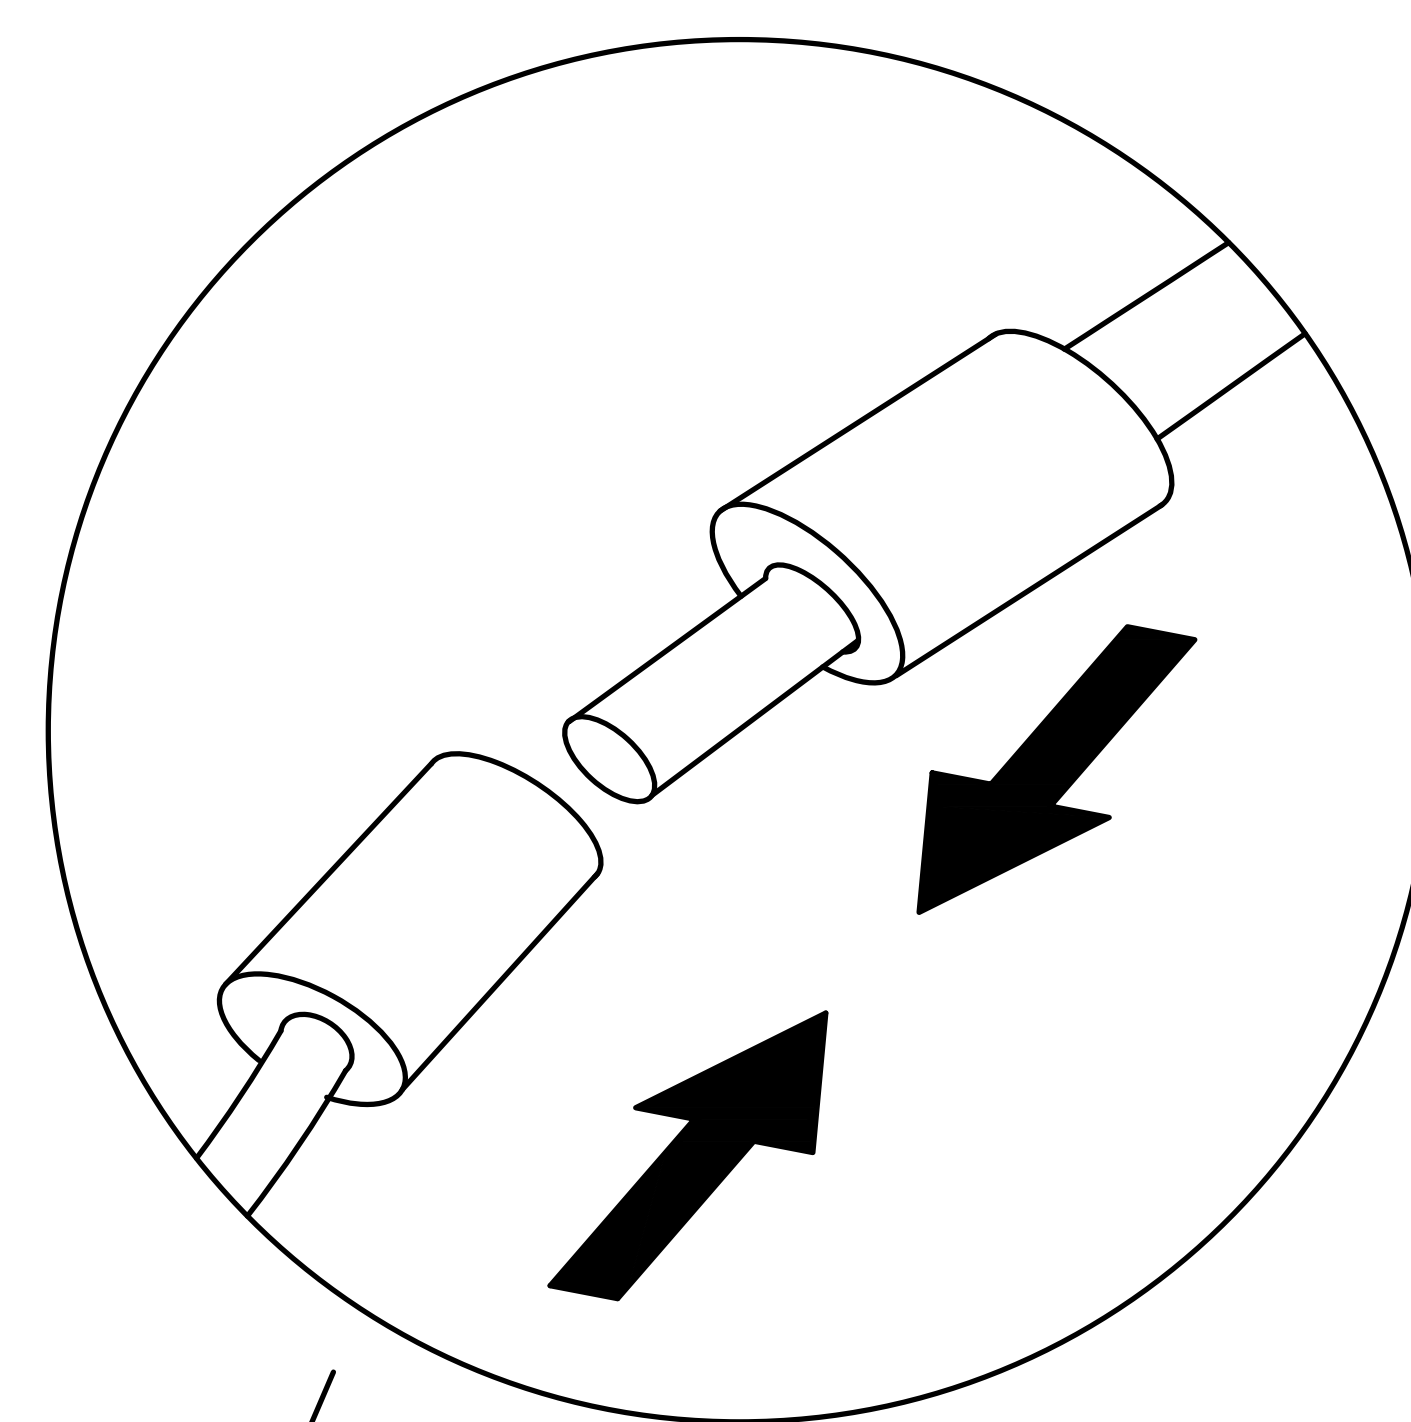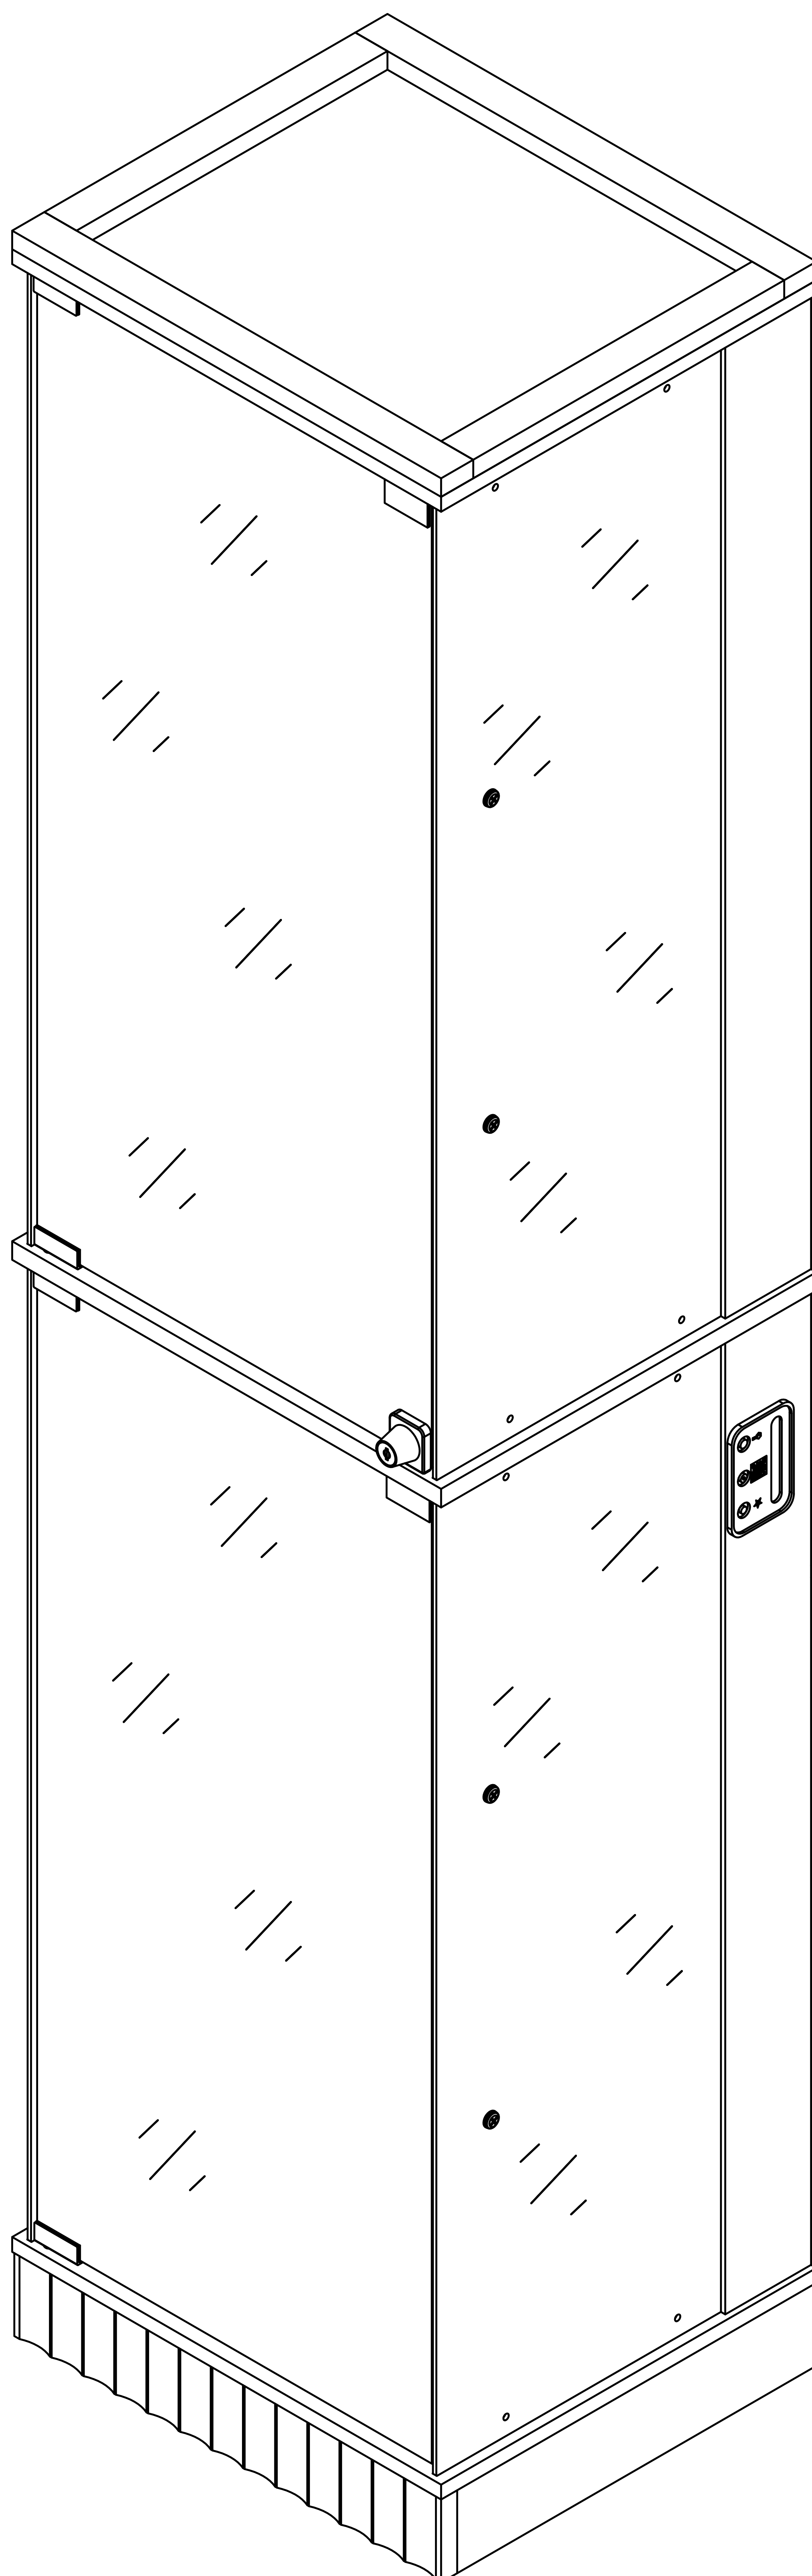


Step 43

Install as required

11

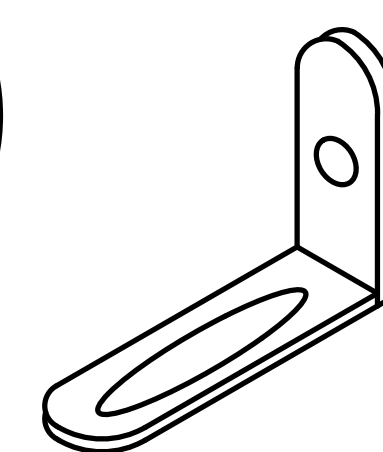


x2

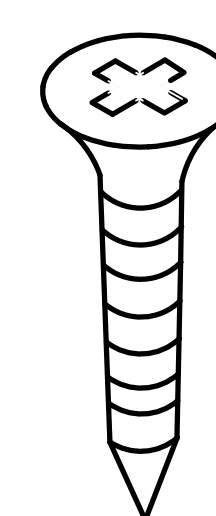




x2

x2

3.5x14mm

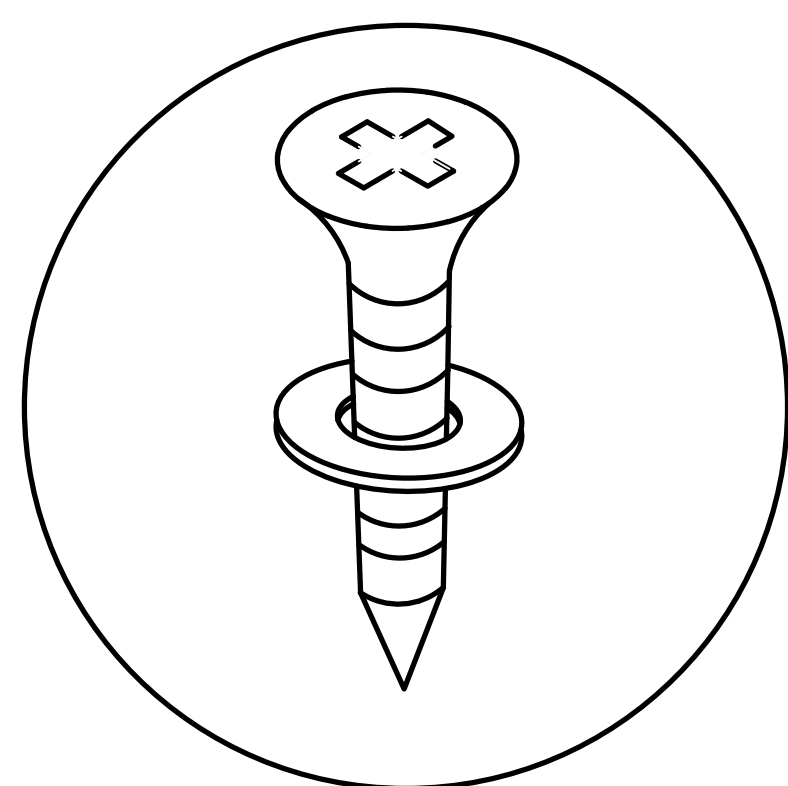

Install the anti fall hardware on the cabinet as shown in the picture first

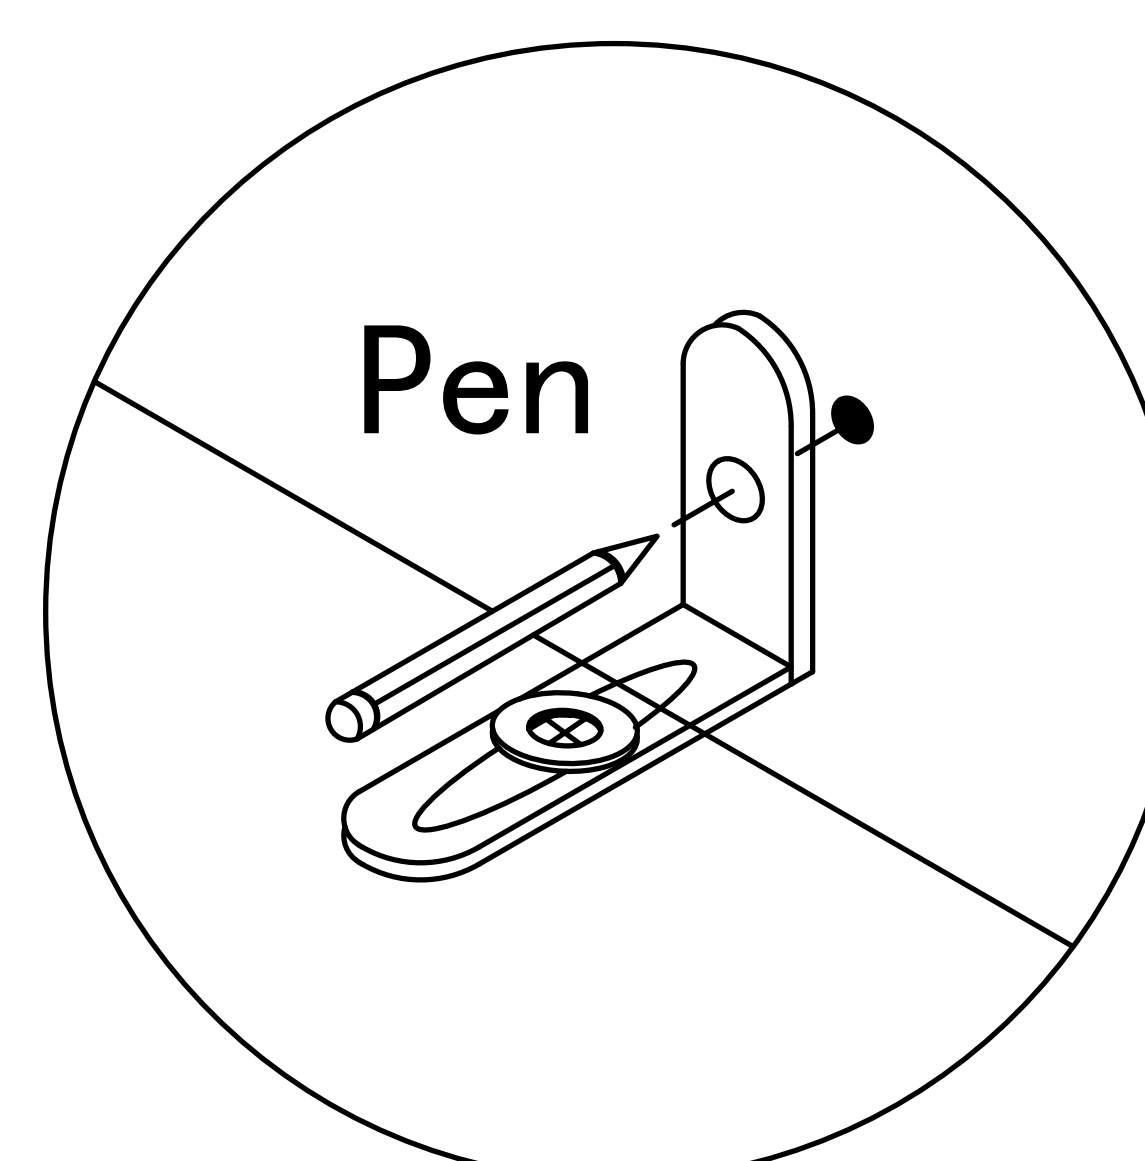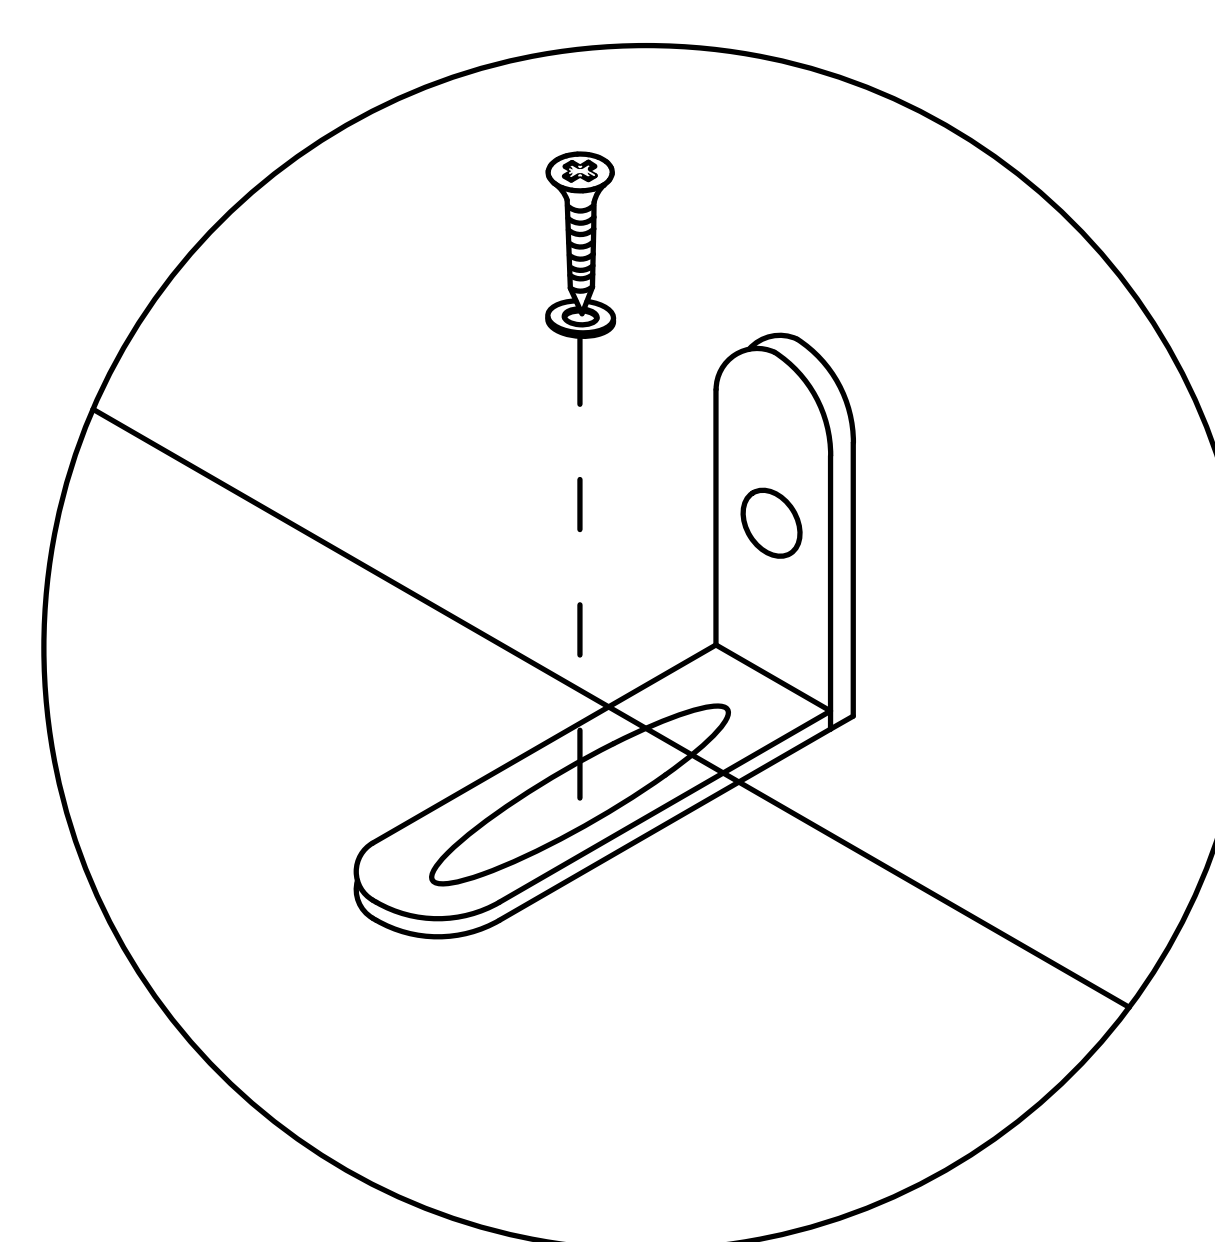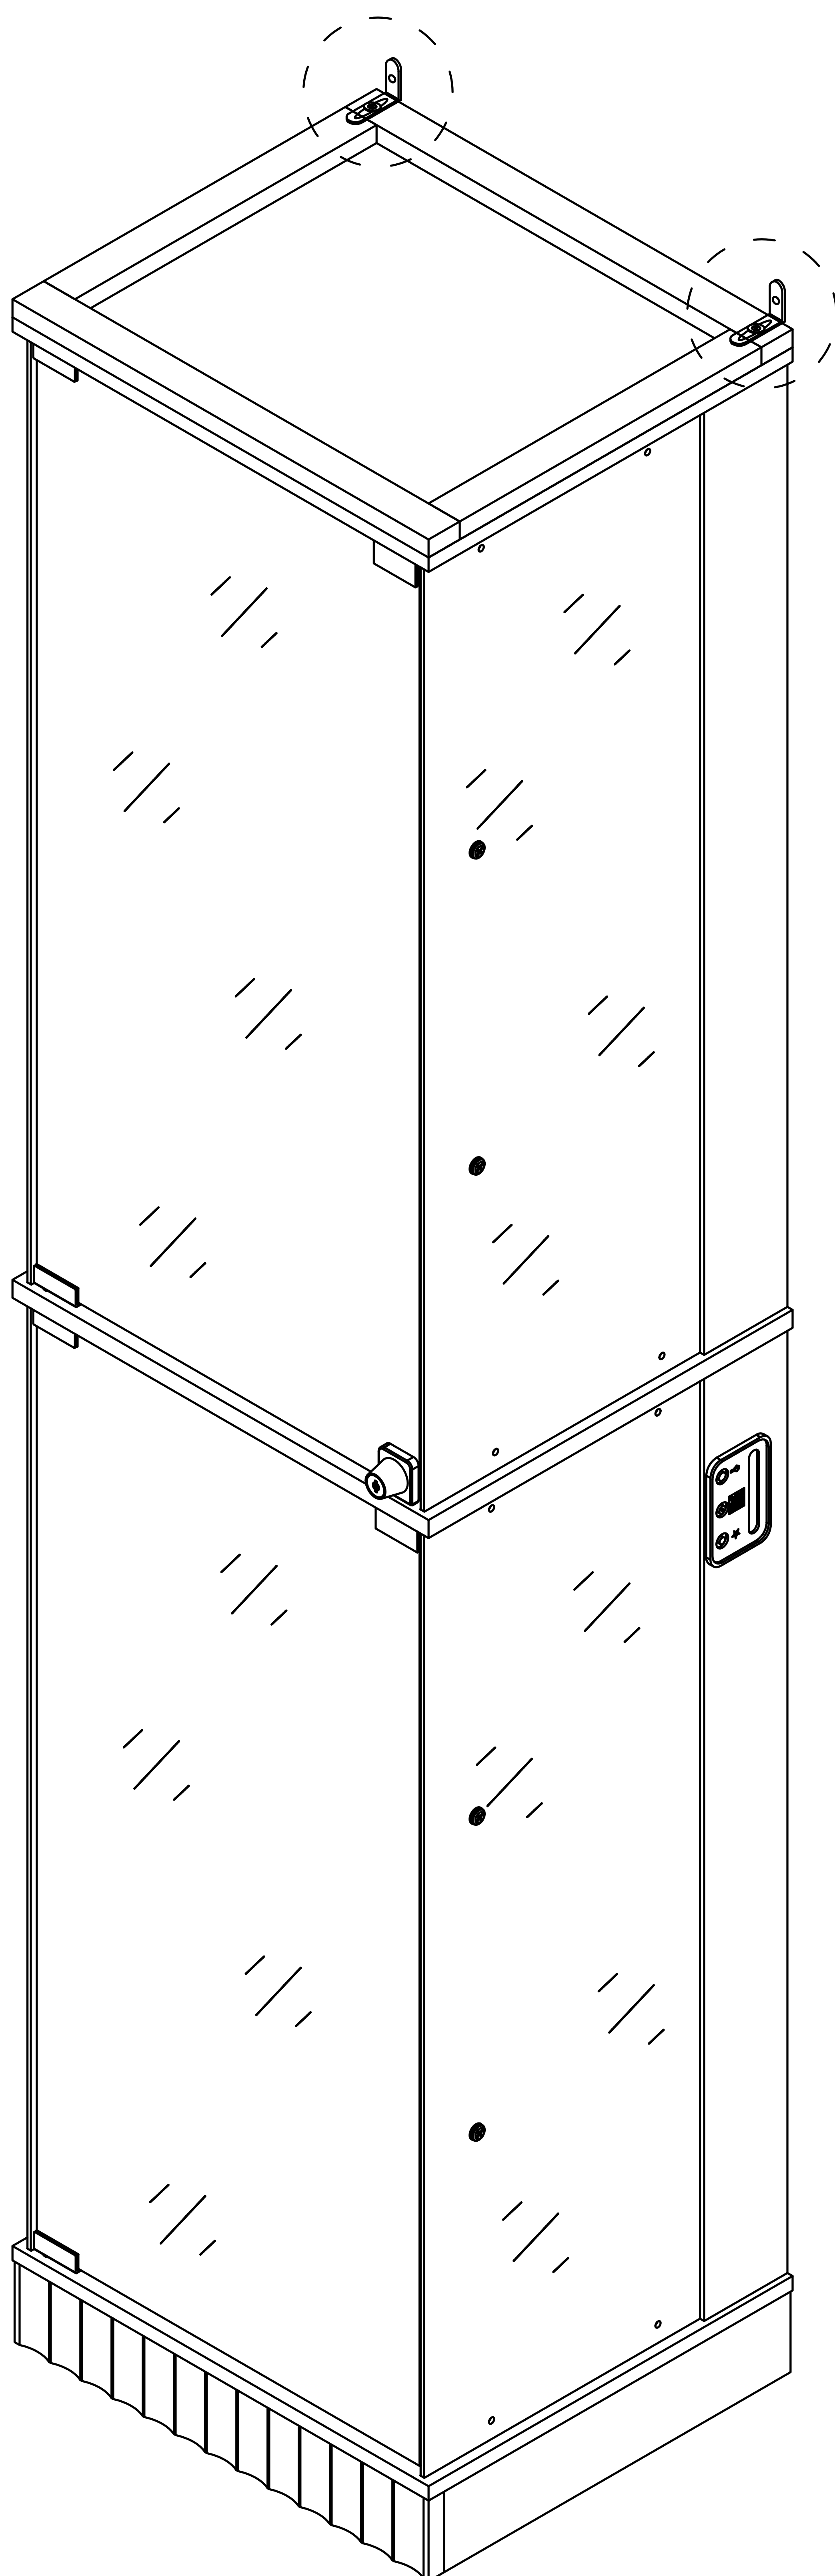

Pen


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 44


11



x2


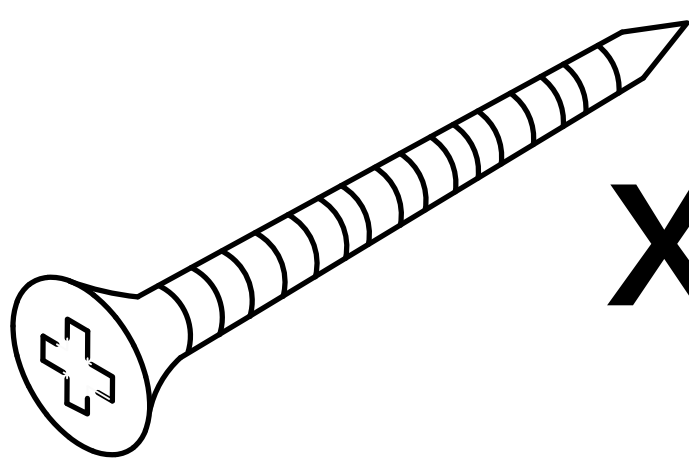


x2






x2

Wall Mount

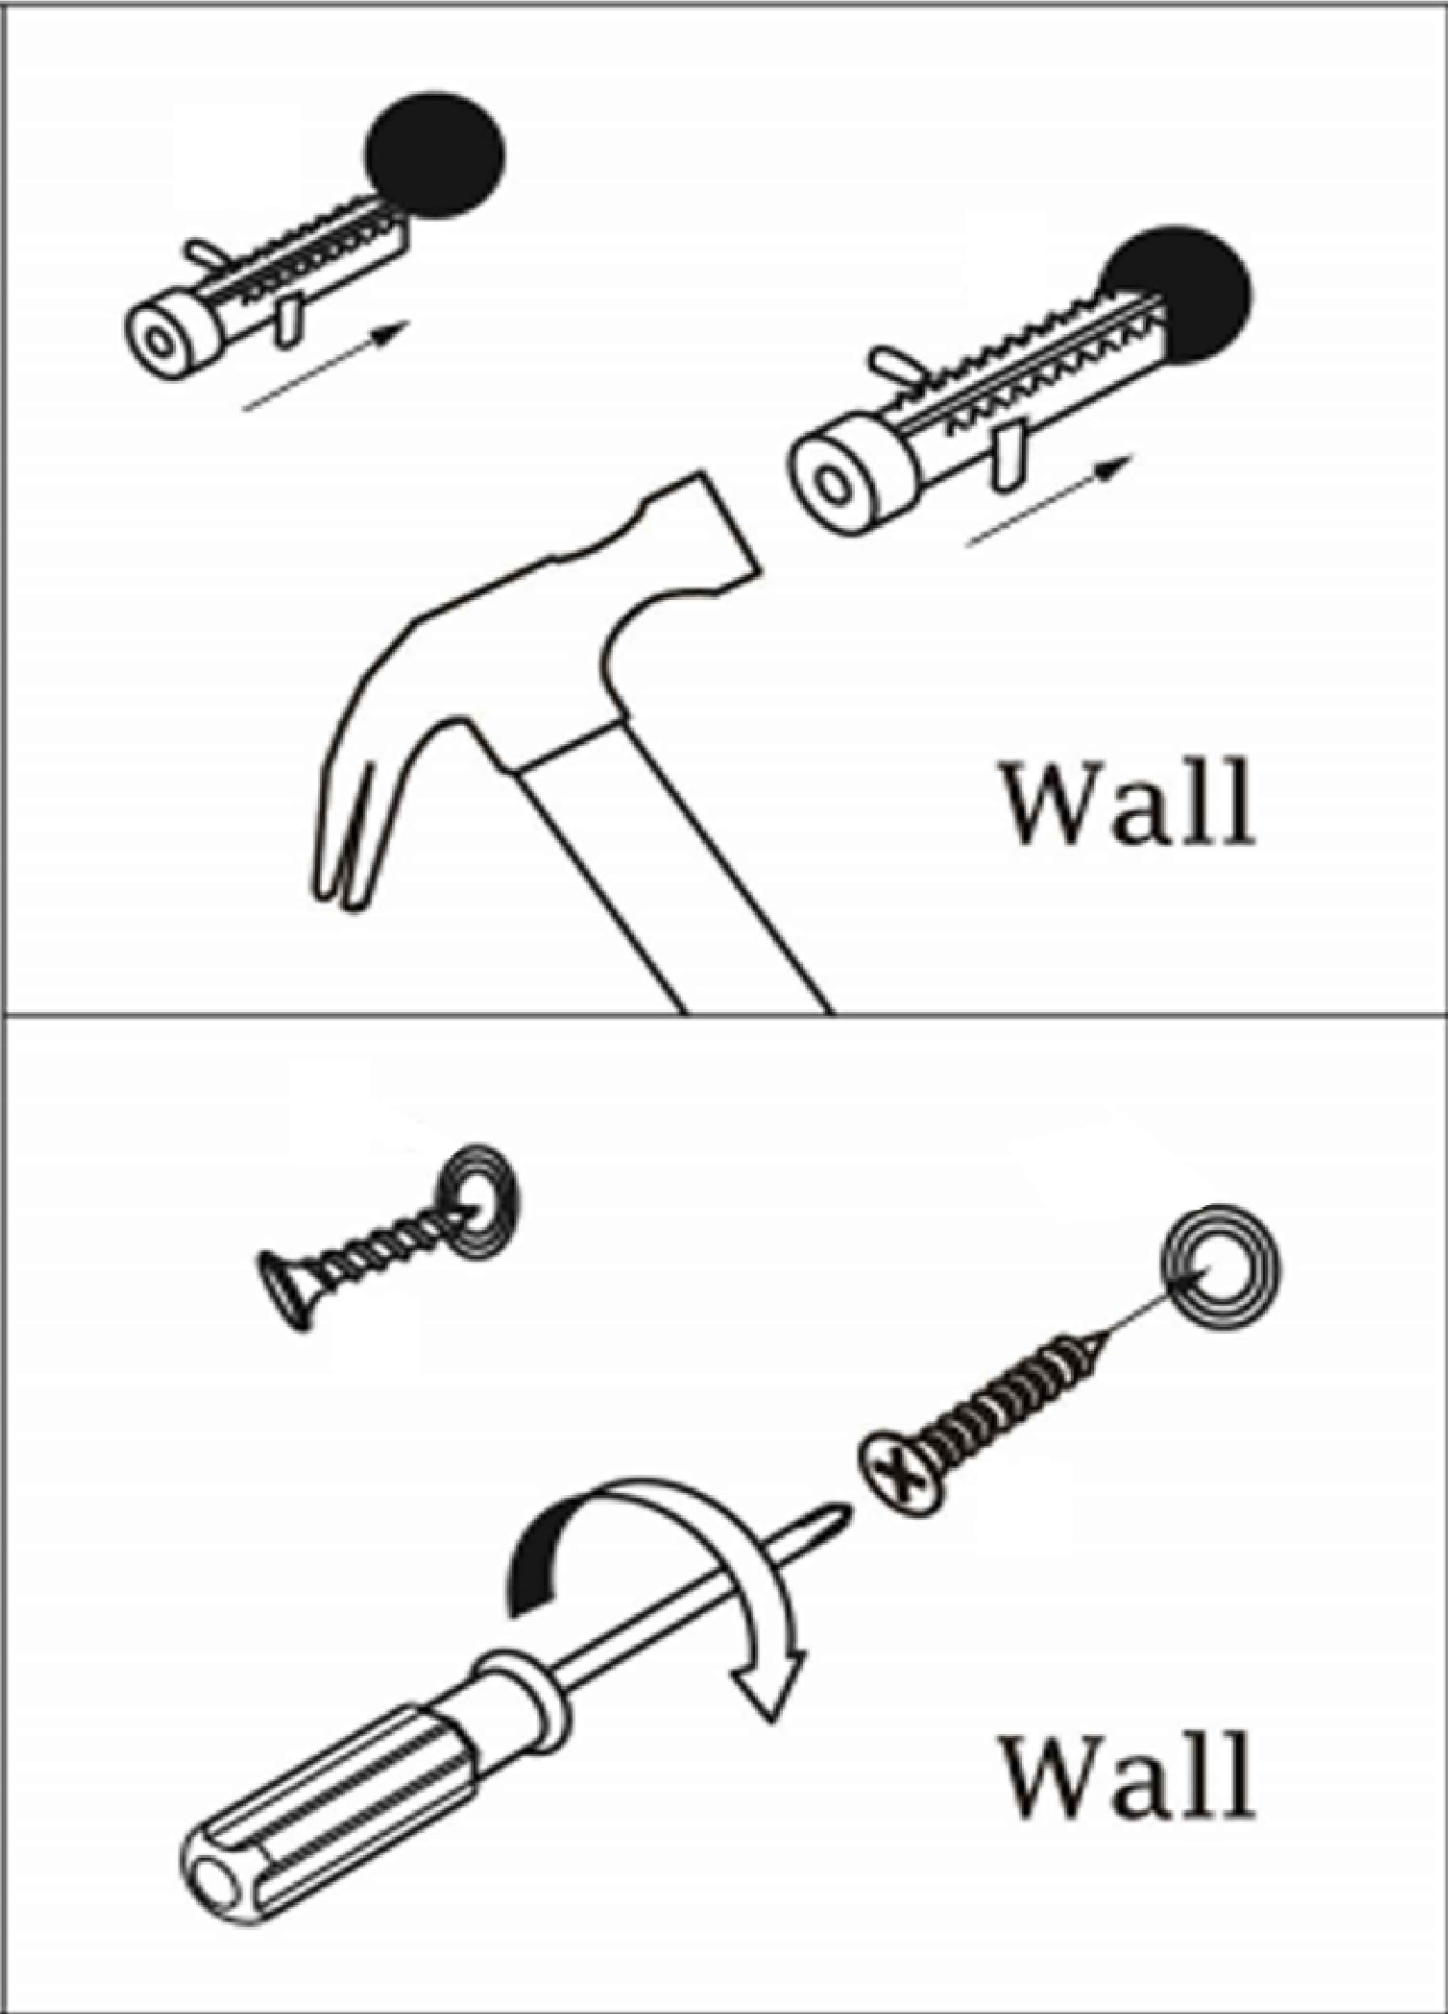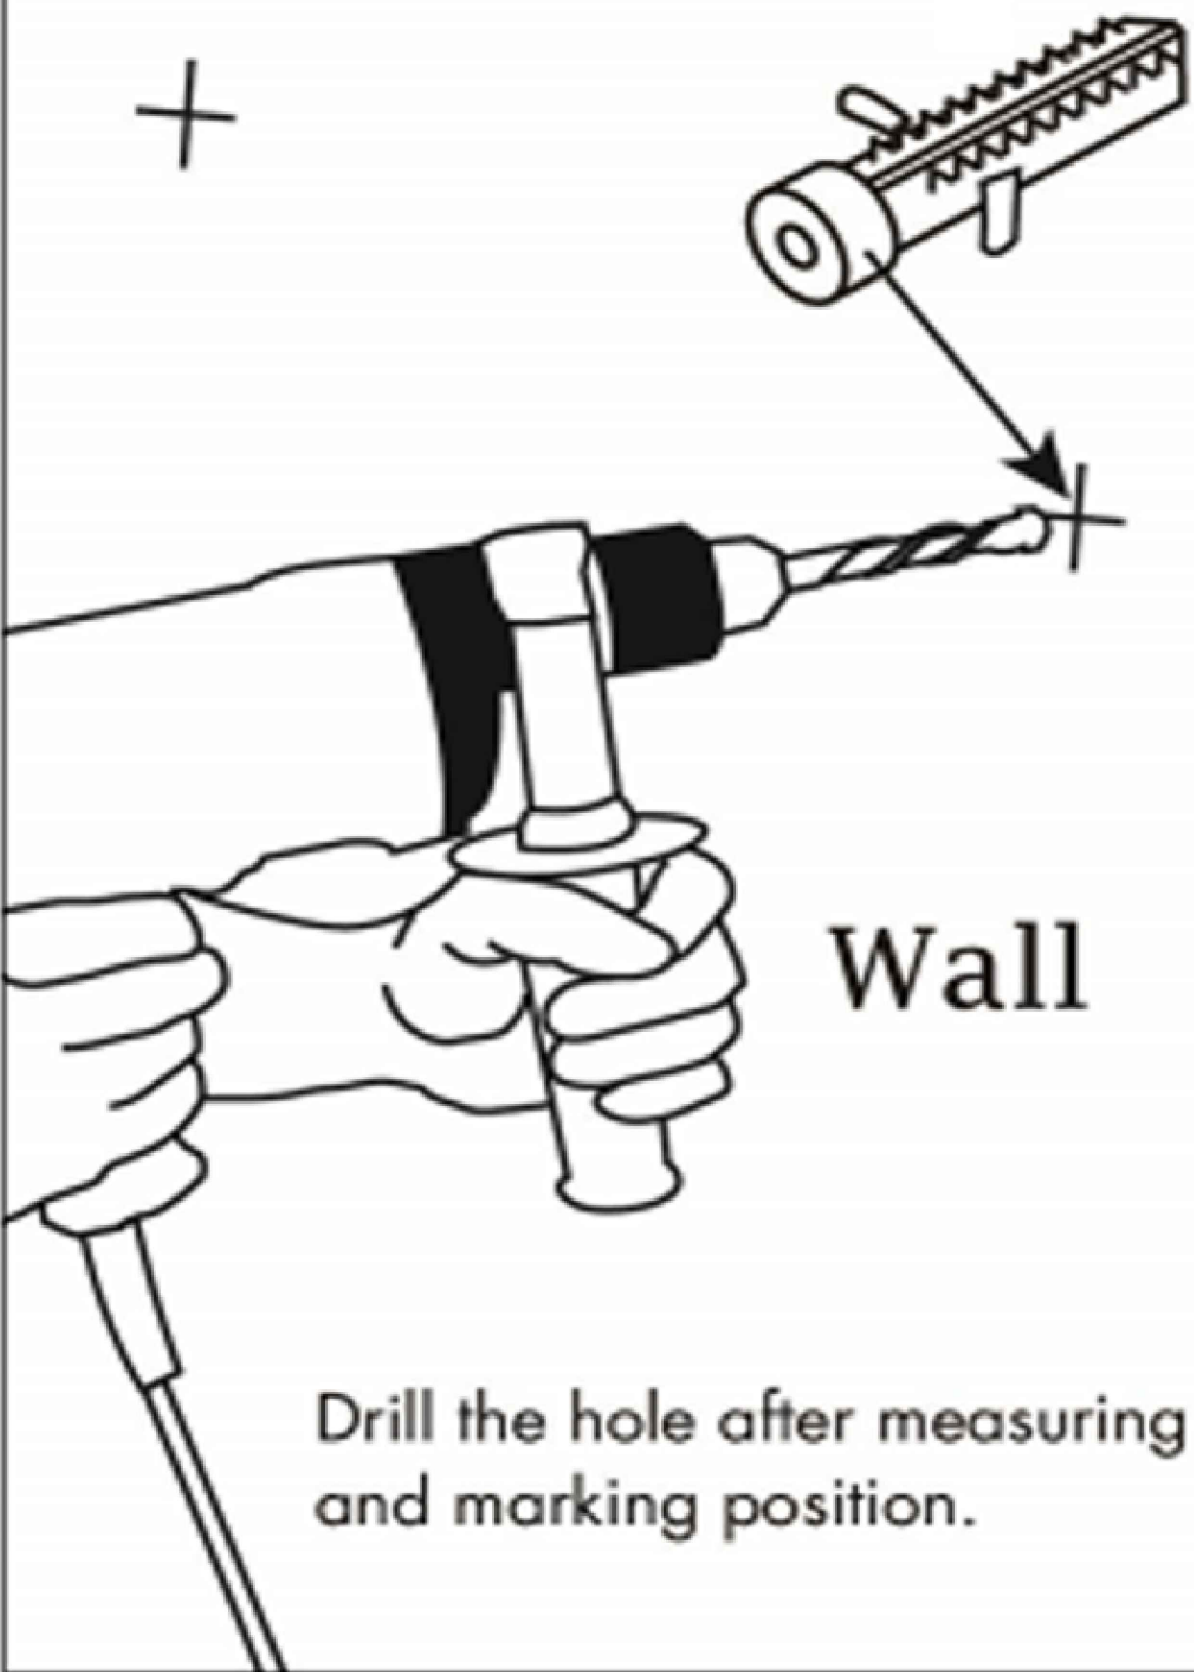


Drill the hole with an electric drill and punch in the colloidal particles

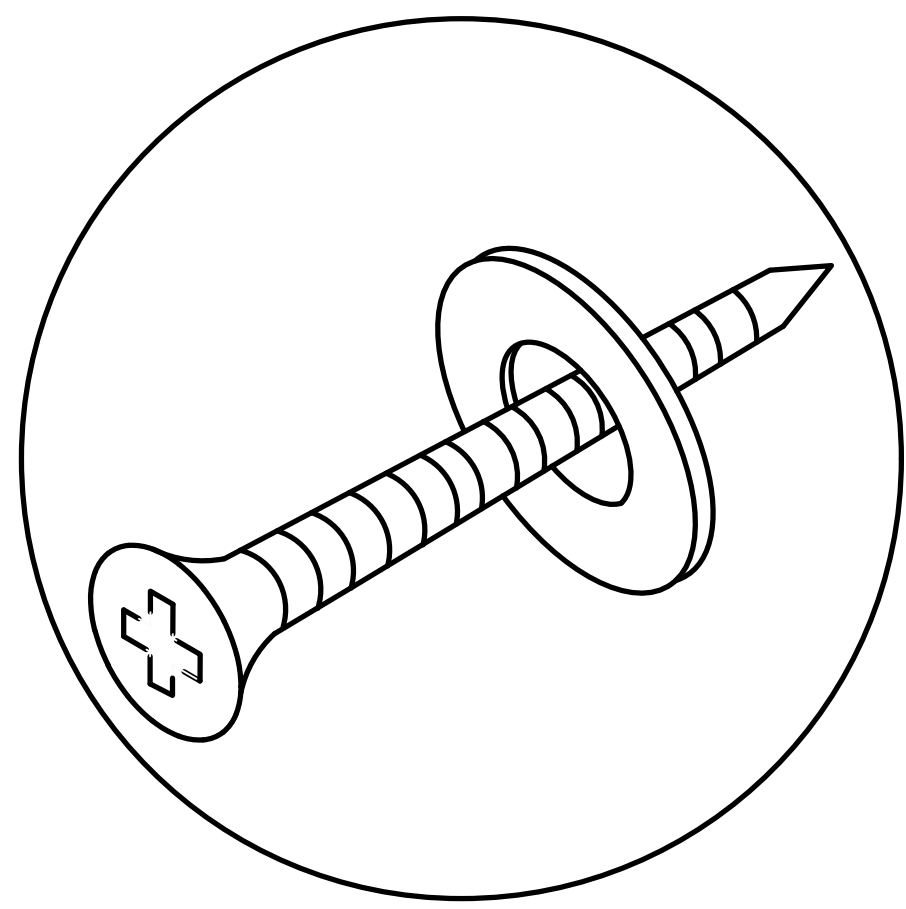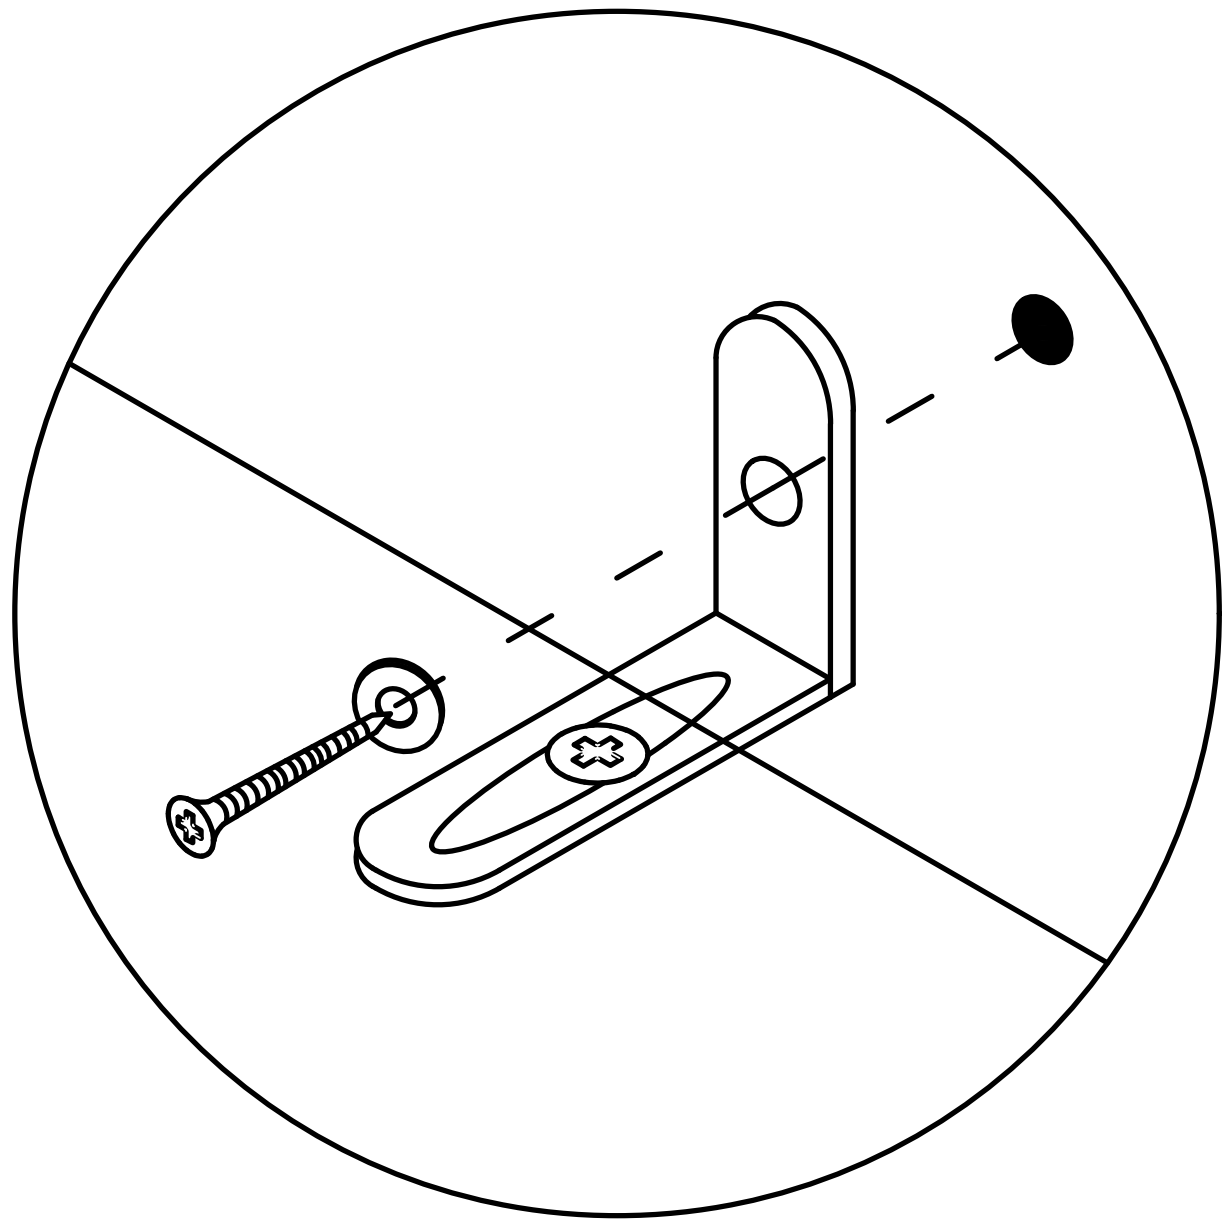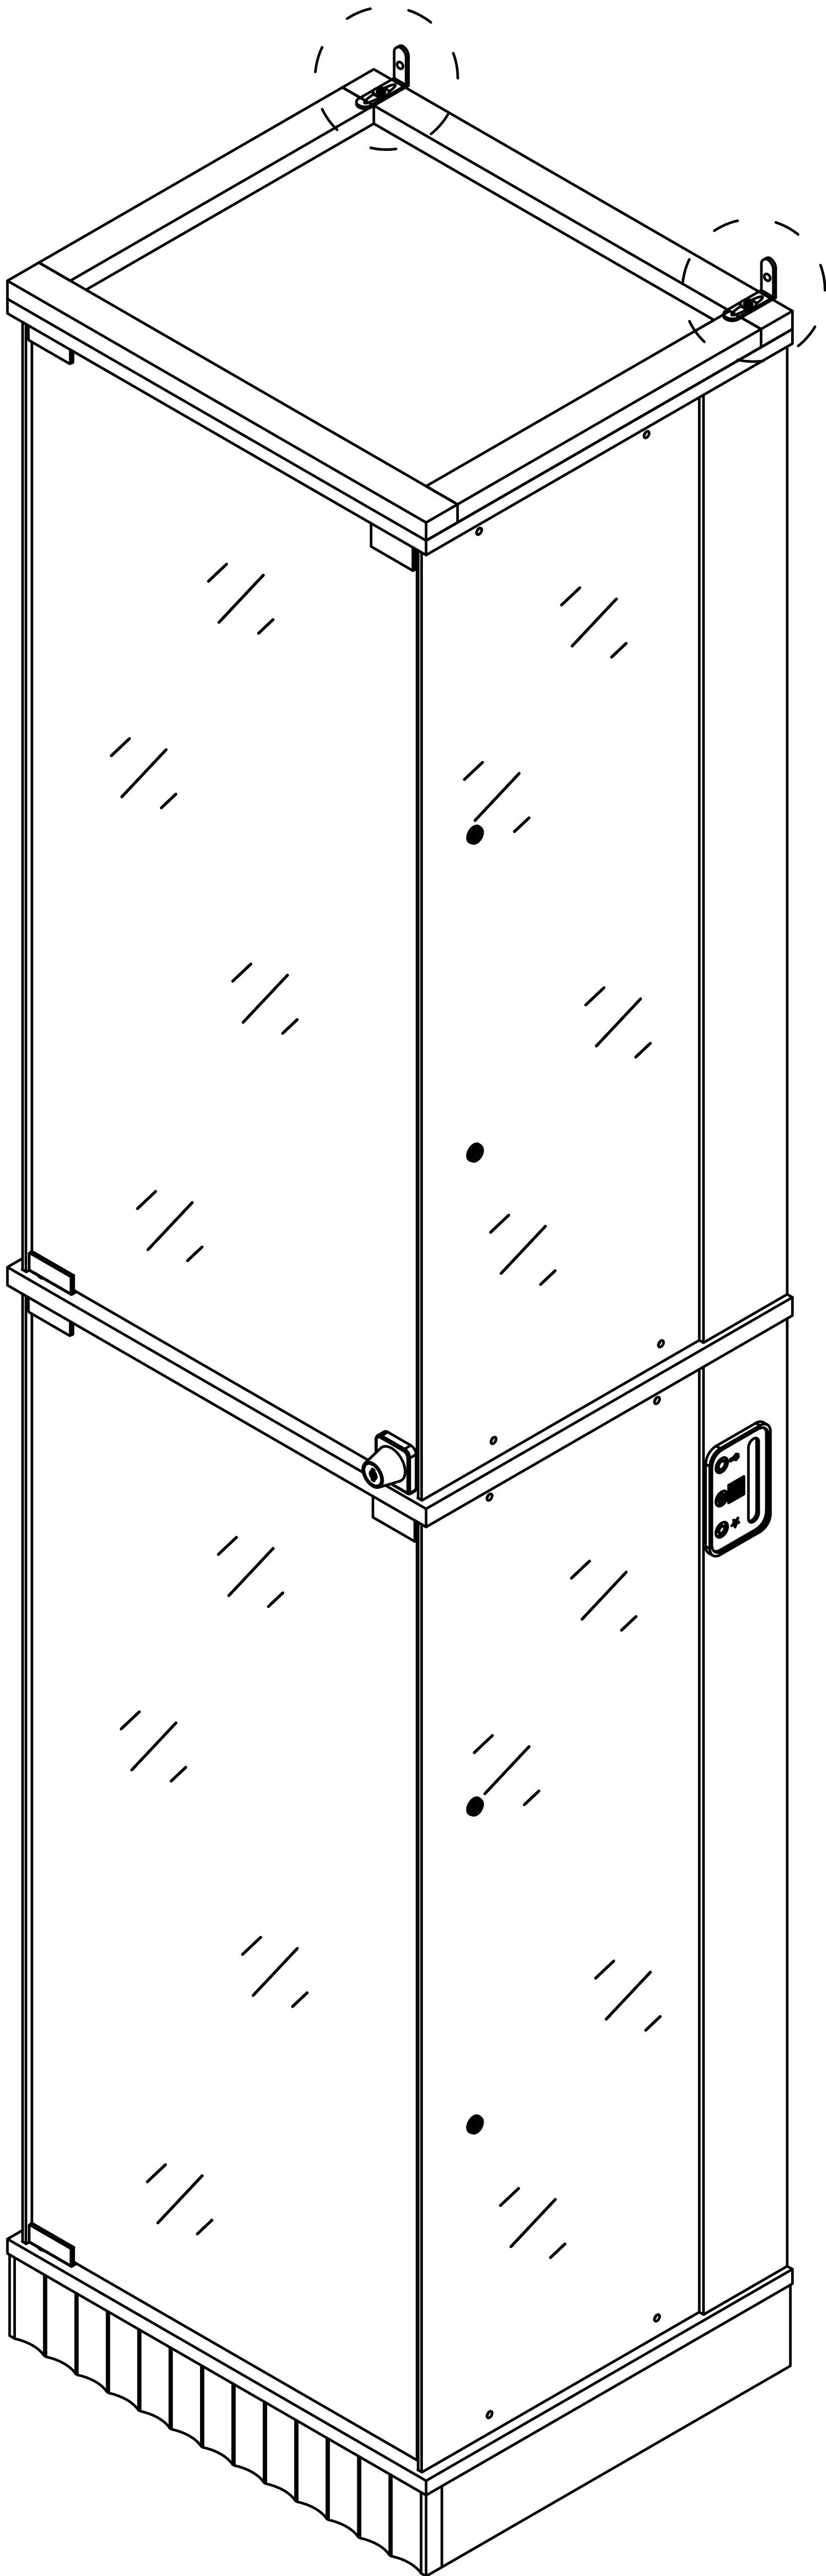

4x45mm


Fix the dressing table to the wall

Smart Box Plug Power Off

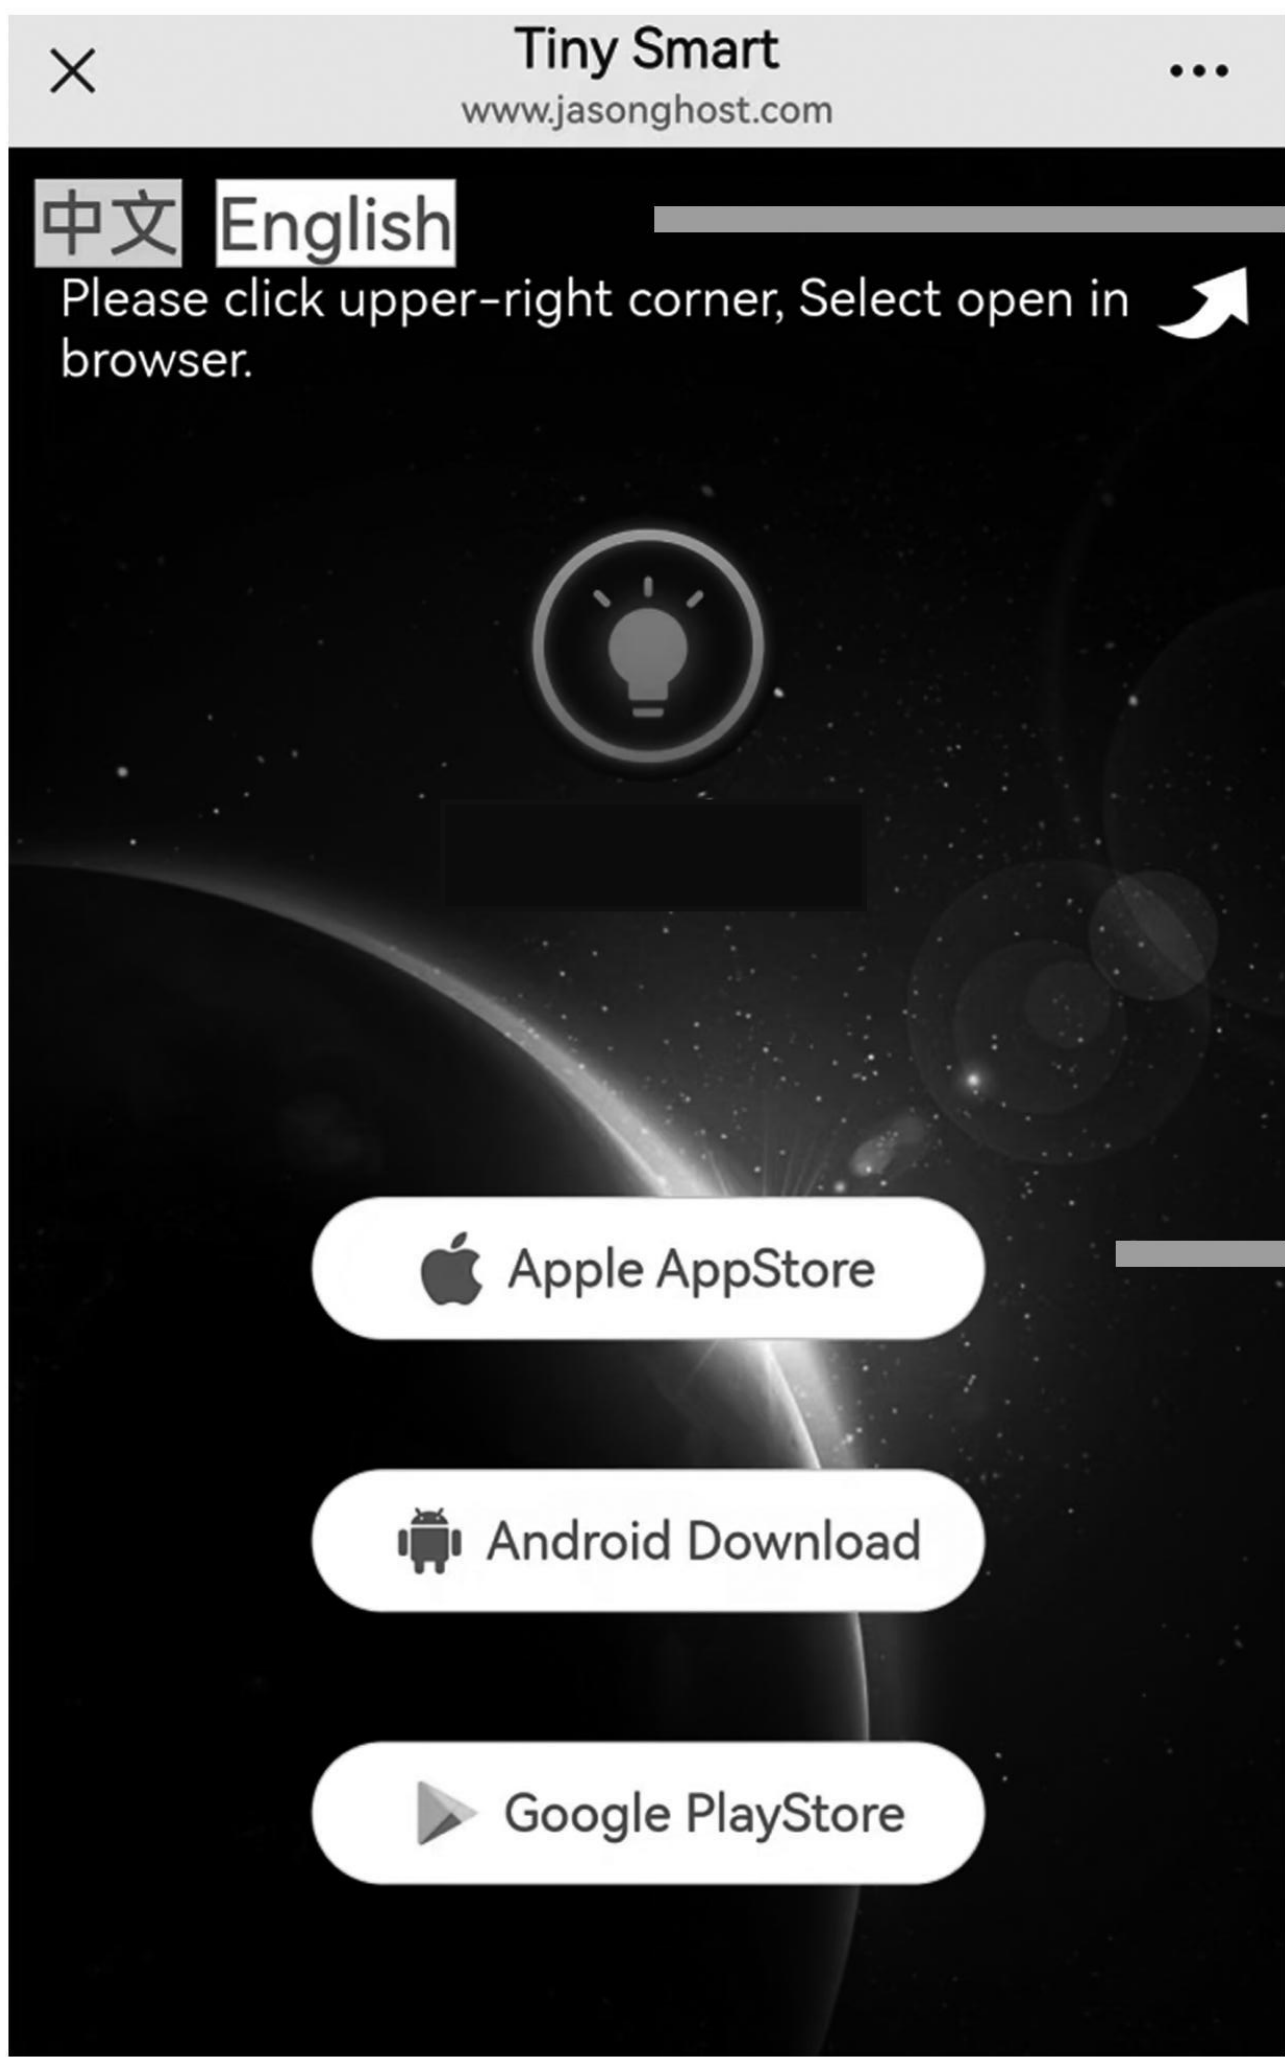


Select English Language

Select the corresponding device to download.
Note: If the download fails, please turn off the “Enhanced Protection” in the Pure Mode settings of the device.

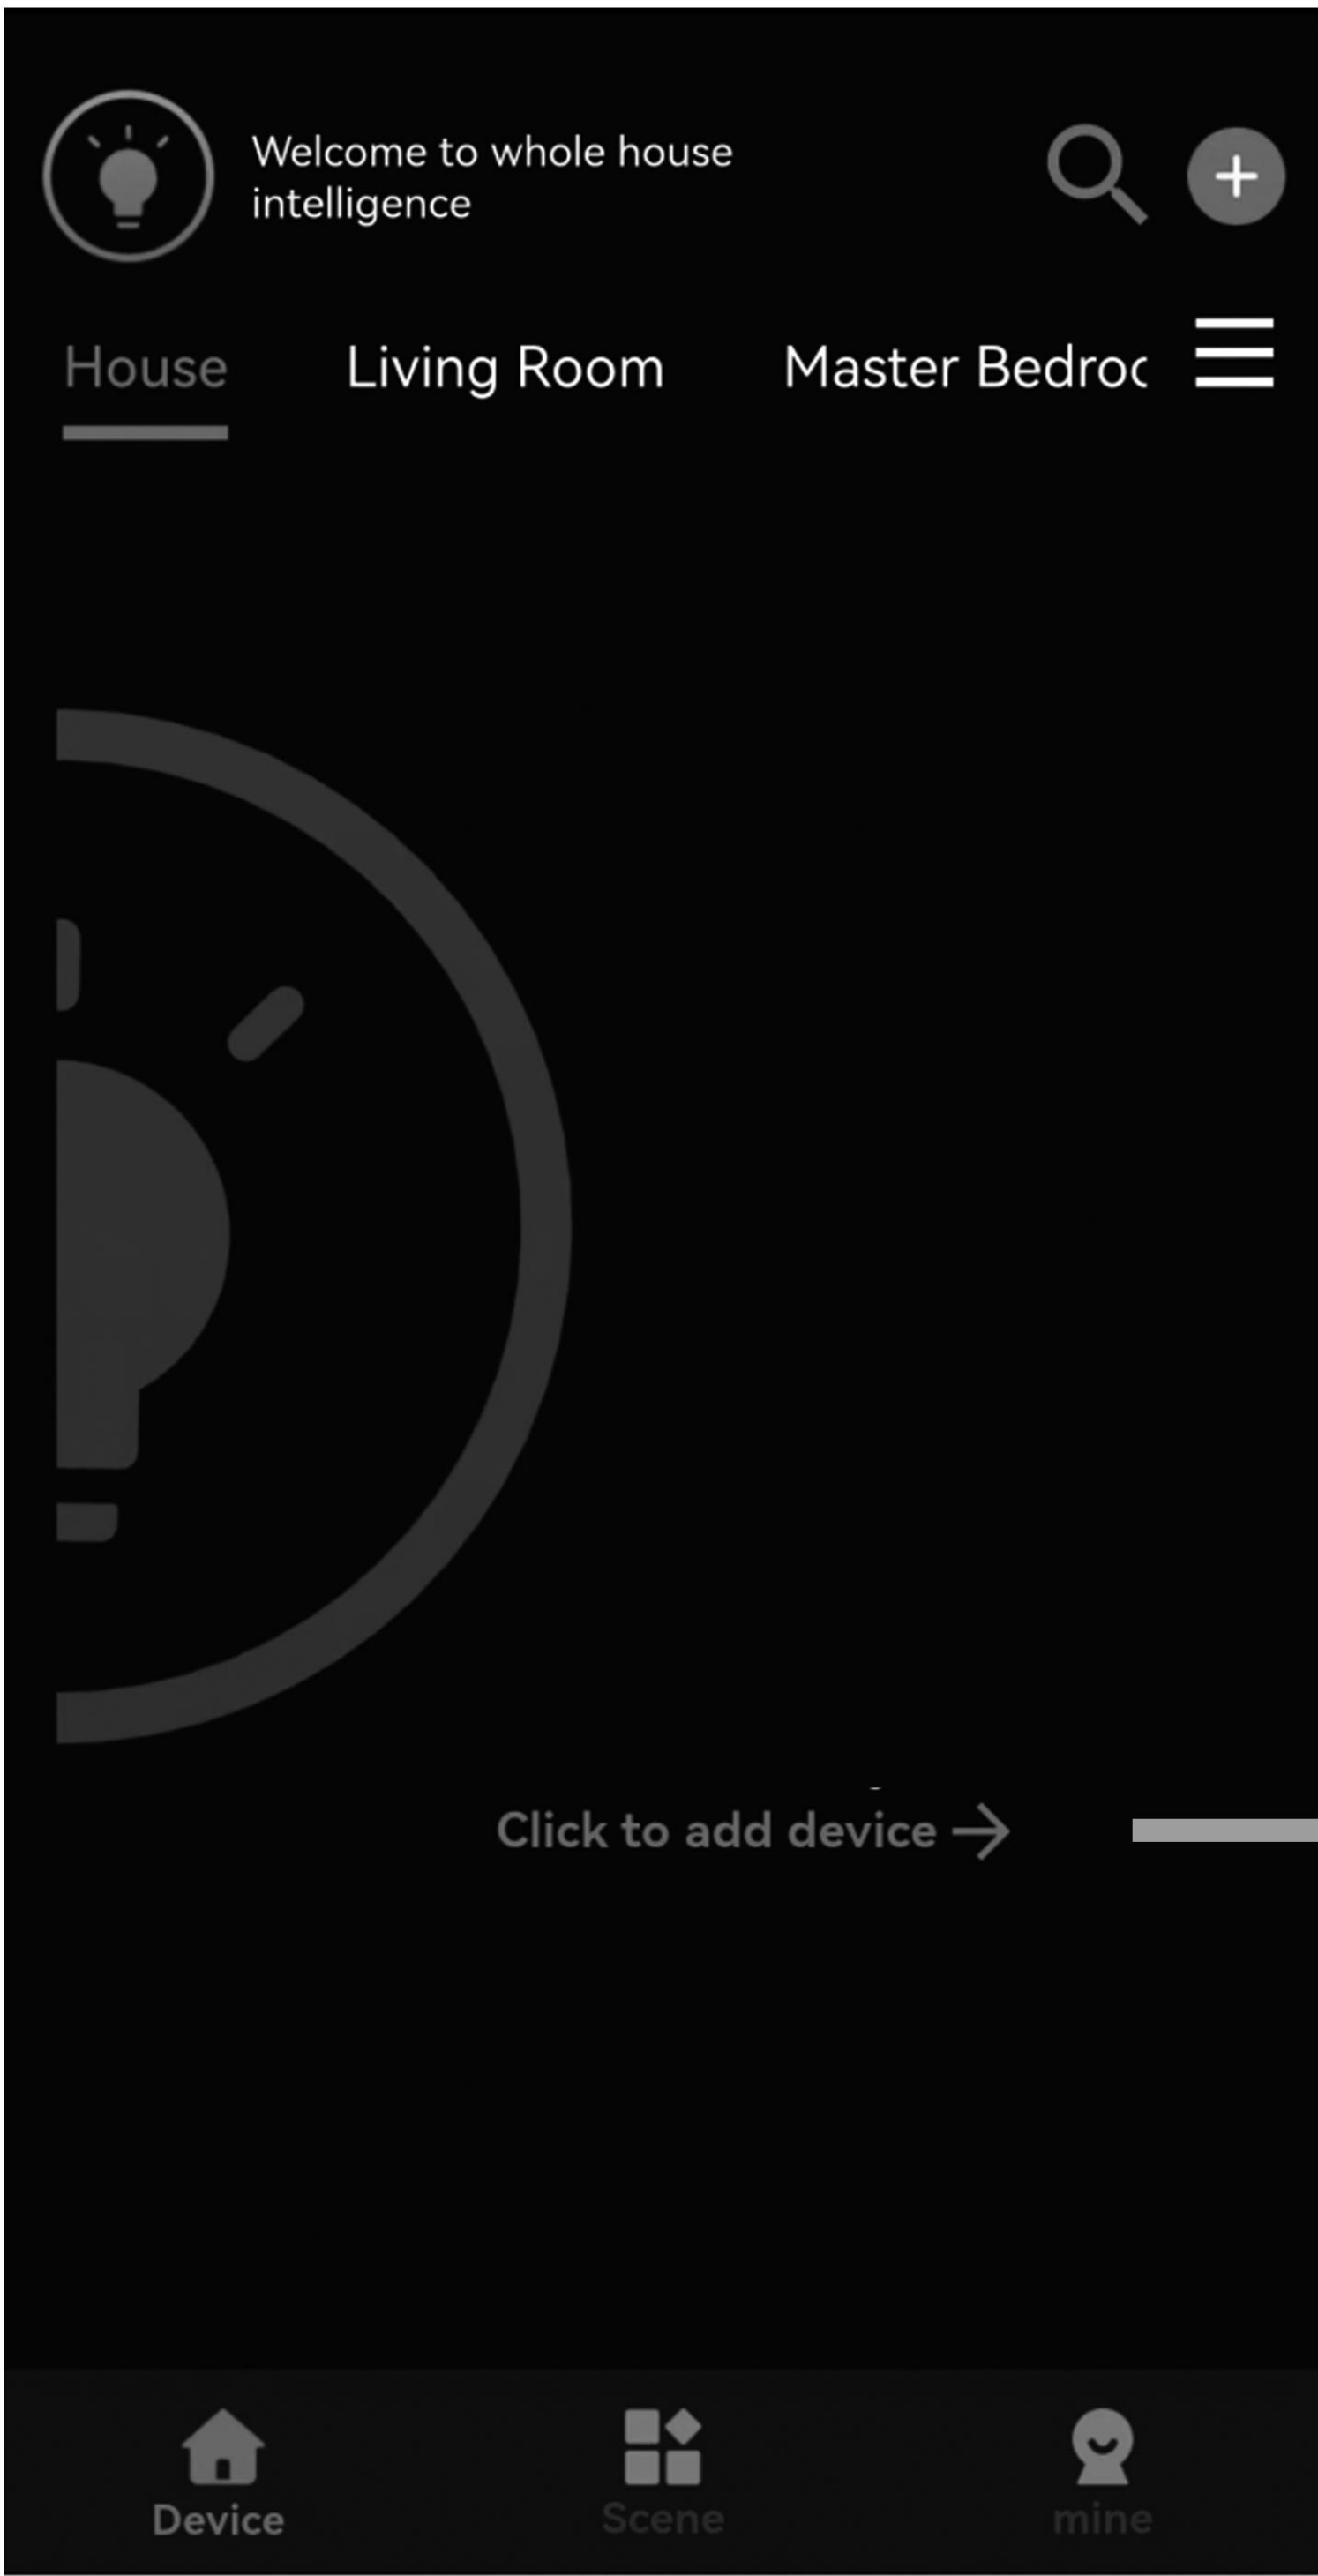


1

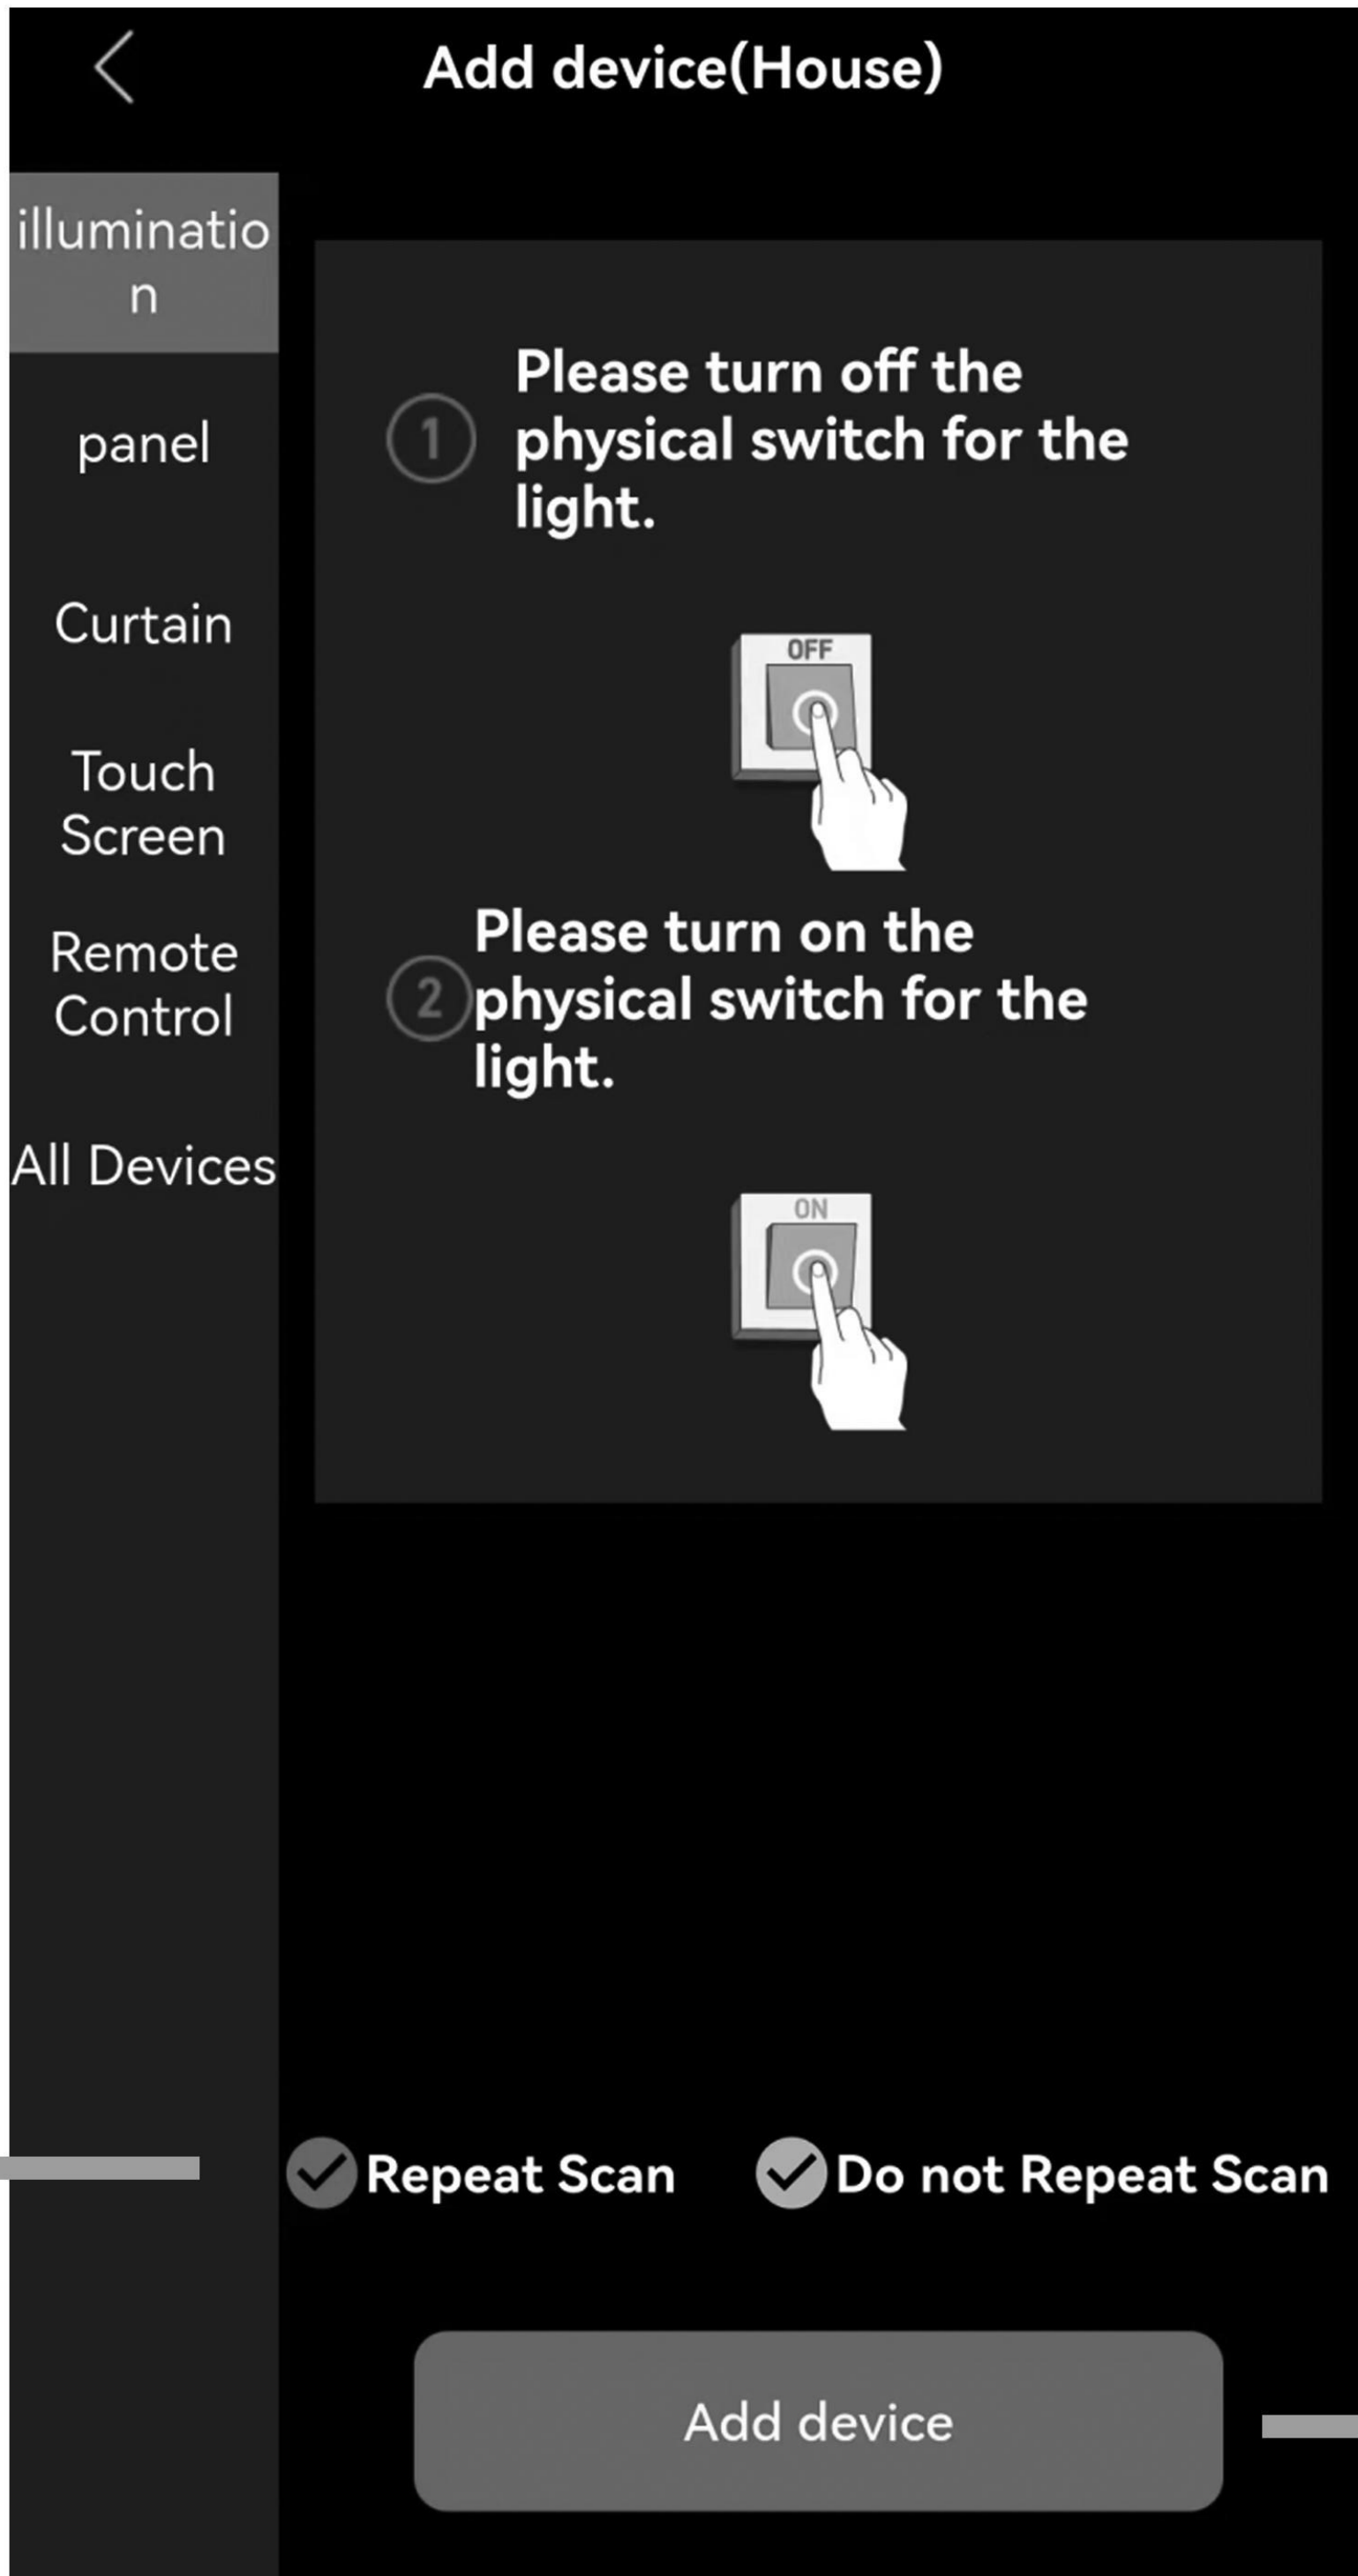

2

It turns blue after clicking

3

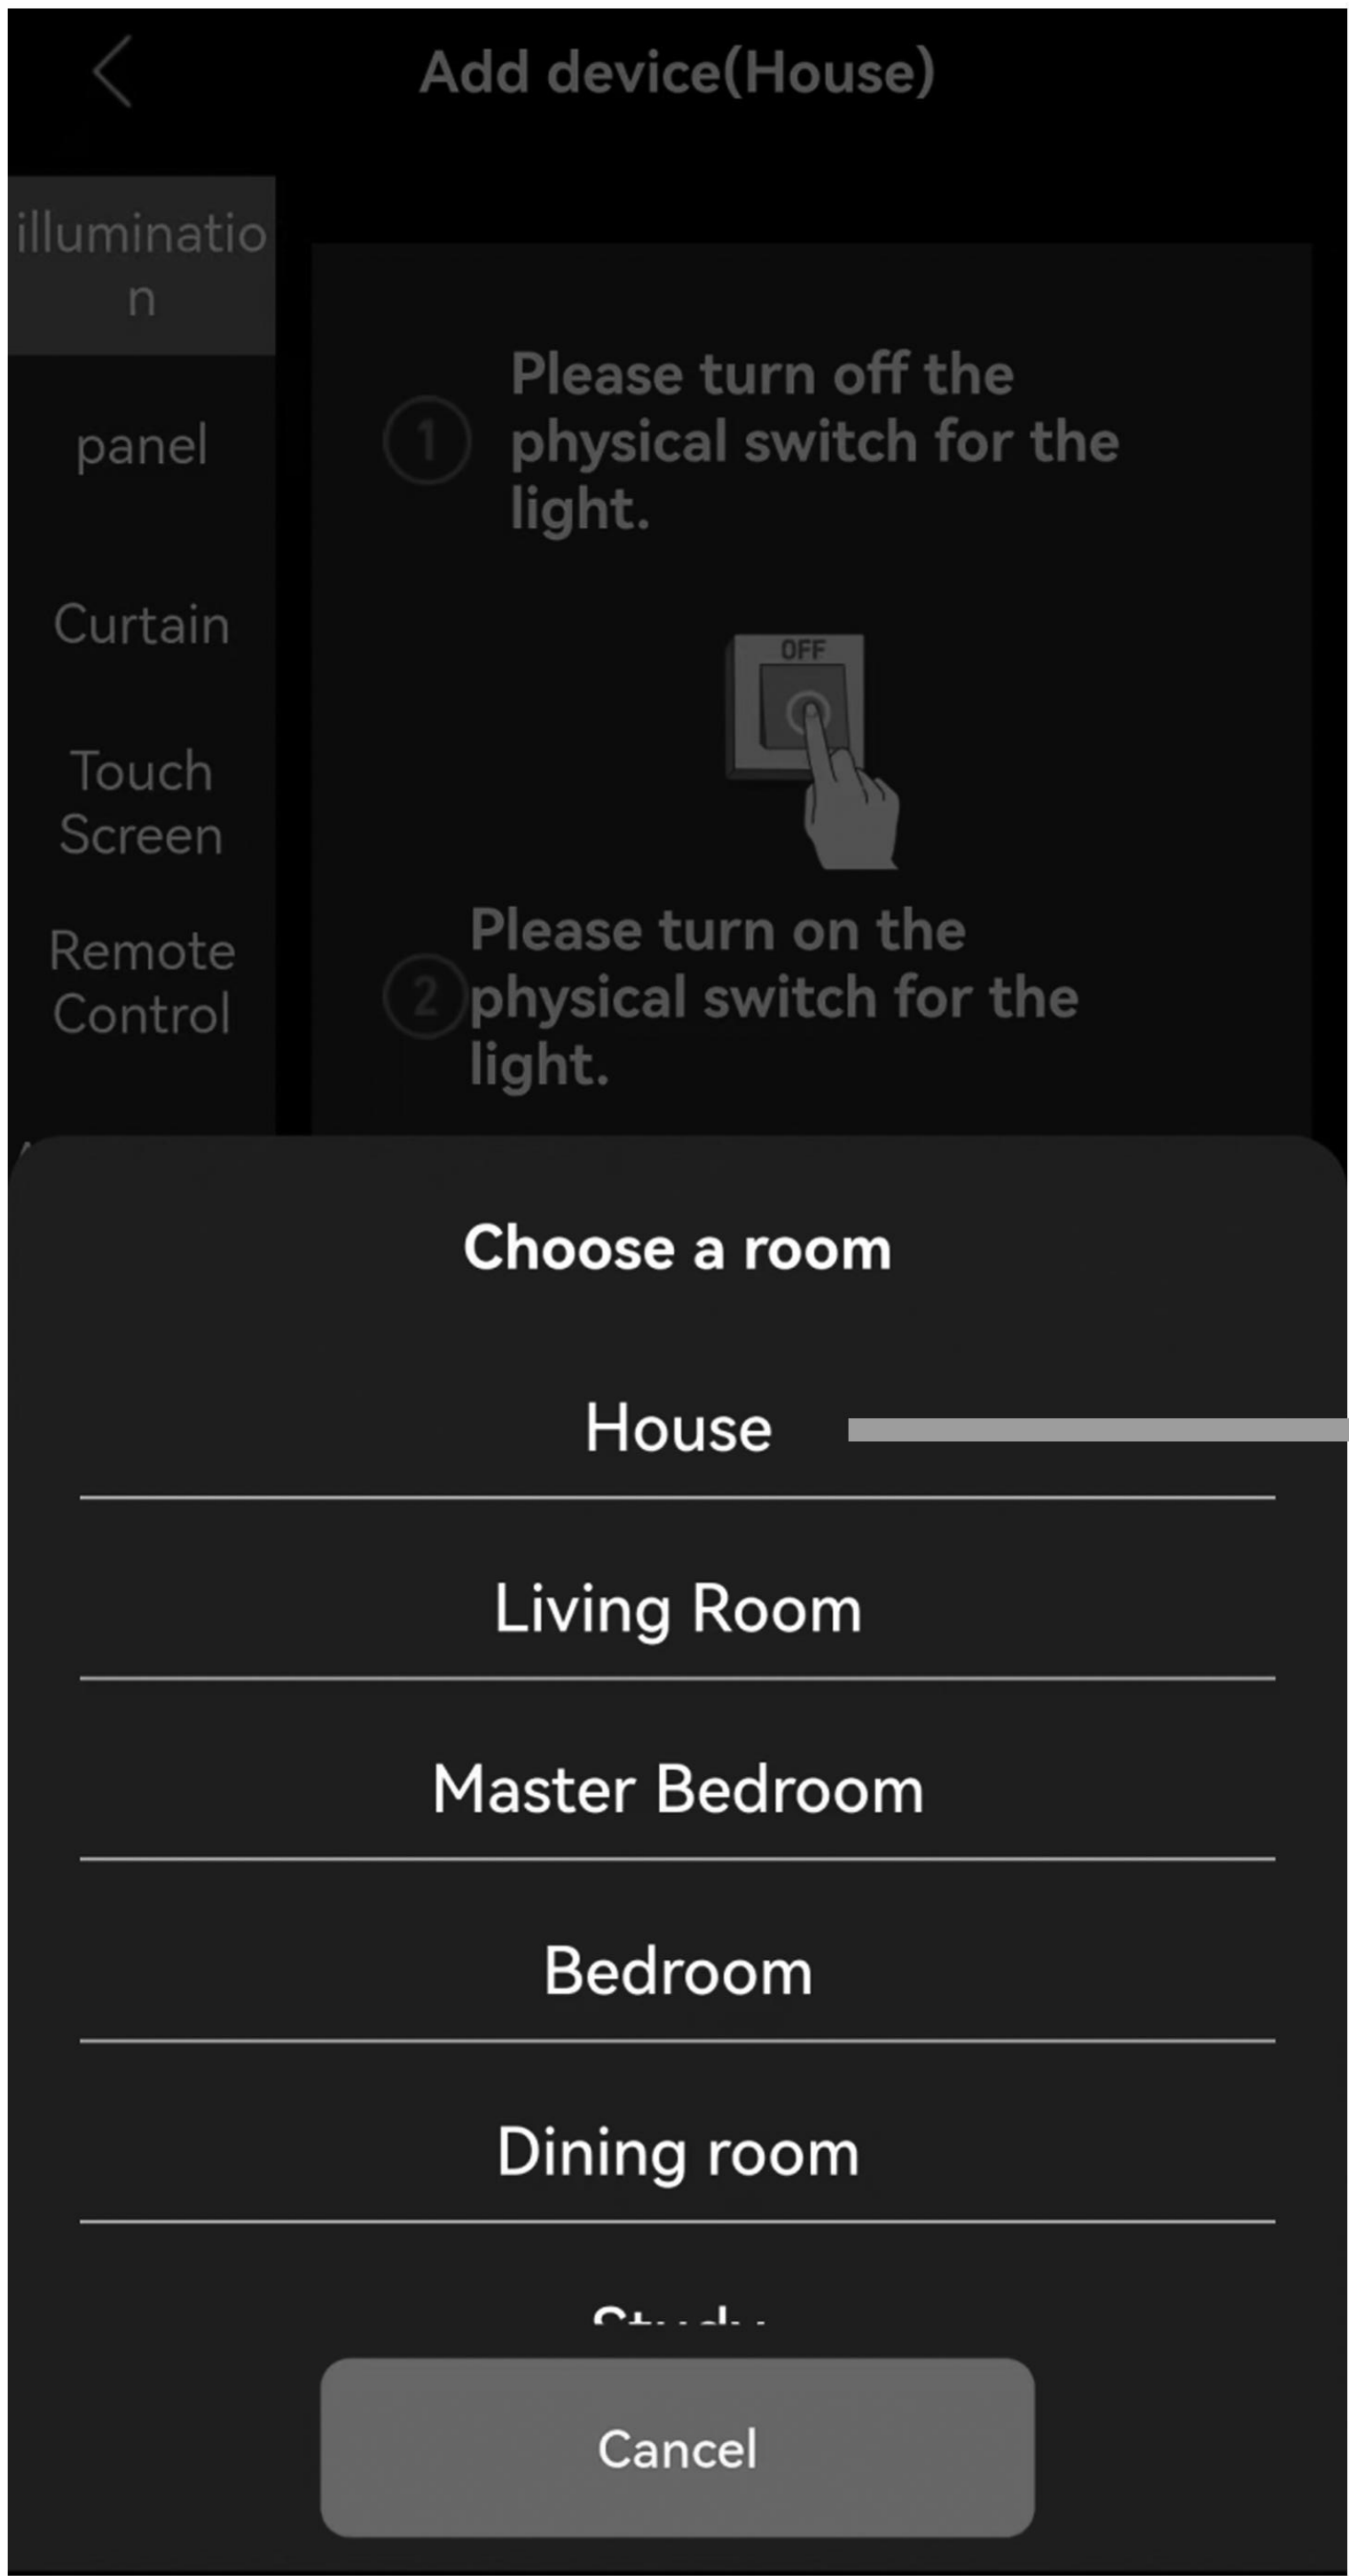


4




5

Unplug the smart box

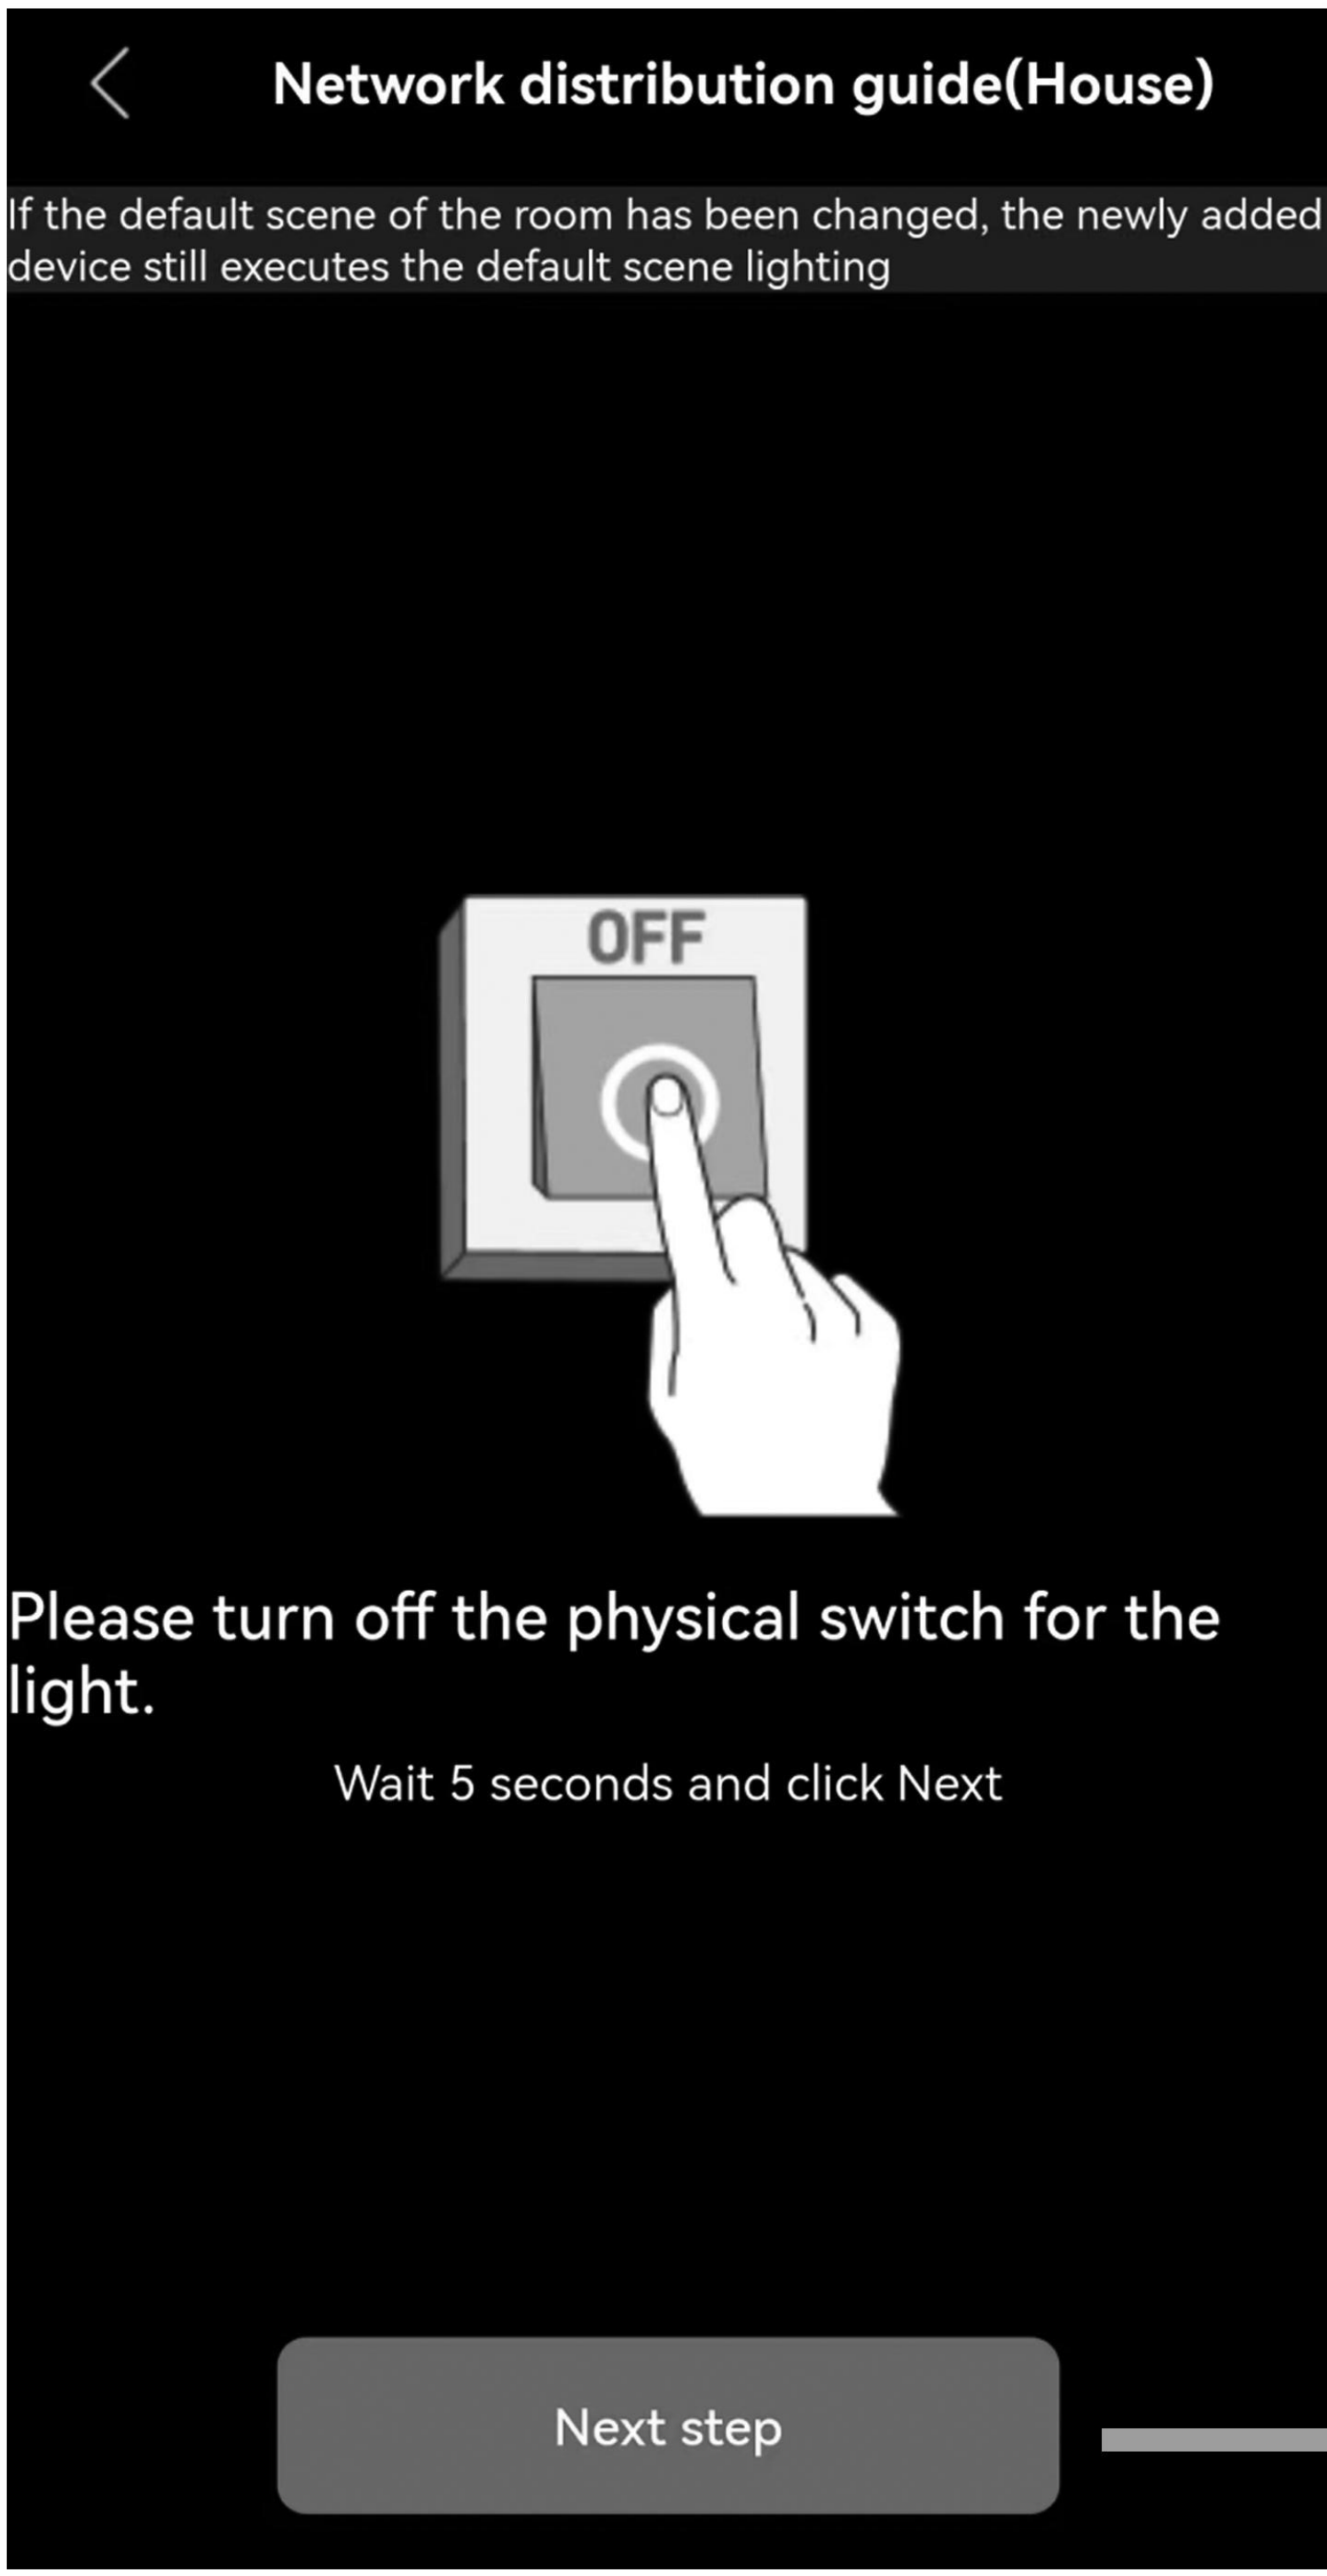


6

7 Plug in the smart box power plug.

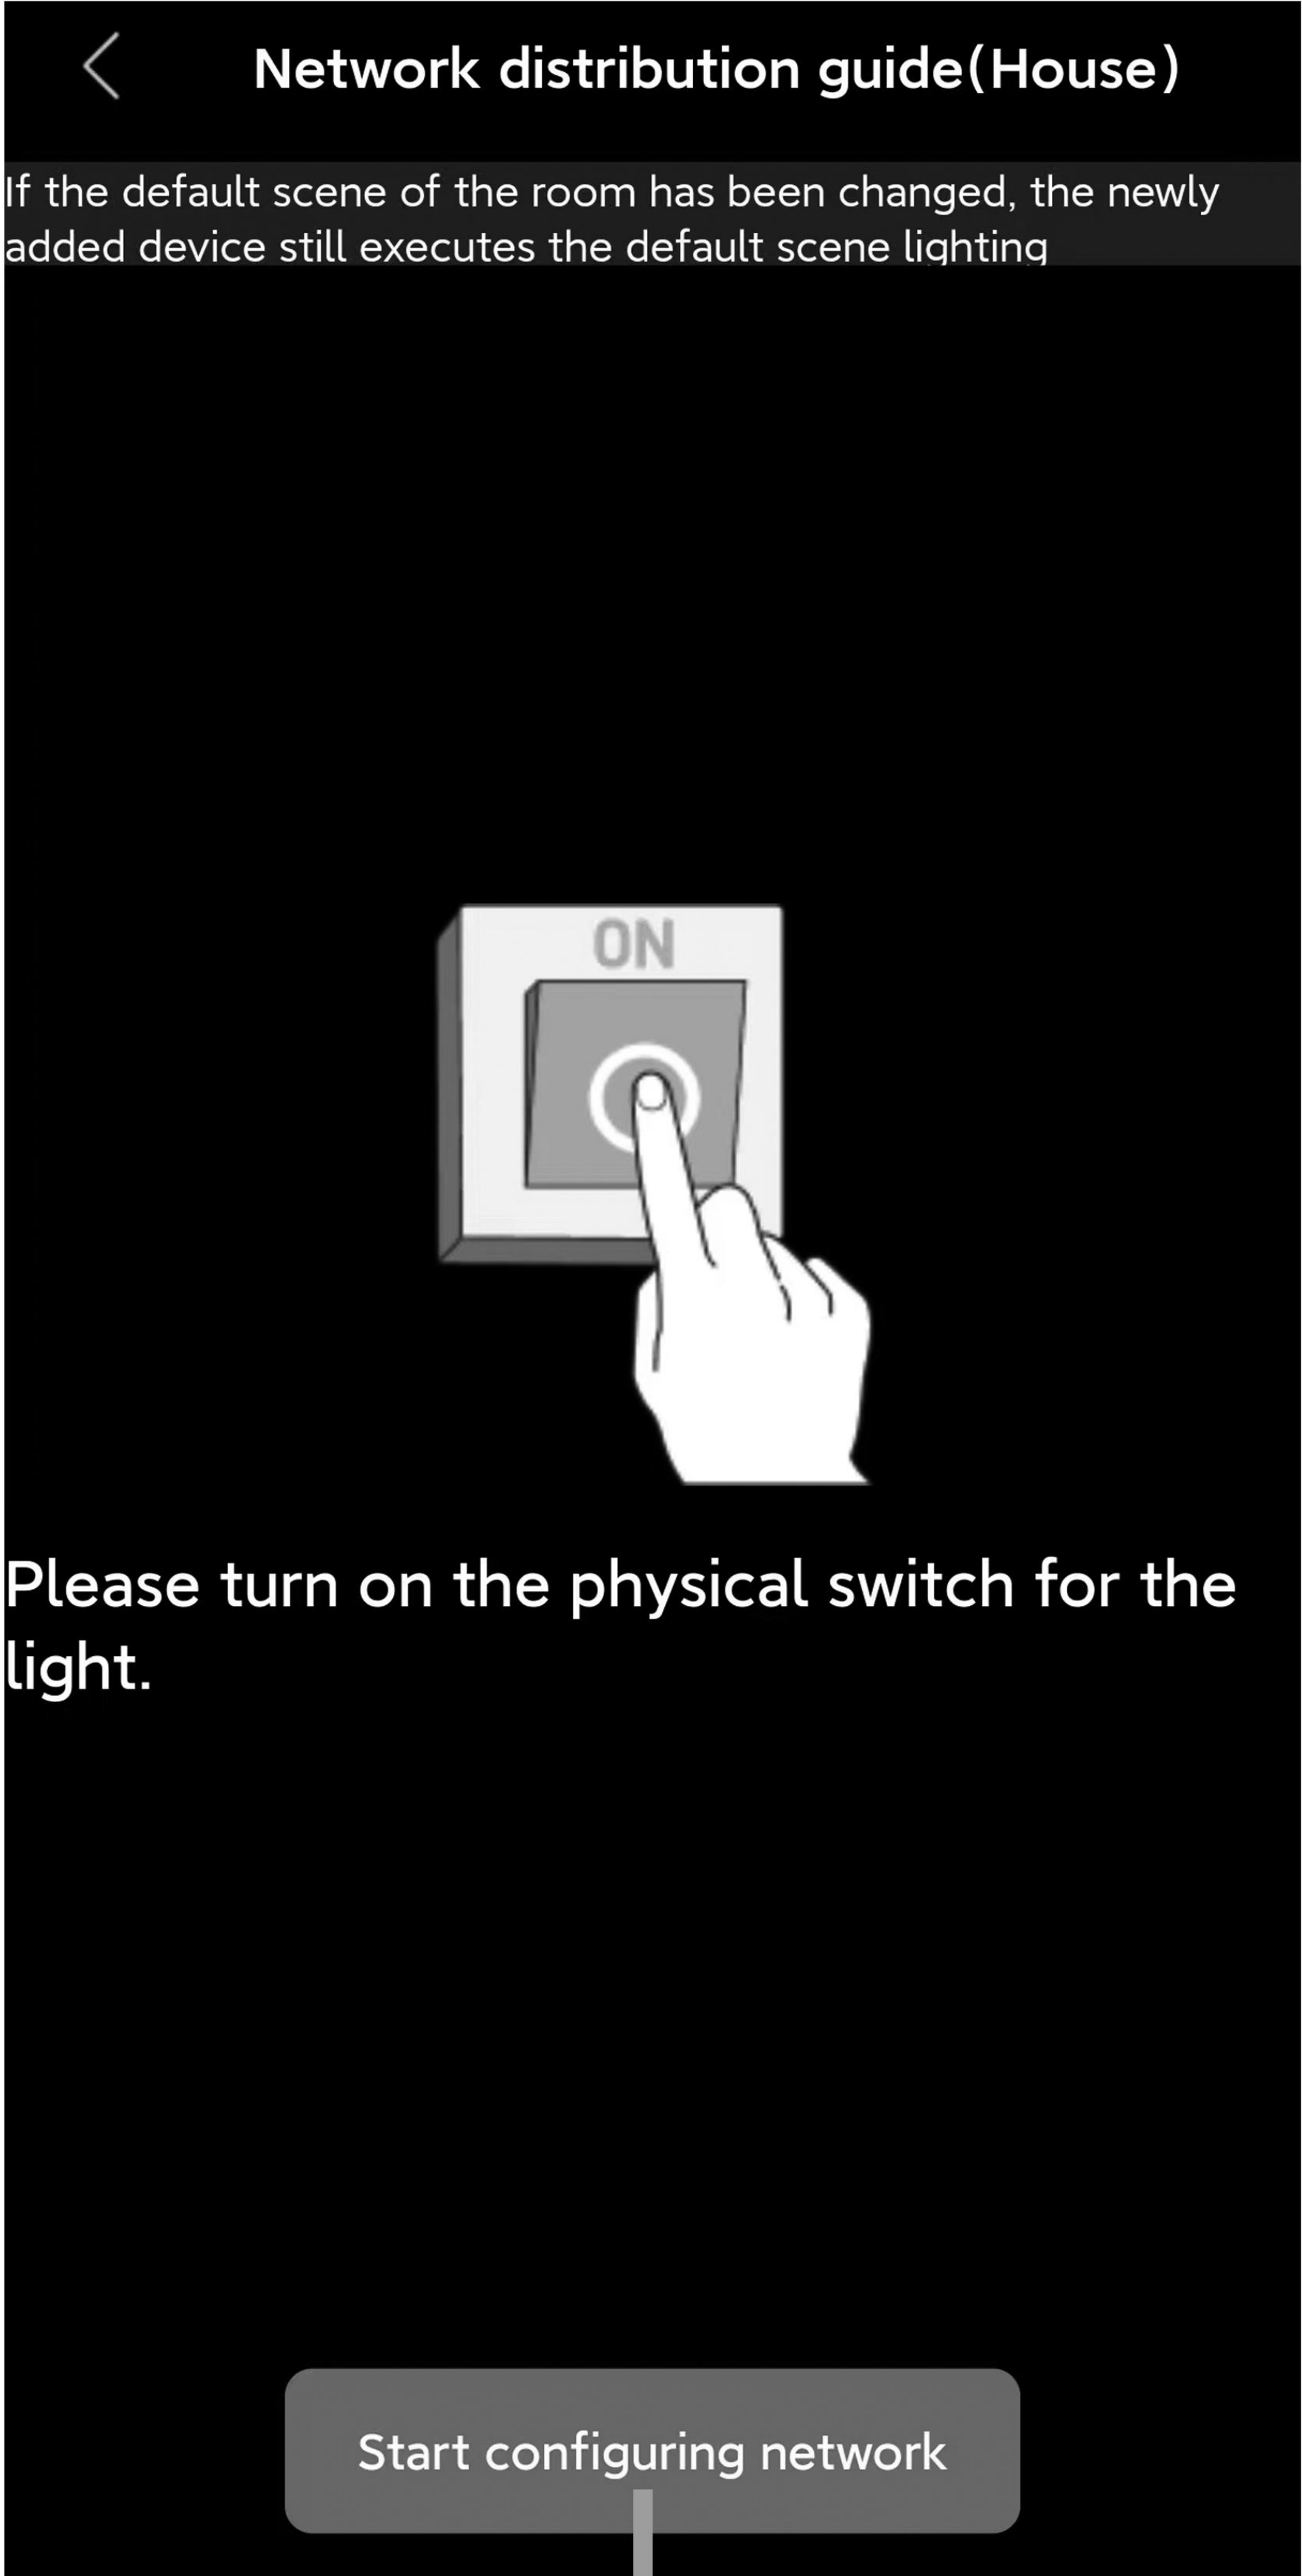


8

The appearance of this program icon indicates that the matching is complete

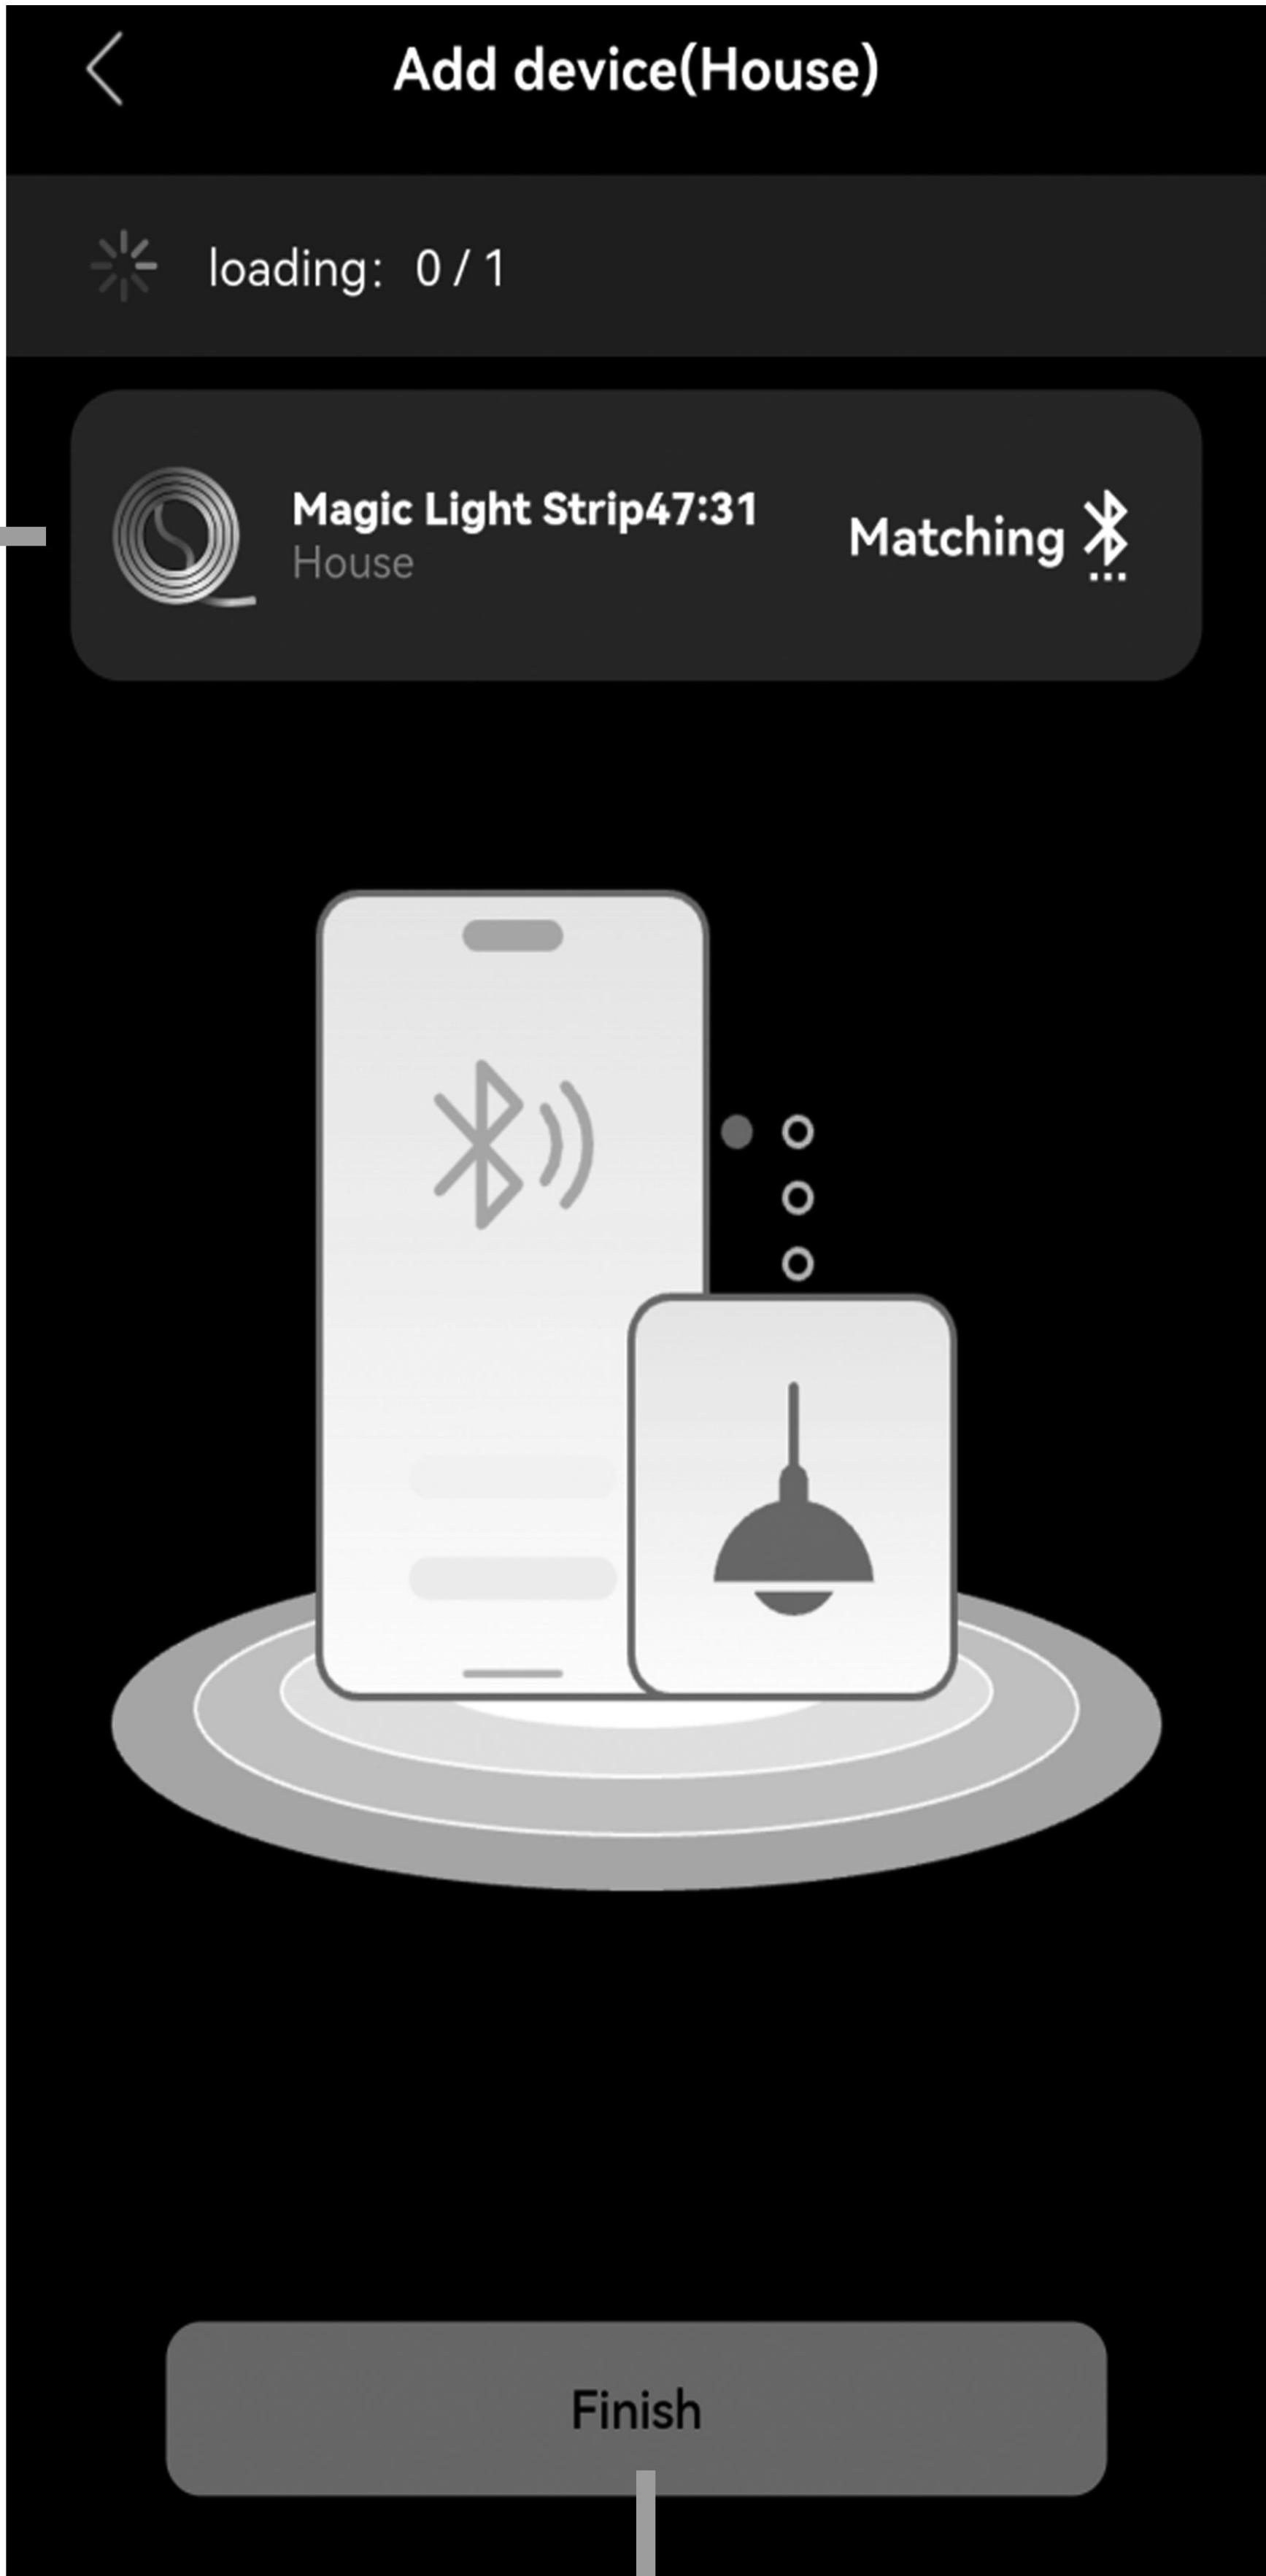


9

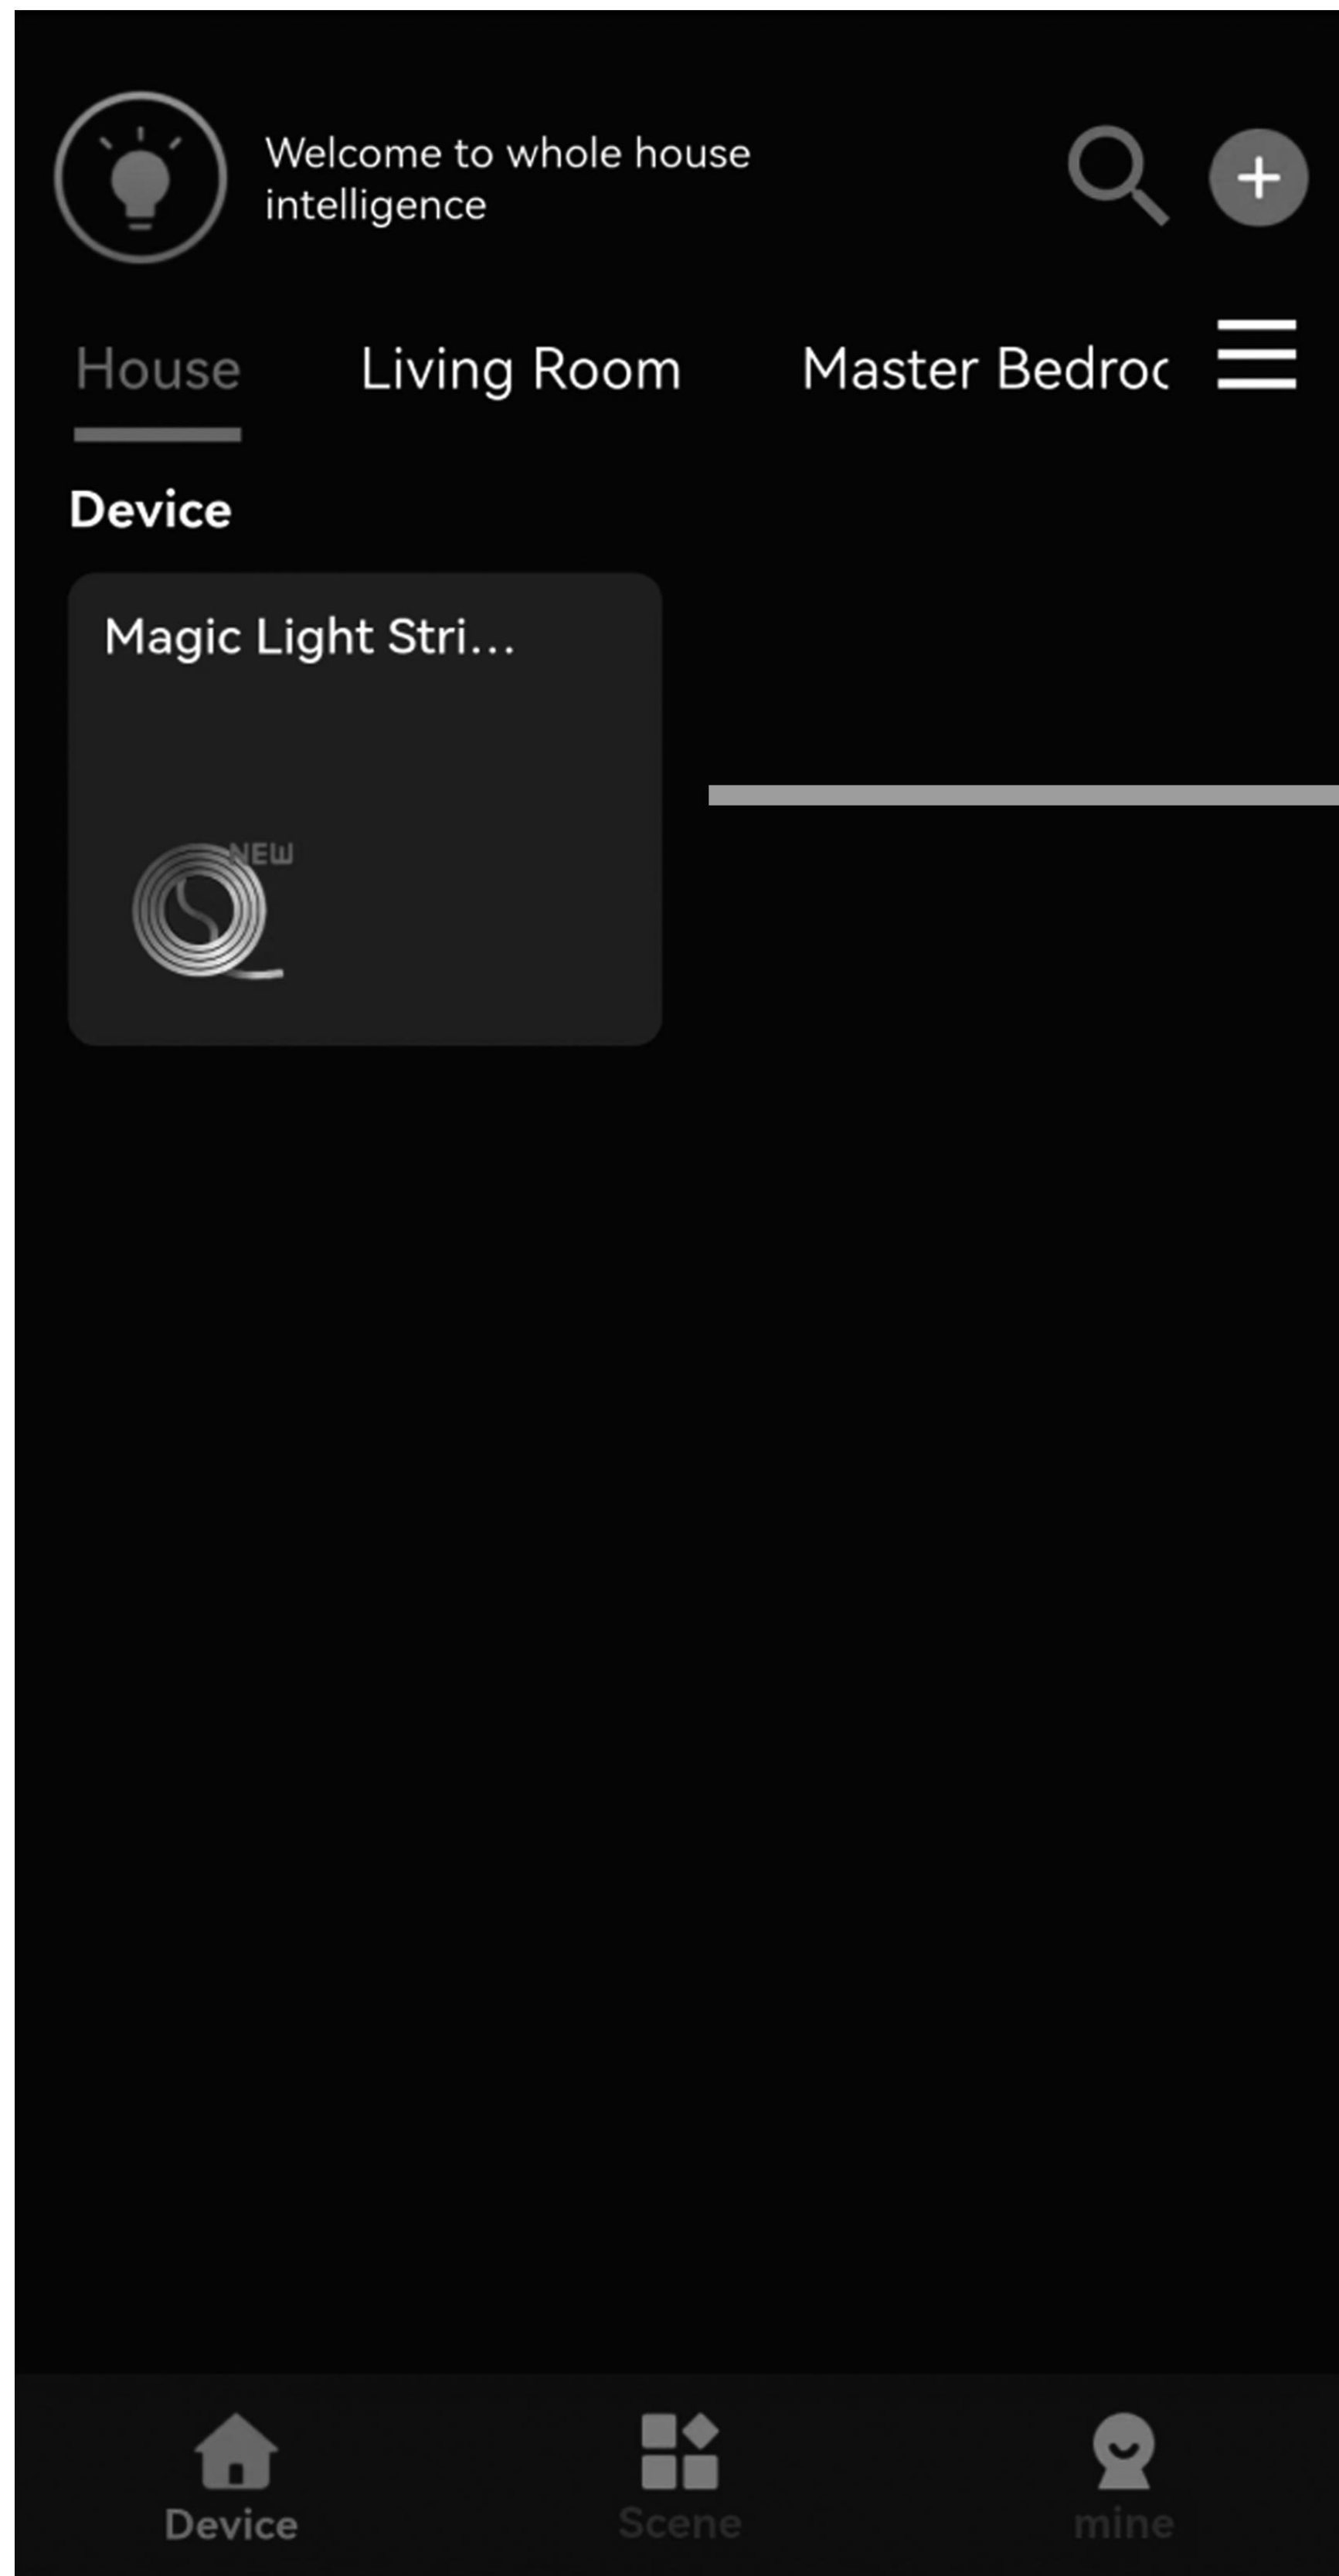

10



Now you can freely adjust the lighting according to your preferences

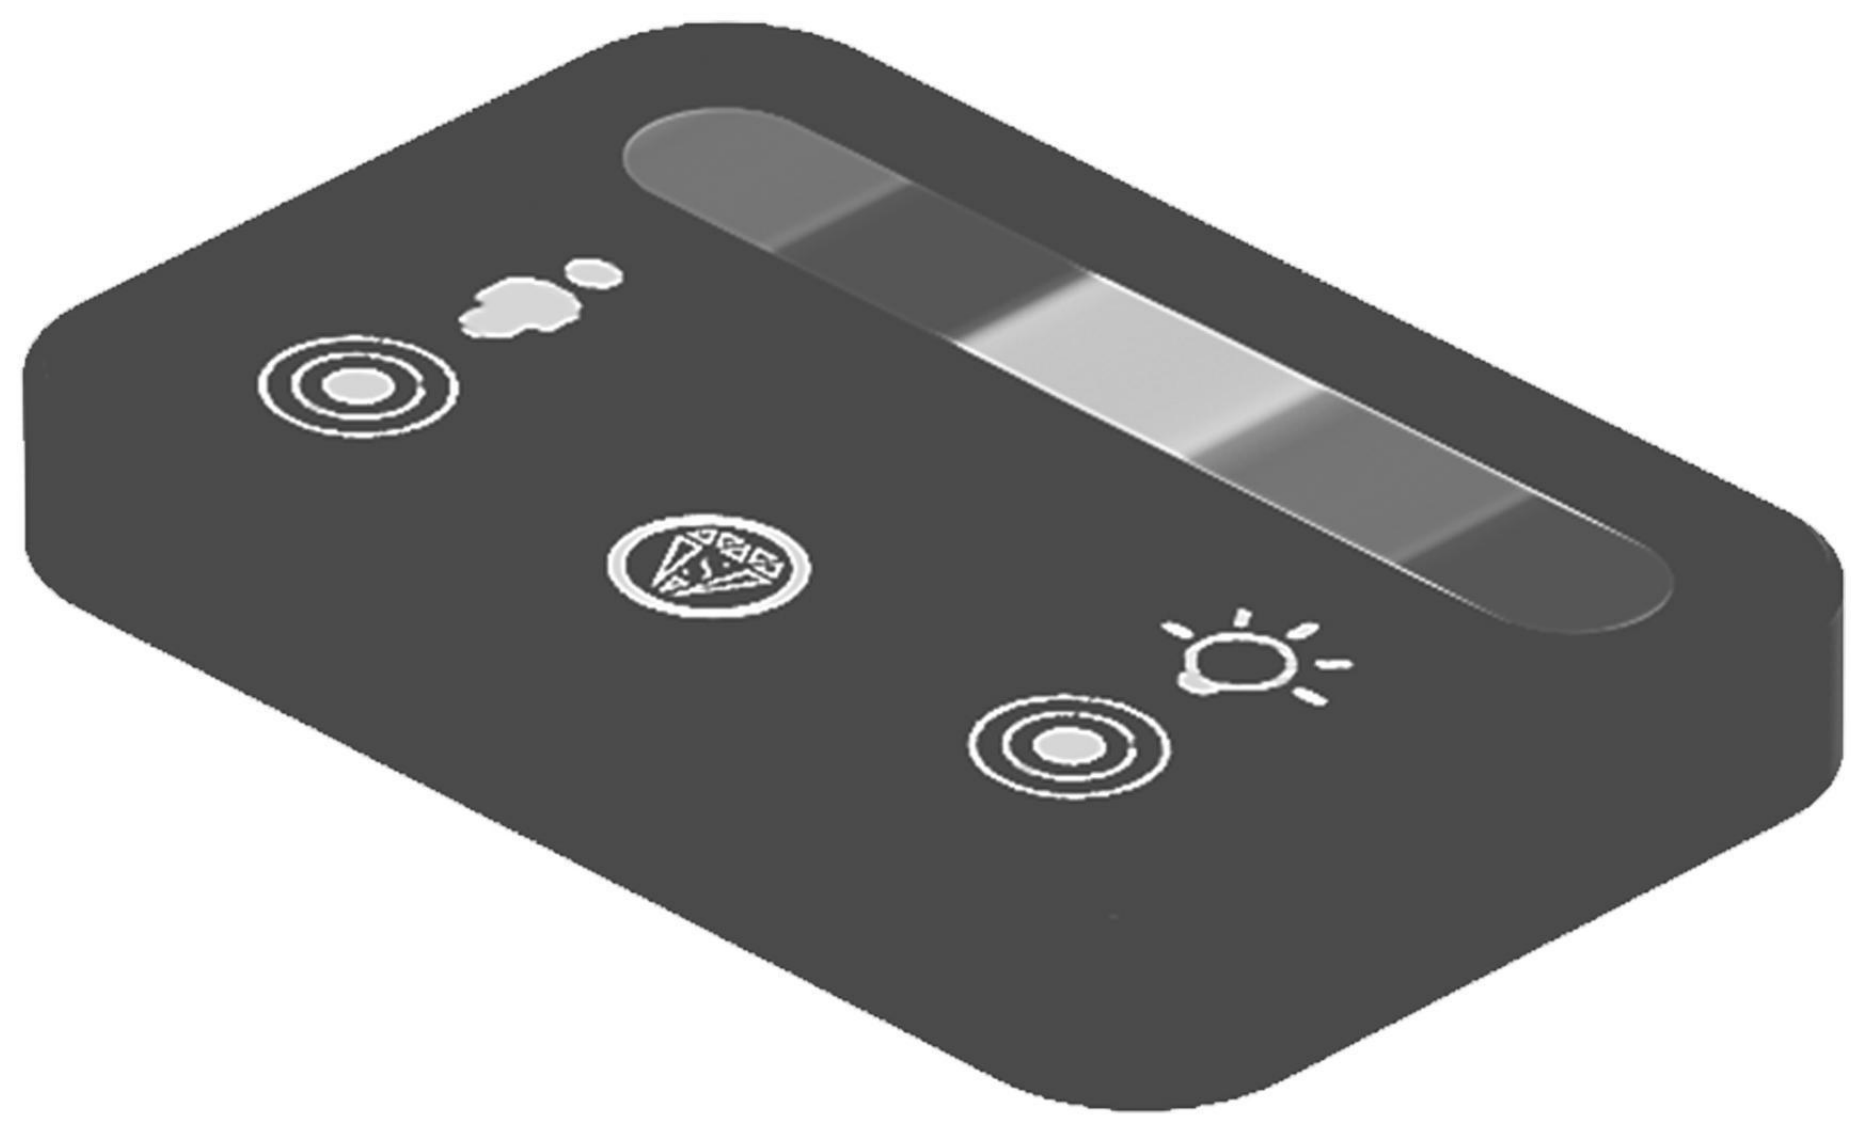

User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.

i. Single Click: Turn the light on/off.

ii. Quick Double-Click: Switch between 7 static RGB colors.

iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to turn on/off the induction function.

A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by human and object activities.

By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.


Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)



This area controls the color switching function.

You can tap or slide to any color bar position to change the color.

Color Palette

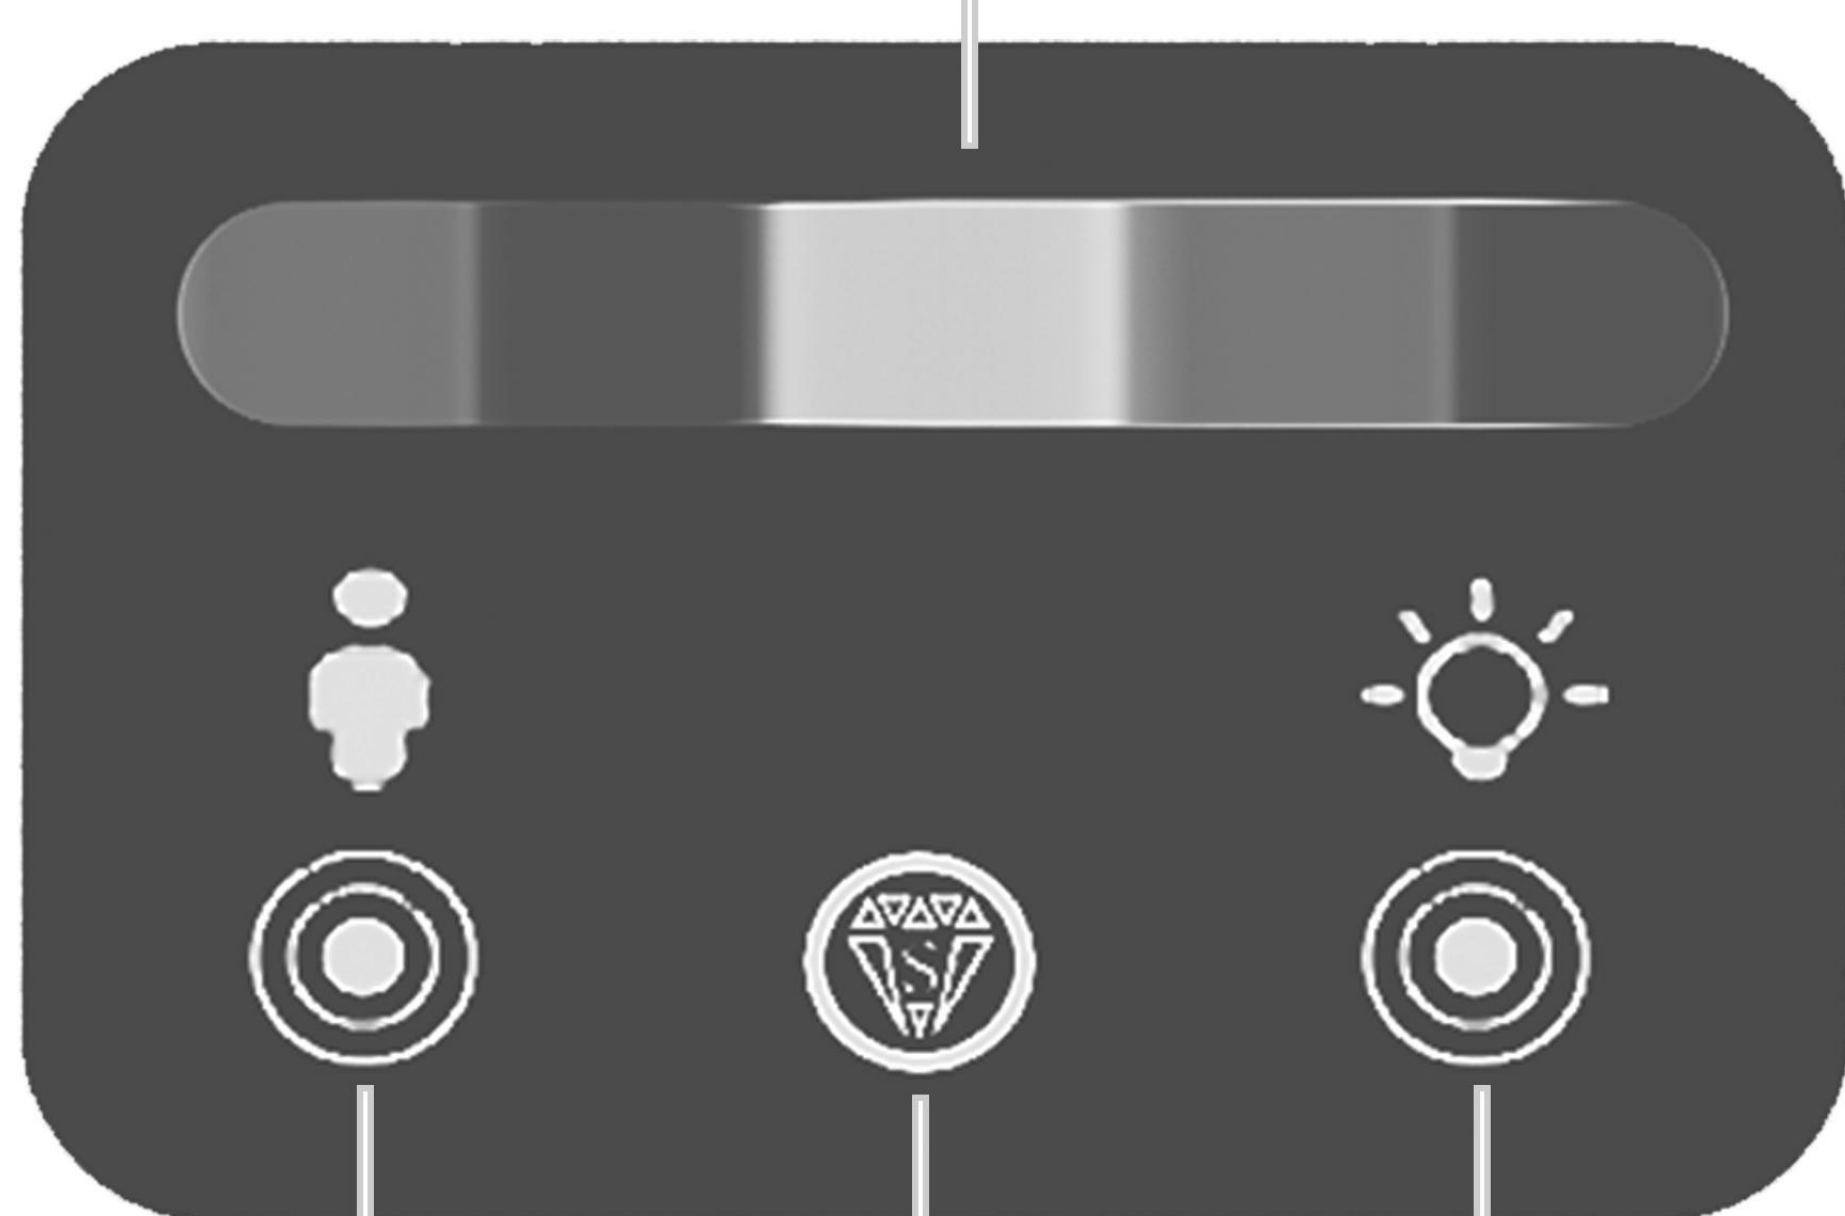

Induction Button

Phantom Color Mode Button

Master Switch Button



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.
3. If you have any questions when installing, please feel free to contact us. Thank you.