


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning



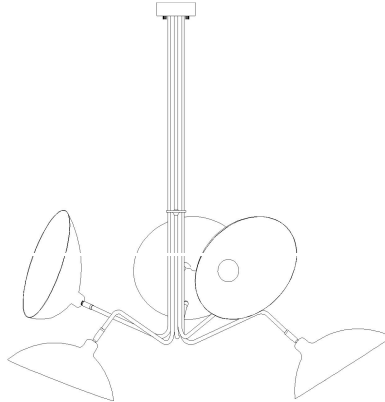










To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Bend tube A		2X	H	Wire harness		1X
B	Bend tube B		3X	I	Mounting Screw		2X
C	Tube		5X	J	Spring washer		5X
D	Canopy		1X	K	Wire connector		5X
E	Bulb		5X	L	Wrench		1X
F	Mounting plate		1X	M	Nut		5X
G	Canopy Nut		2X				

Installation



Step 1

Unpack all parts from cartons carefully. Separate the Mounting Plate(F) from the Canopy(D) by removing the Canopy Nut(G) anti-clockwise.

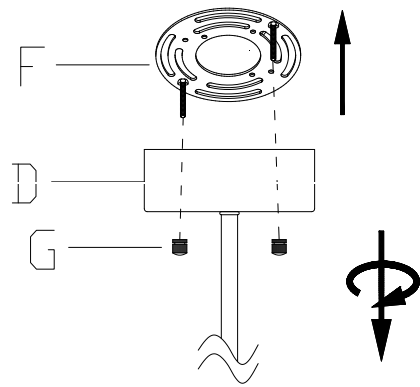


Step 2

According to the assembly sequence on the right, connect the tube(C) into two bent tube(A) and three bent tube(B). Then put spring washer(N) into five tube(C) and using the nut(M) fix the tube(C) on the canopy by wrench(L)

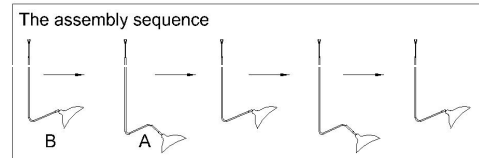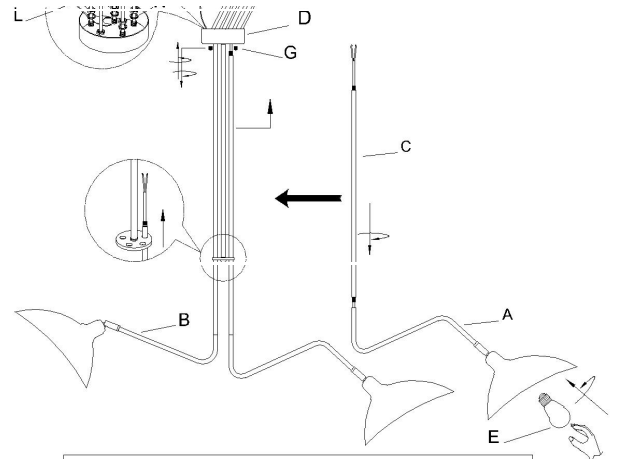

Step 3


Insert the J-box wires through the center opening of Mounting Plate (F). Attach the Mounting Plate (F) onto the J-box and secure it by turning the 2 Mounting Screws (I) clockwise until tight.

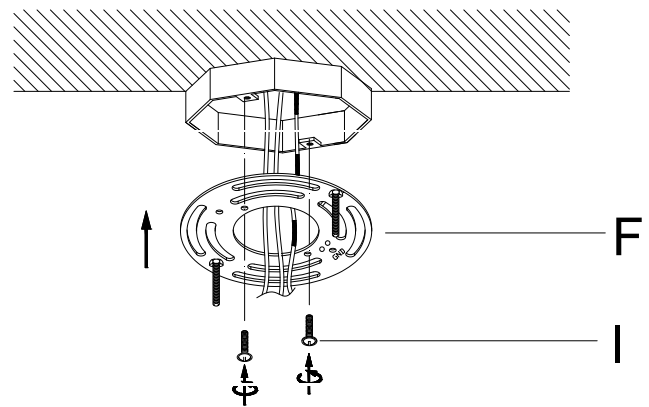

Step 4 Wire connection

Make wire connections, using wire harness(H) connect wire and the main power supply cord. with wire connector (K), following the reference chart listed below.

Connect, Hot, Black or Red outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear, Brwn, Gold or Black without Tracer(colored stripes)	Clear, Brwn, Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:


- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 5

Position the canopy (D) over the Mounting Plate(F), fix the fixture by rotating the Canopy Nut(G) clockwise until secure. Do not over tighten.

Insert the bulb(L) into the socket until secure. **DO NOT EXCEED THE SPECIFIED WATTAGE.**

PLEASE USE TYPE "A" BULB MAX 60-WATT OR CFL BULB MAX 13-WATT OR LED MAX 9-WATT THERE ARE 5*9W LED BULBS IN THE BOX.

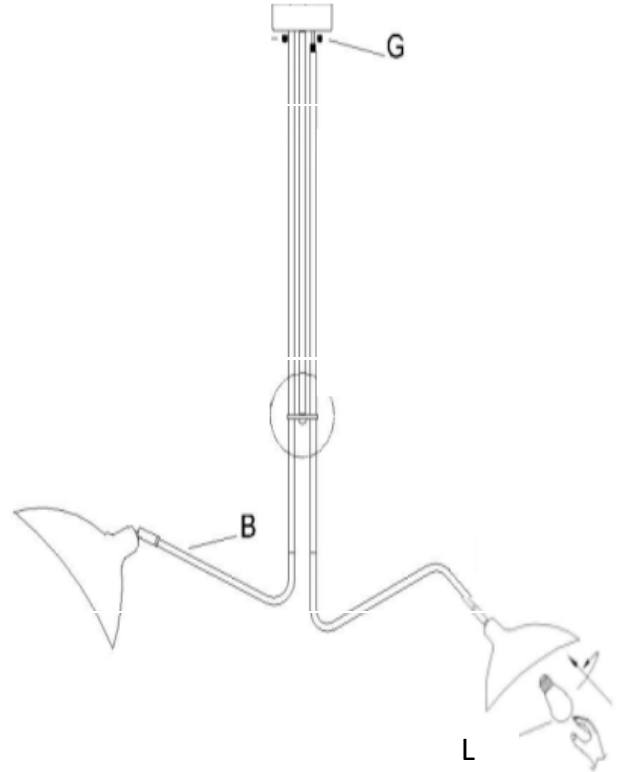

Step 6

Consult a qualified electrician to ensure correct bra circuit conductor

ENJOY YOUR LAMP