



Installation Instruction


G 1/2 two water inlets height is 10-30 lower than the tile surface

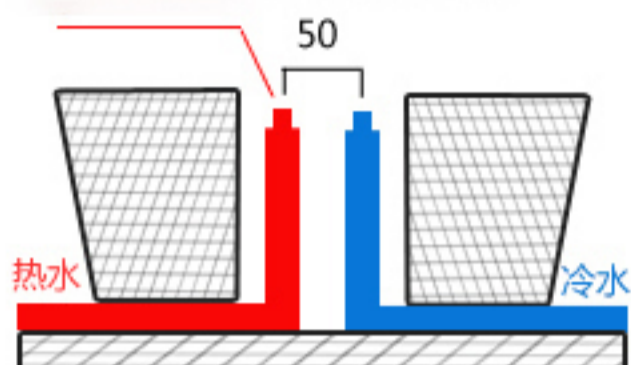


1. The above chart shows the embedded hot and cold water inlet pipe, two inlet pipe center hole 50 + -20MM, height is 10-30MM lower than the ground

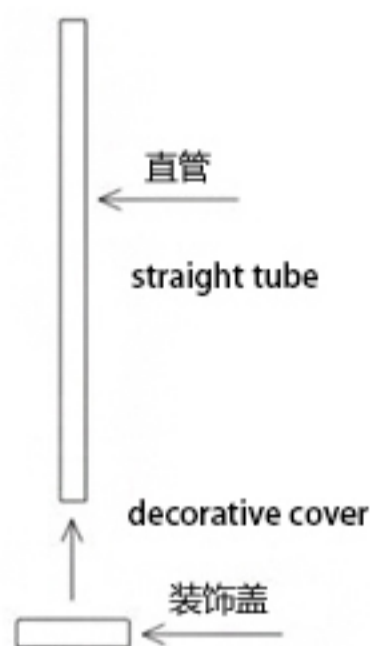


2. Put the decorative cover on the straight tube

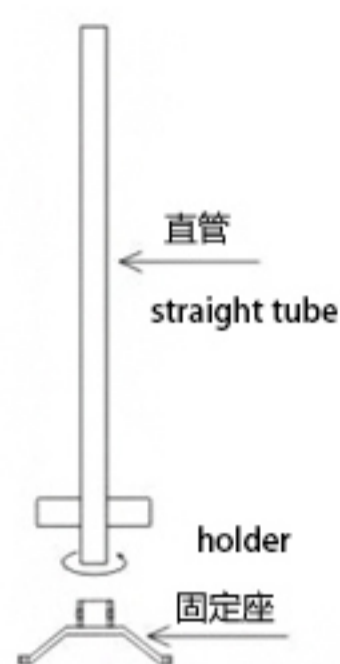


3. Screw the holder to the bottom of the straight pip

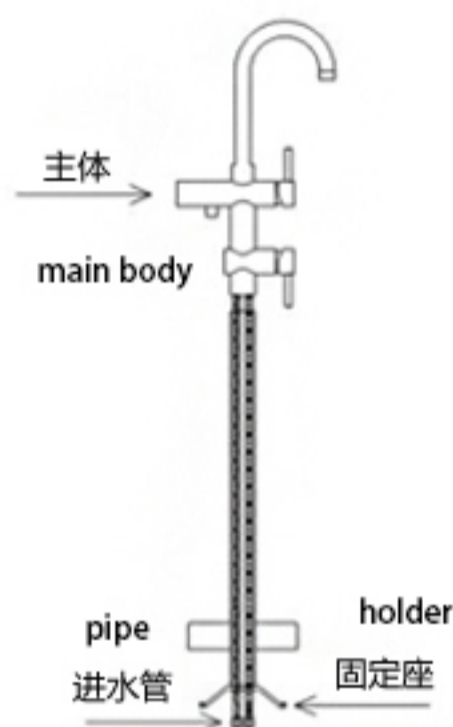


4. The inlet pipe passes through the center of the holder and connect to the faucet

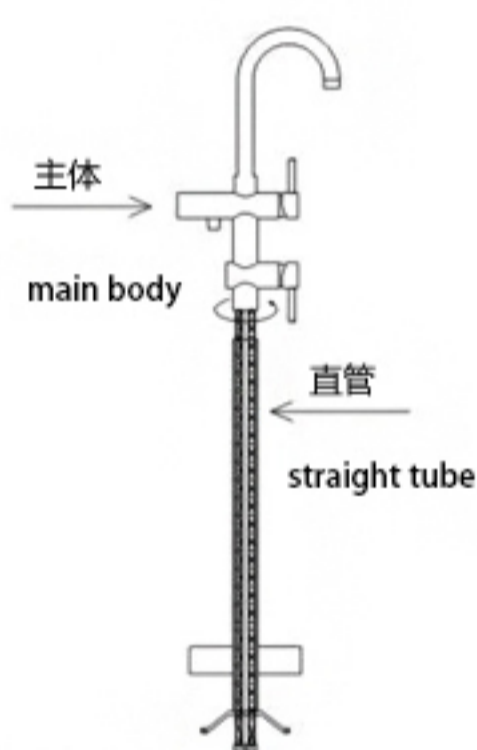


5. Straight pipe connect to the main body and tighten it

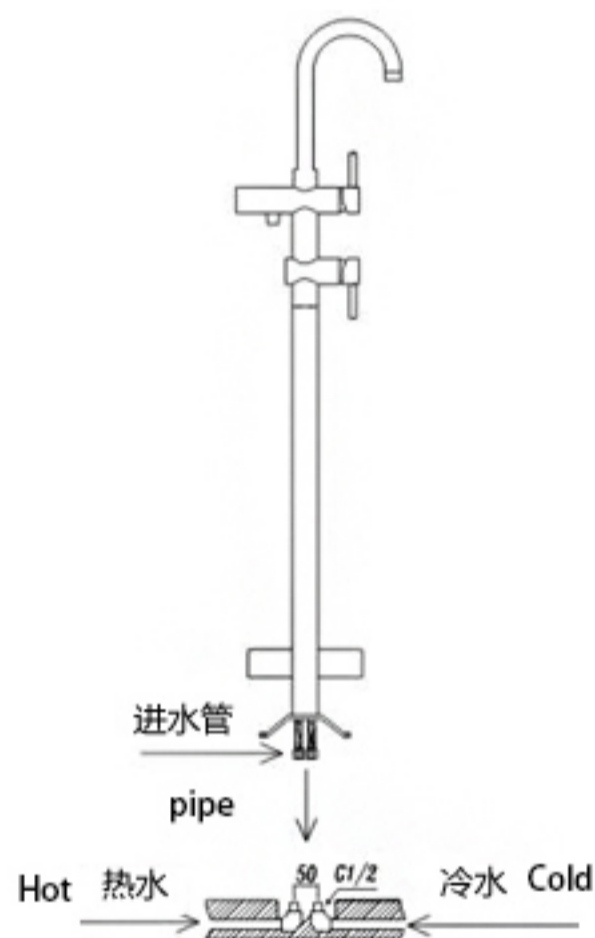

6. Connect the inlet pipe and water supply pipe, the left side with the hot water, the right side with the cold water

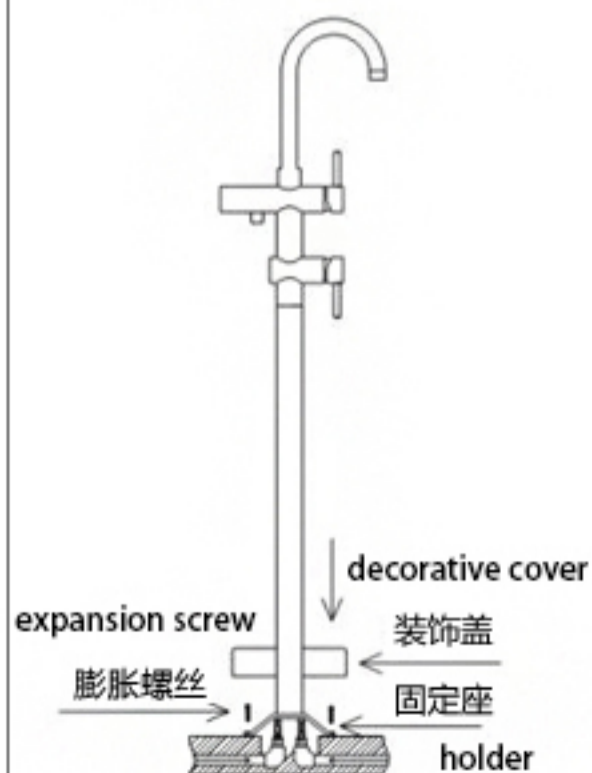

7. fix the faucet to the ground with the expansion screw, and pull down the decorative cover to the ground with hands

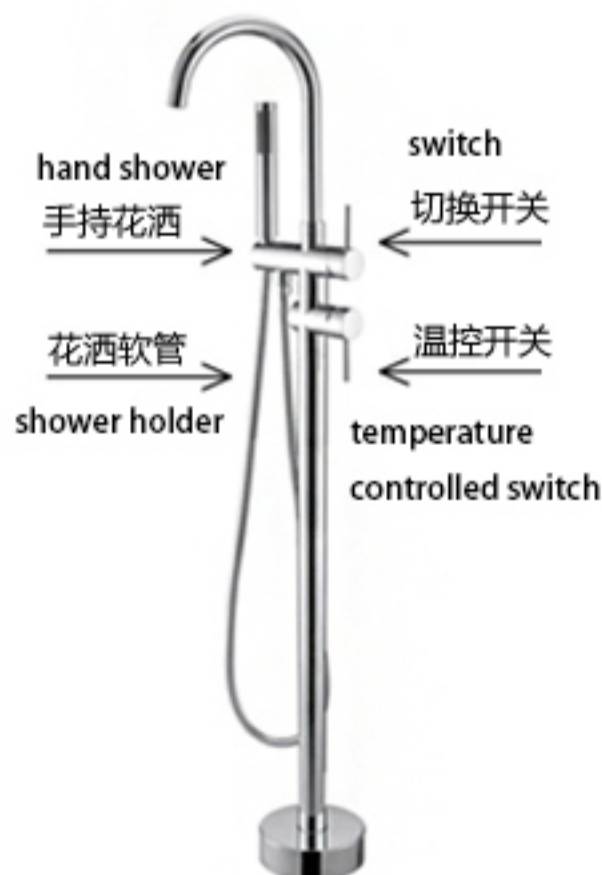

8. Connect the hand shower and hose to the main body

product manual

1. hot and cold water handle used to control the water temperature, lift up to the left is hot water, the right is cold water.
2. switch switch for the faucet and hand shower, to the left hand holding the shower, the right faucet water
3. Landing bath faucet the hot and cold water inlet pipe is usually embedded under the tiles
4. Before cleaning the faucet, please clean the water supply pipe to avoid clogging the faucet