


DINING CHAIR

ASSEMBLY INSTRUCTIONS

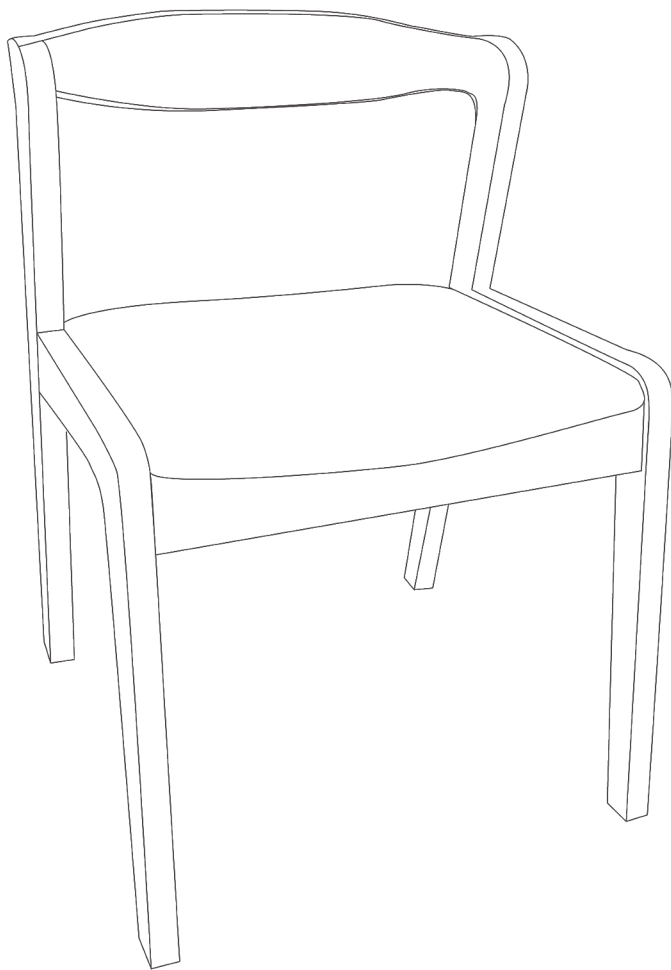

Need help? Contact us through the shopping platform.
Or email: service.furniture@outlook.com

HALF HOUR
ASSEMBLY TIME

2 PEOPLE
REQUIRED FOR ASSEMBLY

1 X 1 M
FLOOR SPACE REQUIRED

INSTALLATION SUGGESTIONS

PLEASE READ ALL THE INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING AND USING THE PRODUCT.




1. Please check whether all parts are complete according to the installation instructions.
2. Please ensure that the installation space is clean and flat to avoid dirt and damage to the product parts.
3. In each step, do not tighten bolts/screws completely until all bolts/screws are lined up and tightened 70% separately. Do not over tighten bolts/screws to avoid stripping.
4. We recommend that all assembled parts should be placed near the assembly location to avoid loss or forgetting while assembling.

TIPS FOR GIVING FEEDBACK

Please provide helpful information. We will give you feedback within 24h.

1. Describe your problem in detail and explain it with some clear multi-angle photos of the problem area.
2. Send your order ID and the letter number and quantity of the part in question from the parts list.
3. A clear photo of the side of the box that has the product information or the label on the bottom of the cushion.

PARTS AND HARDWARE LIST

 M8*60mm A*2	 M6*70mm B*4	 M6*48mm C*4	 D*4	 M8 E*2	 M8 F*2	 G*2
 H*1	 I*1	 J*1	 K*1	 L*1	 M*1	 N*1

ASSEMBLY STEPS

Assembly Tip: To ensure easy alignment, do not fully tighten any bolts until all parts are connected. Once aligned, tighten all bolts completely in a diagonal sequence to ensure stability.

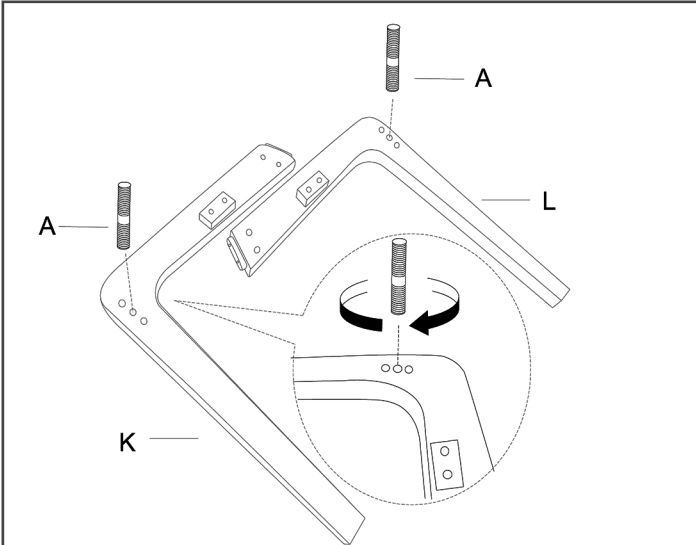


Diagram illustrating Step 1: Thread one Double End Stud (A) into Leg (K) and the other into Leg (L) until finger-tight.

STEP 1.
Thread one Double End Stud (A) into Leg (K) and the other into Leg (L) until finger-tight.

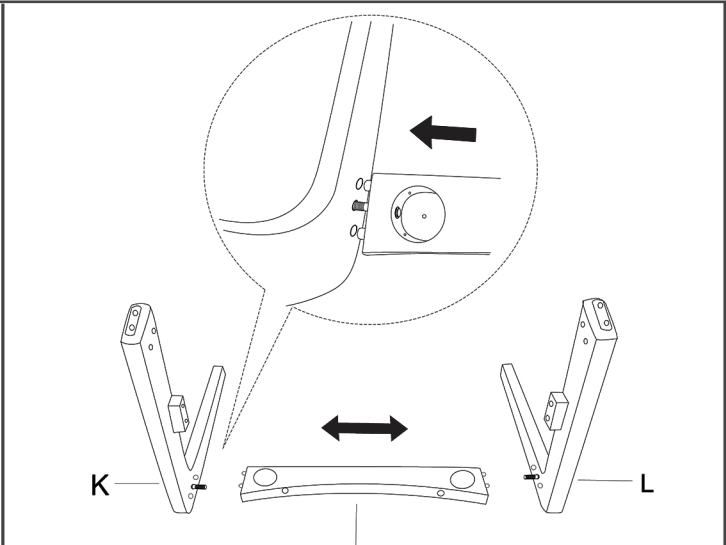


Diagram illustrating Step 2: Align and insert Legs (K) and (L) into both ends of the Front Rail (M).

STEP 2.
Align and insert Legs (K) and (L) into both ends of the Front Rail (M).

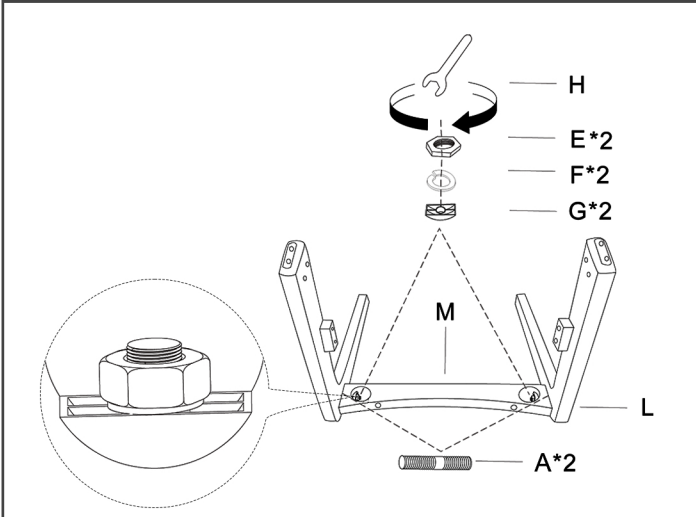


Diagram illustrating Step 3: Secure the Front Rail (M) to Legs (K) and (L) by tightening the Double End Studs (A*2) with Half Moon Washers (G*2), Spring Washers (F*2), and Nuts (E*2).

STEP 3.
Secure the Front Rail (M) to Legs (K) and (L) by tightening the Double End Studs (A*2) with Half Moon Washers (G*2), Spring Washers (F*2), and Nuts (E*2).

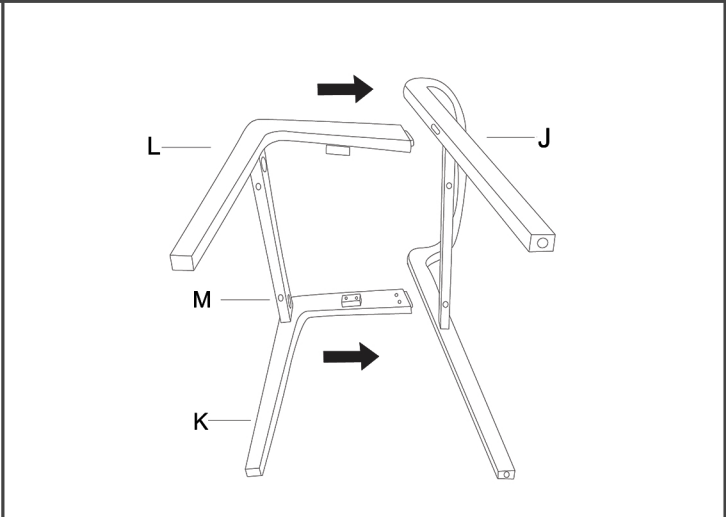


Diagram illustrating Step 4: Align and insert the tenons of Legs (K) and (L) into the mortises of the Back Leg (J).

STEP 4.
Align and insert the tenons of Legs (K) and (L) into the mortises of the Back Leg (J).

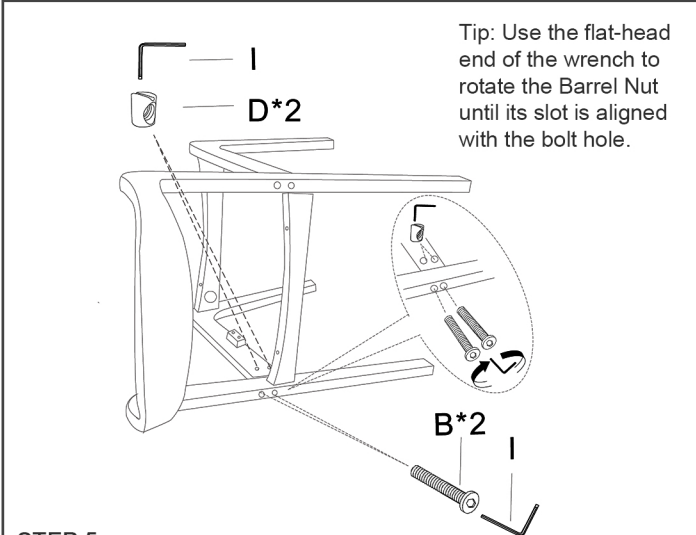


Diagram illustrating Step 5: Insert Barrel Nuts (D*2) into the holes on Leg (L) until they are fully seated at the bottom. Thread Bolts (B*2) through Leg (J) into Nuts (D*2) and tighten.

STEP 5.
Insert Barrel Nuts (D*2) into the holes on Leg (L) until they are fully seated at the bottom. Thread Bolts (B*2) through Leg (J) into Nuts (D*2) and tighten.

Tip: Use the flat-head end of the wrench to rotate the Barrel Nut until its slot is aligned with the bolt hole.



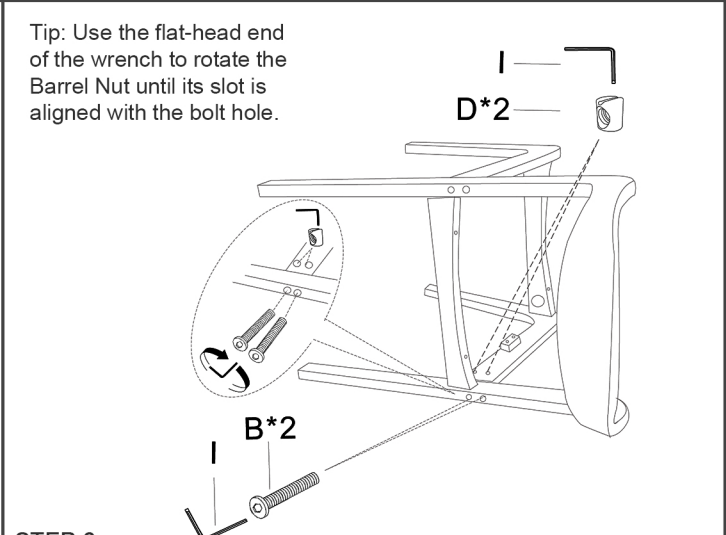


Diagram illustrating Step 6: Insert Barrel Nuts (D*2) into the holes on Leg (K) until they are fully seated at the bottom. Thread Bolts (B*2) through Leg (J) into Nuts (D*2) and tighten.

STEP 6.
Insert Barrel Nuts (D*2) into the holes on Leg (K) until they are fully seated at the bottom. Thread Bolts (B*2) through Leg (J) into Nuts (D*2) and tighten.

Tip: Use the flat-head end of the wrench to rotate the Barrel Nut until its slot is aligned with the bolt hole.

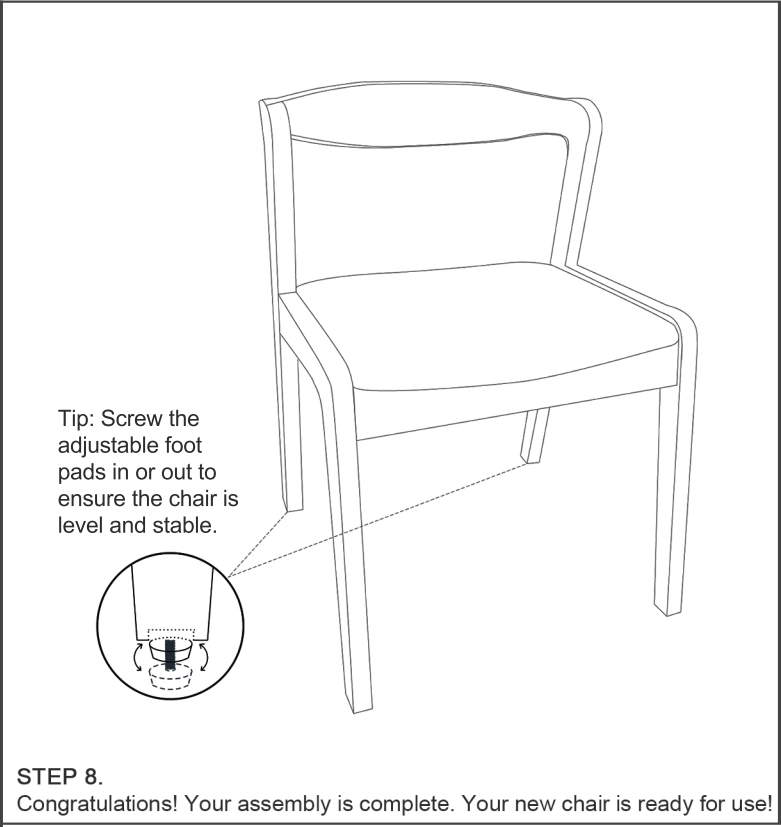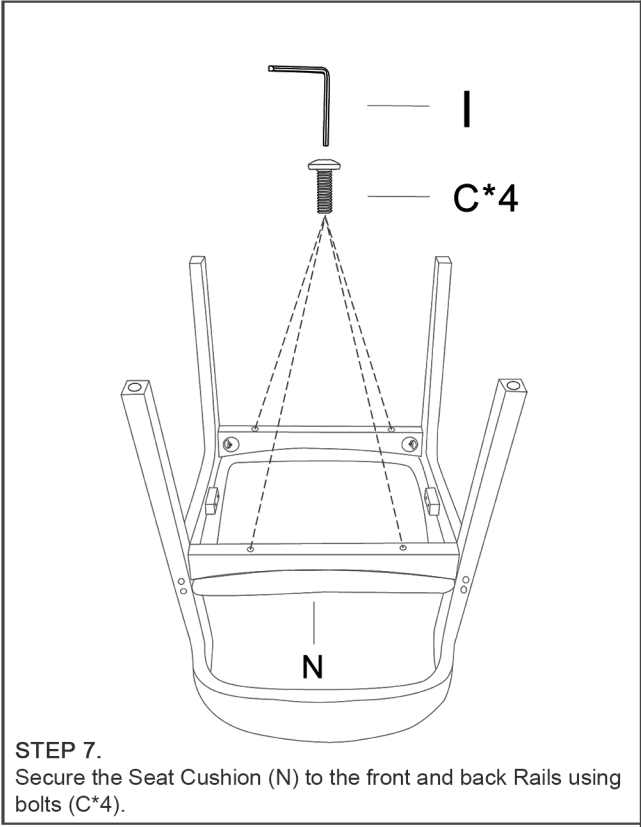

WARRANTY TERMS & CONDITIONS

1. We provide warranty for the product for one year.
2. The warranty period starts on the delivery date.
3. If the product has quality problems, contact us and we promise we will solve it for you.

CORRECT SITTING POSITION

