


# Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

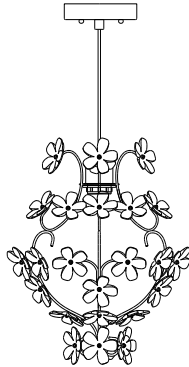

## Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes


## Part List and Hardware List

| PIECE          | DESCRIPTION    | PICTURE   | QUANTITY | PIECE | DESCRIPTION    | PICTURE   | QUANTITY |
|----------------|----------------|---|----------|-------|----------------|---|----------|
| A              | Wire Nut       |  | 3X       | E     | Ball Nut       |  | 56X      |
| B              | Mounting Plate |  | 1X       | F     | Metal Frame    |  | 1X       |
| C              | Mounting Screw |  | 2X       | G     | Socket Ring    |  | 1X       |
| D              | Canopy         |  | 1X       | H     | Socket         |  | 1X       |
| D <sub>1</sub> | Collar         |  | 1X       | I     | Bulb           |  | 1X       |
| D <sub>2</sub> | Allen Screw    |  | 1X       | J     | Flower Acrylic |  | (54+1)X  |
| D <sub>3</sub> | Allen Wrench   |  | 1X       |       |                |   |          |

# Installation


## Step 1

Unpack all parts from cartons carefully.  
Separate the Mounting Plate(B) from the Canopy(D)  
by removing the Canopy Nut(E) anti-clockwise.  
The adjustment or shortening of the lighting fixtures  
suspension length is only needed if the factory set cord  
length is not appropriate for your installation.Adjust the  
power cord length by loose the Allen Screw(D2) of the  
Colloar(D1) with the Allen wench (D3), tighten the Allen  
Screw(D2) if the cord length is desired.

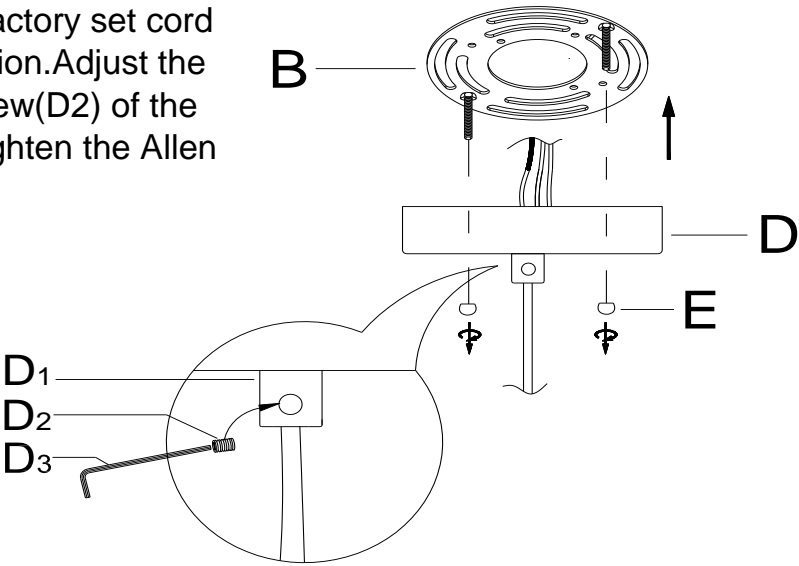


## Step 2 Wire connection

| Connect,Hot,Black or Red outlet Supply Wire to:           | Connect,Neutral,White Outlet Supply Wire to:             |
|---|--|
| Black   | White  |
| *Parallel Cord(round&smooth)                              | *Parallel Cord(square&ridged)                            |
| Clear,Brown,Gold or Black without Tracer(colored stripes) | Clear,Brwn,Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor      | Insulated Wire(not green)with Silver metal conductor     |



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and  
ridged and the hot wire will be round in shape and smooth.(See illustration on left)



### Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green  
ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If  
fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire  
around green grounding screw on mounting bracket. Tighten ground screw.

## Step 3

Fix the Mounting Plate(B) to the junction box with Mounting Screw (C )

Attach the Canopy (D) to the junction box and fix it by turning the Canopy Nut (F) clockwise.

Unscrew the Ball Nut(F) from the Metal Frame(G)


Unscrew the Socket Ring(H) from the Socket (E).

Place the Metal Frame(G) over the socket(E) and fix it by turning the Socket Ring(H) clockwise.

Insert the bulb (I) into the Socket (E).

Insert each Flower Acrylic(J) into the threaded portion of the Metal Frame(G), and fix it by turning the Ball Nut(F) clockwise till tight one by one.

**PLEASE USE ON/OFF TYPE "A" BULB  
MAX 40-WATT OR CFL BULB MAX 9-WATT  
THERE IS CFL 9-WATT BULB IN THE BOX.**

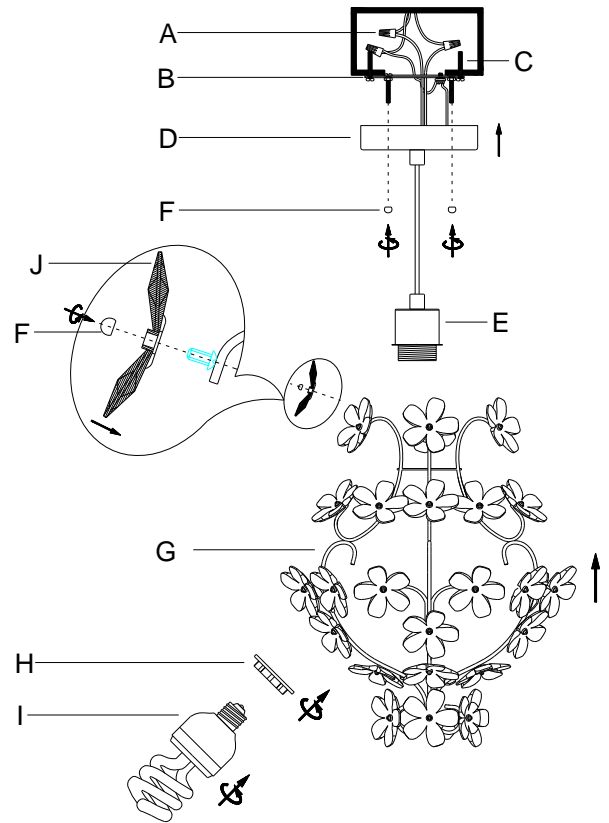

## Step 4

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP