


10' x 8' Metal Storage Shed Owner Manual & Assemble Guide_SS16232GR

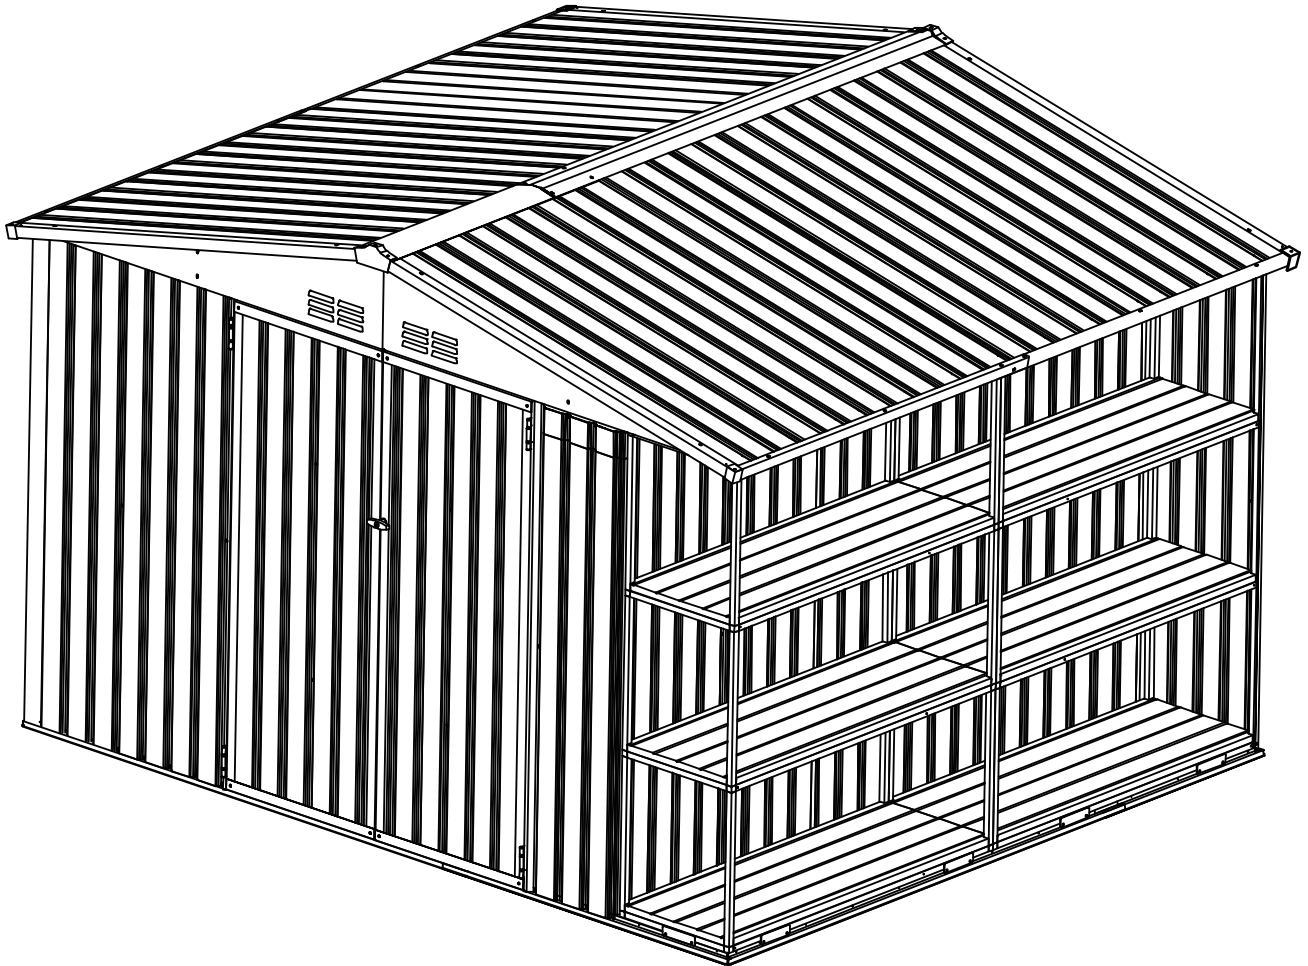

Customer Service:

If you have any problem, please contact us through the online platform.

Base size






Shed Overall Base Size:112.8"(L) x 96"(W)

Shed Inside Base Size:95.3"(L) x 96"(W)

Shed Shelf Base Size:17.5"(L) x 96"(W)

The product comes in 4 packages, pls install after receiving all packages.

Please prepare below tools before installation. (Not Included)

 Electric Screwdriver	 + Manual Screwdriver	 Ladder
Package included Tools	 Gloves x 1Pair	 Spanner x 1

ATTENTION

Care **MUST** be taken when handling various pieces of your building since many contain sharp edges.

Do NOT attempt to assemble your building before double checking that you have all parts indicated in the parts lists. Any building left partially assembled may be seriously damaged by even light winds.

Do NOT attempt to assemble your building on a windy day, the large panels can catch the wind like a “sail”, making construction difficult and unsafe. **Watch the weather closely.** Keep children and pets away from the worksite during construction and until the building is completely assembled. This will help avoid distractions and any accidents which may occur. Never concentrate your weight on the roof of the building.

Before assembling any parts, your base should be constructed and an anchoring system should be ready to use. Your building must be anchored to prevent wind damage.

ASSEMBLY

The best location is a level area with good drainage.

Allow enough space outside the building to be able to access the roof with a ladder.

USE TEAMWORK: Two or more people are required to assemble your building.

CARE & MAINTENANCE

Do NOT use power washing to clean your shed.

Combustibles and corrosives must be stored in air tight containers designed for chemical and/or combustible storage.

Rust Protection Precautions

Avoid nicking or scraping the coating surface, inside and out.







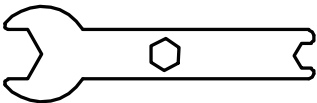

PLEASE KEEP THIS INSTRUCTION FOR FUTURE REFERENCE.

HARDWARE LIST


For missing or damaged part contact customer service. **Do NOT** return to store
Pls note: All hardware pack is placed in box C.

Key No.	Part No.	Qty.	List ✓
1	F1	553	
2	F2	42	
3	F3	32	
4	V2	146	
5	F4	4	
6	SL	70	
7	M20	1	
8	ST	2	



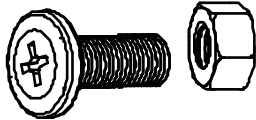





Hardware Views by Key No.

1		2		3		4	
F1		F2		F3		V2	
5		6		7		8	
F4		SL		M4		ST	





















Box_A





















PART	NO.	QTY.
	W5-K	2
	W5	16

Box_B









PART	NO.	QTY.
	K810-7L	2
	K810-7M	8
	K810-7R	2
	W3	2
	W5-C	2
	W4-C	2
	W2-HL	1
	W2-HR	1

Box_C




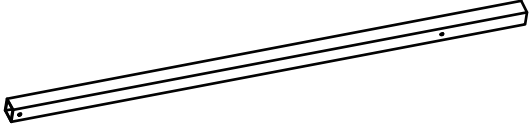



PART	NO.	QTY.
	D810-0	1
	D810-0R	1
	D810-1	2
	D810-1R	2
	K810-2	2
	K810-2R	2
	D810-3A	1
	D810-3AL	1
	D810-3B	1
	D810-3BR	1
	K810-4	2
	K810-4R	2
	K810-5L	2
	K810-5R	2
	K810-6	4
	K810-6R	4
	K810-8	4
	K810-9L	2
	K810-9R	2
	K810-10	1

PART	NO.	QTY.
	C4	4
	C3	4
	T-F	4
	C2	4
	GC	4
	GE	2
	DC	2
	F1	553
	F2	42
	F3	32
	V2	146
	F4	4
	GL	1
	DH	4
	SL	70
	M20	1
	ST	2
	C1	5
	G3	14
	G4	18

Box_C

PART	NO.	QTY.	PART	NO.	QTY.
	K810-10R	1		DLA	1
	D68-11	1		DRA	1
	UA	2		DDA	4
	DA	2		DBA	4


Box_D

PART	NO.	QTY.
	C5	15
	C5-1	1
	C6	24
	C7	14
	C9L	1
	C9R	1
	C12	6

Part List

Shed top panels


NO.	K810-7L	K810-7M	K810-7R	K810-8	K810-9L	K810-9R	K810-10	K810-10R	GC	GE
QTY.	2	8	2	4	2	2	1	1	4	2

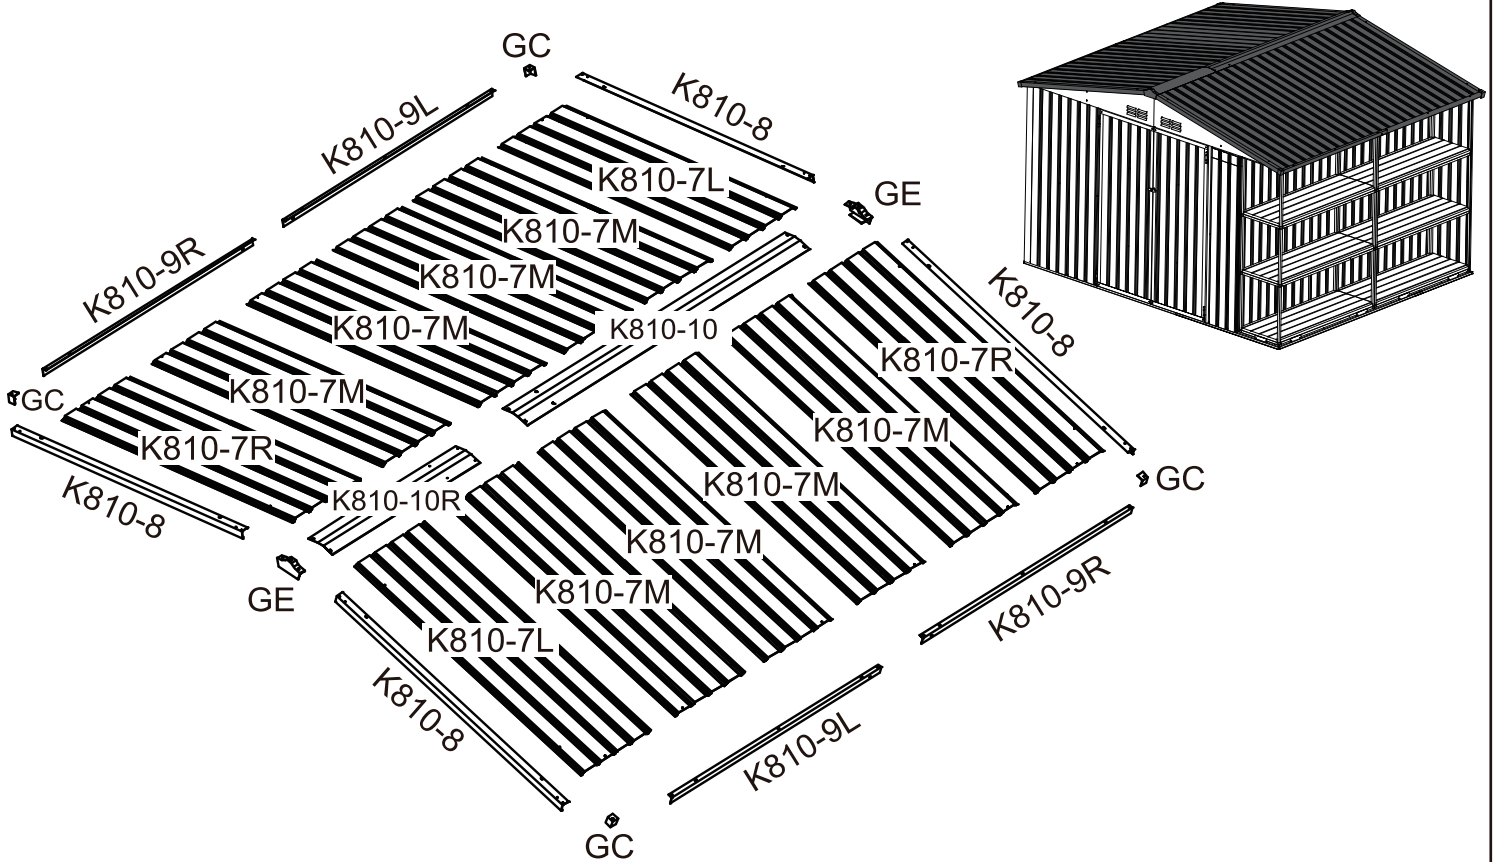

Shed top frame



NO.	K810-4	K810-4R	K810-6	K810-6R	K810-5L	K810-5R	D810-3A	D810-3AL
QTY.	2	2	4	4	2	2	1	1

NO.	D810-3B	D810-3BR	C2	C3	C4
QTY.	1	1	4	4	4


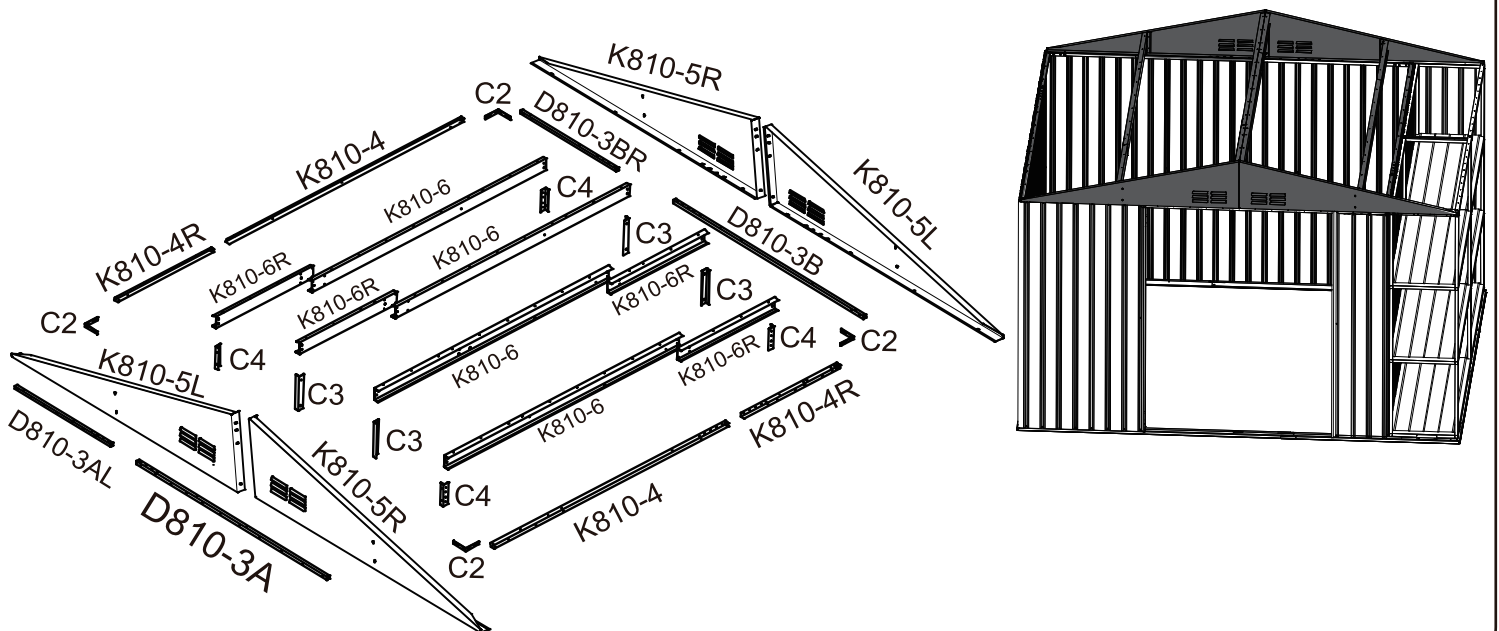


Part List

Shed Shelf	NO.	C5	C9L	C6	C7	G3	G4	C12
	QTY.	8	1	12	7	7	9	3

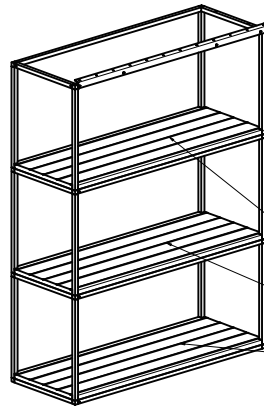
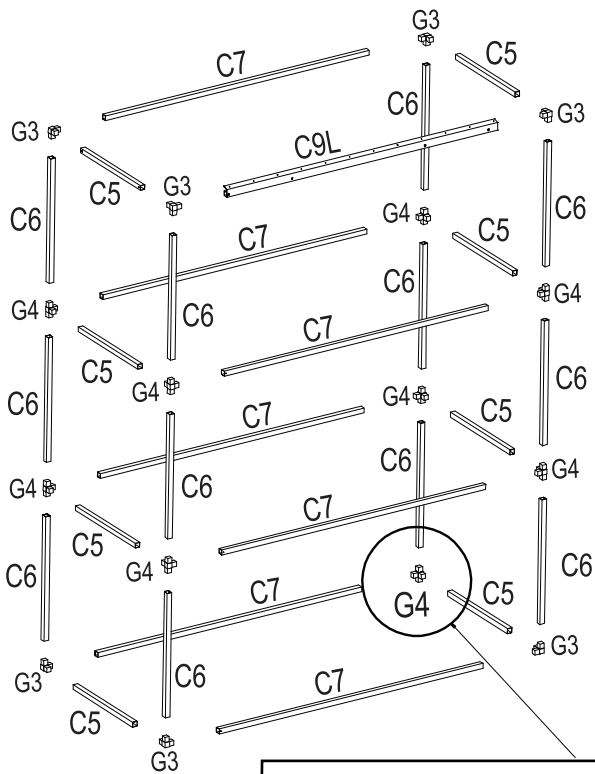


Left Shelf

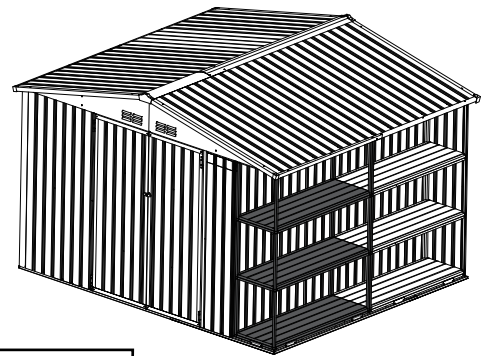



NOTE: The lower right corner of the left shelf needs to be connected with [G4] for support.

Shed Shelf	NO.	C5	C9R	C6	C7	G3	G4	C5-1	C12
	QTY.	7	1	12	7	7	9	1	3

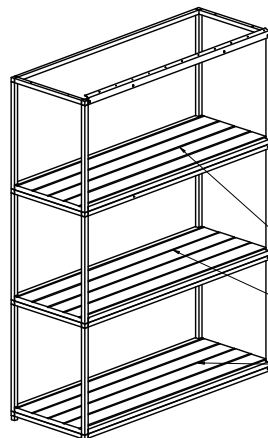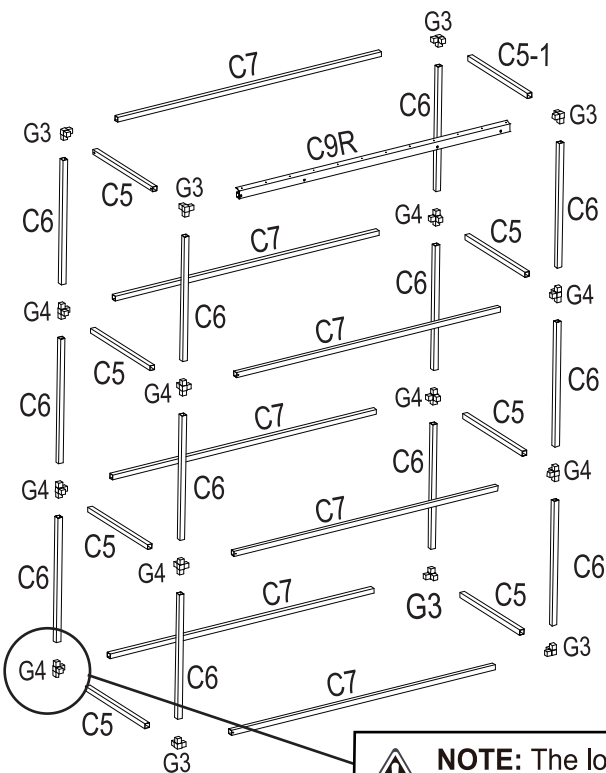



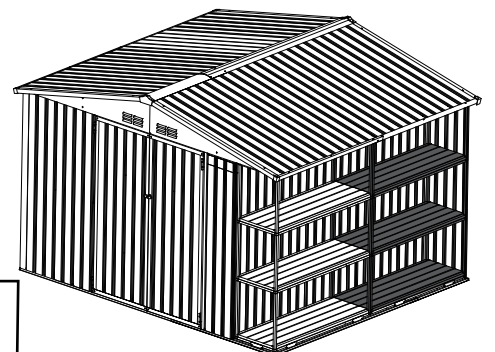





Right Shelf




NOTE: The lower left corner of the left shelf needs to be connected with [G4] for support.

Shed Base Frame Assemble


PART	NO.	QTY.
	D810-1	2
	D810-1R	2
	K810-2	2
	K810-2R	2

PART	NO.	QTY.
	D810-0	1
	D810-0R	1
	T-F	4
	F1	41


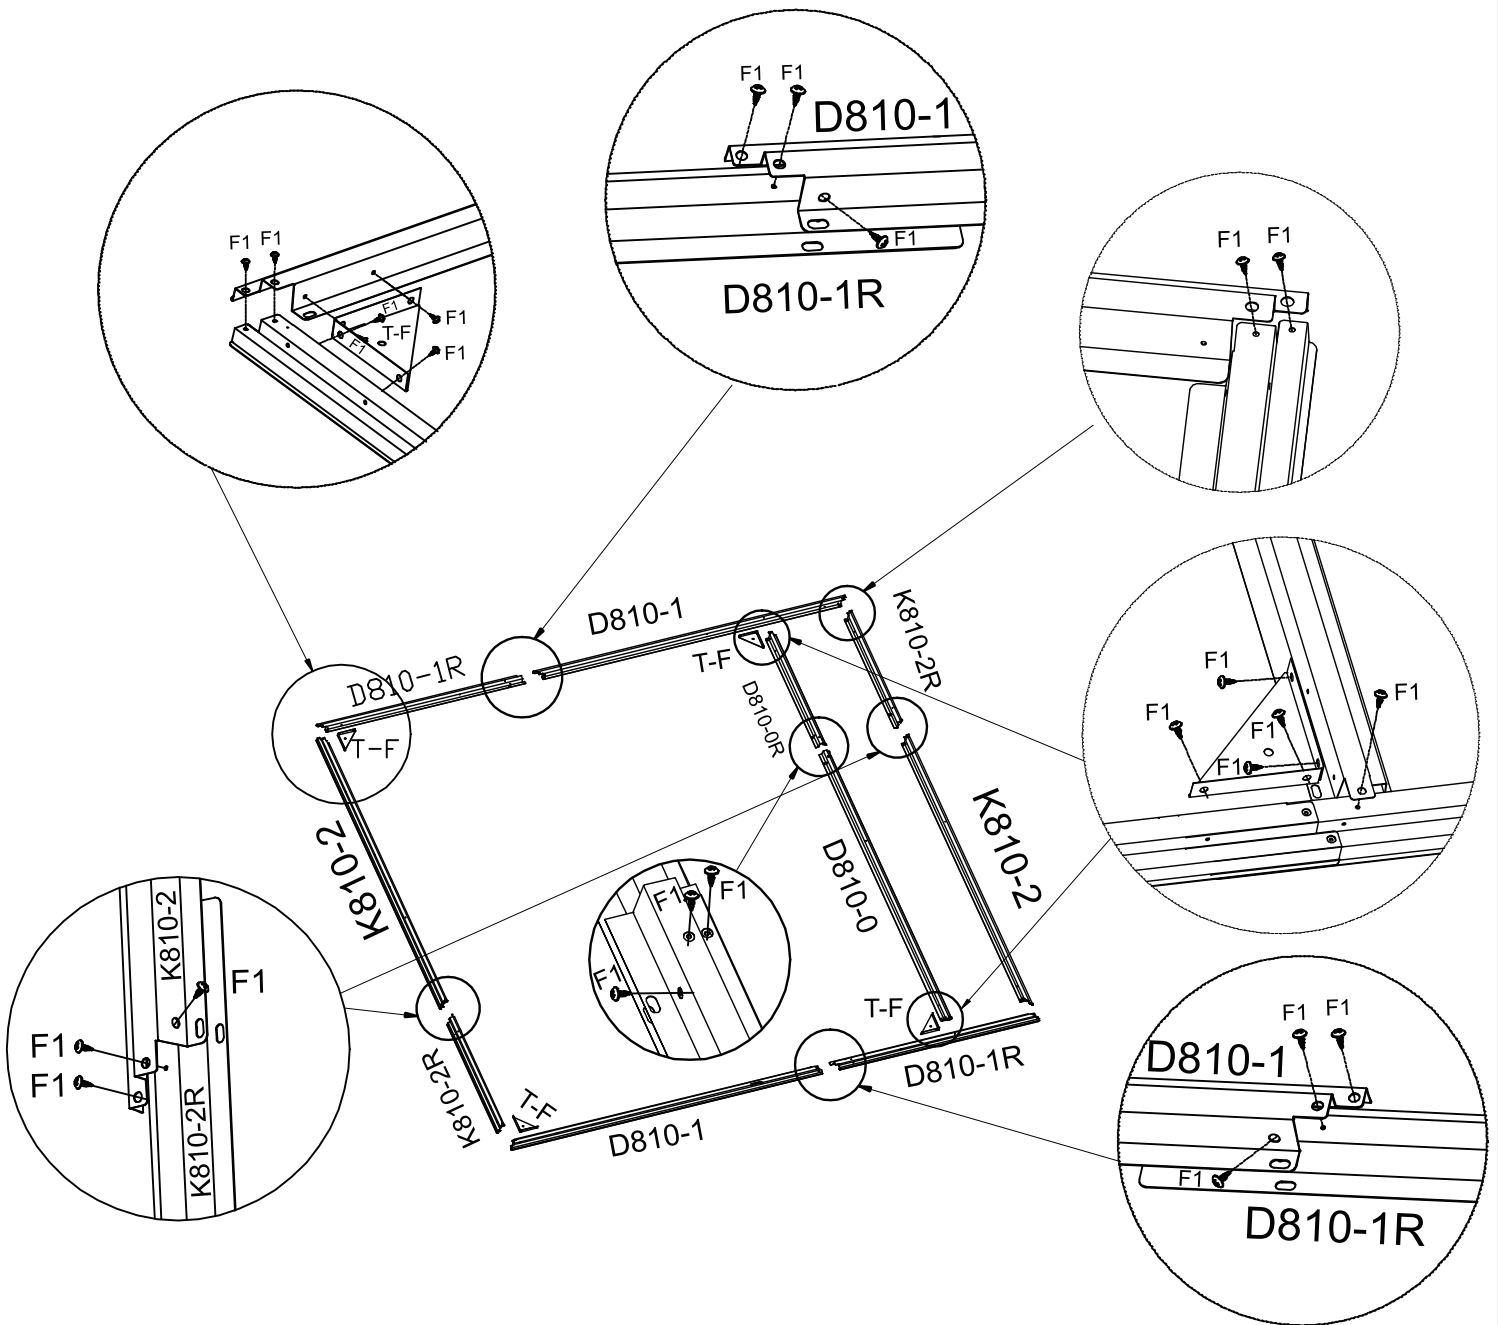


The frame is sharp, must pay attention to the installation of gloves, to avoid scratches


Shed Side Panels Assemble

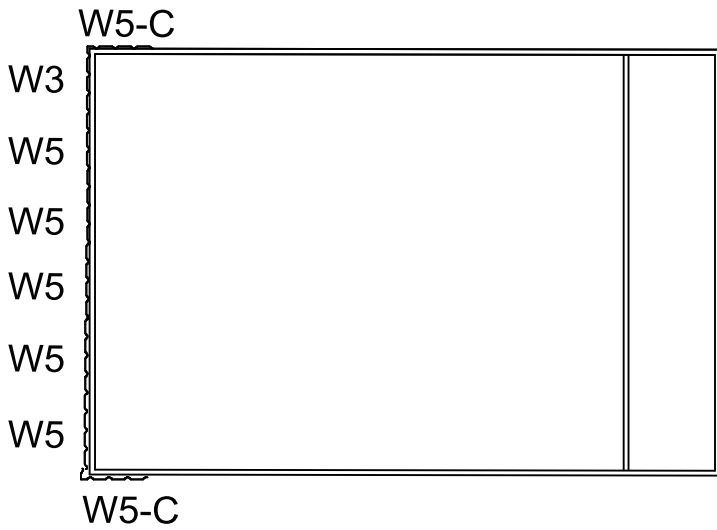



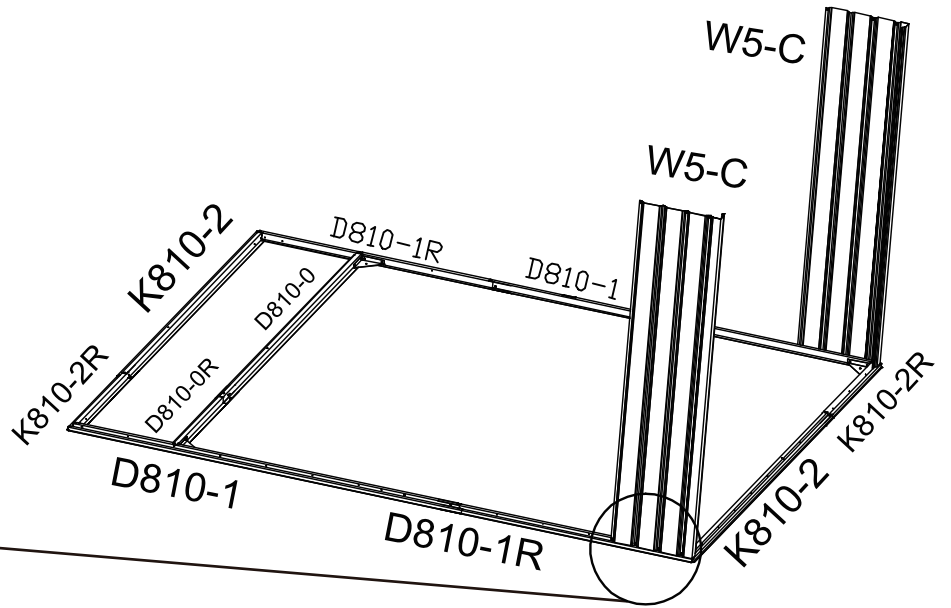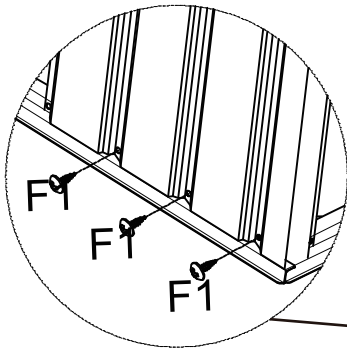


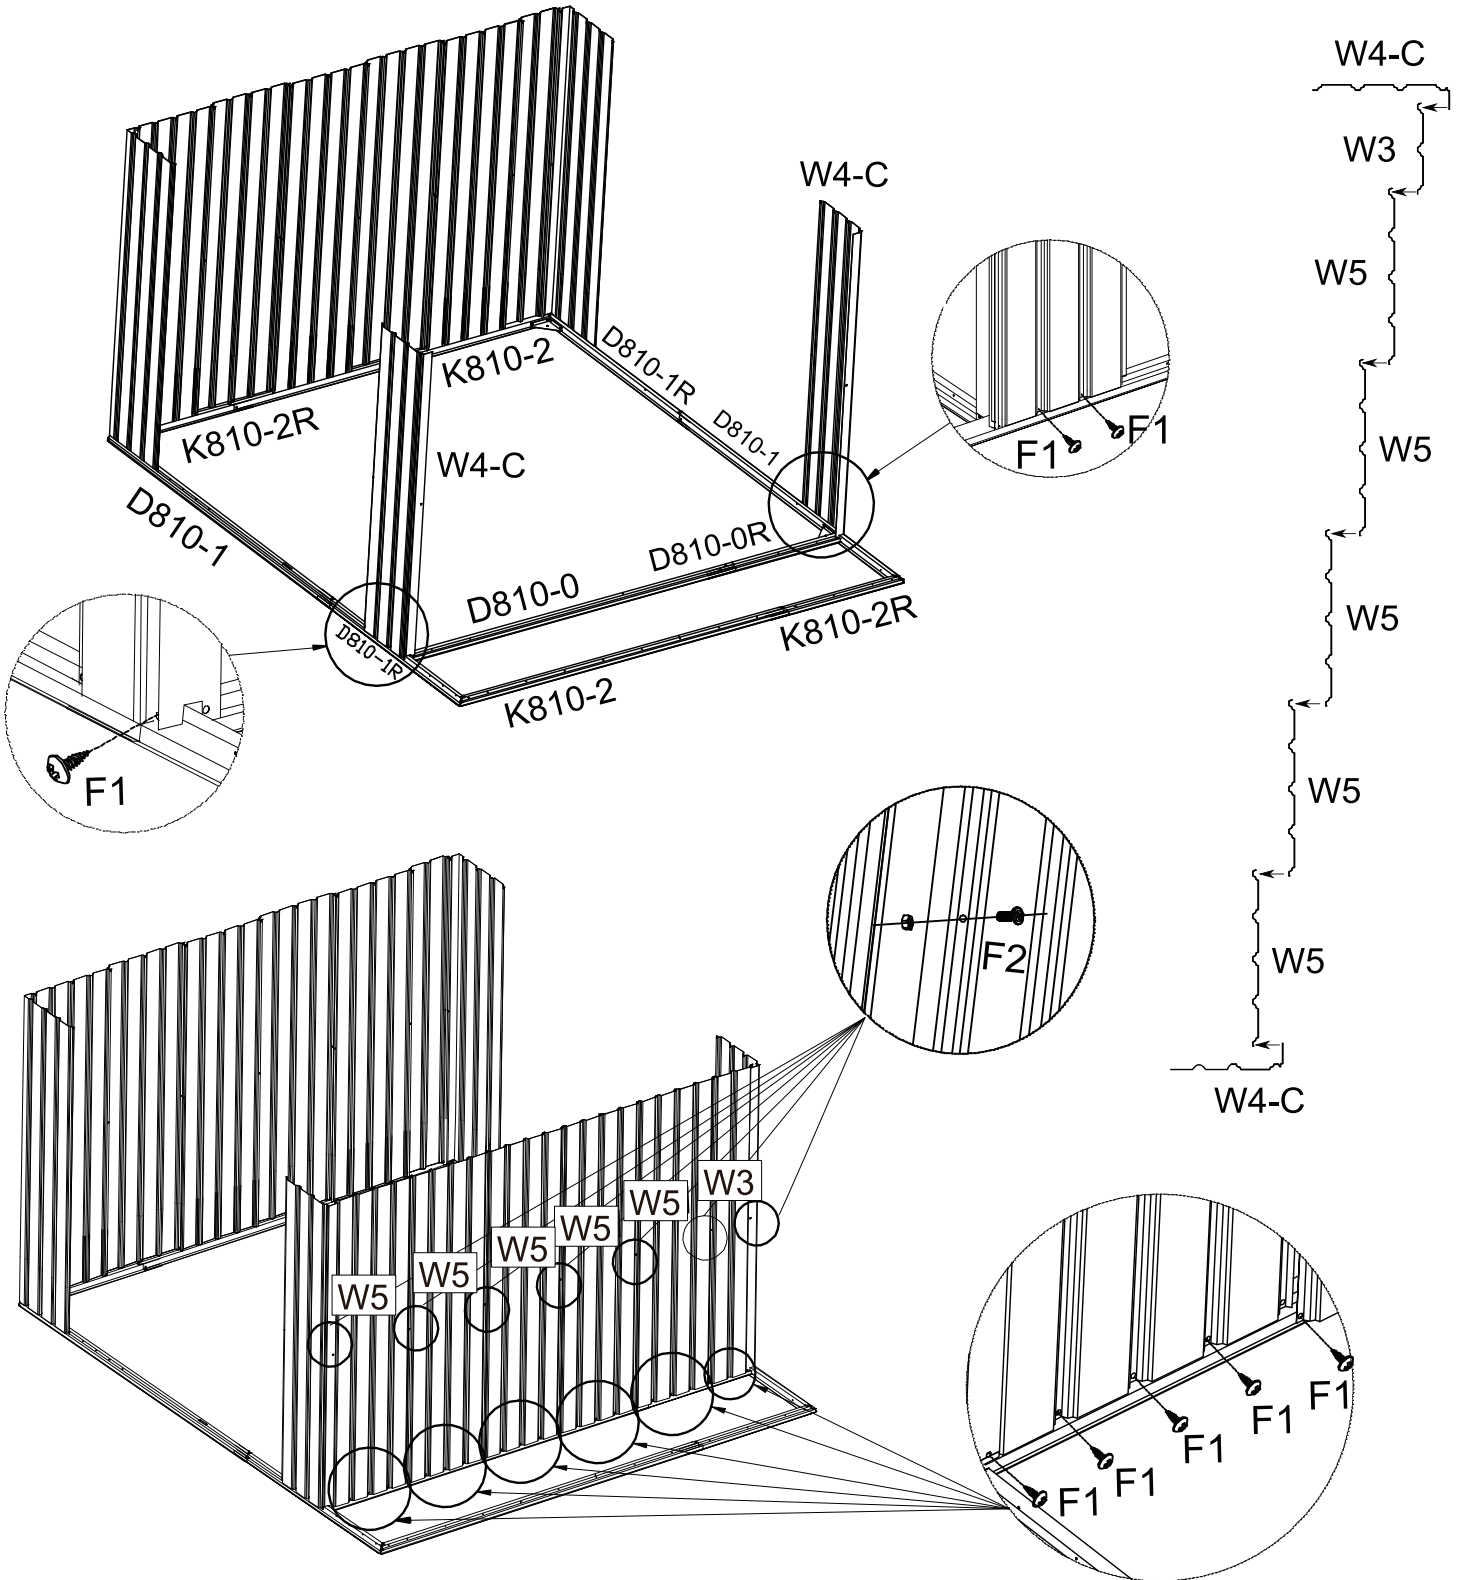
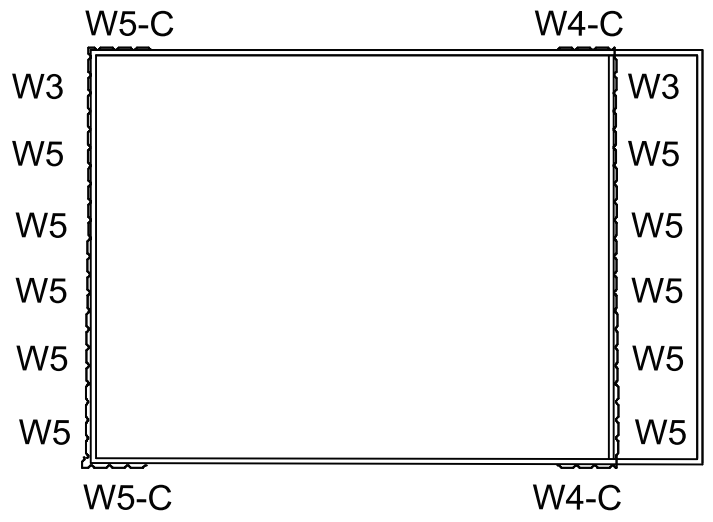
PART	NO.	QTY.
	W5-C	2
	W5	5
	W3	1
	F1	29
	F2	7

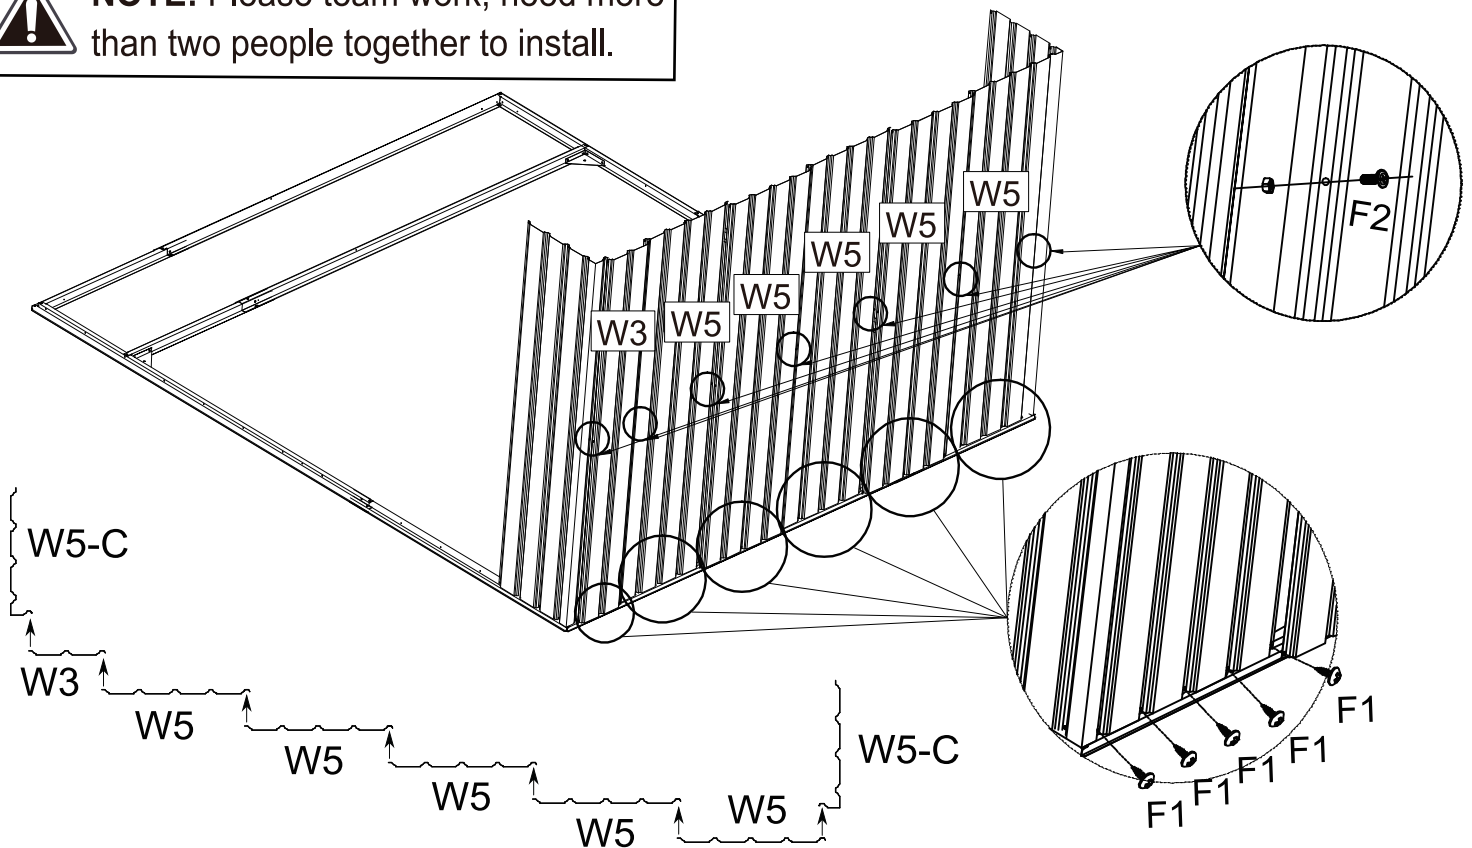









NOTE: Please team work, need more than two people together to install.













PART	NO.	QTY.
	W4-C	2
	W3	1
	W5	5
	F1	27
	F2	7

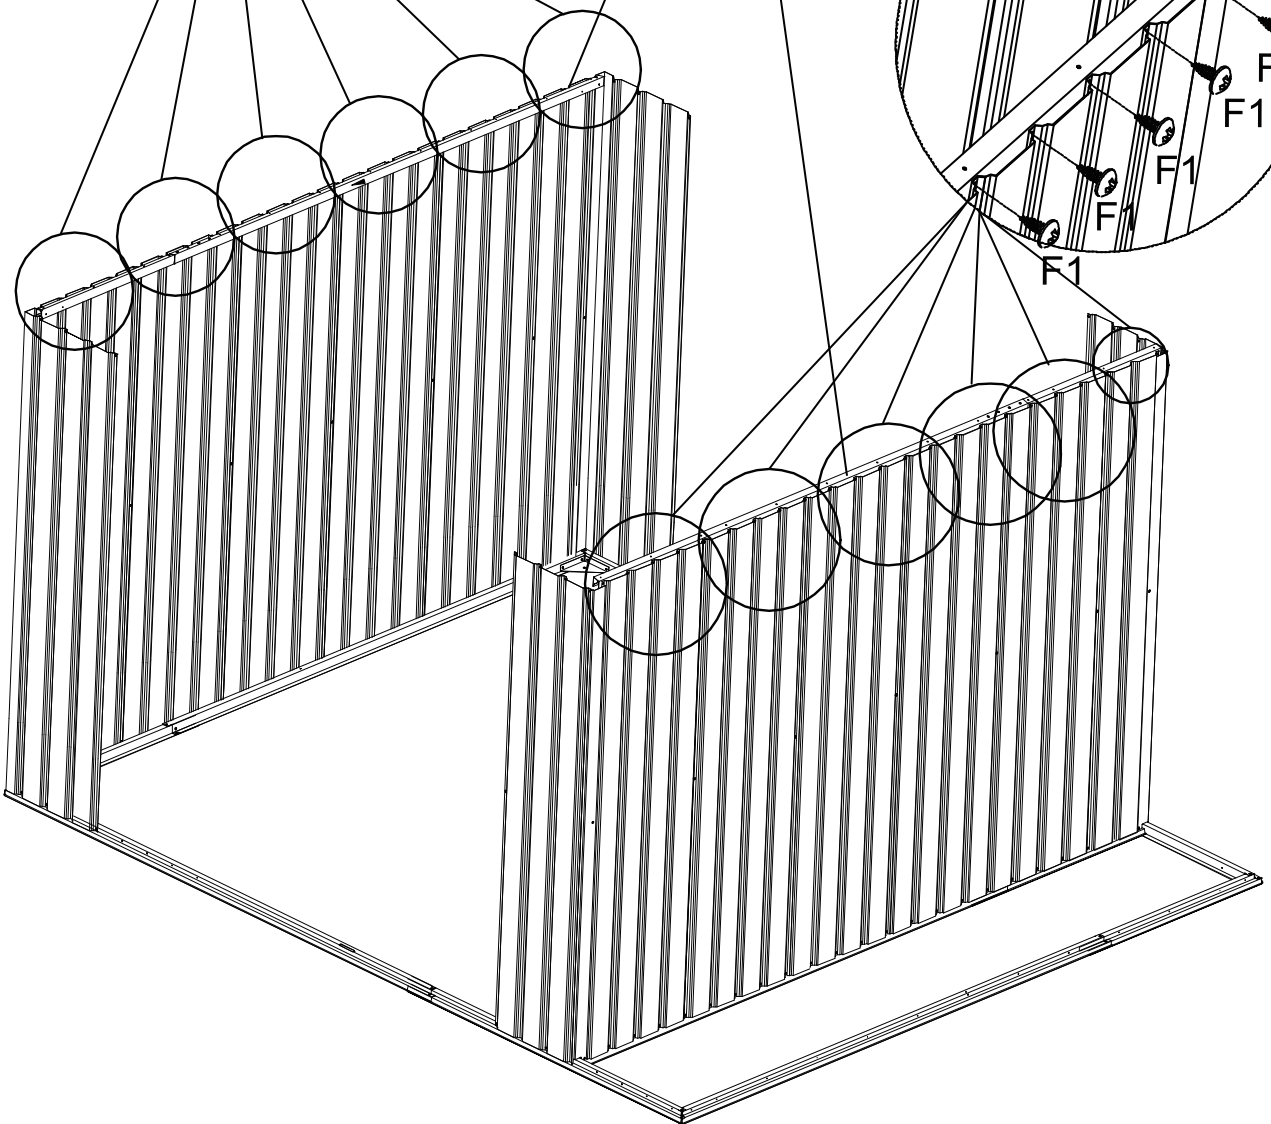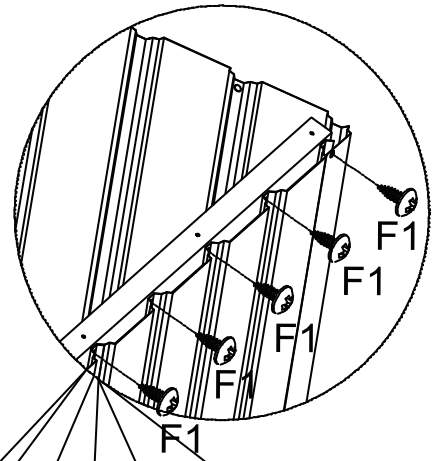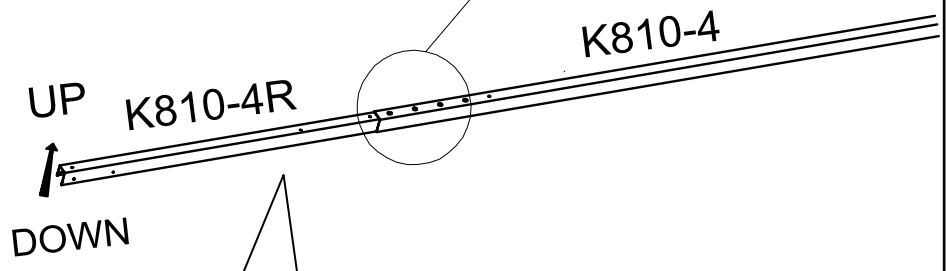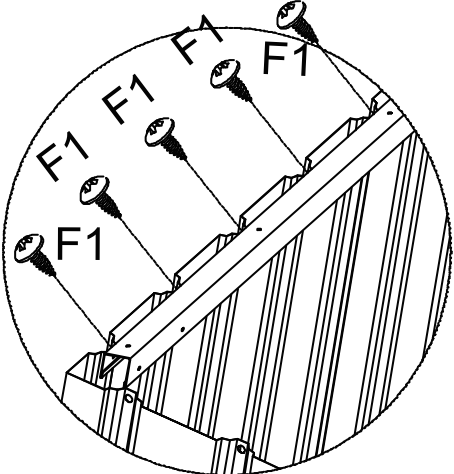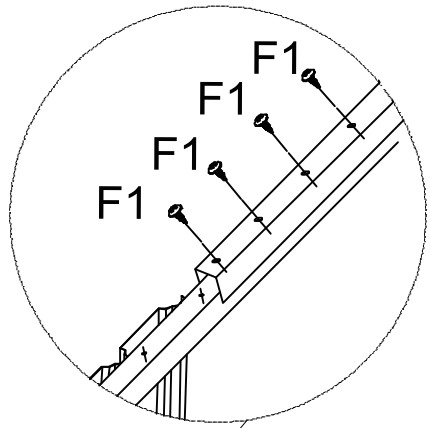






PART	NO.	QTY.
	K810-4	2
	K810-4R	2
	F1	54

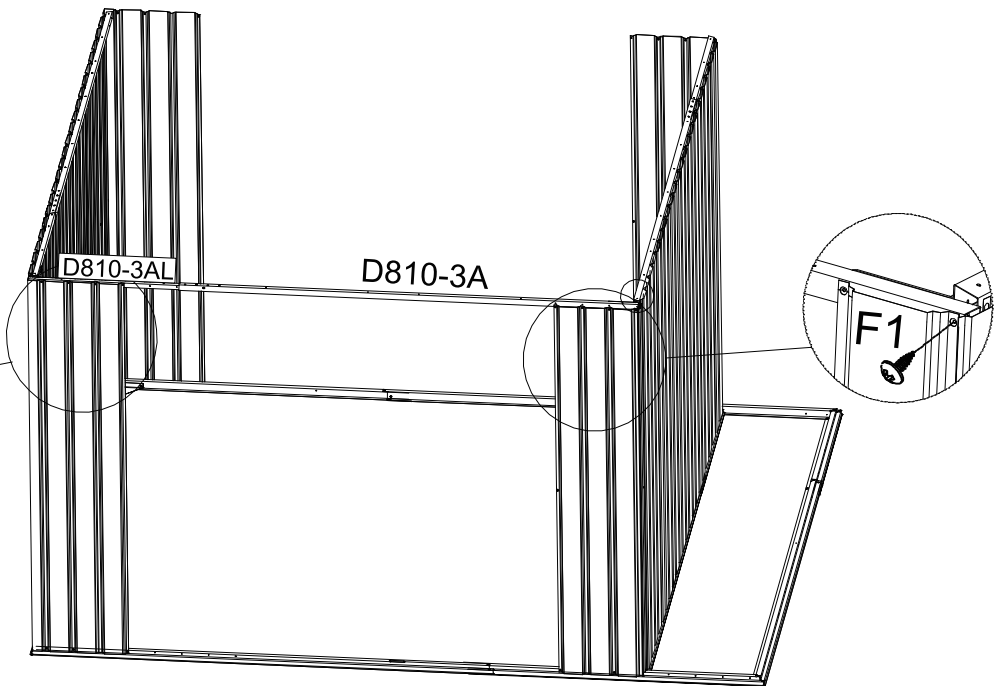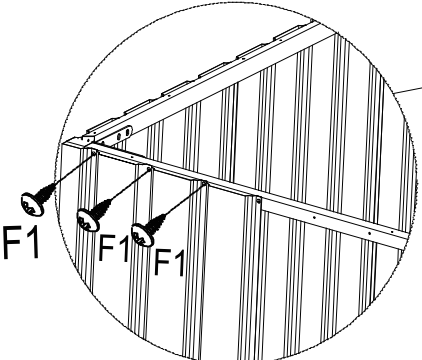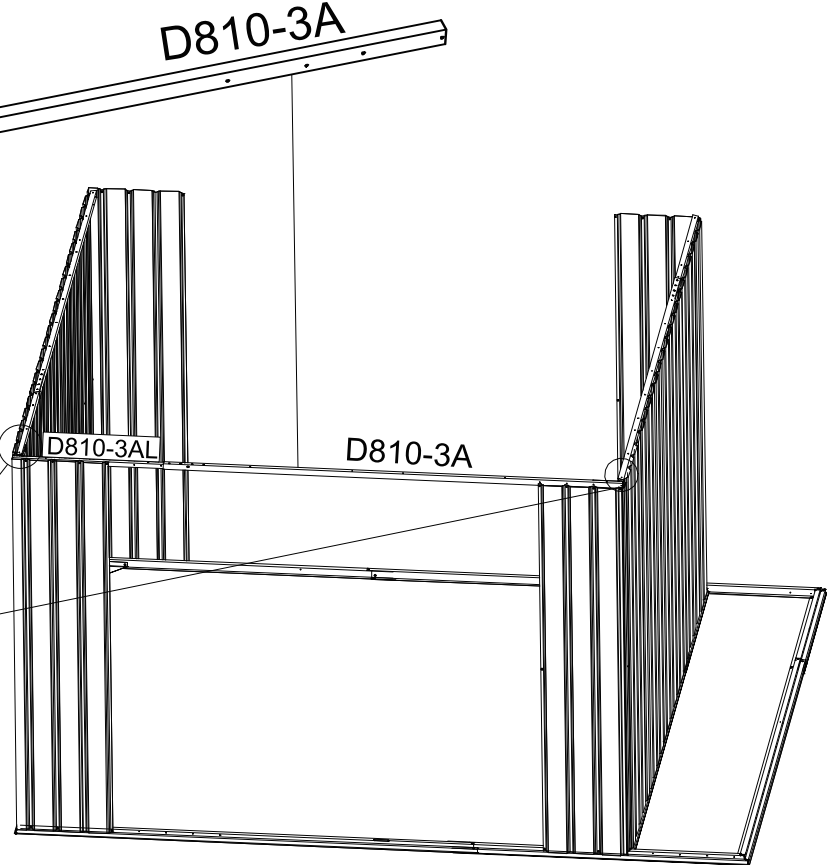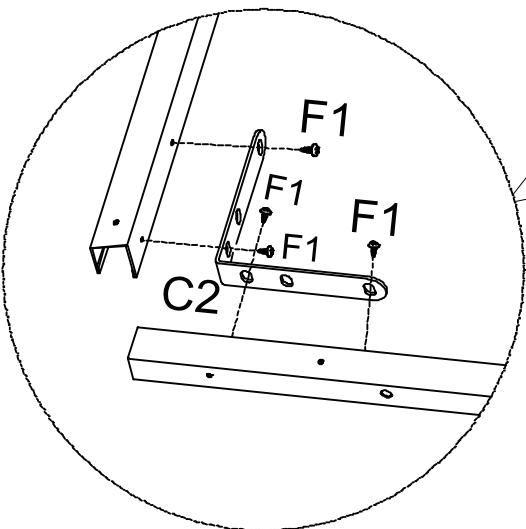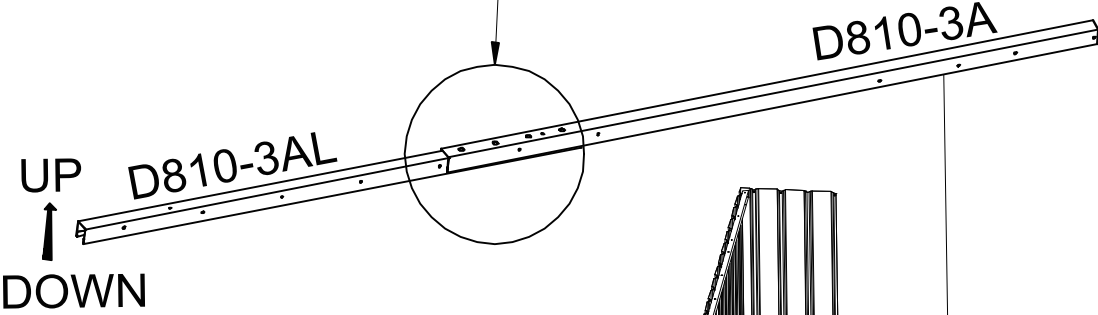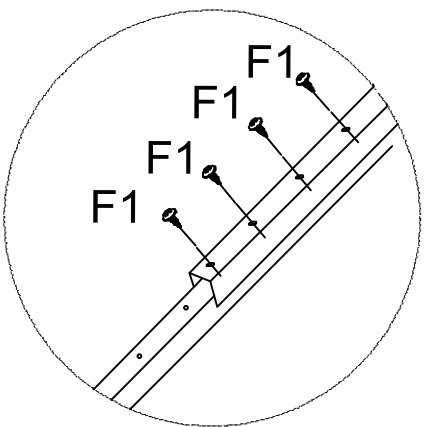



PART	NO.	QTY.
	D810-3A	1
	D810-3AL	1
	F1	17
	C2	2

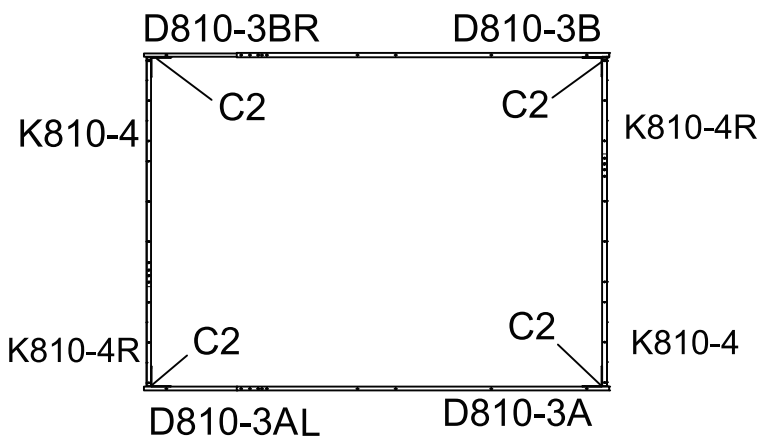




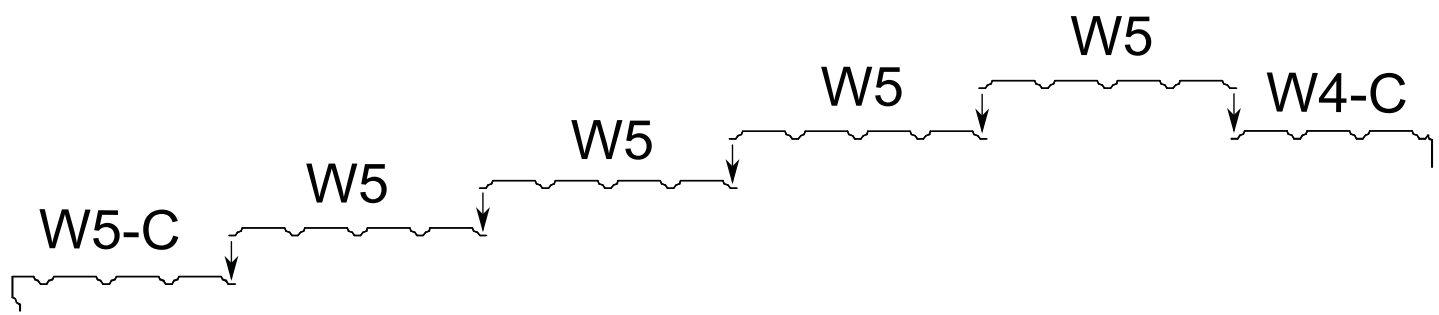
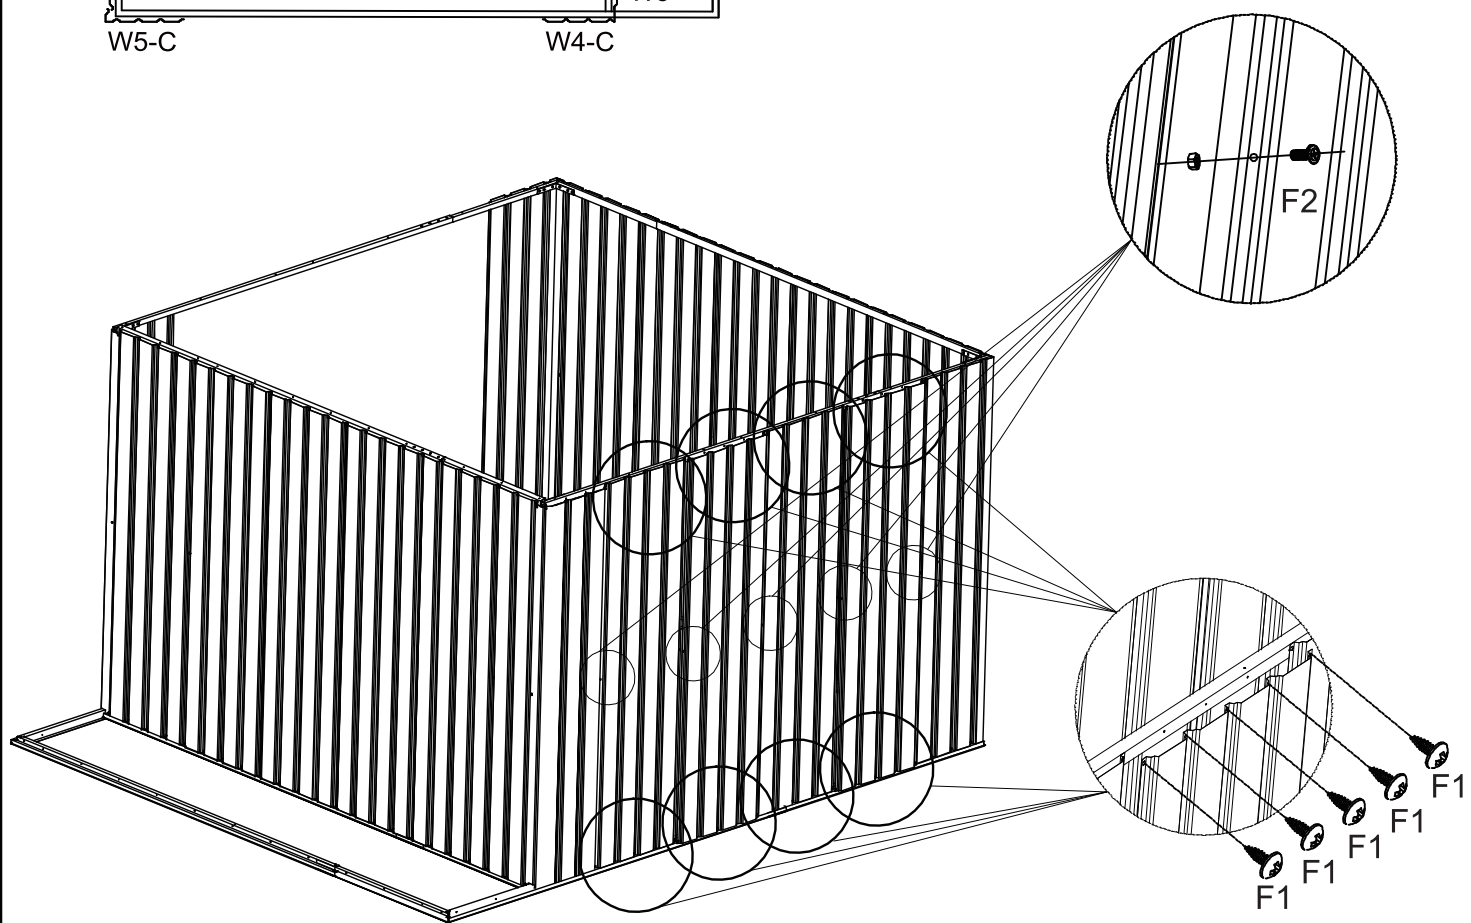


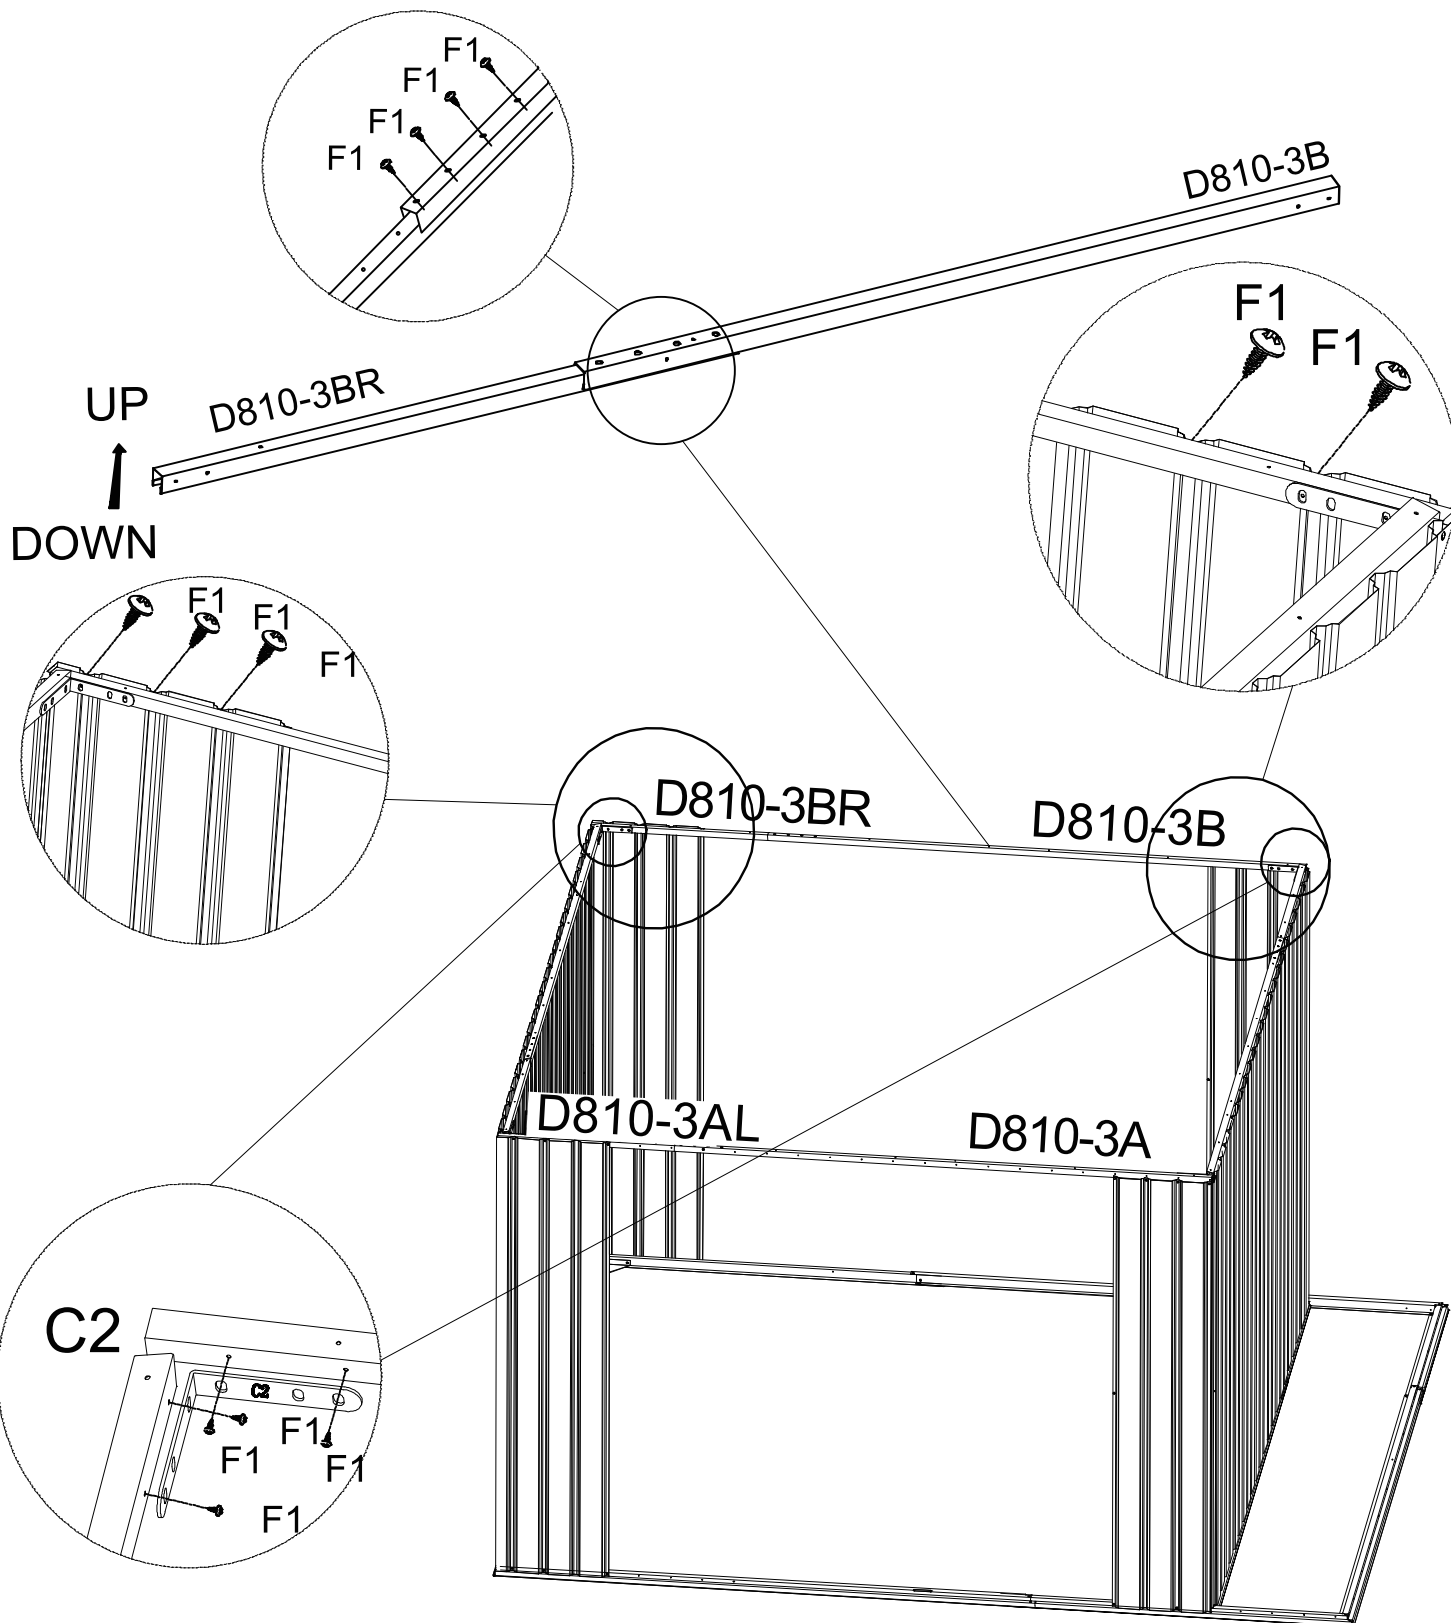
PART	NO.	QTY.
	D810-3B	1
	D810-3BR	1
	F1	17
	C2	2

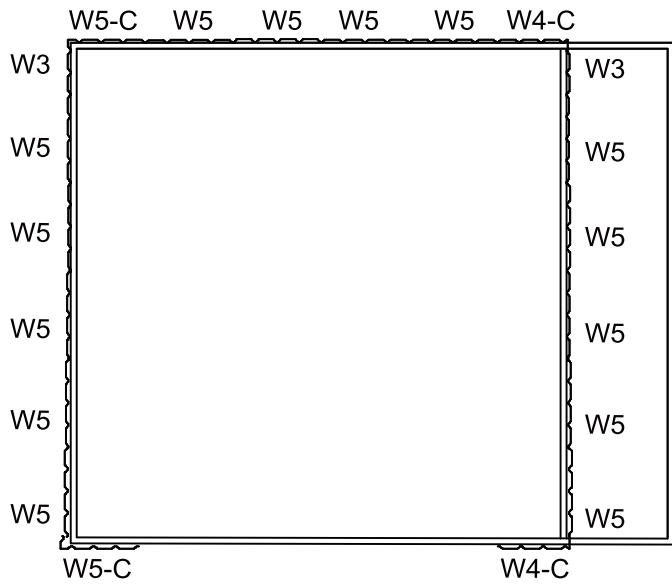











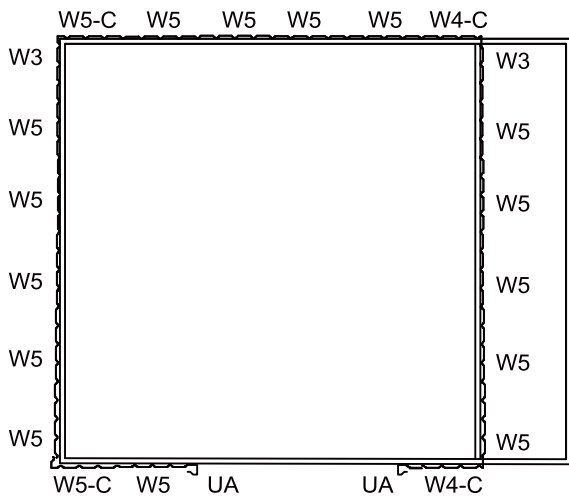


PART	NO.	QTY.
	W5	4
	F1	34
	F2	5








PART	NO.	QTY.
	W5	1
	UA	2
	F1	12
	F2	3

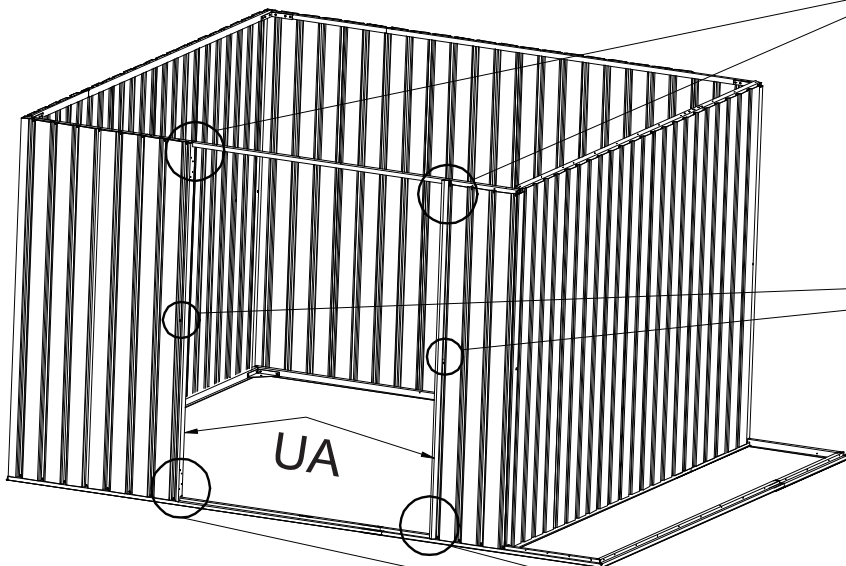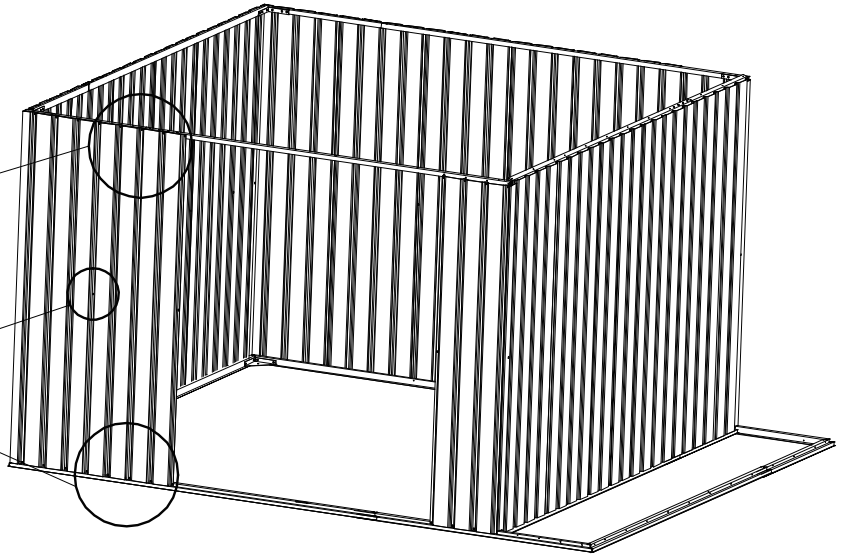

Shelf Assemble

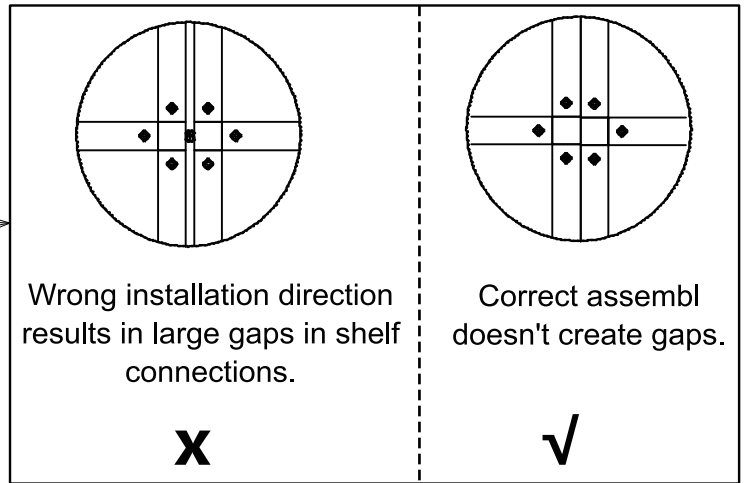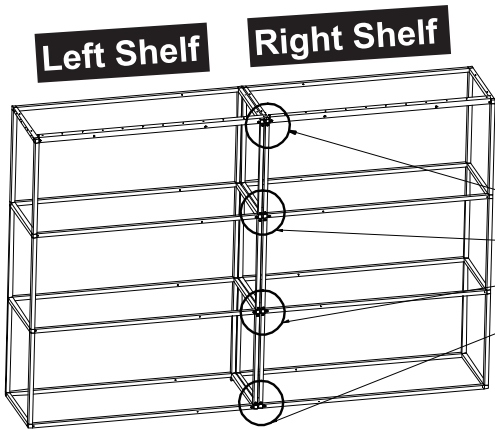

Note: The left and right sides of the screw installation direction is not consistent, the left side of the screw is installed from outside to inside, the right side of the screw is installed from inside to outside.



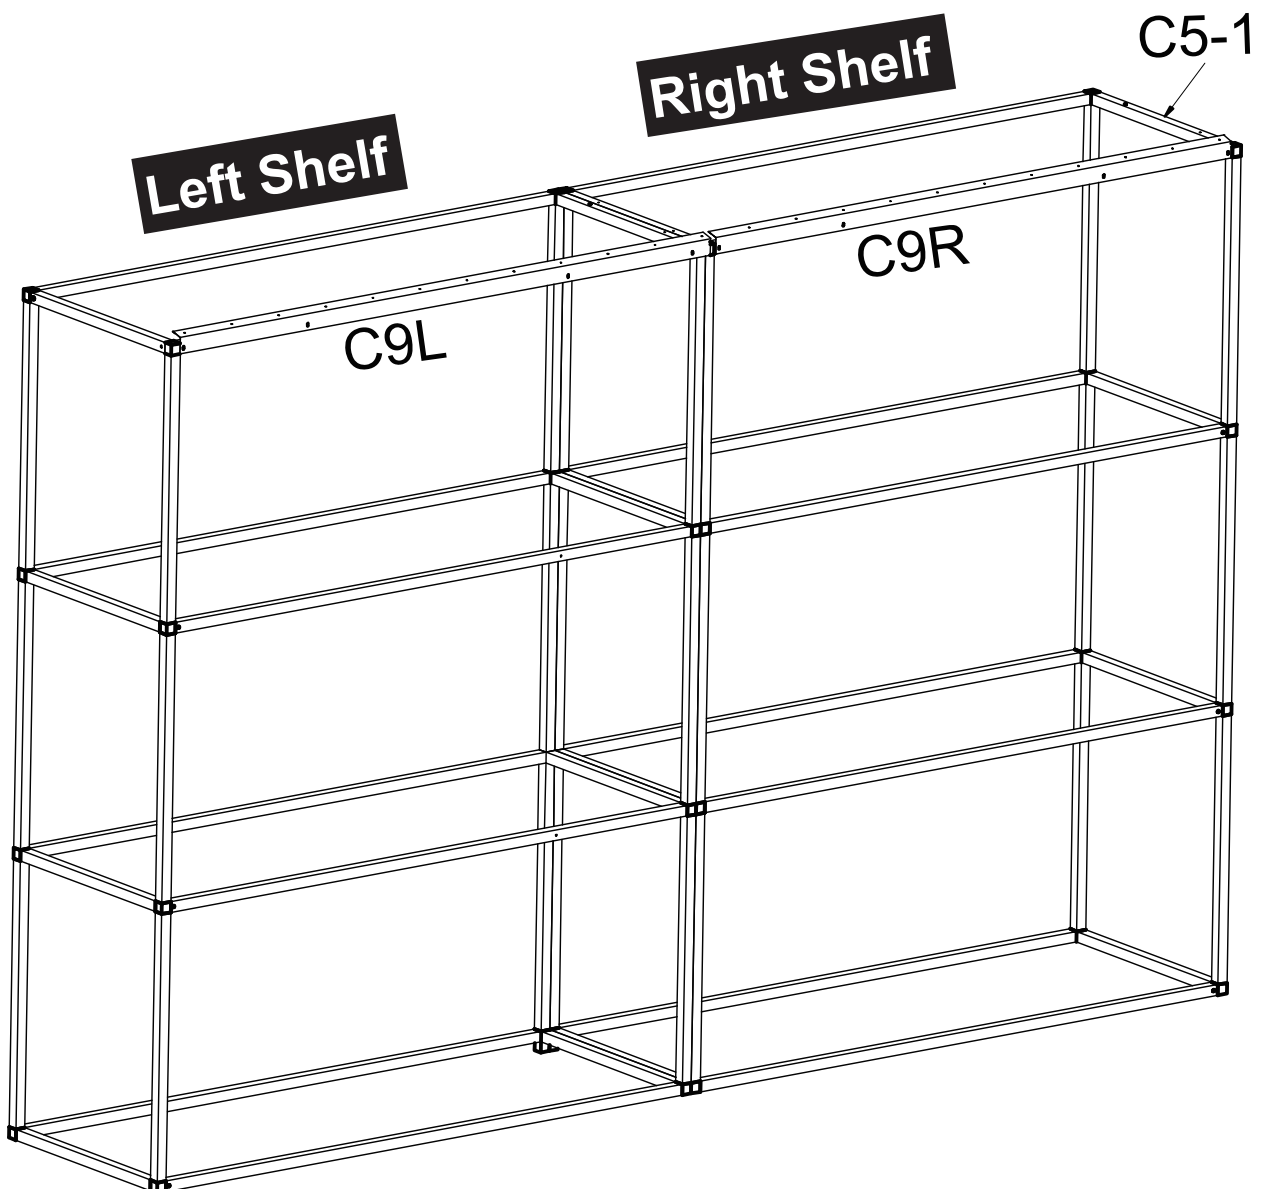


Left Shed Shelf Assemble



Note: C9L assembly attention to the upper and lower order, there are 12 holes on one side is upward.





PART	NO.	QTY.
	G3	7
	G4	9
	F1	56
	C5	8
	C6	12
	C7	7
	C9L	1

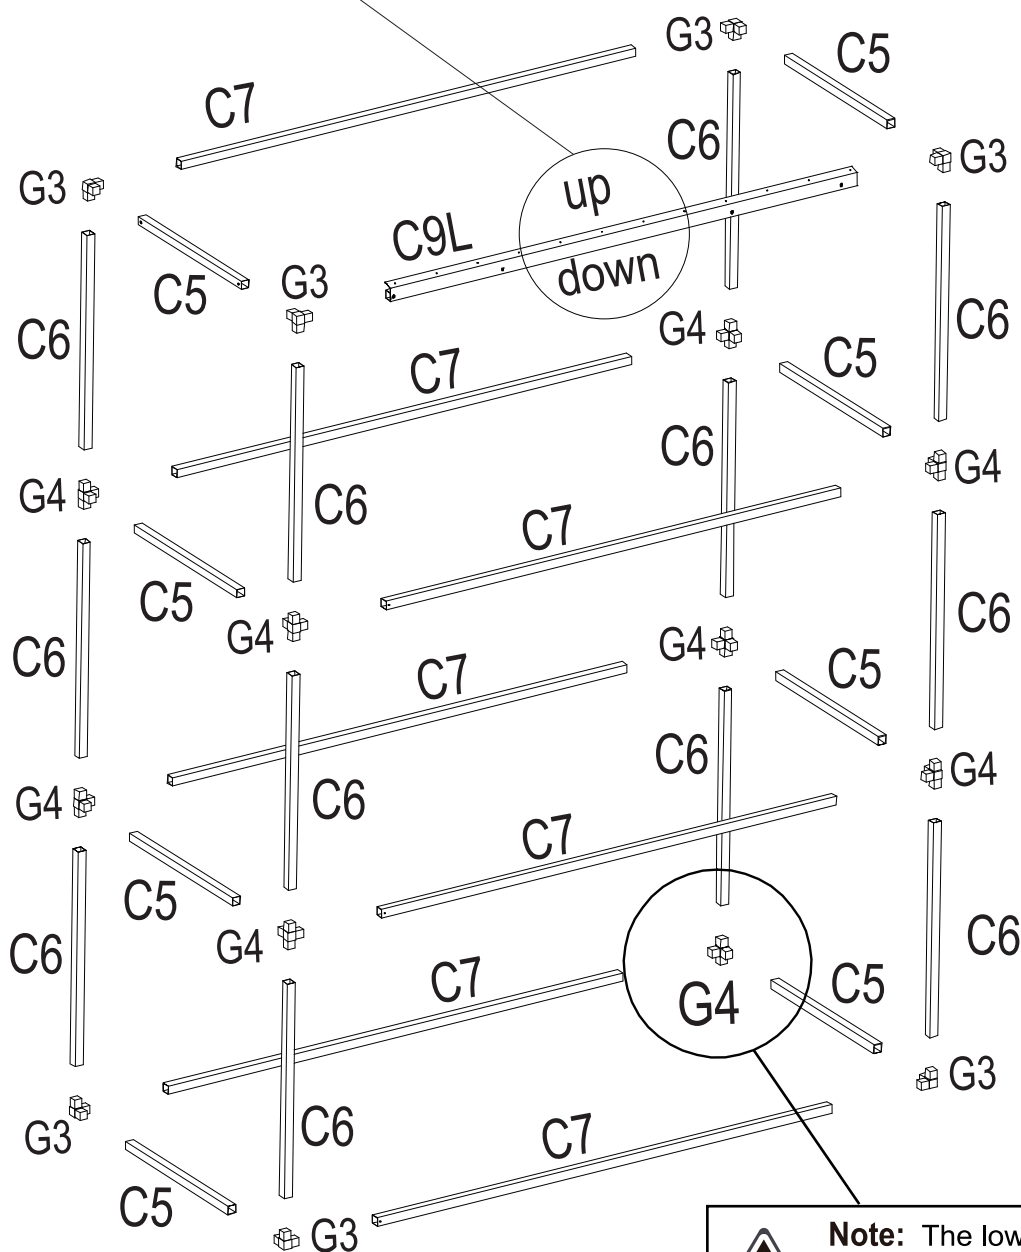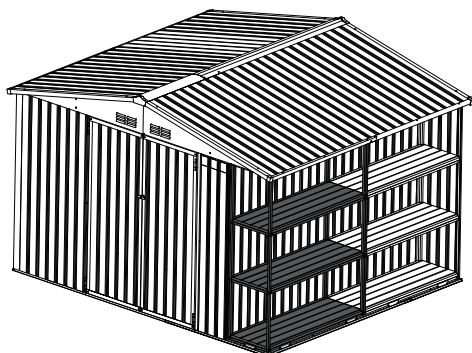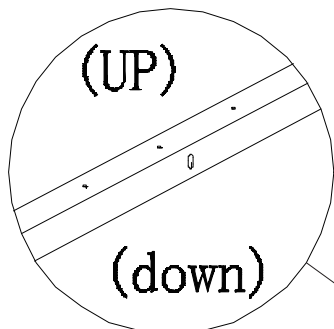



Note: The lower right corner of the left shelf needs to be connected with [G4] for support.



Note: The left and right sides of the screw installation direction is not consistent, the left side of the screw is installed from outside to inside, the right side of the screw is installed from inside to outside.

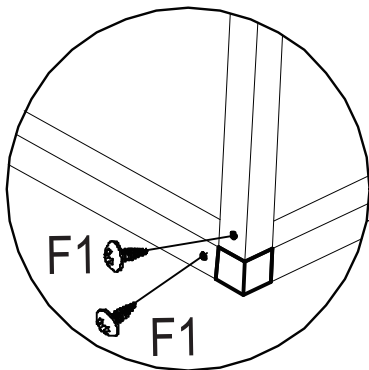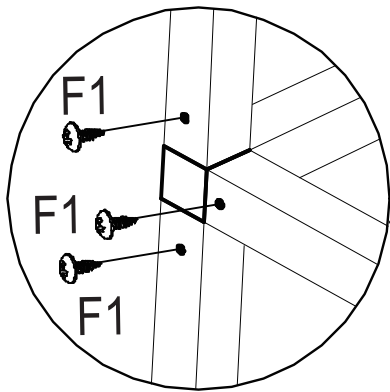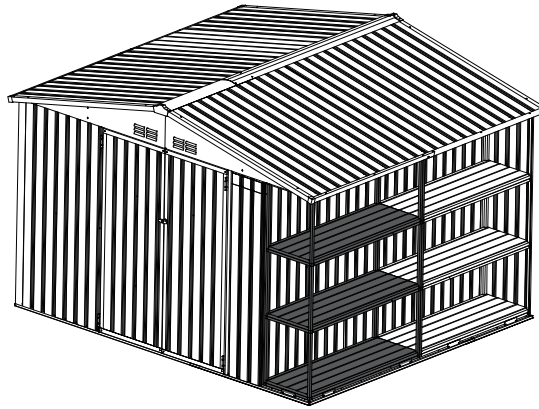

left side

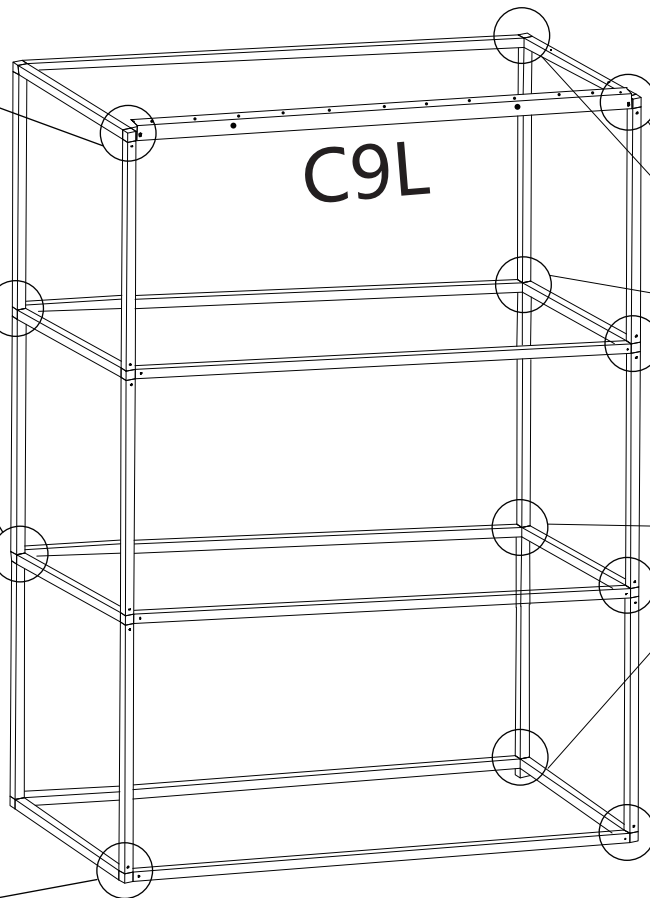

Right side











Note: The left side of the screw is installed from outside to inside.



Note: The right side of the screw is installed from inside to outside.

Right Shed Shelf Assemble

PART	NO.	QTY.
	C5-1	1
	C5	7
	C6	12
	C7	7


PART	NO.	QTY.
	G3	7
	G4	9
	F1	56
	C9R	1



Note: C9L assembly attention to the upper and lower order, there are 12 holes on one side is upward.





Note: C5-1 assembly attention to the upper and lower order, there are 10 holes on one side is upward.

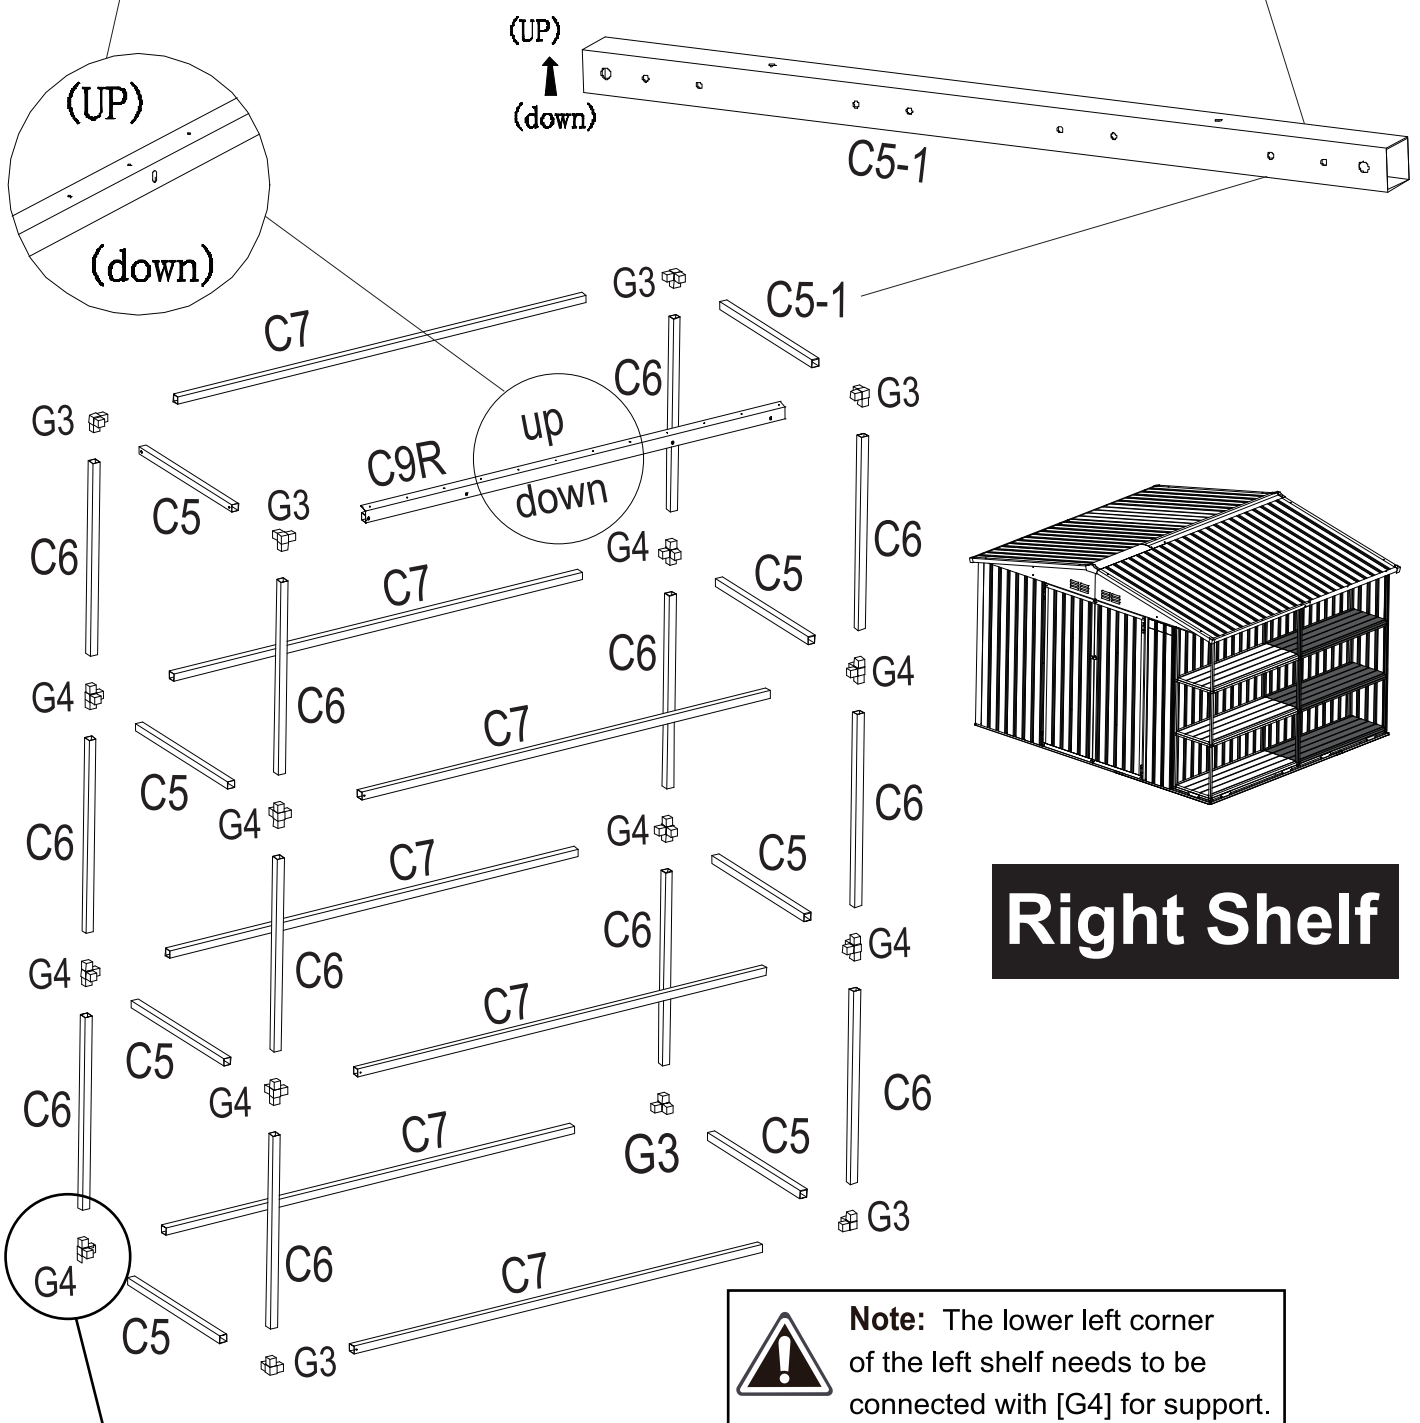

Note: The lower left corner of the left shelf needs to be connected with [G4] for support.



Note: The left and right sides of the screw installation direction is not consistent, the left side of the screw is installed from inside to outside, the right side of the screw is installed from outside to inside.

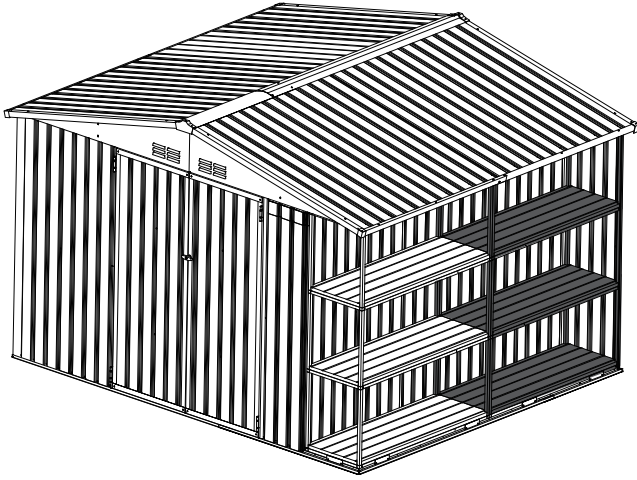

left side

Right side



Note: The left side of the screw is installed from inside to outside.




Note: The right side of the screw is installed from outside to inside.

Storage Shed Assemble




Note : Shelf and shed connection must pay attention to the direction, C5-1 upward, C9L and C9R outward.

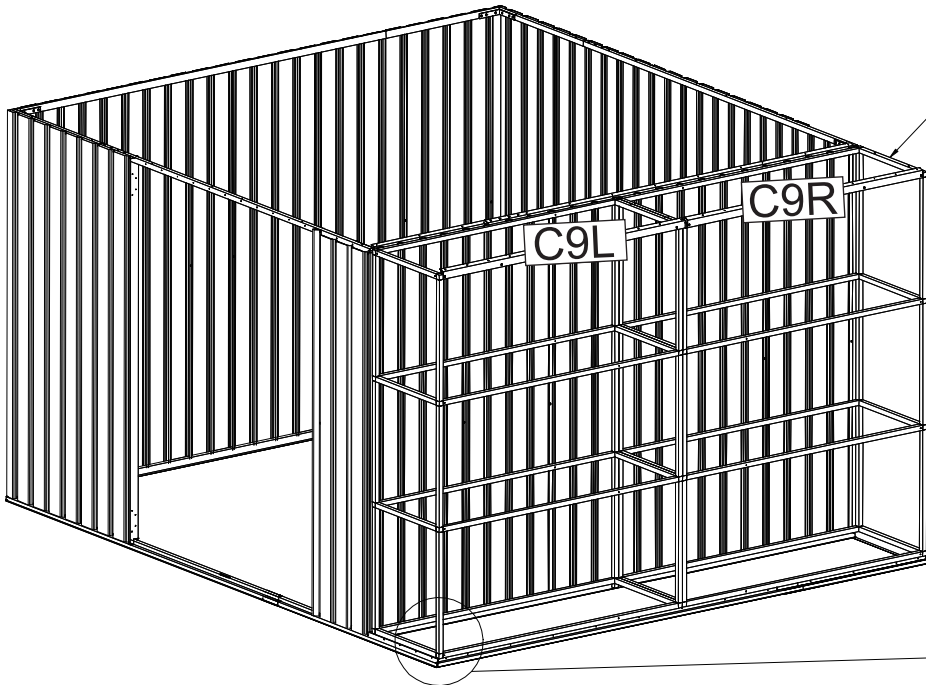


C5-1

C9L



C9R

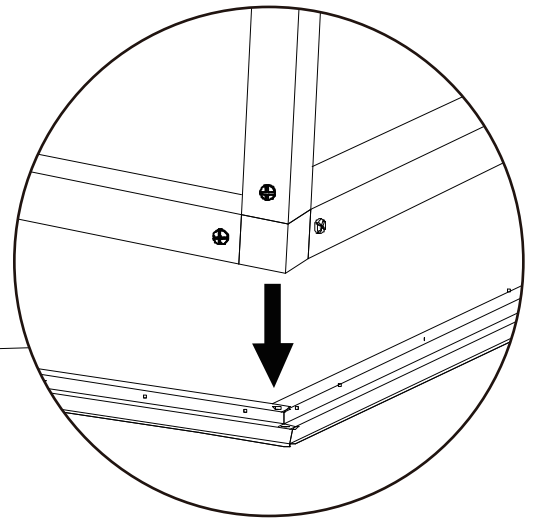


Note : The shelf to be placed on the shed base, then connected by Part [C1].





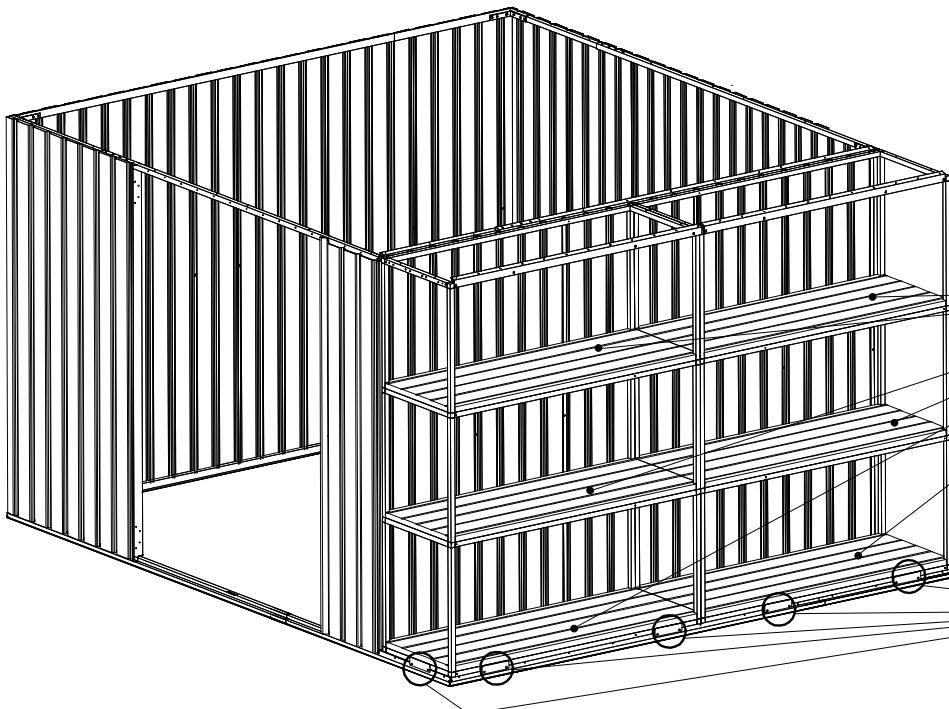


PART	NO.	QTY.
	C1	5
	F1	10
	C12	6

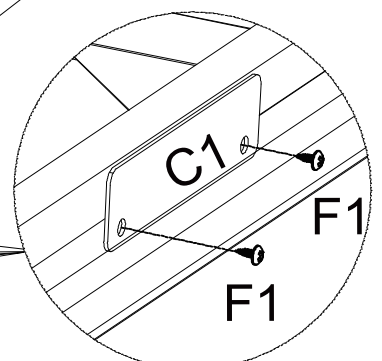




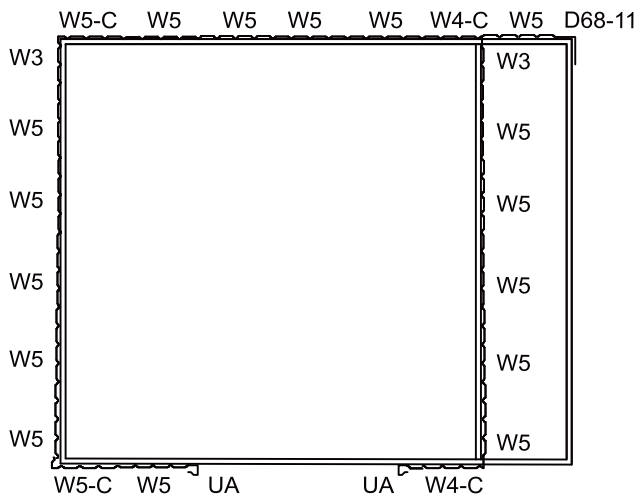


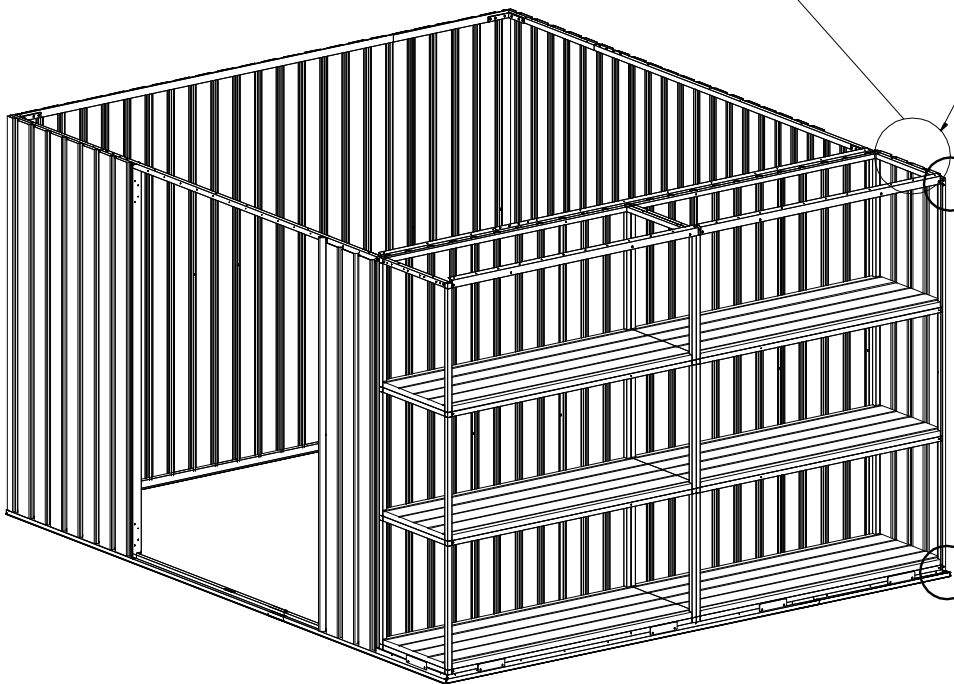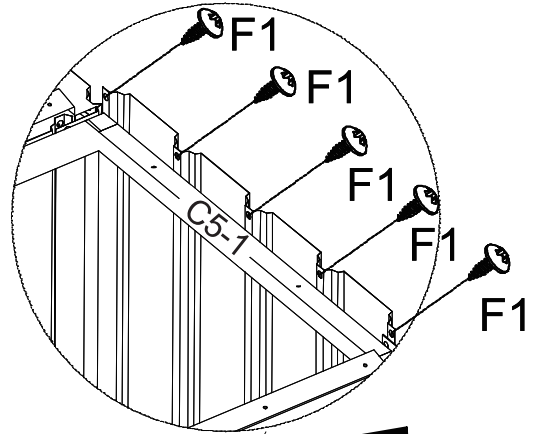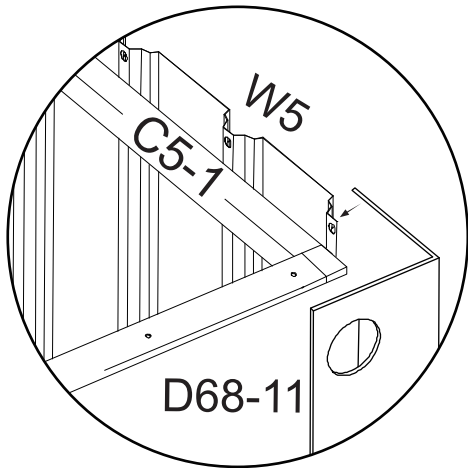


PART	NO.	QTY.
	W5	1
	D68-11	1
	F1	12
	F2	2









Note :Please fix side panel Part [D68-11] to Part [G3] with Screw [F1].




Shed Top Frame Assemble

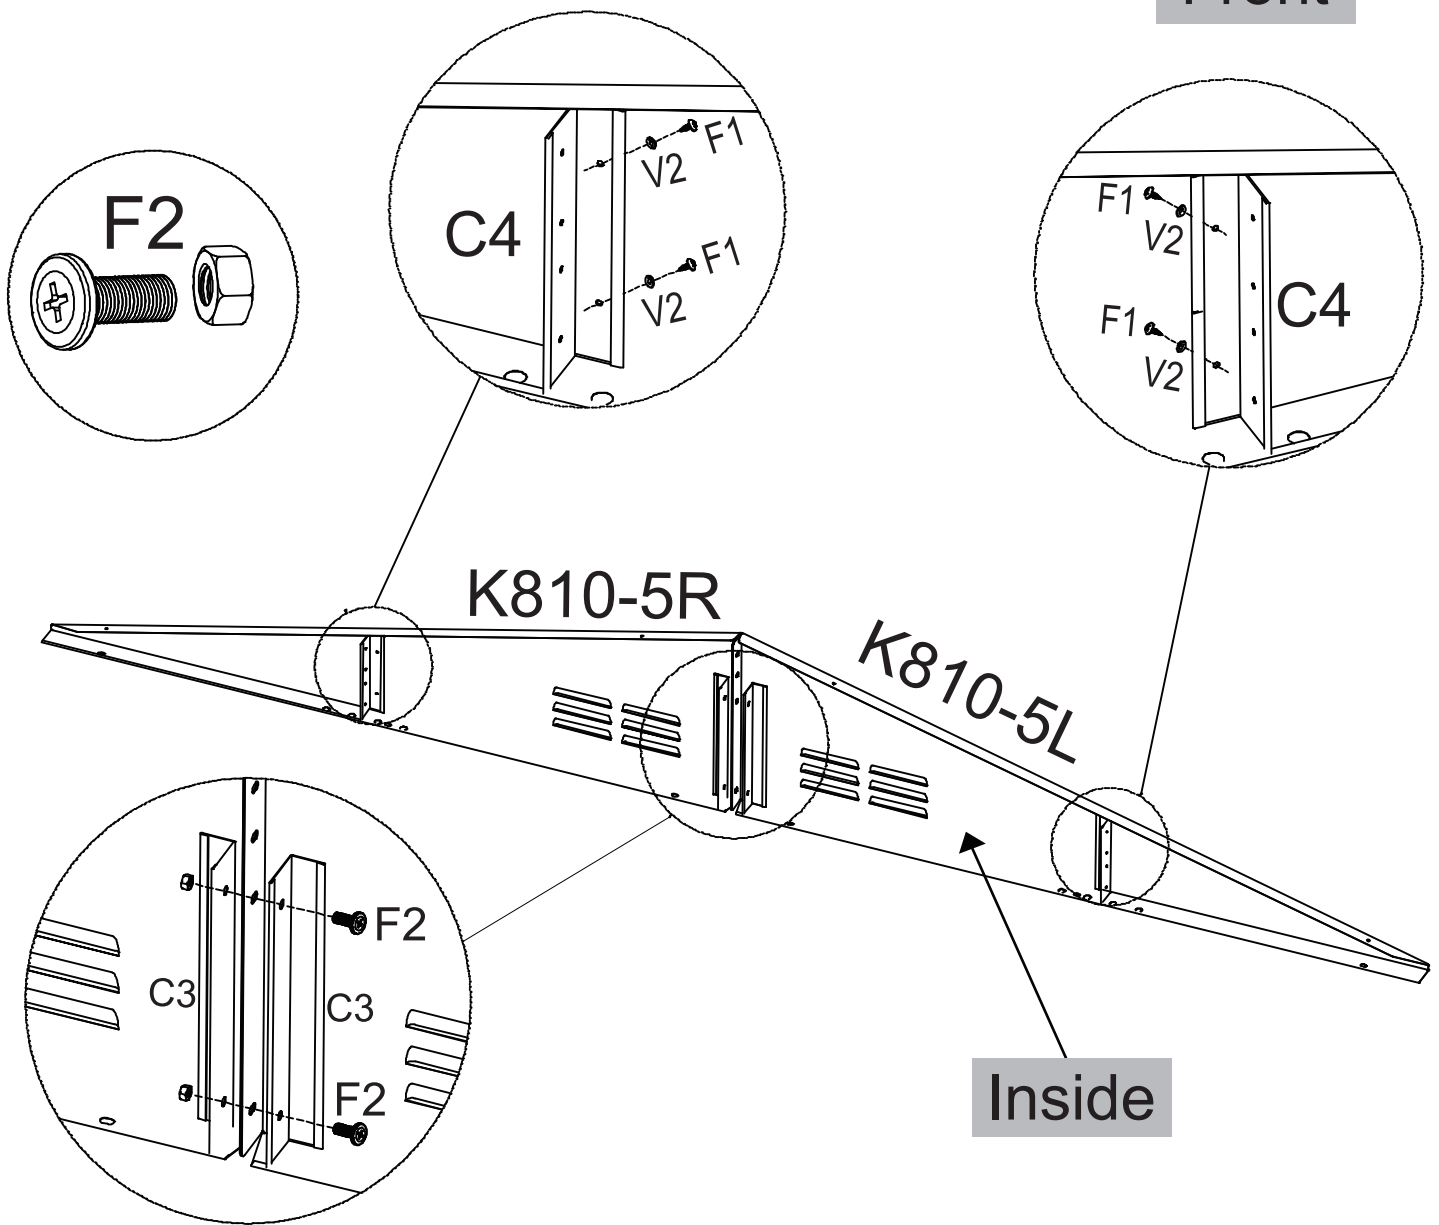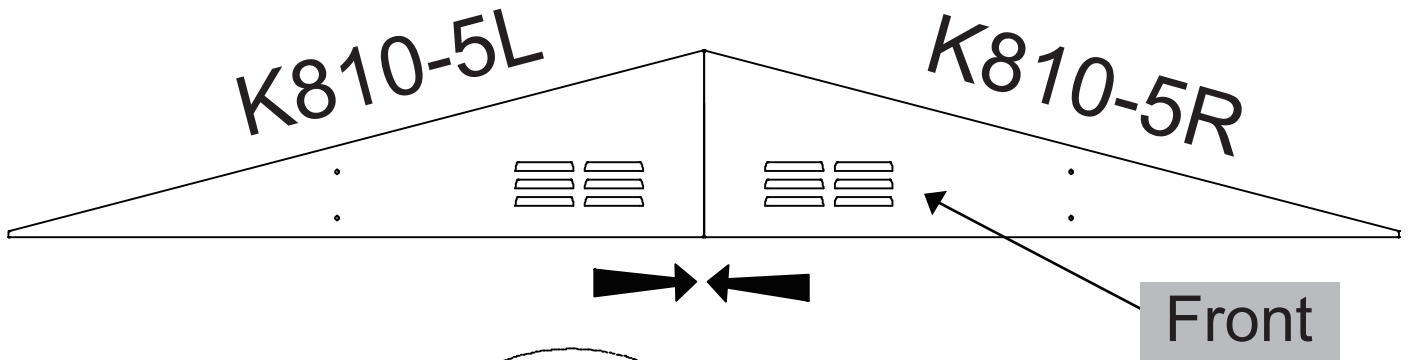PART	NO.	QTY.
	K810-5L	2
	K810-5R	2
	C3	4
	C4	4



PART	NO.	QTY.
	F2	4
	V2	8
	F1	8




PART	NO.	QTY.
	K810-6	4
	K810-6R	4
	F2	6
	F1	24

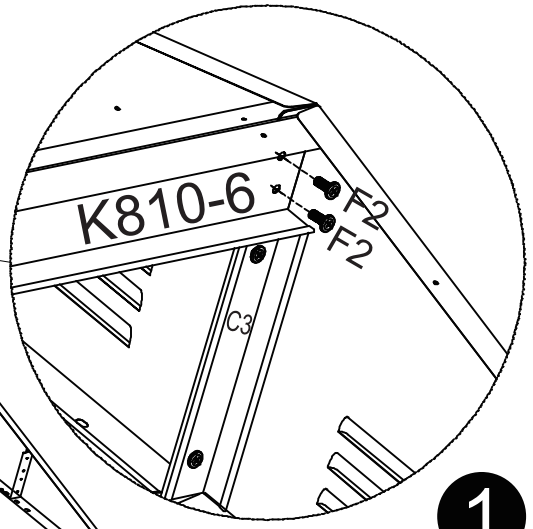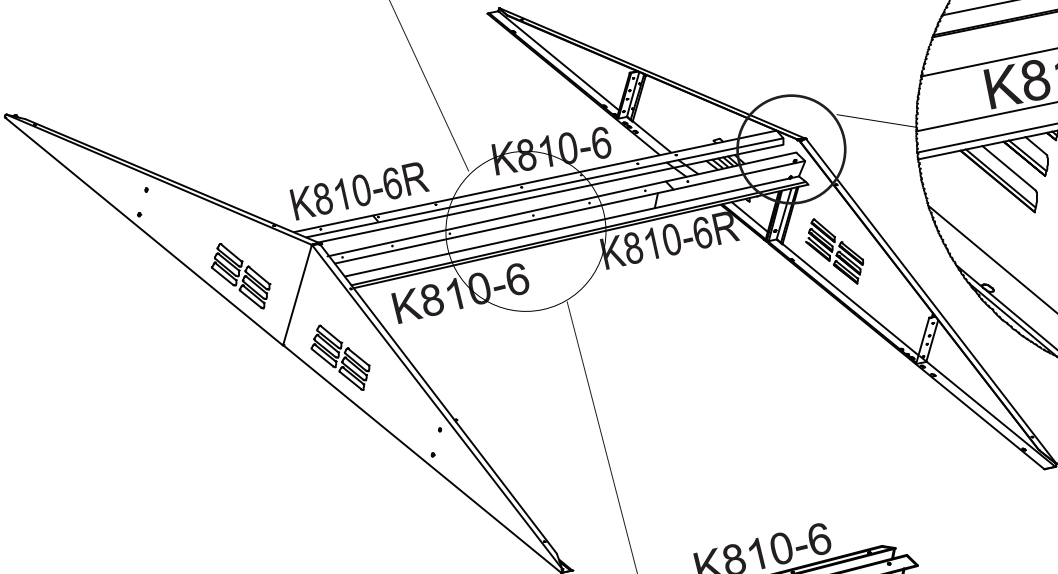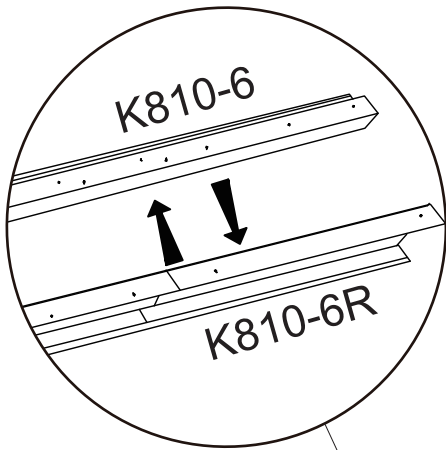


1

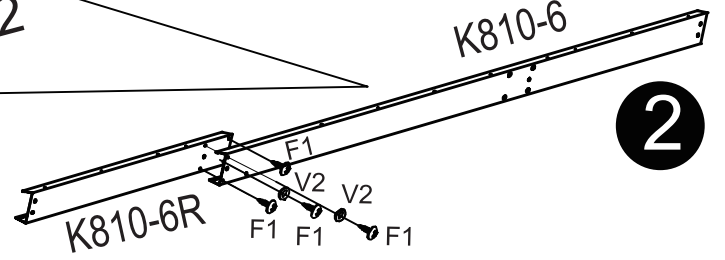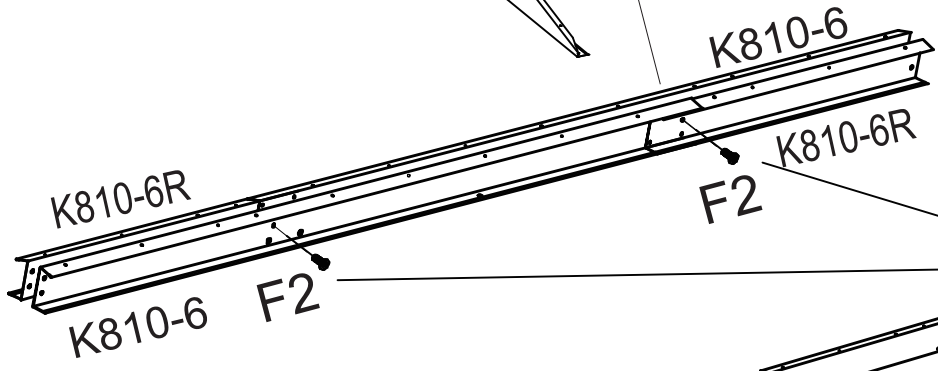



2

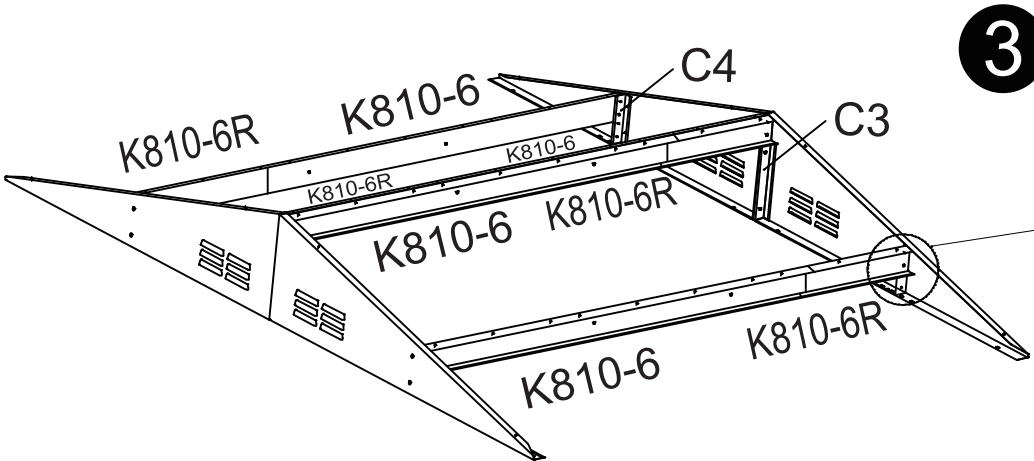

 **Note :** Please follow the assembly sequence ①-②-③



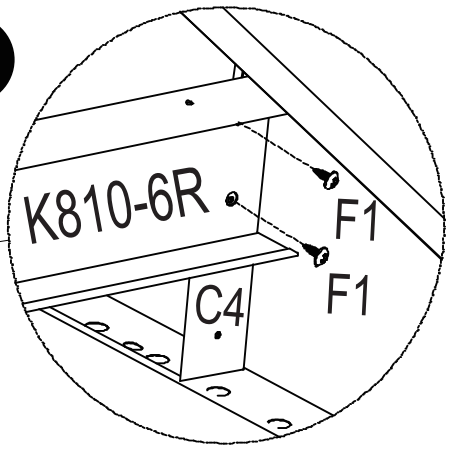


3

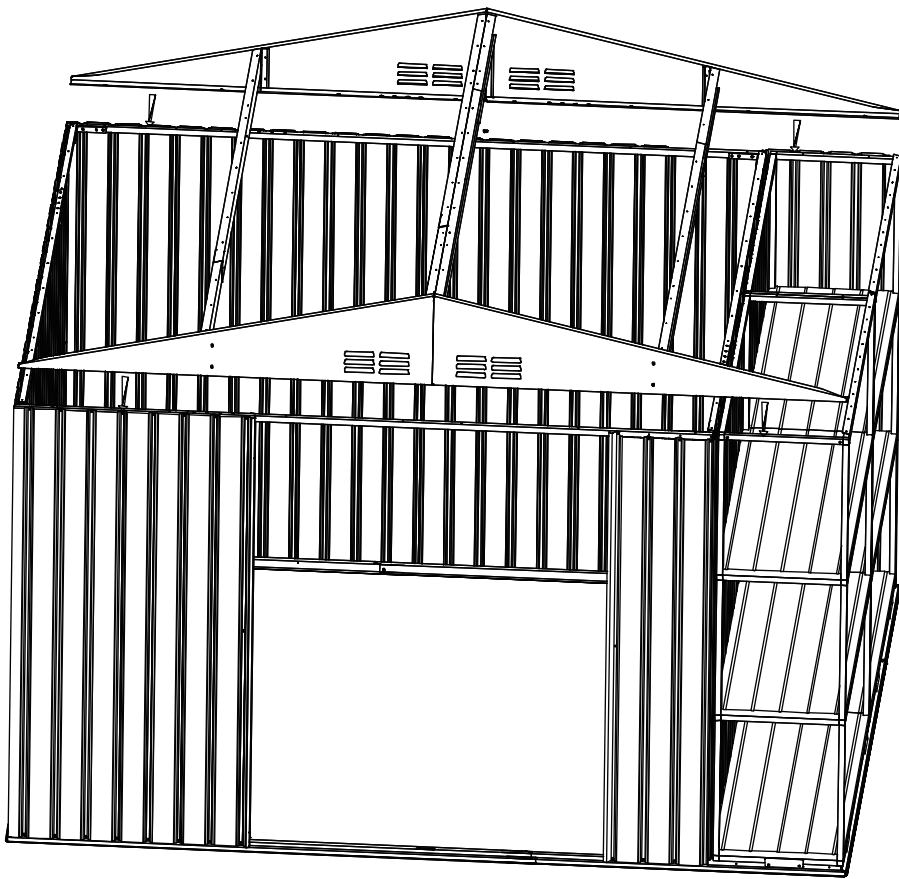




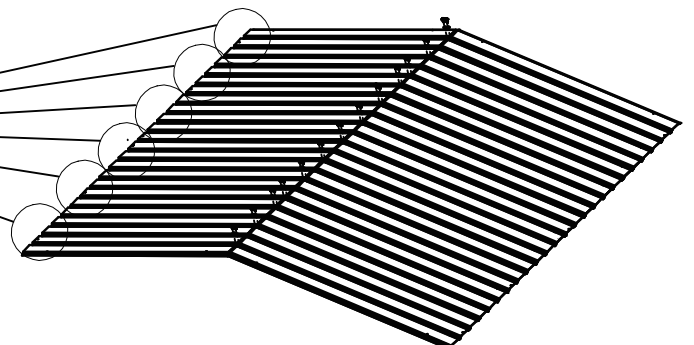
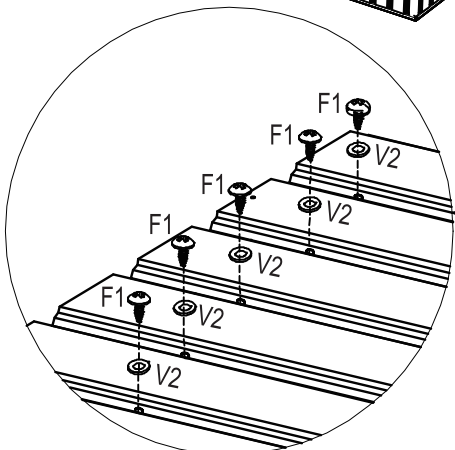
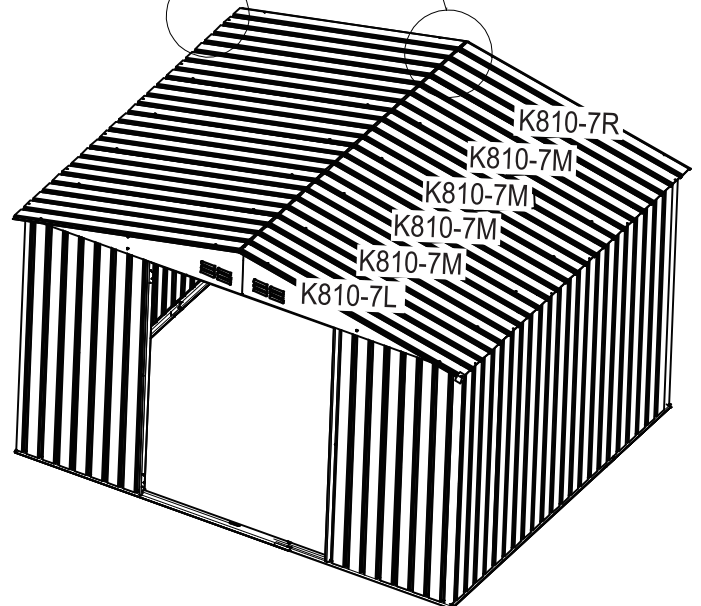
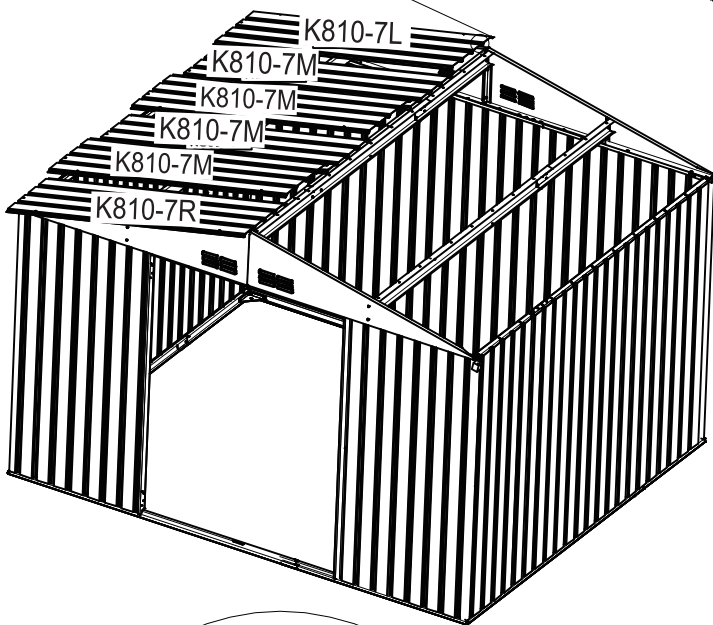
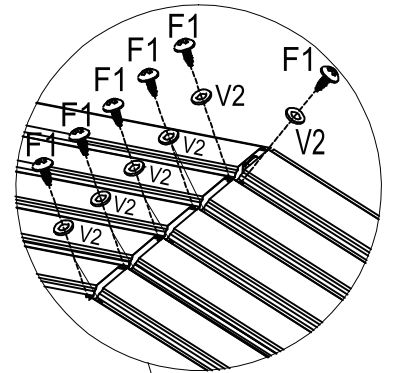
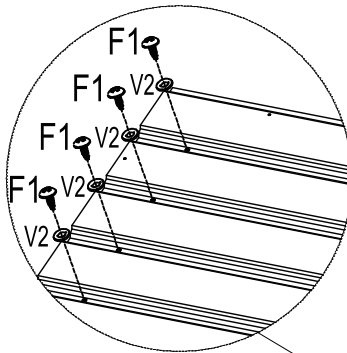
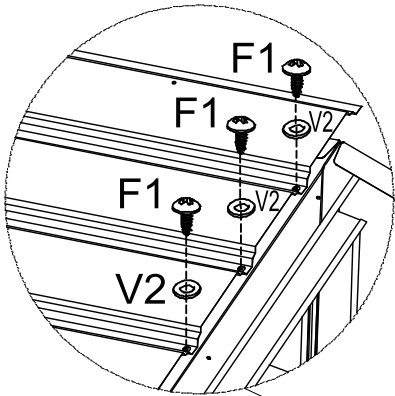
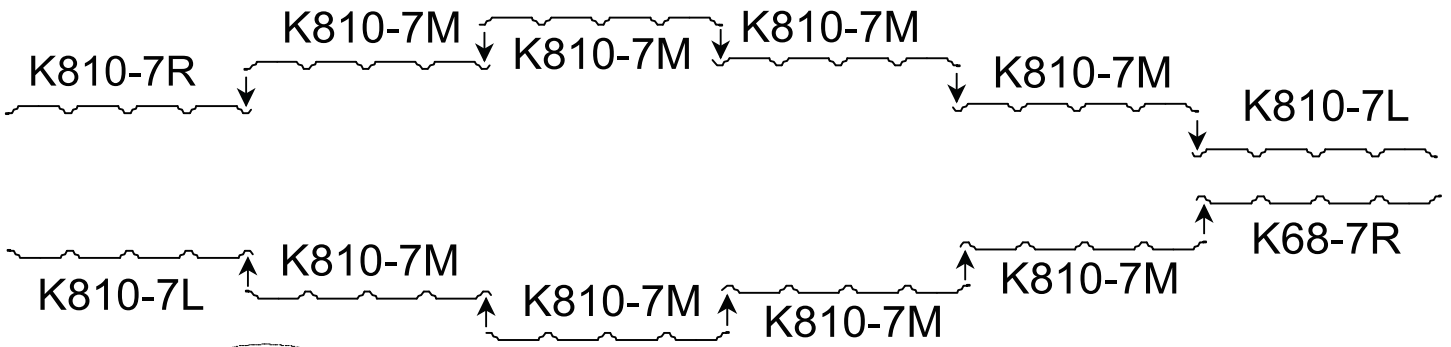


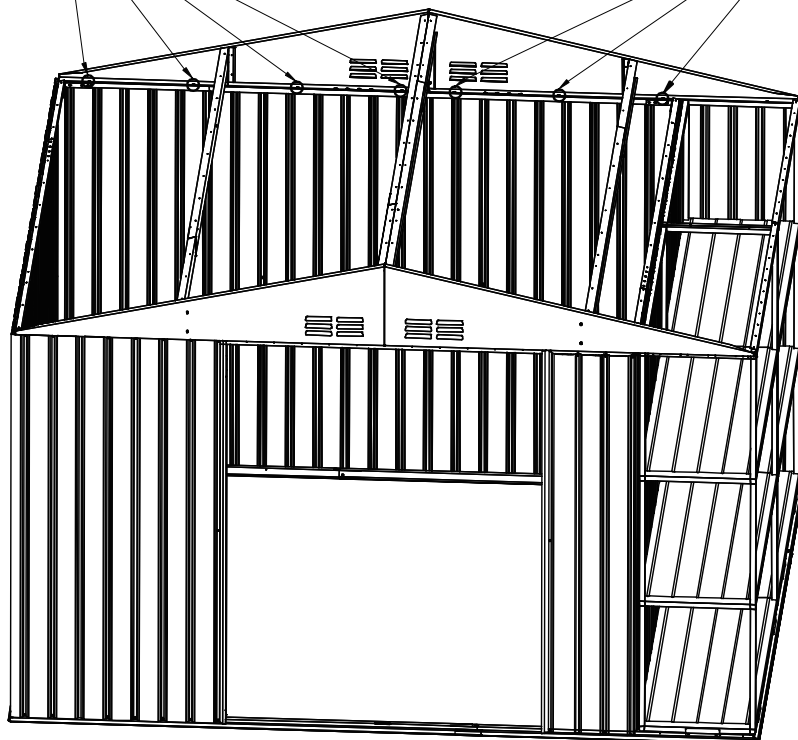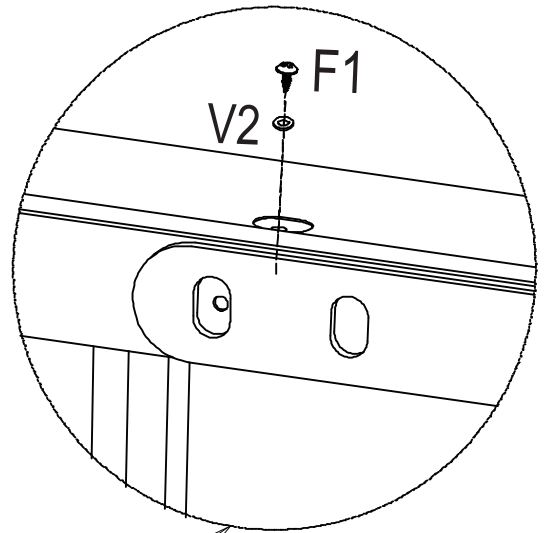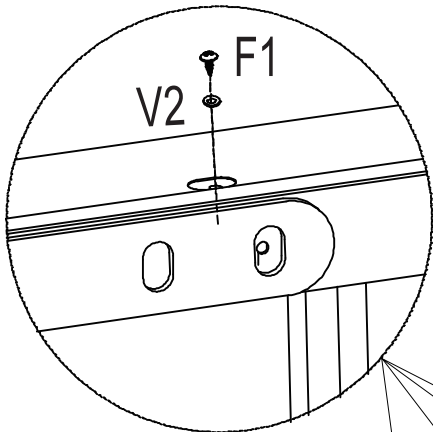
PART	NO.	QTY.
	V2	14
	F1	14










Shed Top Panels Assemble

PART					
NO.	K810-7L	K810-7M	K810-7R	F1	V2
QTY.	2	8	2	92	92



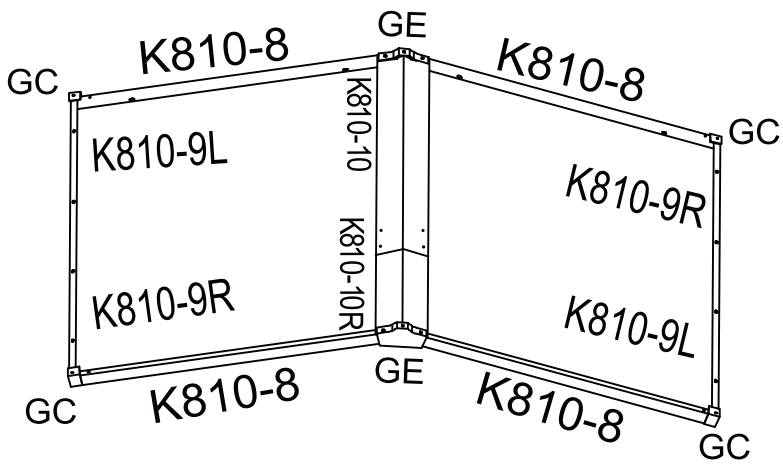

PART	NO.	QTY.
	K810-8	4
	K810-9L	2
	K810-9R	2
	GC	4
	GE	2
	F1	28
	V2	32
	K810-10	1
	K810-10R	1
	F4	4

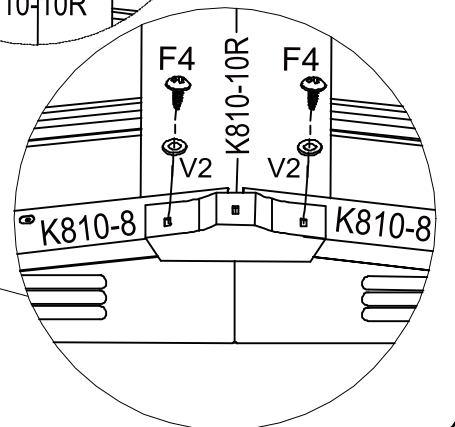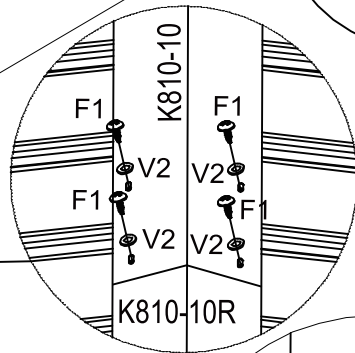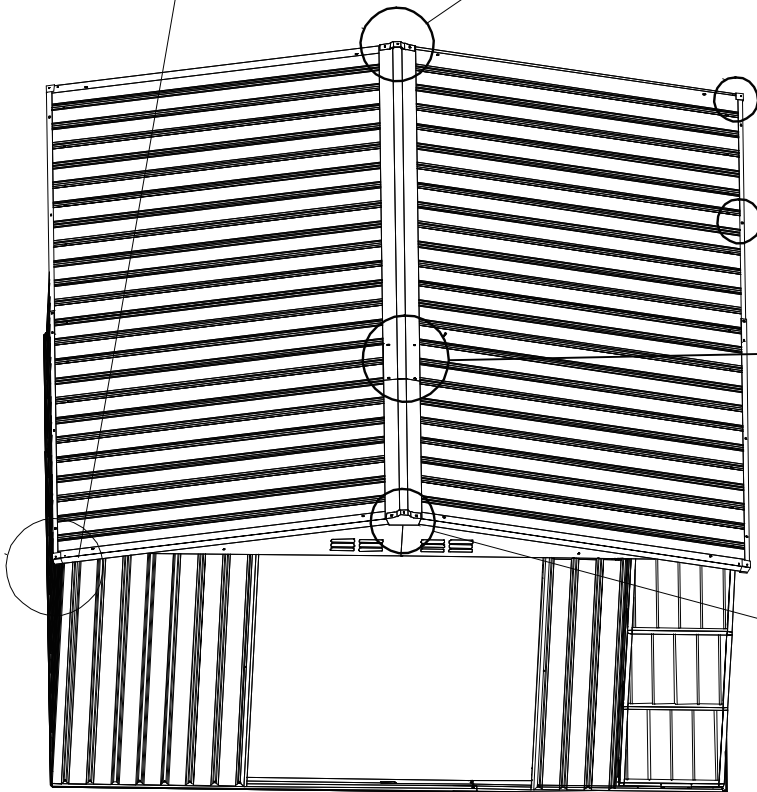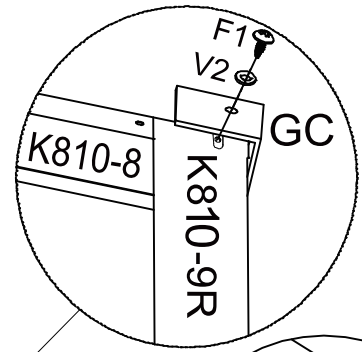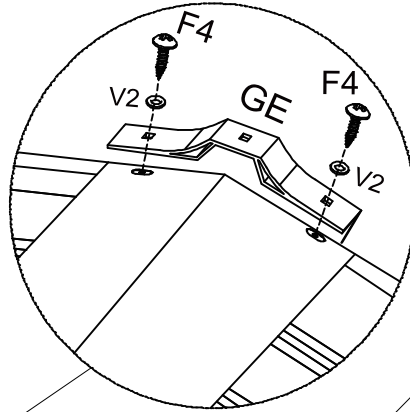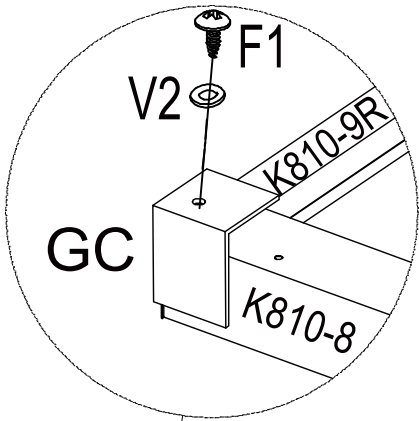



Door Assemble

DL




View from the front, the vertical rod covers the horizontal rod. The larger hole is always covers over small ones.

PART	NO.	QTY.
	W5-K	1
	W2-HL	1
	F2	2

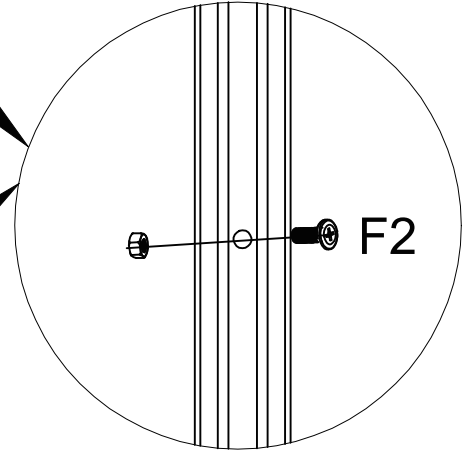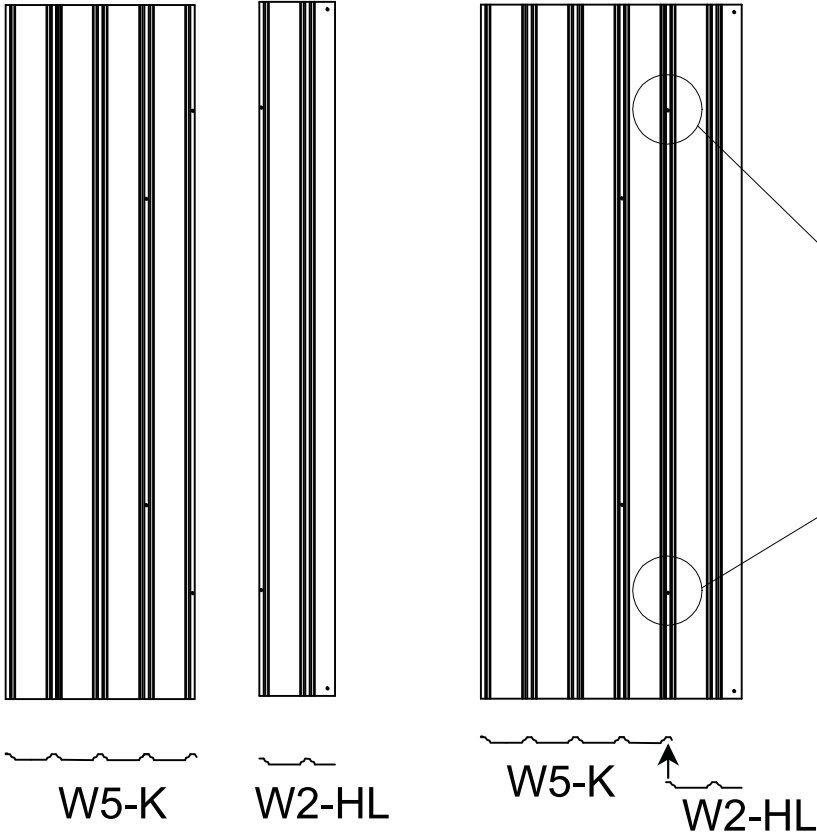



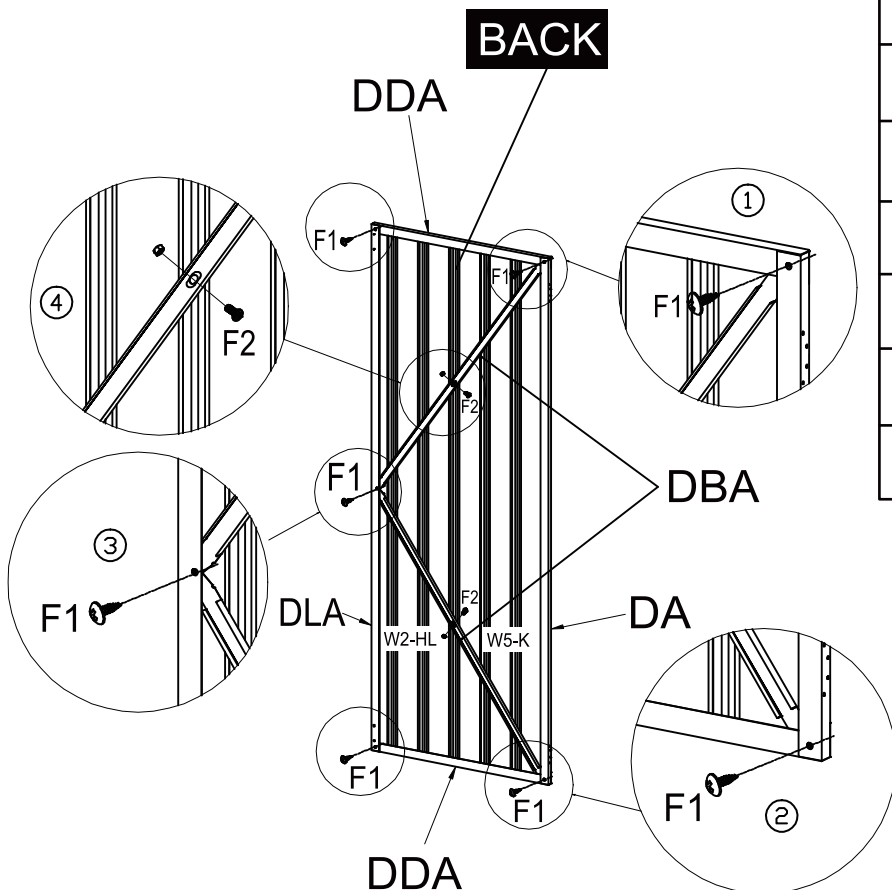

PART	NO.	QTY.
	DA	1
	DLA	1
	DDA	2
	DBA	2
	F1	9
	F2	2





Please follow the steps of
①-②-③-④







The final fixation should be done
after all parts are aligned

PART	NO.	QTY.
	W5-K	1
	W2-HR	1
	F2	2

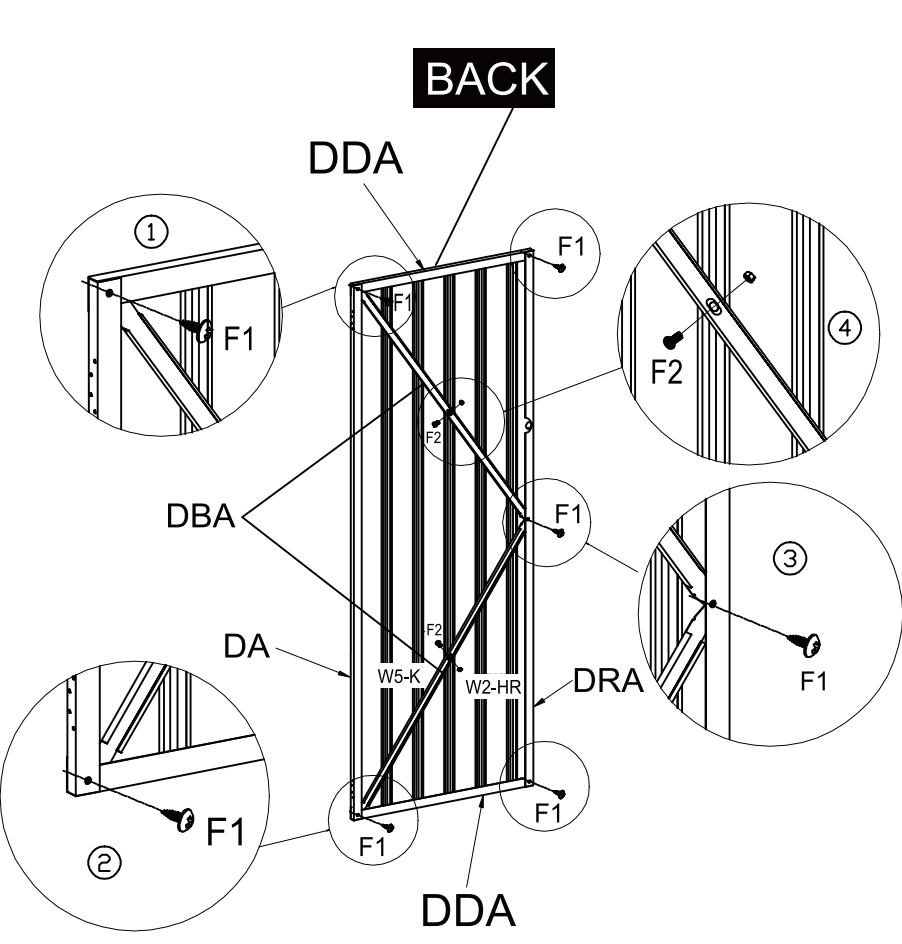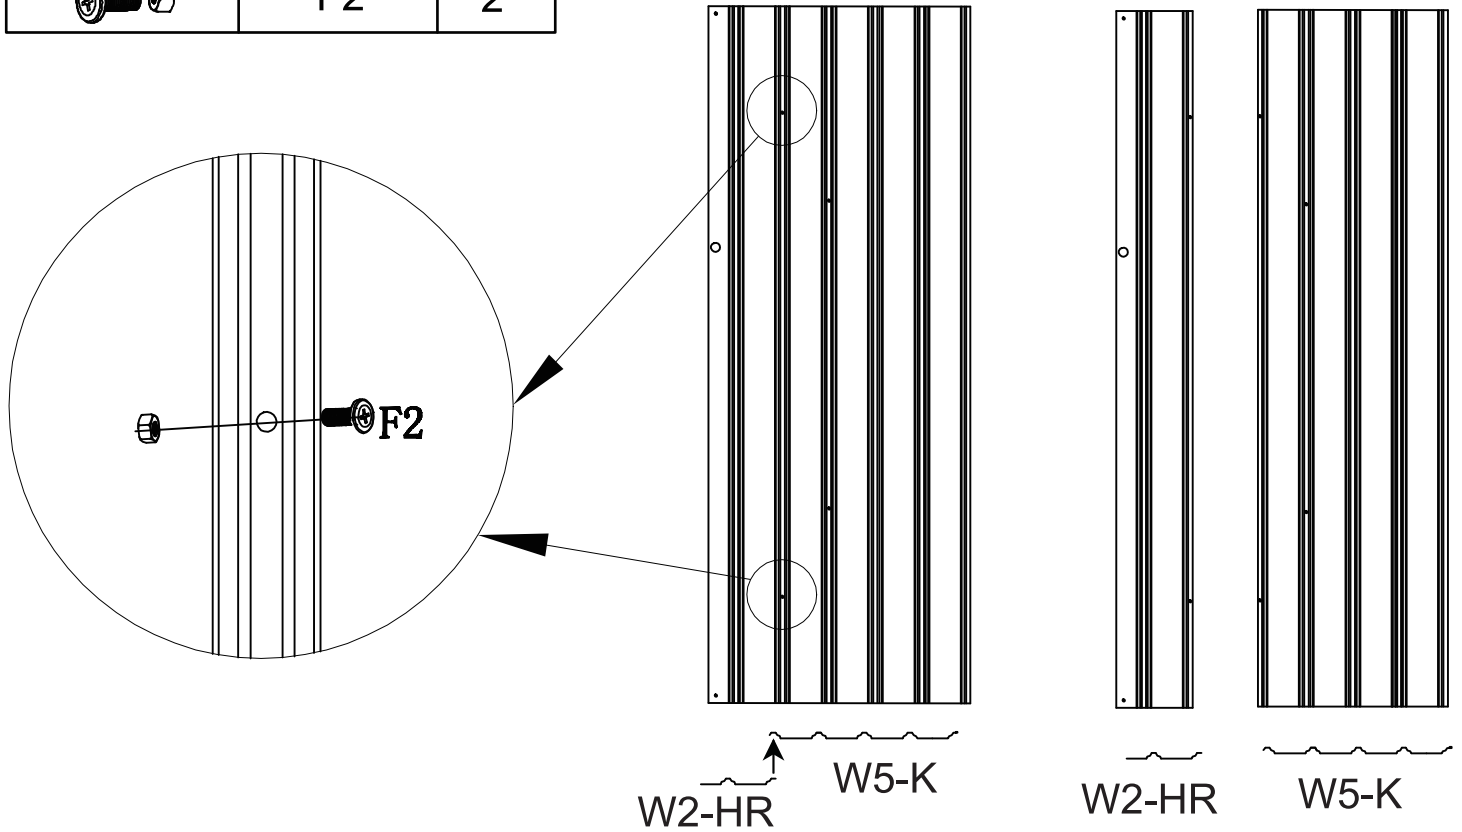 View from the front, the vertical rod covers the horizontal rod. The larger hole is always covers over small ones.




DR






PART	NO.	QTY.
	DA	1
	DRA	1
	DDA	2
	DBA	2
	F1	9
	F2	2


Please follow the steps of ①-②-③-④


The final fixation should be done after all parts are aligned

PART	NO.	QTY.
	DH	4
	DC	2
	F3	16

PART	NO.	QTY.
	F1	4
	GL	1

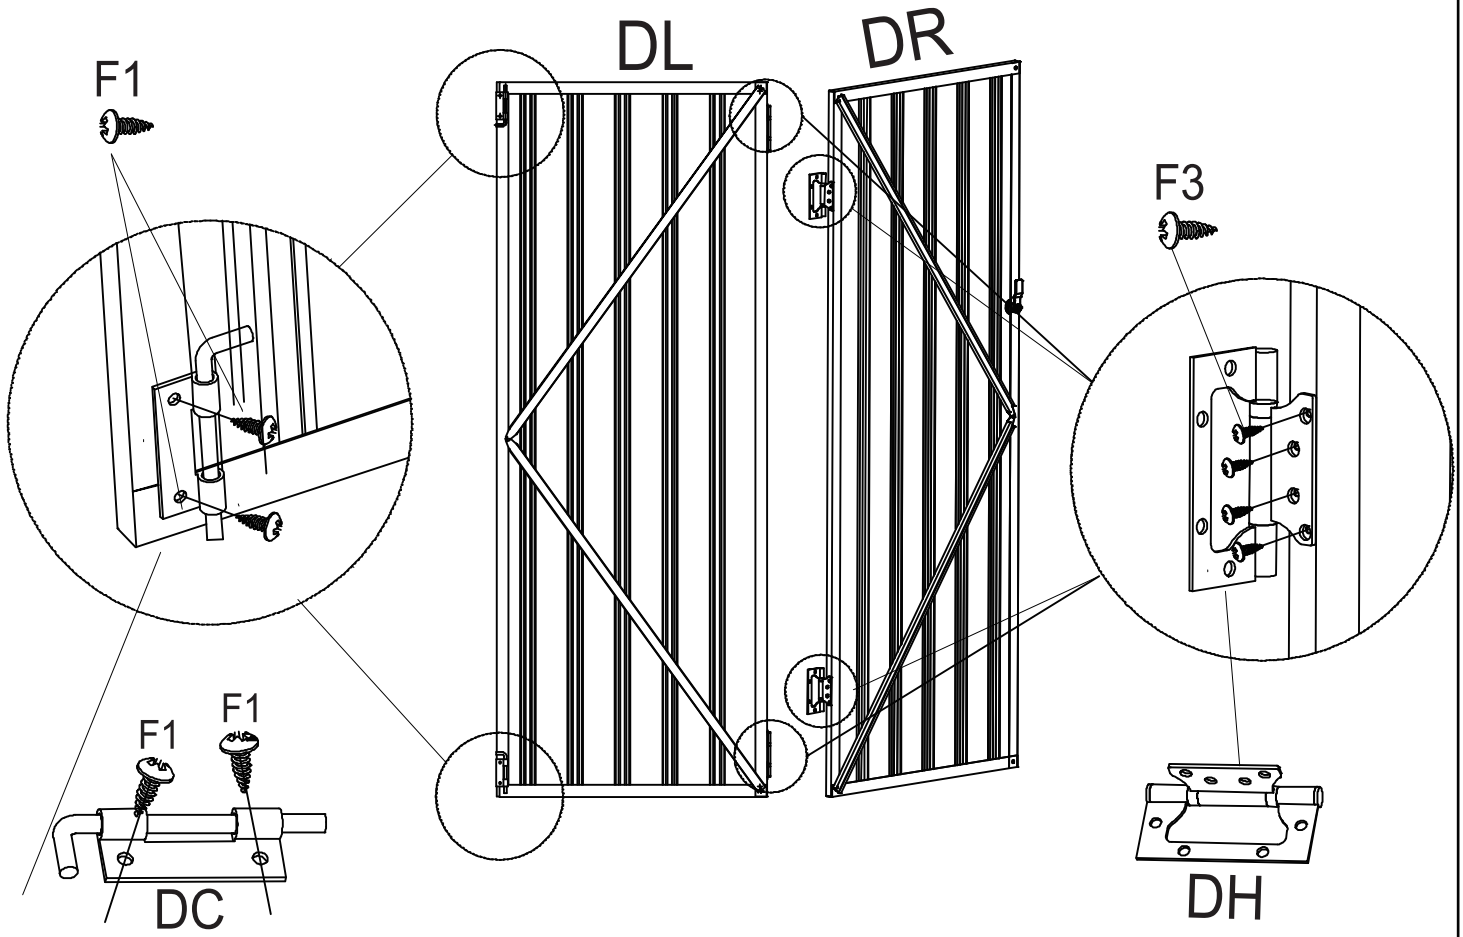




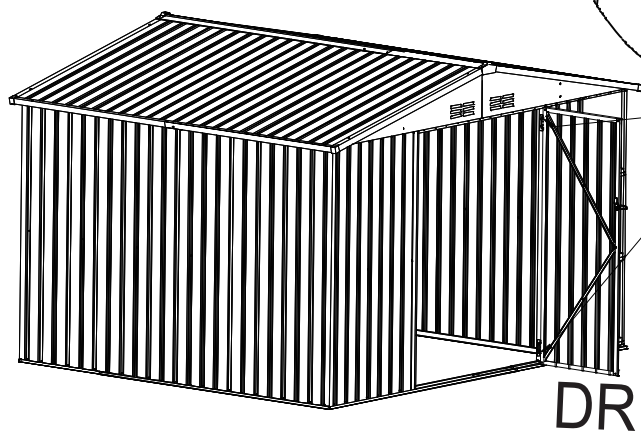
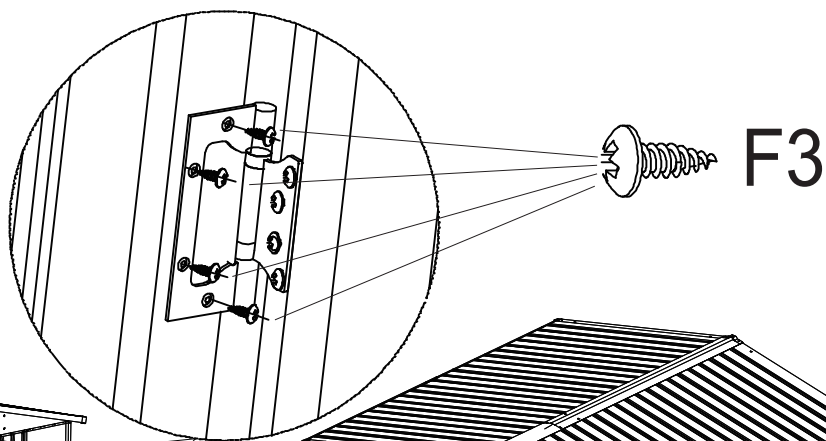
 The Left or Right is seen from the outside.

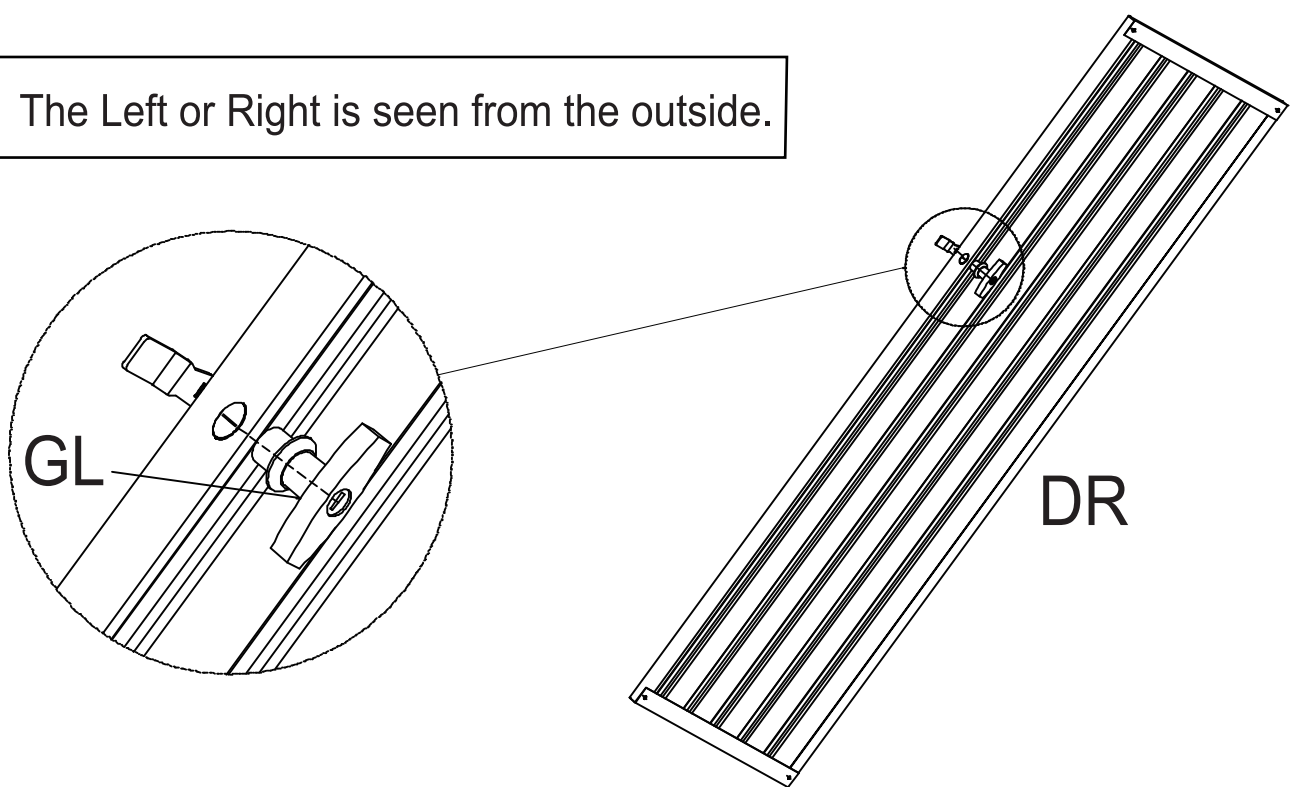




After assembled the doors,
the two door panels are
named as DR and DL.


PART	NO.	QTY.
	DL	1
	DR	1
	F3	16




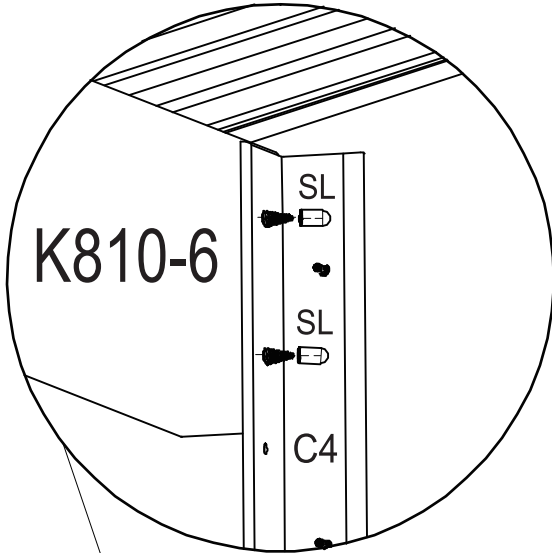
DR

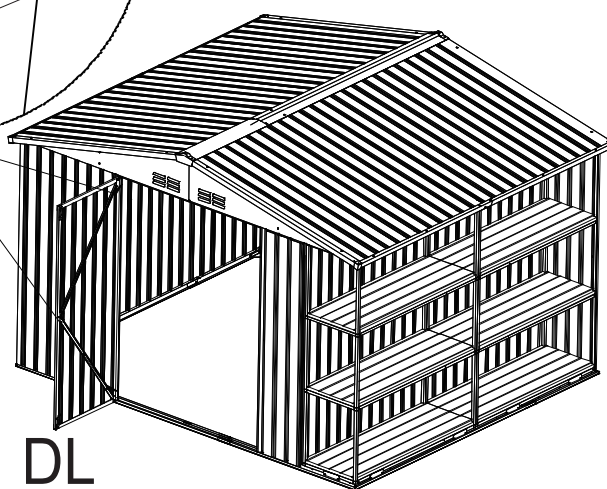


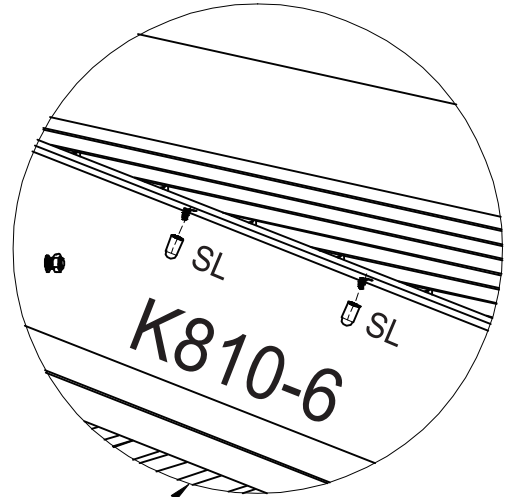
DL

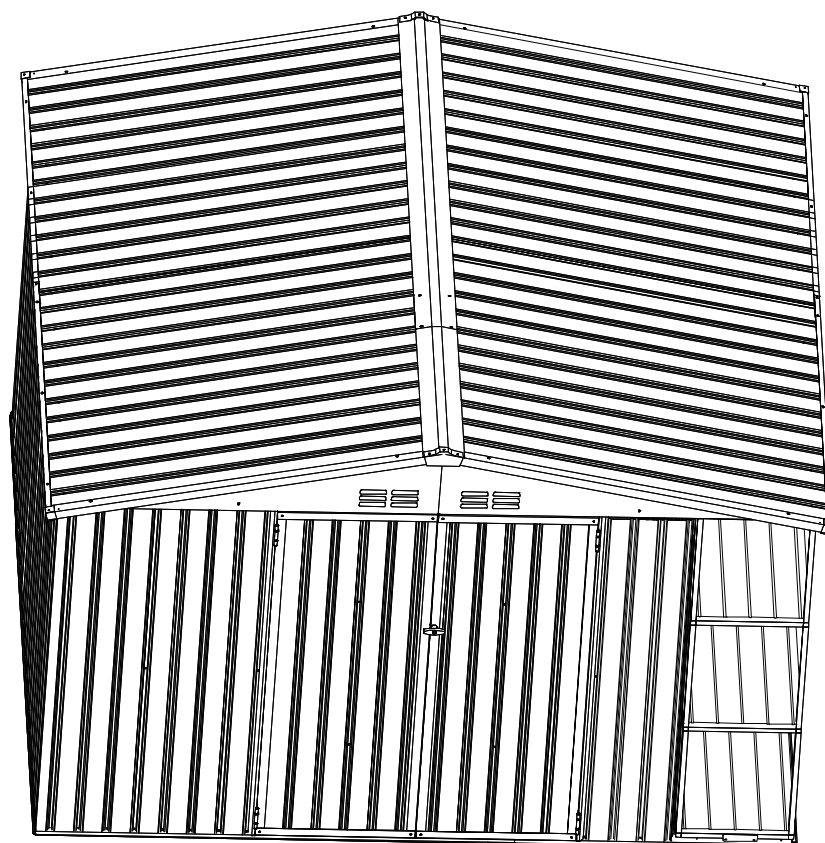


PART	NO.	QTY.
	SL	70



 Install protective caps SL for those exposing screws on K810-6 and K810-6R



 Install protective caps SL for those exposing screws on C4

