INSTALLATION INSTRUCTION

LED Ceiling Light

E-FM-042504

East Grove
• HOME •

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by **EastGroveHome**. Substitution of parts or accessories not designated for use with this product by **EastGroveHome** could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.


MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licensié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits **EastGroveHome**. Remplacer des pièces ou accessoires non conçus pour ce produit **EastGroveHome** pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidue sur le luminaire. Nous recommendons aux clients qui resident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

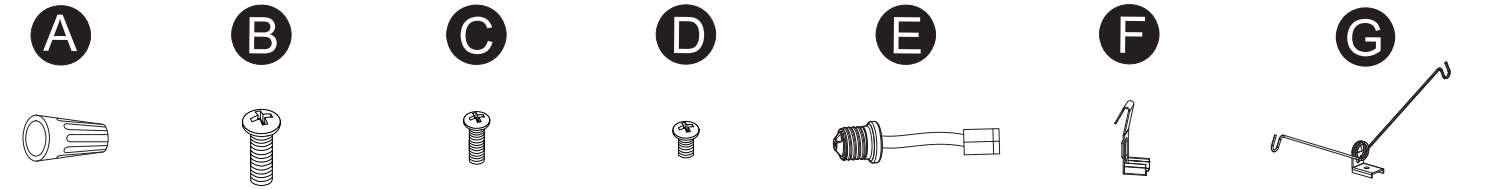


A	B	C	D	E	F	G
Wire Connector Qty: 3 pcs	Junction Box Screws Qty: 2 pcs	Mounting Screws C Qty: 3 pcs	Mounting Screws D Qty: 4 pcs	E26 Socket Adapter Qty: 1pcs	Mounting Springs F Qty: 3 pcs	Mounting Springs G Qty: 2 pcs

Fig.1 Wiring



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	**House Wires**
White or Ribbed	White (Neutral)
Fixture Wires	**House Wires**
Bare wire (Ground)	Green or Bare Copper (Ground)

Fig. 2 5CCT Switch



EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here


INSTALLATION INSTRUCTION

LED Ceiling Light


E-FM-042504

East Grove
• HOME •

Fig.3

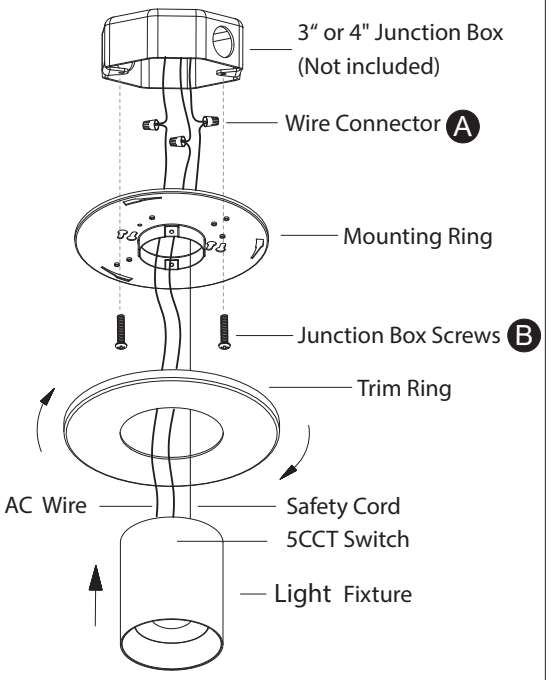


3" OR 4" JUNCTION BOX

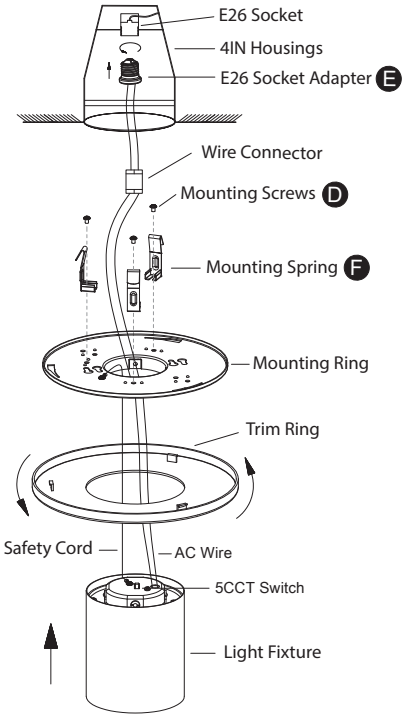

4" RECESSED HOUSINGS

Fig.4

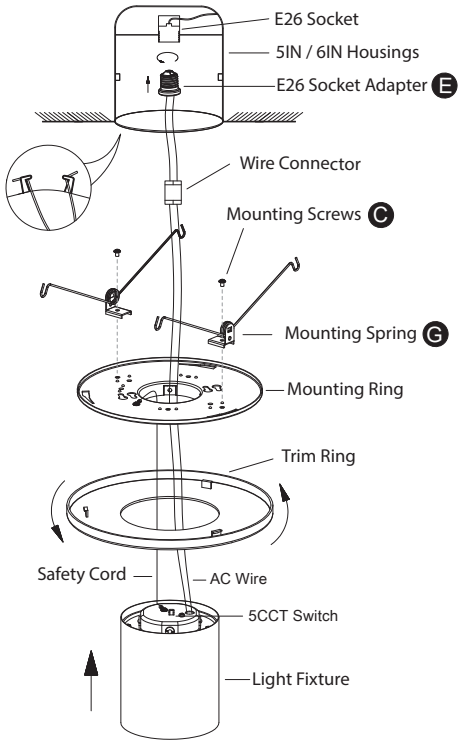

5" / 6"RECESSED HOUSINGS

INSTALLATION ONTO 3" OR 4" JUNCTION BOX

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 1 \ Fig.2 \ Fig.3)

3. The lamp can switch between five color temperatures (2700K-3000K-3500K-4000K-5000K),which can be adjusted to your preference with the switch in the fixture (Fig. 2).
4. Connect the fixture's input wires to junction box wires as shown (Fig. 1). Make sure that all wire connectors (A) are secure. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. After wires are connected, tuck them carefully inside the junction box.
5. Secure the mounting ring to the junction box using standard junction box screws that comes with the junction box. (Fig. 3)
   Note: (i)using any other non-original-manufacturer provided junction box screw may result in safety issue.
6. Twist the trim ring clockwise on mounting ring and lock the trim ring in place.
7. Align the light fixture with the installation holes on the mounting ring and embed it.Turn on the power after installation, check the light fixture can work well.(Fig. 3)

INSTALLATION ONTO 4" / 5" / 6" RECESSED HOUSINGS

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 2 \ Fig.4)

3. Use the mounting screws to fix the mounting springs piece onto the mounting ring.
4. Screw E26 socket adapter into socket in housing.
5. The lamp can switch between five color temperatures (2700K-3000K-3500K-4000K-5000K),which can be adjusted to your preference with the switch in the fixture (Fig. 4).
6. Insert the AC wire on the light fixture into the wire connector of the E26 socket adapter.
7. Squeeze the torsion springs together as shown and install into torsion spring brackets inside the housing. (Fig. 4)
8. Twist the trim ring clockwise on mounting ring and lock the trim ring in place.
9. Align the light fixture with the installation holes on the mounting ring and embed it.Turn on the power after installation, check the light fixture can work well.(Fig. 3)

EastGroveHome.com
Phone: 888-602-0990

Corporate Headquarters
1000 N West Street, Suite 1200
Wilmington, DE 19801

*Corporate Address ONLY – Do not send returns here