

WARNING

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.
WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT
BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR
OBVIOUS DEFECT, DO NOT INSTALL. ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

CARE AND MAINTENANCE

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

* Please make sure that you have all parts indicated before you begin assembly of this item


* This item should be assembled on a soft surface to prevent scratching the finish during assembly

* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation

*The external flexible cable or cord of this lamp cannot be replaced

If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	Wire connector		3X	H	Chain		1X
B	Crossbar		1X	I	Central rod		1X
C	Outlet box screw		2X	J	Light bulb		6X
D	Canopy		1X	K	Fixture frame		1X
E	Collar loop		1X	L	Bottom Cover		1X
F	Canopy ring		1X	M	Finial		1X
G	Lock link		2X				

JY
JONATHAN Y

Model#: JYL9558

Product Dimensions: 35.5"Lx35.5"Wx22.5-81.5"H

Product Dimensions:90.2x90.2x57.2-207.0cm

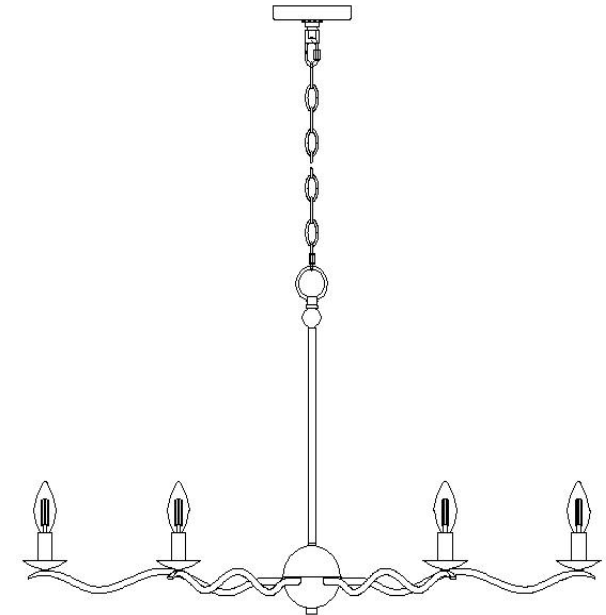

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.


Estimated Assembly Time: 25minutes.

The number of people required to assemble the product:1 person.

If there are any questions relating to defects, missing parts, assembly issues, replacements, or device connectivity issues, please send a detailed email to cs@jonathany.com

1. Attach the crossbar(B) to the junction box with outlet box screw(C).
2. Slide the electrical wires through the central rod(I), raise the Central rod(I) thread of the fixture frame(K), adjust the arms to be a suitable position.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.




*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw(B) on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
 - b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.
3. Slide the electrical wires through the chain(H)/collar loop(E)/canopy ring(F) /canopy(D) and assembled crossbar(B).
 4. Connect the wire with wire connector (A) accordingly.
 5. Attach the canopy(D) to the junction box,secure with canopy ring(F).
 6. Connect the metal chain by locking the screw collar loop(E) with the lock link (G) on the top and lock the fixture loop on the top.
 7. Attach the bottom cover(L) to the fixture frame(K) and secure with finial, finally install the light bulb(J) to the lamp holder.

PLEASE USE TYPE"B" BULB MAX 40-WATT OR LED BULB MAX 9-WATT THERE IS LED 6PCS 4-WATT BULB IN THE BOX

ENJOY YOUR LAMP

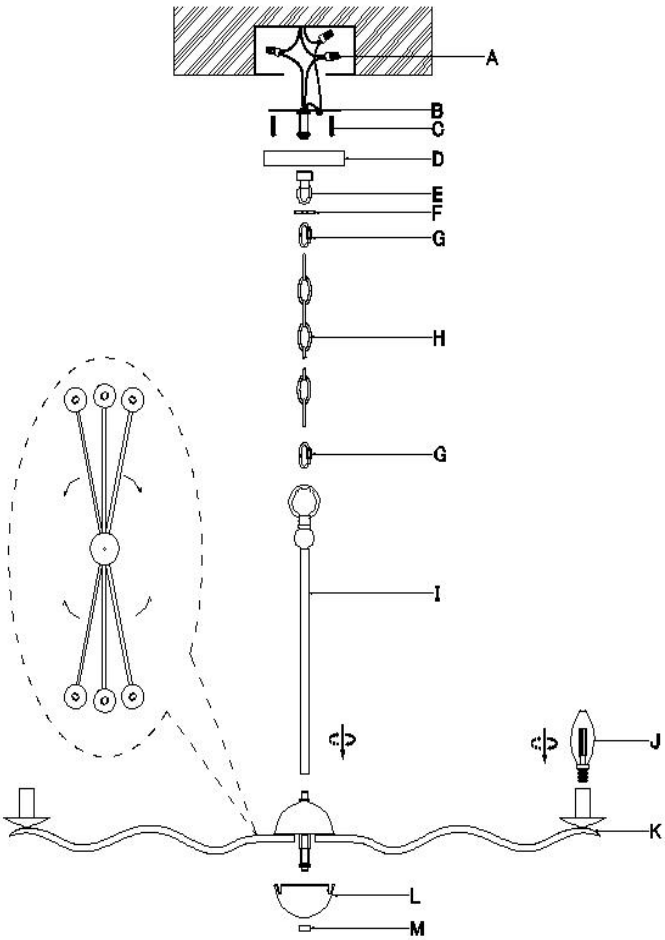

ADVERTENCIA

RECOMENDAMOS que la instalación de este dispositivo de iluminación sea realizada por un eléctrico con licencia.

ADVERTENCIA *** Apagar el suministro eléctrico principal desde la caja de fusión principal / circuito

INTERRUPTOR ANTES DE LA INSTALACIÓN.

Inspeccione el artículo con cuidado antes de intentar instalarlo. Si hay algún daño o

DEFECTO OBVIDO, NO INSTALAR. El artículo no puede ser devuelto una vez que se ha instalado.

CUIDADO Y MANTENIMIENTO

Para limpiar el exterior del accesorio, use un paño limpio seco o ligeramente humedecido (use agua limpia, nunca un disolvente) para limpiar la superficie del accesorio.

Para limpiar el interior del accesorio, primero desconecte la alimentación al accesorio apagando el interruptor o retirando el fusible en la caja del fusible. A continuación, use un clorth limpio seco o suavemente amortiguado (use agua limpia, nunca un disolvente) para limpiar la superficie interior del accesorio.

No utilice limpiadores con productos químicos, disolventes o abrasivos duros. Usa solo un paño seco y suave para polvificar o limpiar con cuidado.

AVISO E INSTRUCCIONES IMPORTANTES DE SEGURIDAD

* Asegúrese de tener todas las partes indicadas antes de comenzar el montaje de este artículo

* Este artículo debe montarse en una superficie suave para evitar rasarse el acabado durante el montaje

* Para reducir el riesgo de incendio, choque eléctrico o lesiones a personas o bienes, siga las directrices a continuación para un uso e instalación seguros.

* El cable o cable flexible externo de esta luminaria no se puede reemplazar

Si el cable está dañado, la luminaria será destruida.

Lista de piezas y lista de hardware


Pieza	descripción	Imagen	cantidad	Pieza	descripción	Imagen	cantidad
A	Conector para cables		3X	H	Cadena		1X
B	Barra cruzada		1X	I	Varilla central		1X
C	Tornillo para caja de		2X	J	Bombilla		6X
D	Campana		1X	K	Marco de la luminaria		1X
E	Argolla de collar		1X	L	Tapa inferior		1X
F	Anillo de campana		1X	M	Remate decorativo		1X
G	Eslabón de seguridad		2X				

JY
JONATHAN Y

Modelo#:: JYL9558

Dimensiones del producto: 35.5"Lx35.5"Wx22.5-81.5"H

Dimensiones del producto: 90.2x90.2x57.2-207.0cm

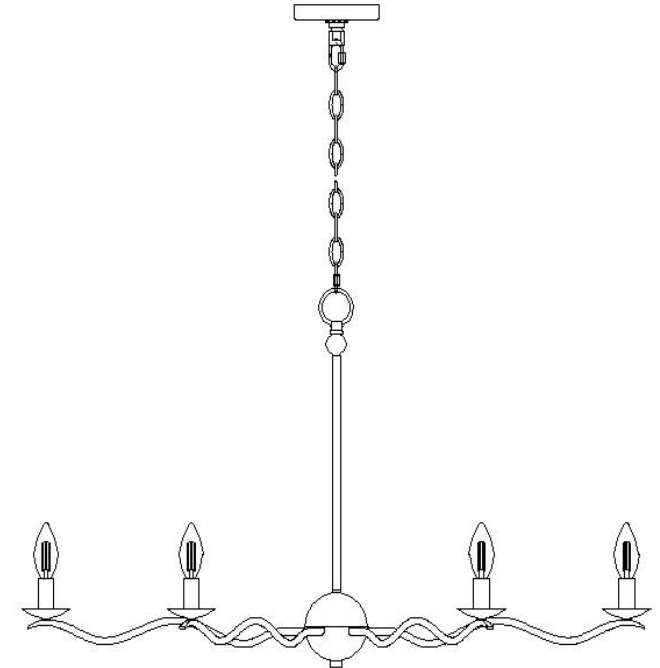

PREPARACIÓN

Antes de comenzar el ensamblaje del producto, asegúrese de que todas las piezas estén presentes. Compare las piezas con la lista de contenido del paquete y la lista de hardware. Si falta alguna pieza o está dañada, no intente ensamblar el producto.


Tiempo estimado de ensamblaje: 25 minutos.

Número de personas requeridas para el montaje del producto: 1 persona.

Si tiene alguna pregunta relacionada con defectos, piezas faltantes, problemas de ensamblaje, reemplazos o problemas de conectividad del dispositivo, envíe un correo electrónico detallado a cs@jonathany.com

- 1. Fije la barra cruzada (B) a la caja de conexiones con el tornillo de la caja (C).
- 2. Deslice los cables eléctricos a través de la varilla central (I), eleve la rosca de la varilla central (I) del marco de la luminaria (K), ajuste los brazos a una posición adecuada.

Connect, Hot, Black or Red Outlet Supply Wire to:	Connect, Neutral, White Outlet Supply Wire to:
Black	White
* Parallel Cord (round & smooth)	* Parallel Cord (square & ridged)
Clear, Brown, Gold or Black without Tracer (colored stripes)	Clear, Brown, Gold or Black with Tracer (colored stripes)
Insulated Wire (not green) with copper metal conductor	Insulated Wire (not green) with Silver metal conductor.



*Note: When parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth. (See Illustration on left.)

Instrucciones de Conexión a Tierra:

- a) Para instalación en Estados Unidos: Enrolle el cable de tierra de la caja de conexión alrededor del tornillo verde de tornillo de tierra (B) del soporte de montaje, dejando al menos 5 cm del extremo del cable libre. Apriete el tornillo de tierra. Si la luminaria incluye un cable de tierra, conéctelo al cable de tierra del tomacorriente utilizando un conector para cables.
- b) Para instalación en Canadá: Si la luminaria incluye cable de tierra, enrolle el cable de tierra alrededor del tornillo verde de conexión a tierra en el soporte de montaje. Apriete firmemente el tornillo de tierra.
- 3. Deslice los cables eléctricos a través de la cadena (H)/argolla de collar (E)/anillo de campana (/campana (D) y barra cruzada ensamblada (B).
- 4. Conecte los cables con el conector (A) según corresponda.
- 5. Fije la campana (D) a la caja de conexiones, asegure con el anillo de campana (F).
- 6. Conecte la cadena metálica bloqueando la argolla de collar roscada (E) con el eslabón de seguridad (G) en la argolla de la luminaria en la parte superior.
- 7. Fije la tapa inferior (L) al marco de la luminaria (K) y asegure con el remate decorativo, finalmente instale la bombilla (J) en el portalár

USE ÚNICAMENTE BOMBILLAS TIPO 'B' DE MÁXIMO 40 VATIOS, BOMBILLAS CFL DE 13 VATIOS O BOMBILLAS LED DE 9 VATIOS. EL PAQUETE INCLUYE 6PCS BOMBILLA LED DE 4 VATIOS

DISFRUTE DE SU LÁMPARA

